
Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 Scale-free


Wald (delta)	0.96 [0.93, 0.98]	w = 0.57
ILR, mapped back	1 [0.98, 1]	w = 0.546
Profile likelihood	0.96 [0.92, 0.98]	w = 0.516
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.596
Wald (delta)	0.97 [0.94, 0.99]	w = 0.571
ILR, mapped back	1 [0.98, 1]	w = 0.544
Profile likelihood	0.96 [0.92, 0.98]	w = 0.516
Wald (delta)	0.99 [0.97, 1]	w = 0.579
ILR, mapped back	1 [0.98, 1]	w = 0.529
Method's own interval	0.88 [0.83, 0.92]	w = 0.67
Own interval, transcript fractions	0.9 [0.84, 0.93]	w = 0.67
Fisher information (Wald)	1 [0.98, 1]	w = 0.994
Godambe sandwich	1 [0.98, 1]	w = 0.971
Released code, as published	1 [0.98, 1]	w = 0.971

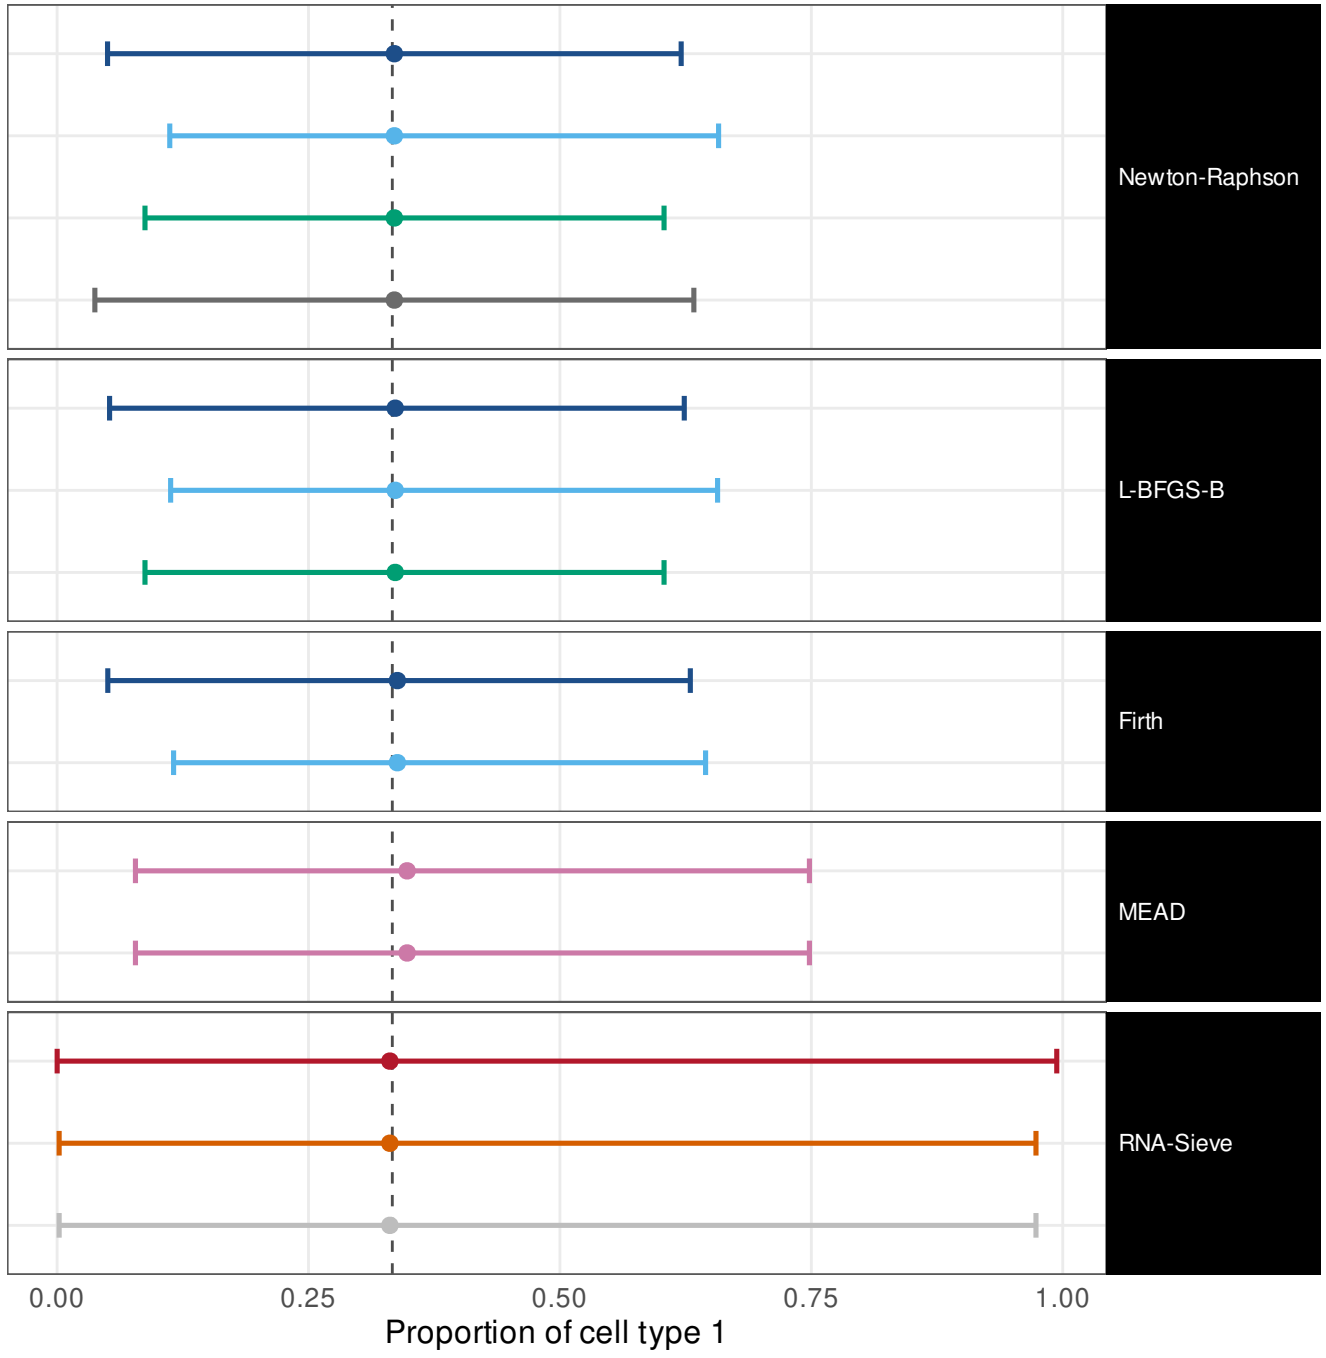

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 Scale-free

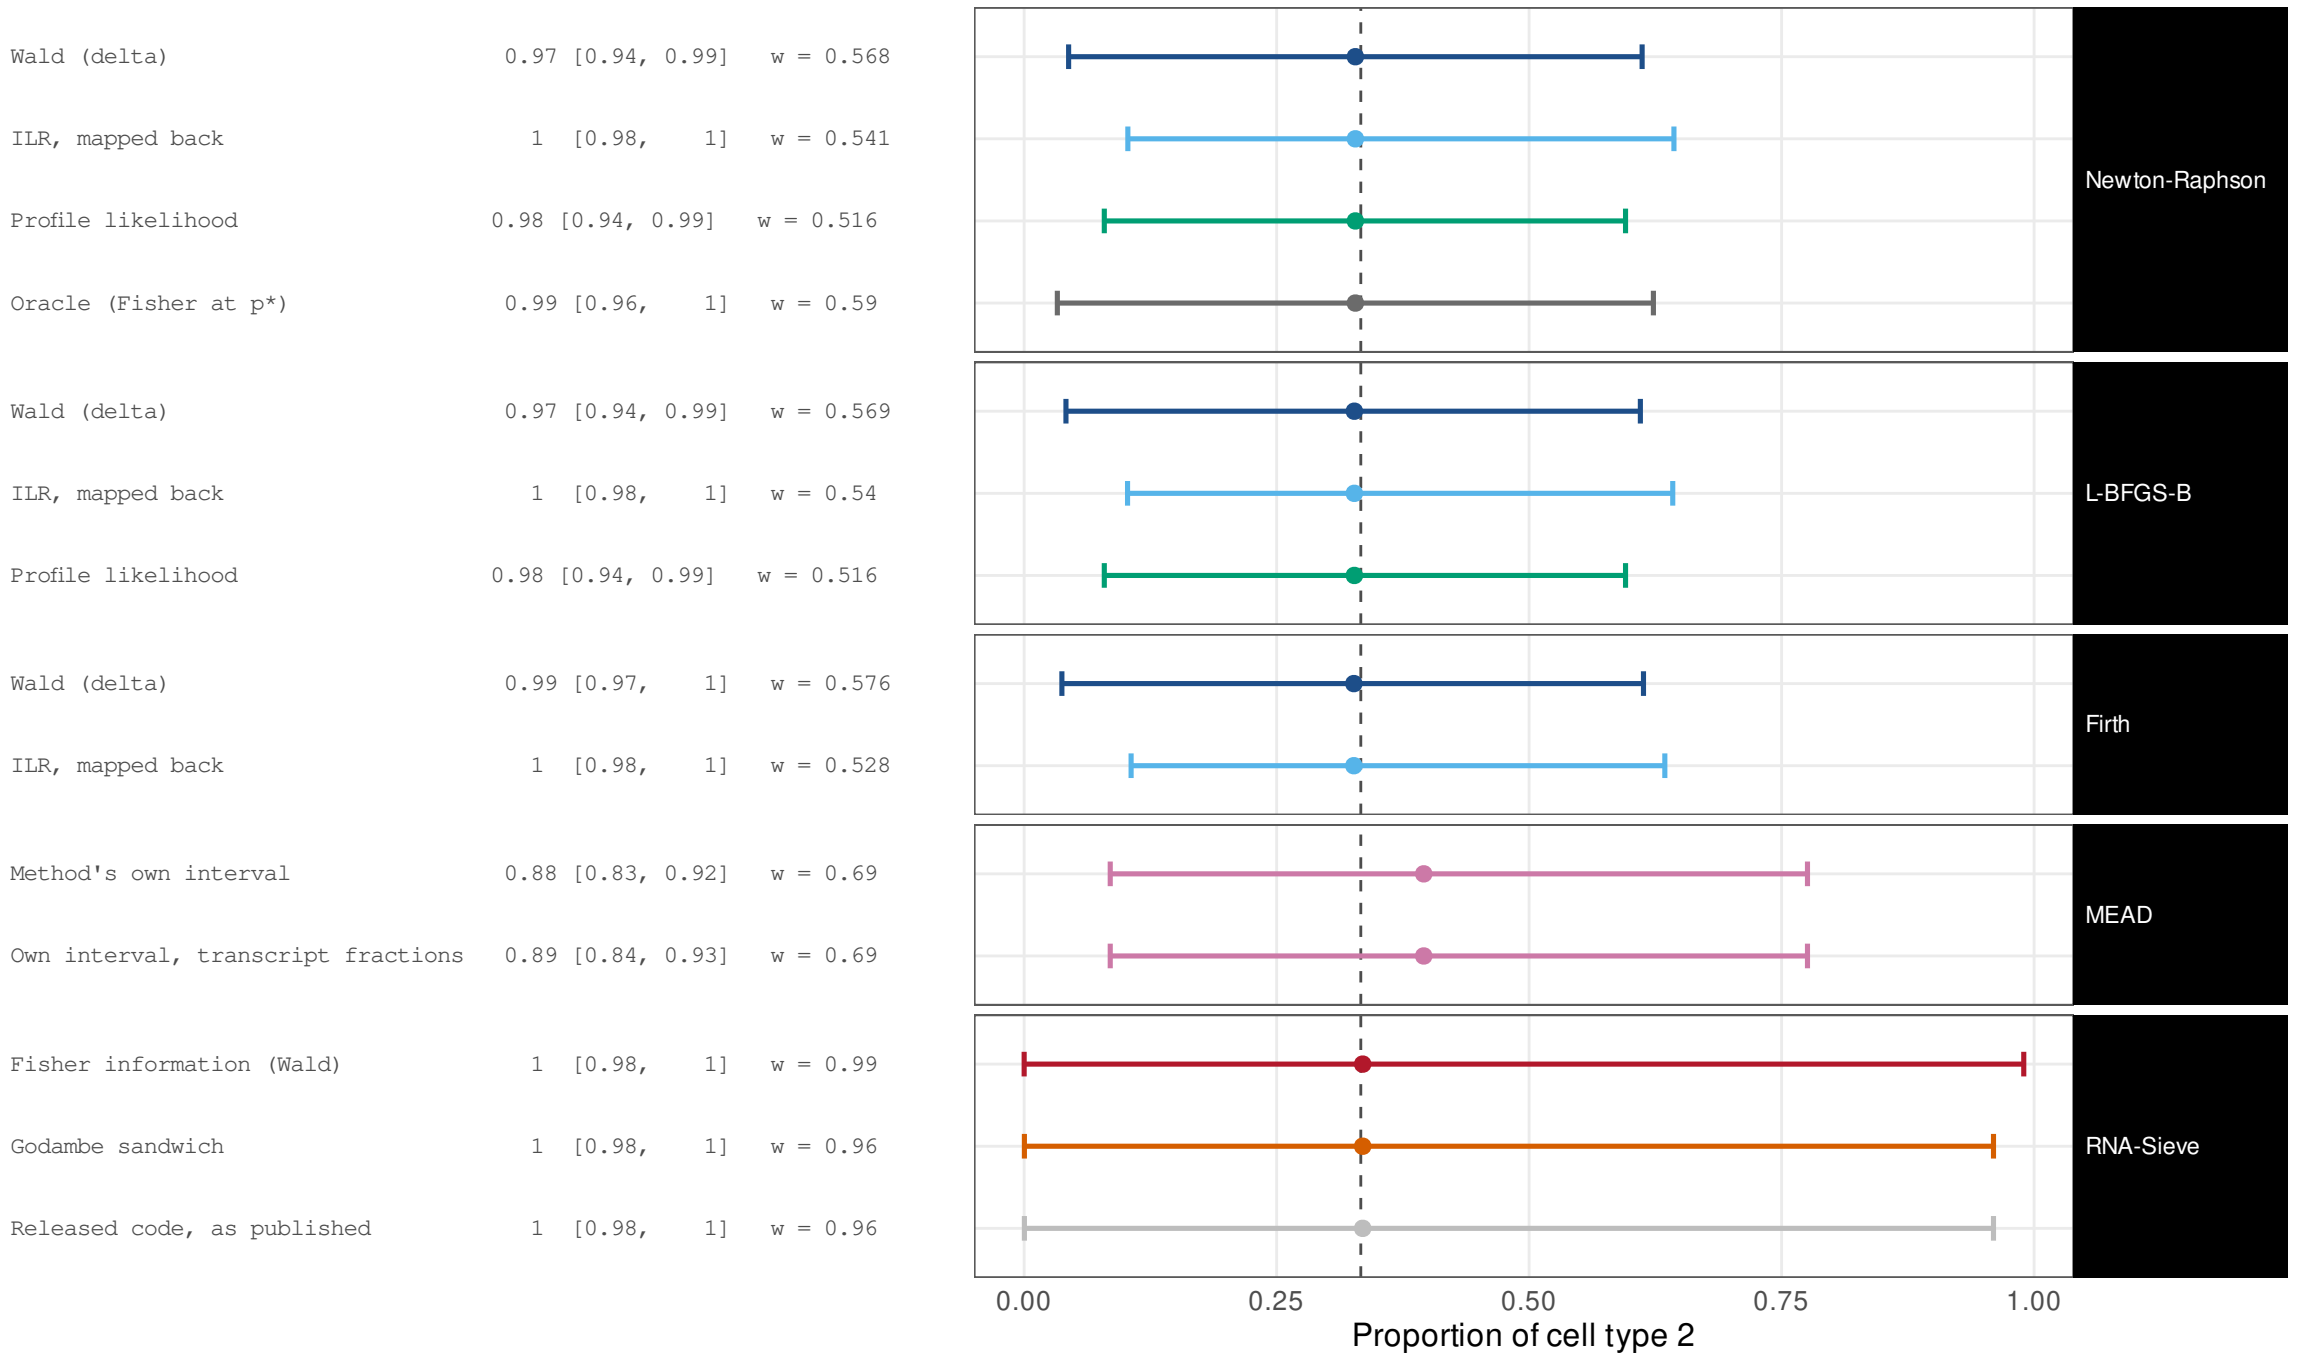


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.97 [0.94, 0.99]	w = 0.266
ILR, mapped back	1 [0.97, 1]	w = 0.286
Profile likelihood	0.96 [0.93, 0.98]	w = 0.271
Oracle (Fisher at p*)	0.96 [0.92, 0.98]	w = 0.257
Wald (delta)	0.97 [0.94, 0.99]	w = 0.266
ILR, mapped back	0.99 [0.97, 1]	w = 0.284
Profile likelihood	0.96 [0.93, 0.98]	w = 0.271
Wald (delta)	0.98 [0.95, 0.99]	w = 0.263
ILR, mapped back	0.99 [0.97, 1]	w = 0.272
Method's own interval	0.66 [0.59, 0.72]	w = 0.213
Own interval, transcript fractions	0.9 [0.86, 0.94]	w = 0.213
Fisher information (Wald)	1 [0.98, 1]	w = 0.816
Godambe sandwich	0.99 [0.96, 1]	w = 0.588
Released code, as published	0.99 [0.96, 1]	w = 0.588

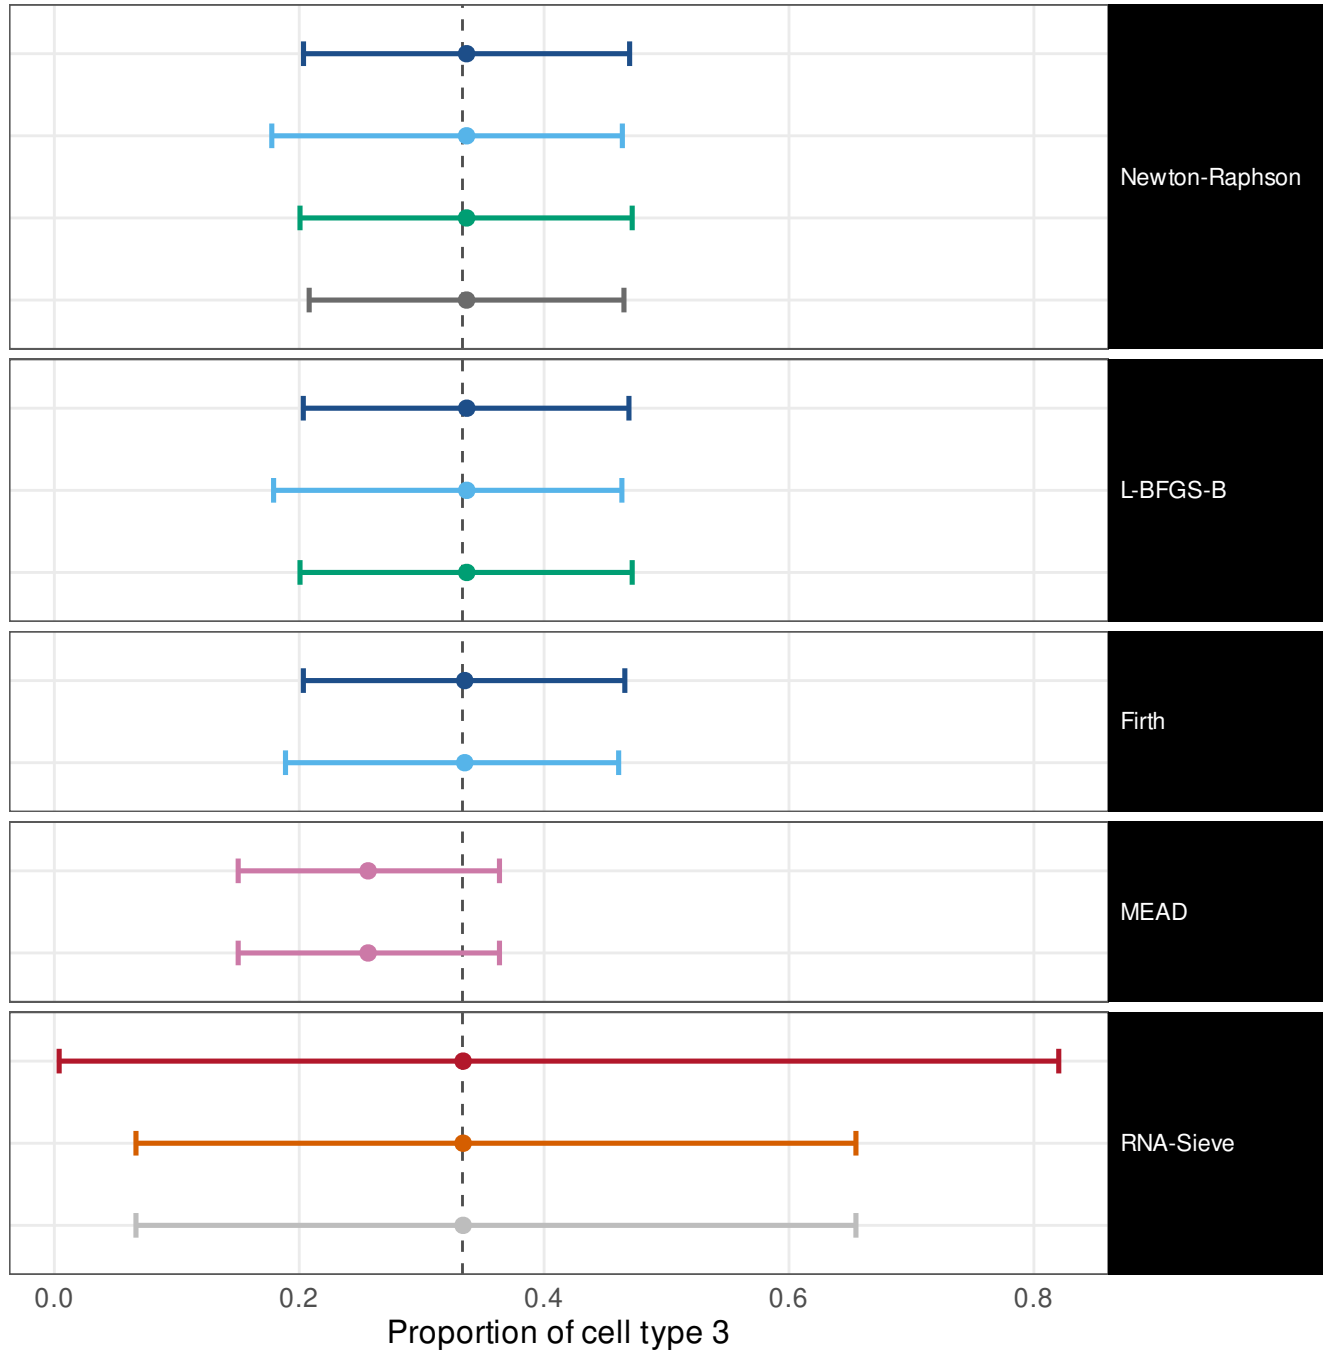


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.95 [0.91, 0.97]	w = 0.55
ILR, mapped back	1 [0.98, 1]	w = 0.537
Profile likelihood	0.98 [0.94, 0.99]	w = 0.512
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 0.562
Wald (delta)	0.96 [0.92, 0.98]	w = 0.551
ILR, mapped back	1 [0.98, 1]	w = 0.533
Profile likelihood	0.98 [0.94, 0.99]	w = 0.512
Wald (delta)	1 [0.98, 1]	w = 0.558
ILR, mapped back	1 [0.98, 1]	w = 0.515
Method's own interval	0.92 [0.87, 0.95]	w = 0.699
Own interval, transcript fractions	0.9 [0.85, 0.93]	w = 0.699
Fisher information (Wald)	1 [0.98, 1]	w = 0.992
Godambe sandwich	1 [0.98, 1]	w = 0.966
Released code, as published	1 [0.98, 1]	w = 0.966

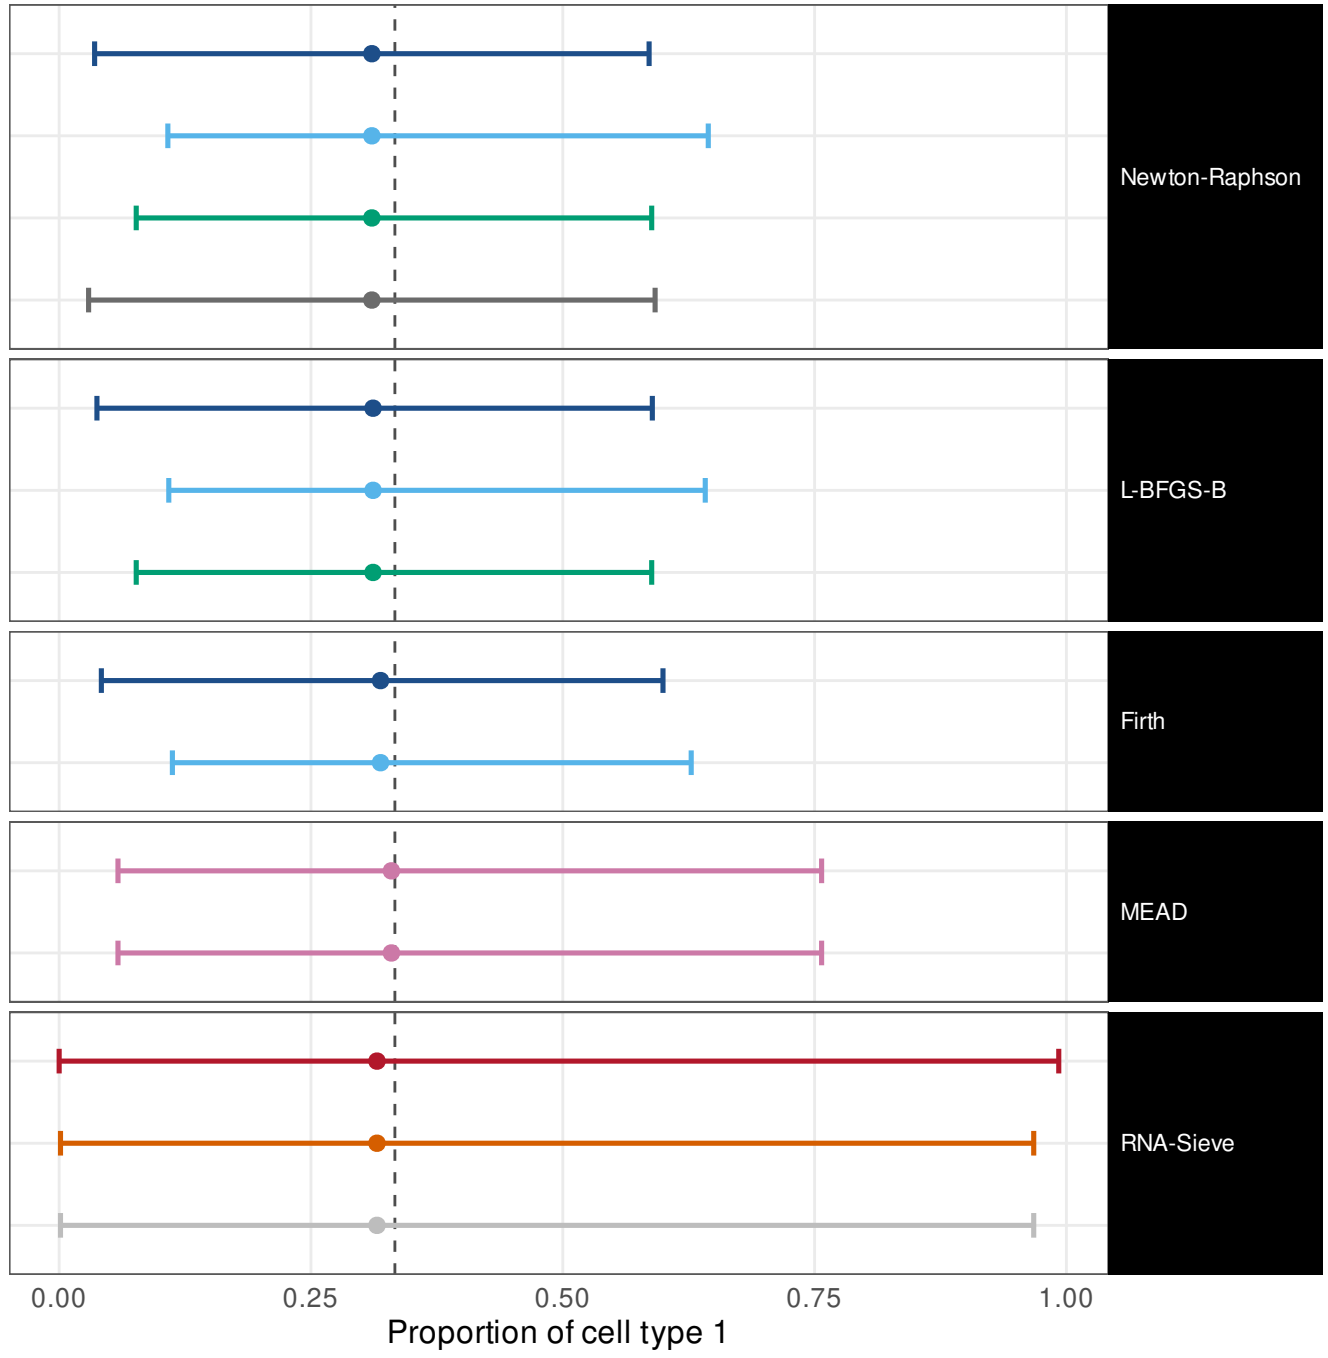


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96 [0.92, 0.98]	w = 0.547
ILR, mapped back	1 [0.98, 1]	w = 0.52
Profile likelihood	0.98 [0.96, 0.99]	w = 0.523
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 0.556
Wald (delta)	0.97 [0.94, 0.99]	w = 0.548
ILR, mapped back	1 [0.98, 1]	w = 0.518
Profile likelihood	0.98 [0.96, 0.99]	w = 0.523
Wald (delta)	1 [0.98, 1]	w = 0.553
ILR, mapped back	1 [0.98, 1]	w = 0.505
Method's own interval	0.88 [0.83, 0.92]	w = 0.716
Own interval, transcript fractions	0.89 [0.84, 0.93]	w = 0.716
Fisher information (Wald)	1 [0.98, 1]	w = 0.992
Godambe sandwich	1 [0.98, 1]	w = 0.976
Released code, as published	1 [0.98, 1]	w = 0.976

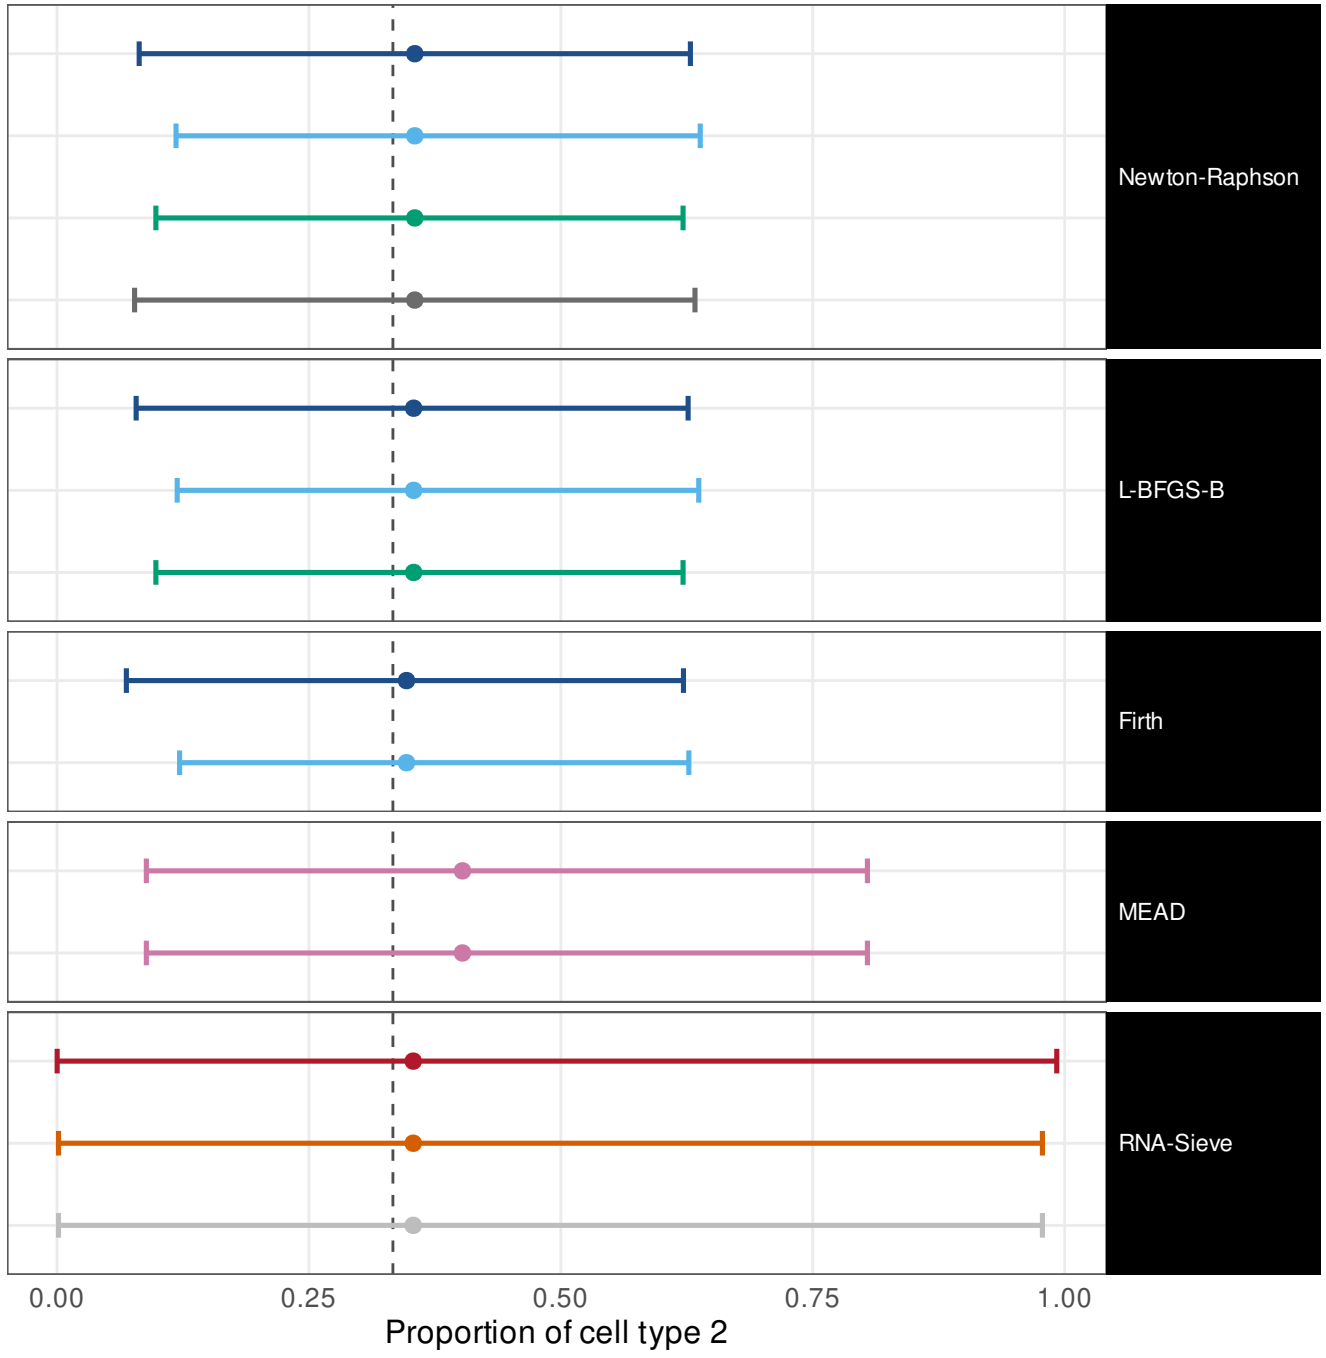


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 Scale-free


Wald (delta)	0.94 [0.9, 0.97]	w = 0.245
ILR, mapped back	0.98 [0.95, 0.99]	w = 0.266
Profile likelihood	0.94 [0.89, 0.96]	w = 0.252
Oracle (Fisher at p*)	0.93 [0.89, 0.96]	w = 0.236
Wald (delta)	0.94 [0.9, 0.97]	w = 0.245
ILR, mapped back	0.99 [0.96, 1]	w = 0.265
Profile likelihood	0.94 [0.89, 0.96]	w = 0.252
Wald (delta)	0.96 [0.93, 0.98]	w = 0.241
ILR, mapped back	1 [0.98, 1]	w = 0.252
Method's own interval	0.74 [0.68, 0.8]	w = 0.302
Own interval, transcript fractions	0.9 [0.84, 0.93]	w = 0.302
Fisher information (Wald)	1 [0.98, 1]	w = 0.812
Godambe sandwich	1 [0.98, 1]	w = 0.63
Released code, as published	1 [0.98, 1]	w = 0.63

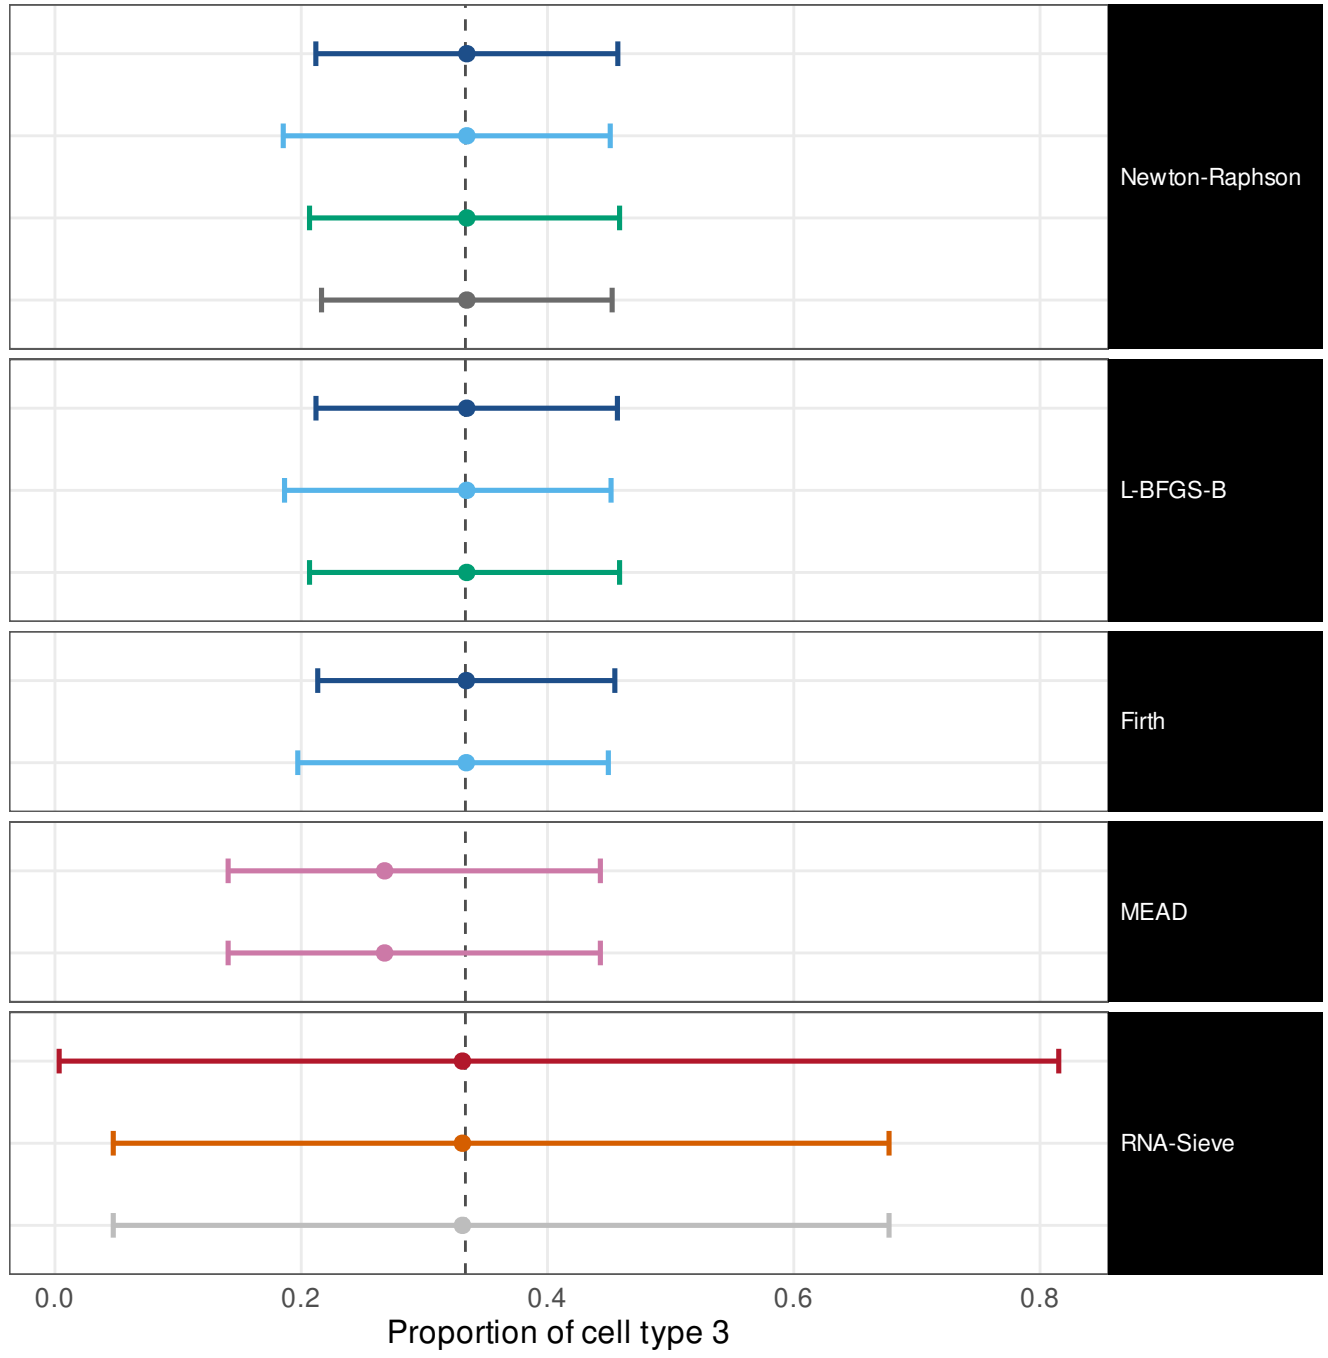

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w


balanced / low overlap / CT1 Scale-free / CT2 SBM

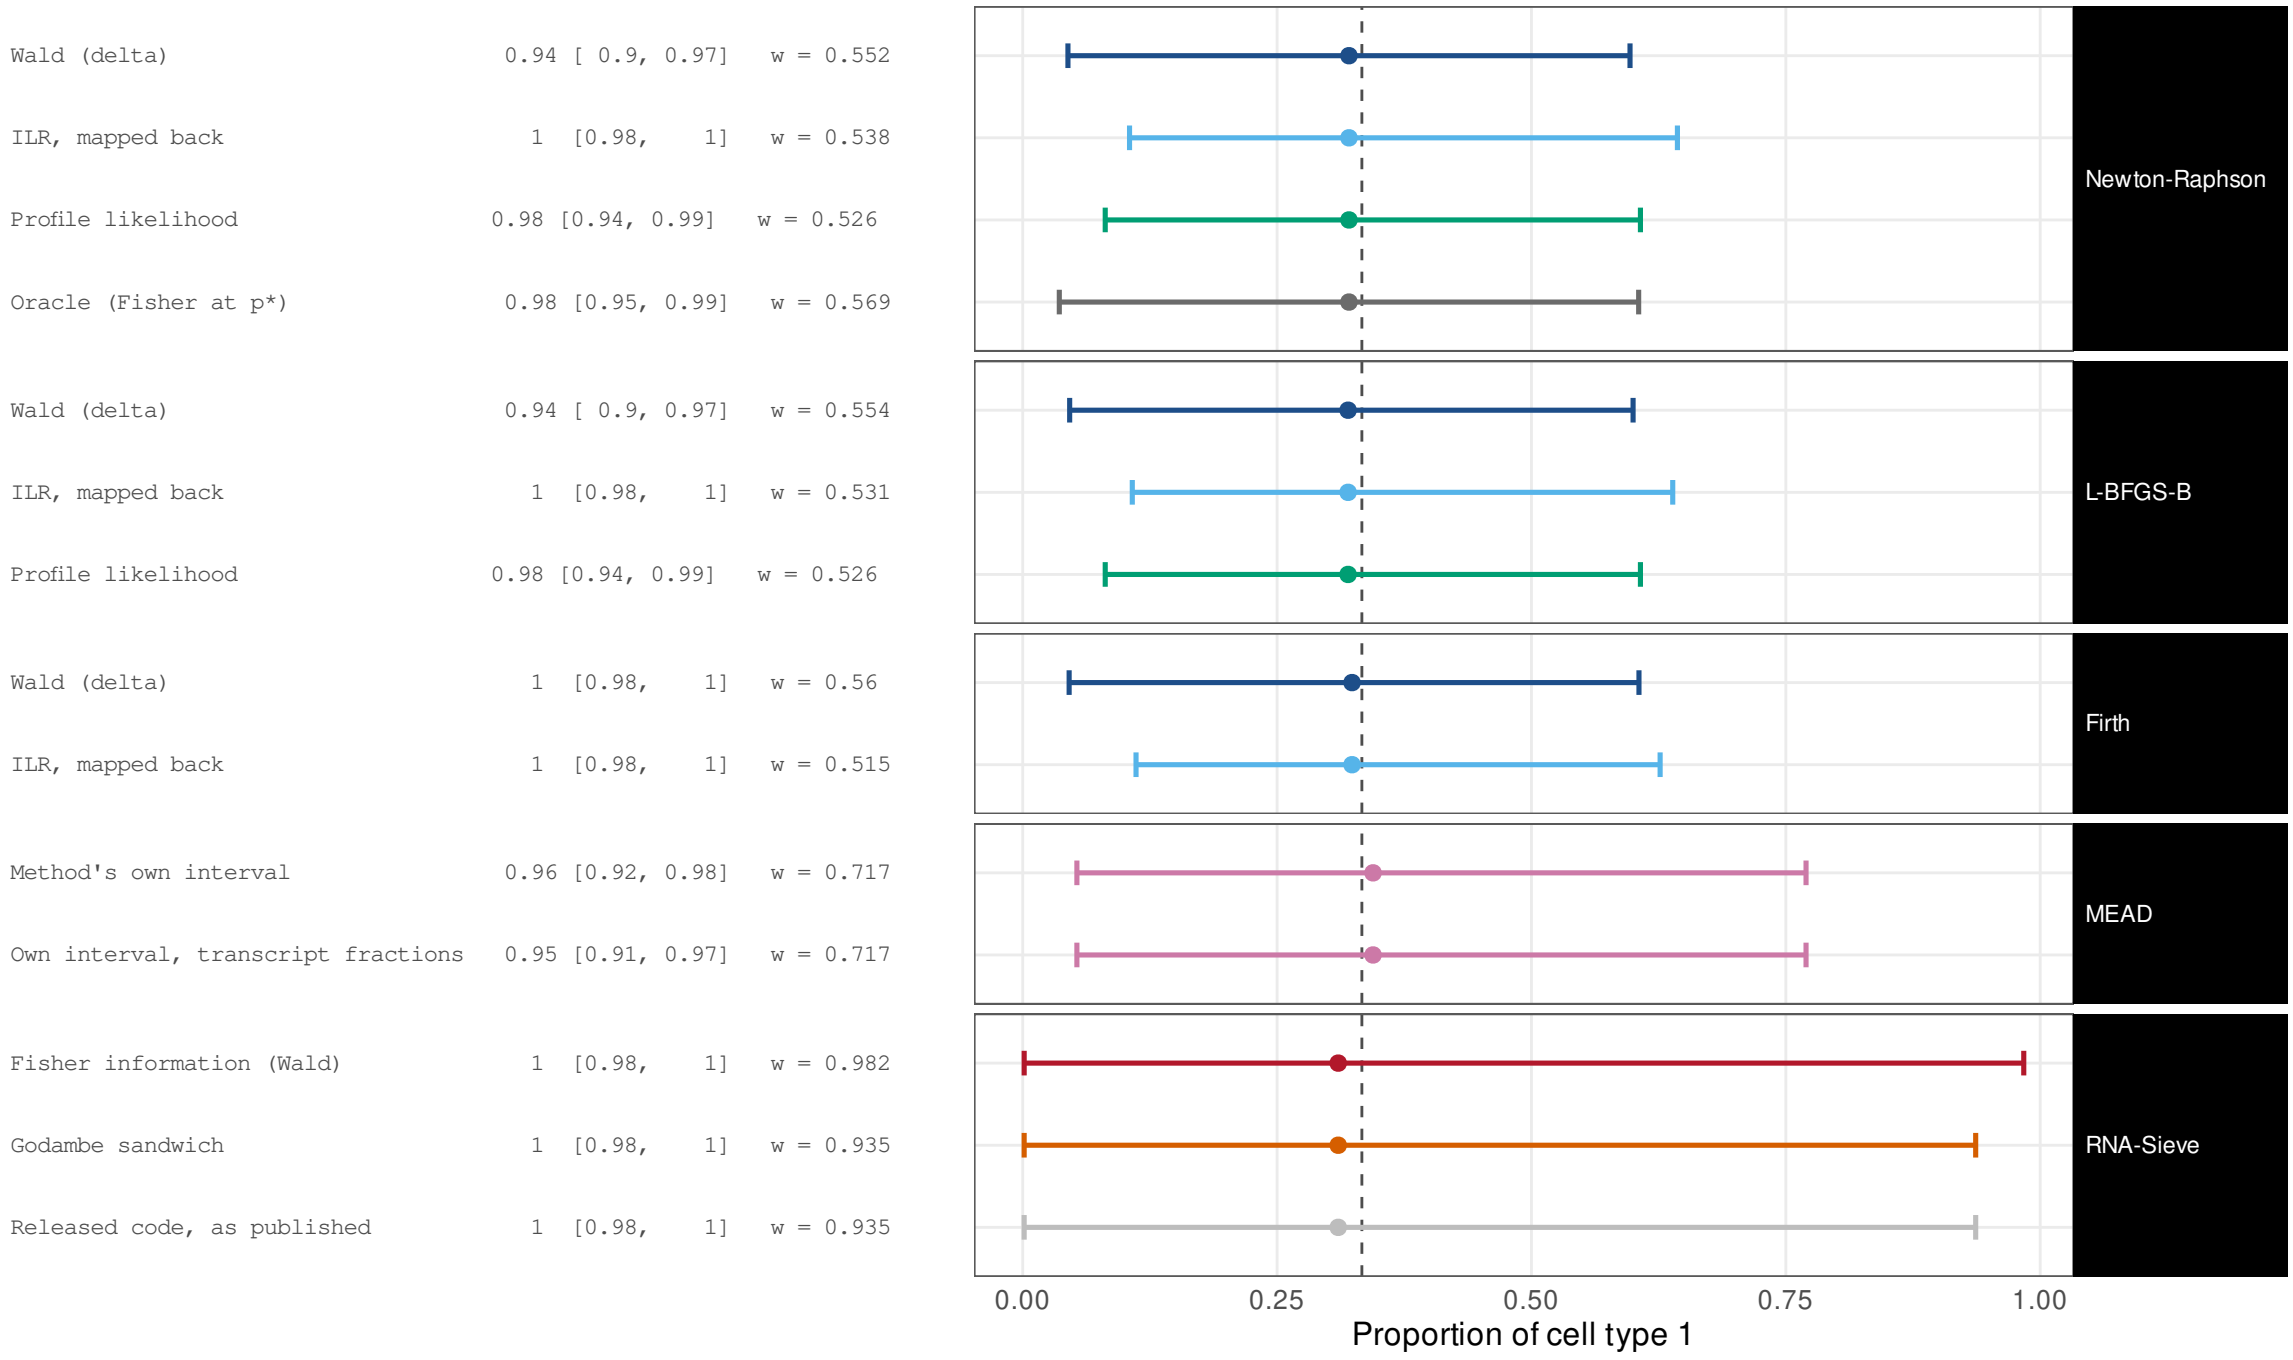

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 SBM

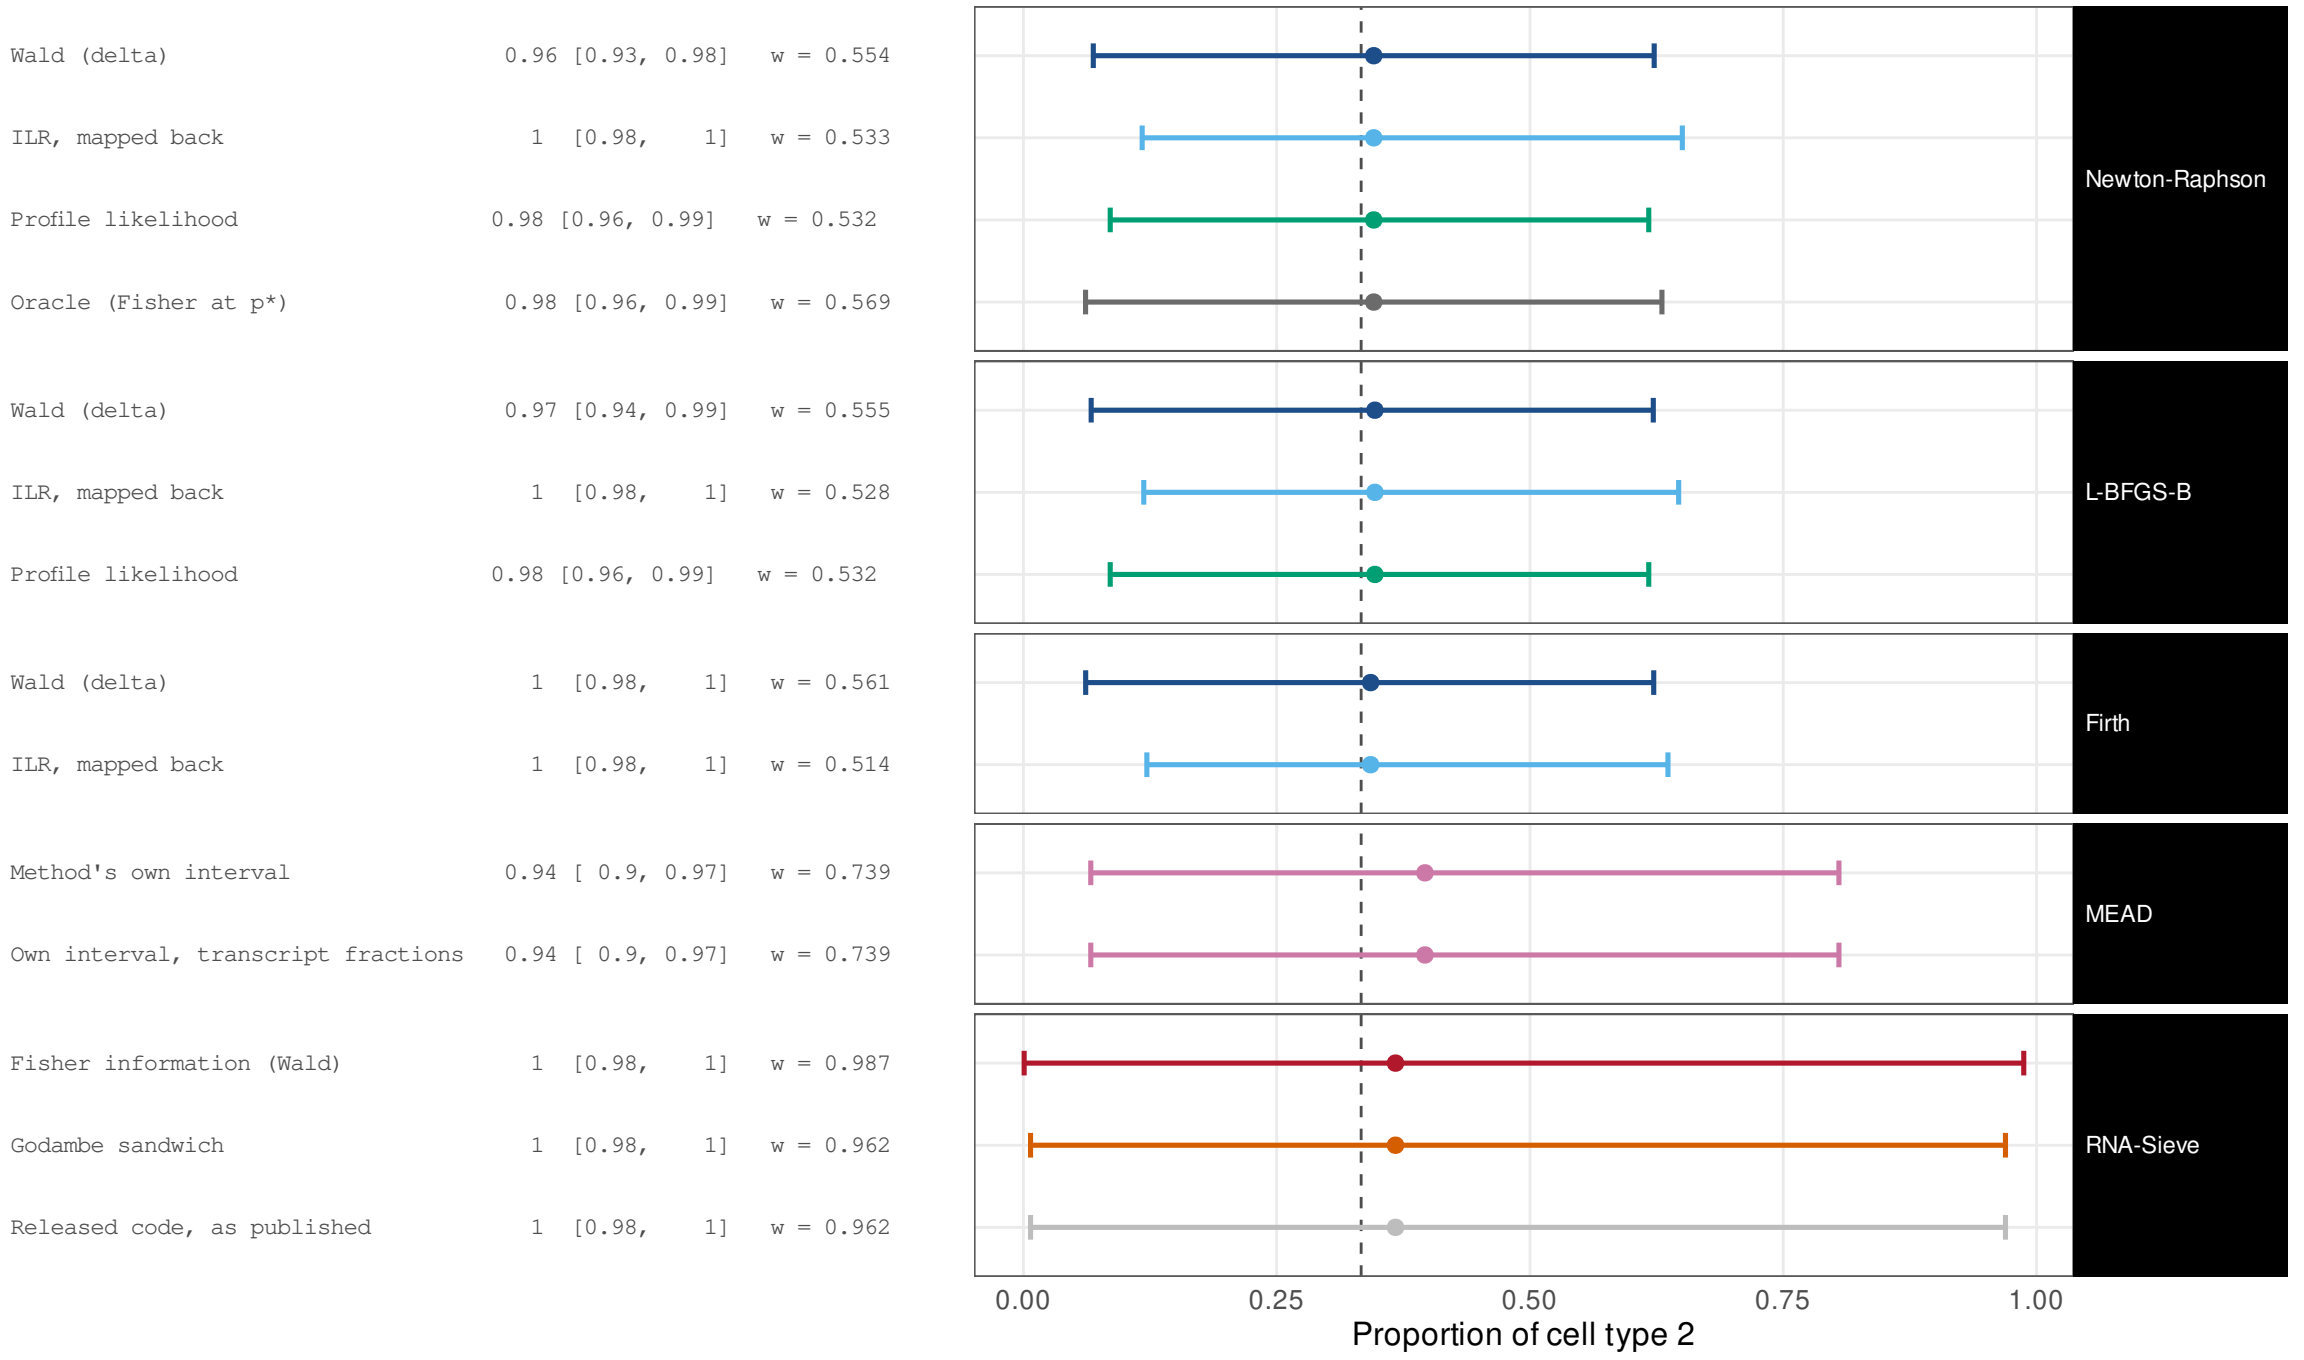


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.97 [0.94, 0.99]	w = 0.265
ILR, mapped back	1 [0.97, 1]	w = 0.285
Profile likelihood	0.97 [0.94, 0.99]	w = 0.275
Oracle (Fisher at p*)	0.97 [0.94, 0.99]	w = 0.256
Wald (delta)	0.97 [0.94, 0.99]	w = 0.264
ILR, mapped back	0.99 [0.97, 1]	w = 0.281
Profile likelihood	0.97 [0.94, 0.99]	w = 0.275
Wald (delta)	0.97 [0.94, 0.99]	w = 0.261
ILR, mapped back	1 [0.98, 1]	w = 0.269
Method's own interval	0.72 [0.65, 0.77]	w = 0.242
Own interval, transcript fractions	0.82 [0.77, 0.87]	w = 0.242
Fisher information (Wald)	1 [0.97, 1]	w = 0.801
Godambe sandwich	0.99 [0.96, 1]	w = 0.625
Released code, as published	0.99 [0.96, 1]	w = 0.625

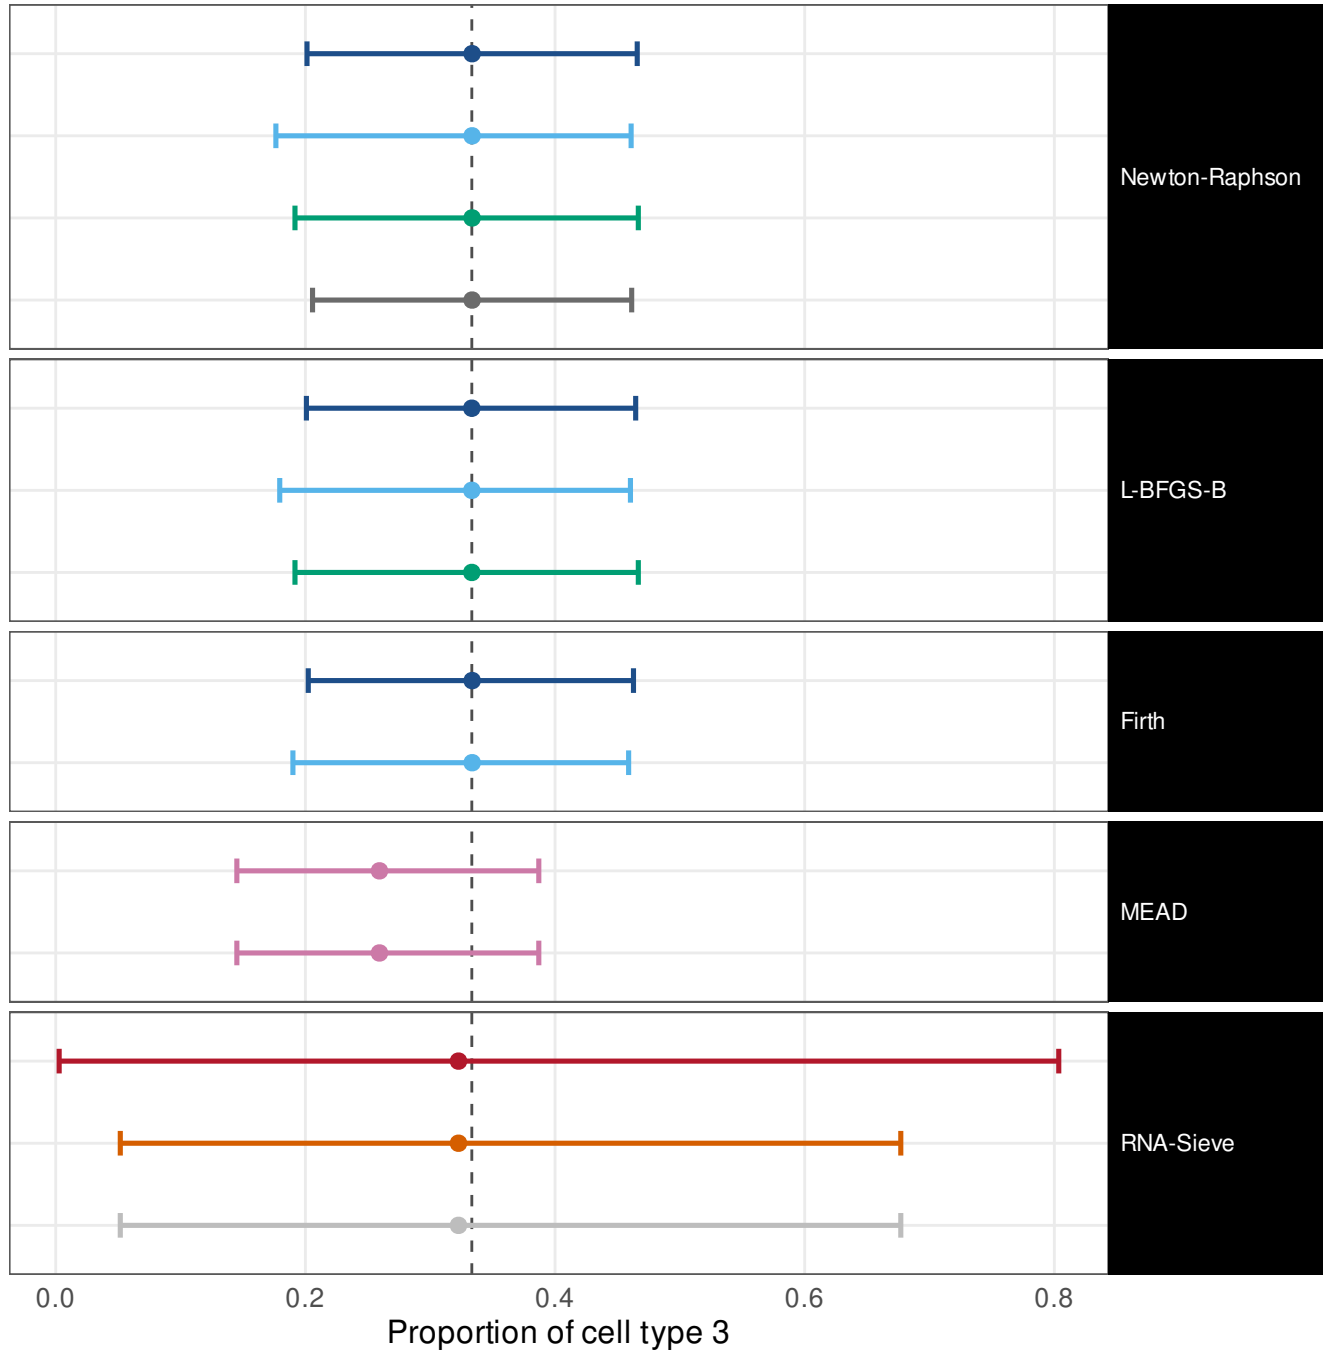


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 SBM


Wald (delta)	0.94 [0.9, 0.97]	w = 0.55
ILR, mapped back	1 [0.98, 1]	w = 0.531
Profile likelihood	0.97 [0.94, 0.99]	w = 0.526
Oracle (Fisher at p*)	0.98 [0.94, 0.99]	w = 0.567
Wald (delta)	0.96 [0.93, 0.98]	w = 0.552
ILR, mapped back	1 [0.98, 1]	w = 0.523
Profile likelihood	0.97 [0.94, 0.99]	w = 0.526
Wald (delta)	1 [0.98, 1]	w = 0.557
ILR, mapped back	1 [0.98, 1]	w = 0.51
Method's own interval	0.9 [0.86, 0.94]	w = 0.687
Own interval, transcript fractions	0.9 [0.86, 0.94]	w = 0.687
Fisher information (Wald)	1 [0.98, 1]	w = 0.986
Godambe sandwich	1 [0.98, 1]	w = 0.948
Released code, as published	1 [0.98, 1]	w = 0.948

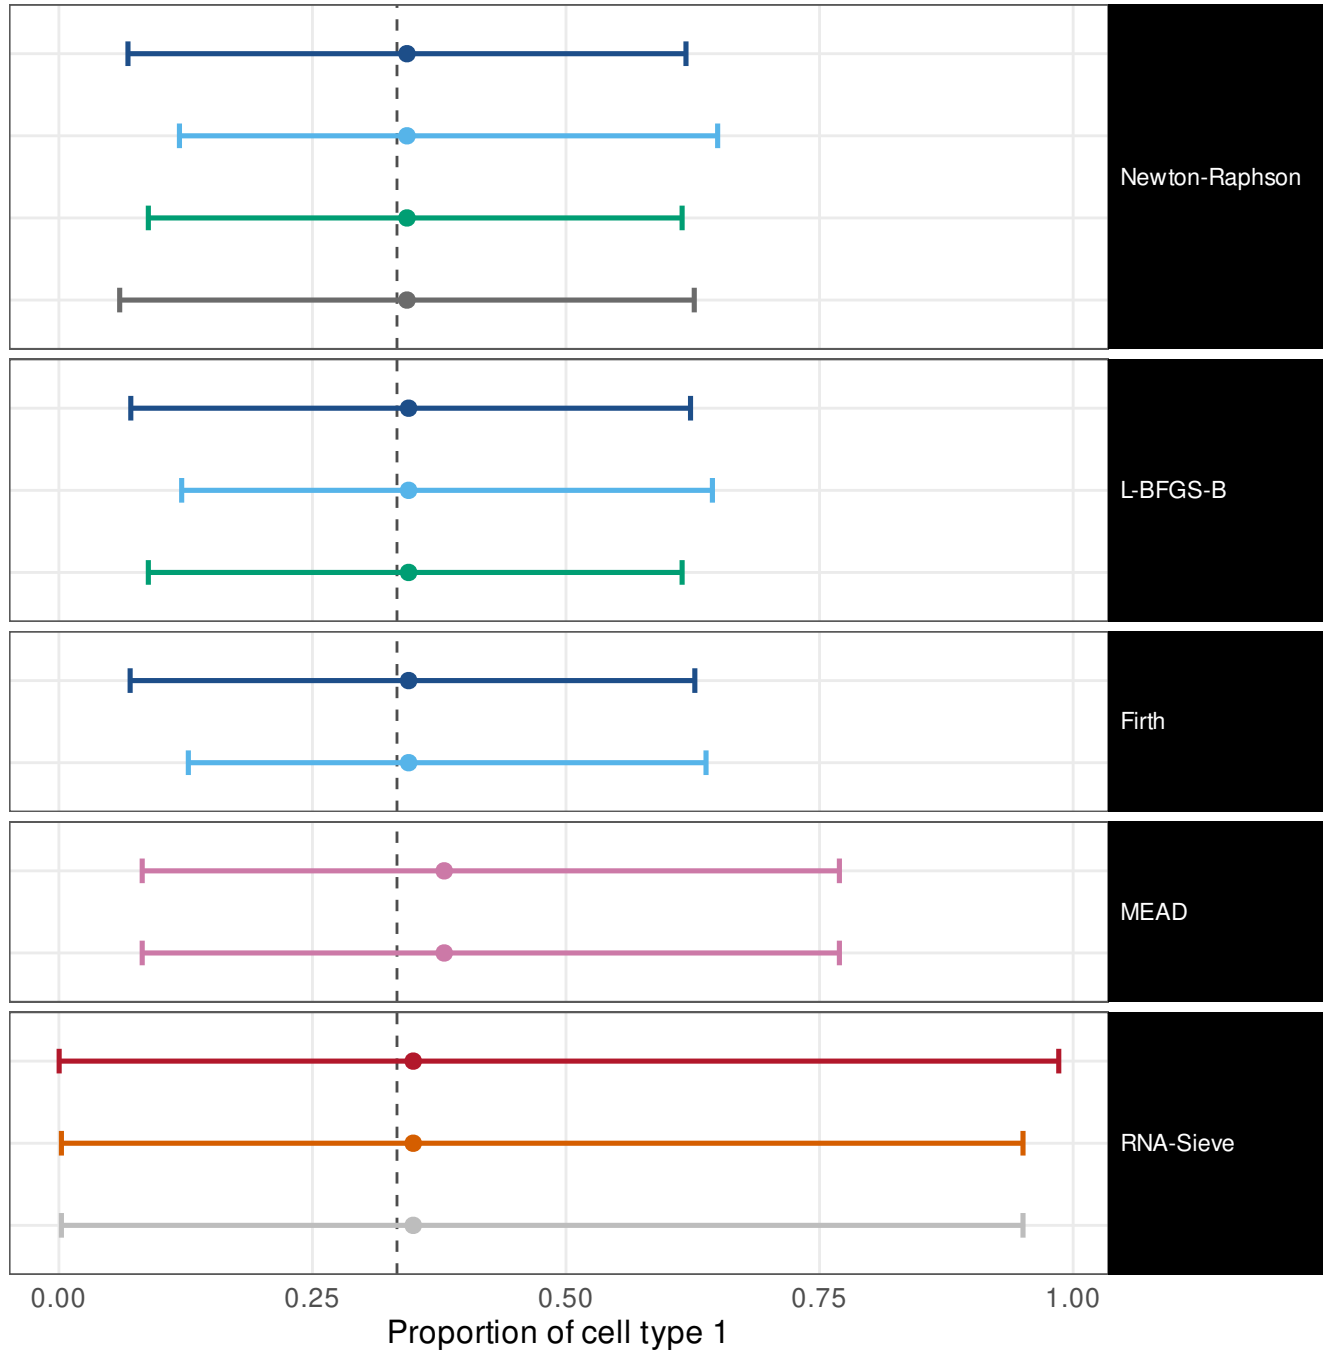

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 SBM

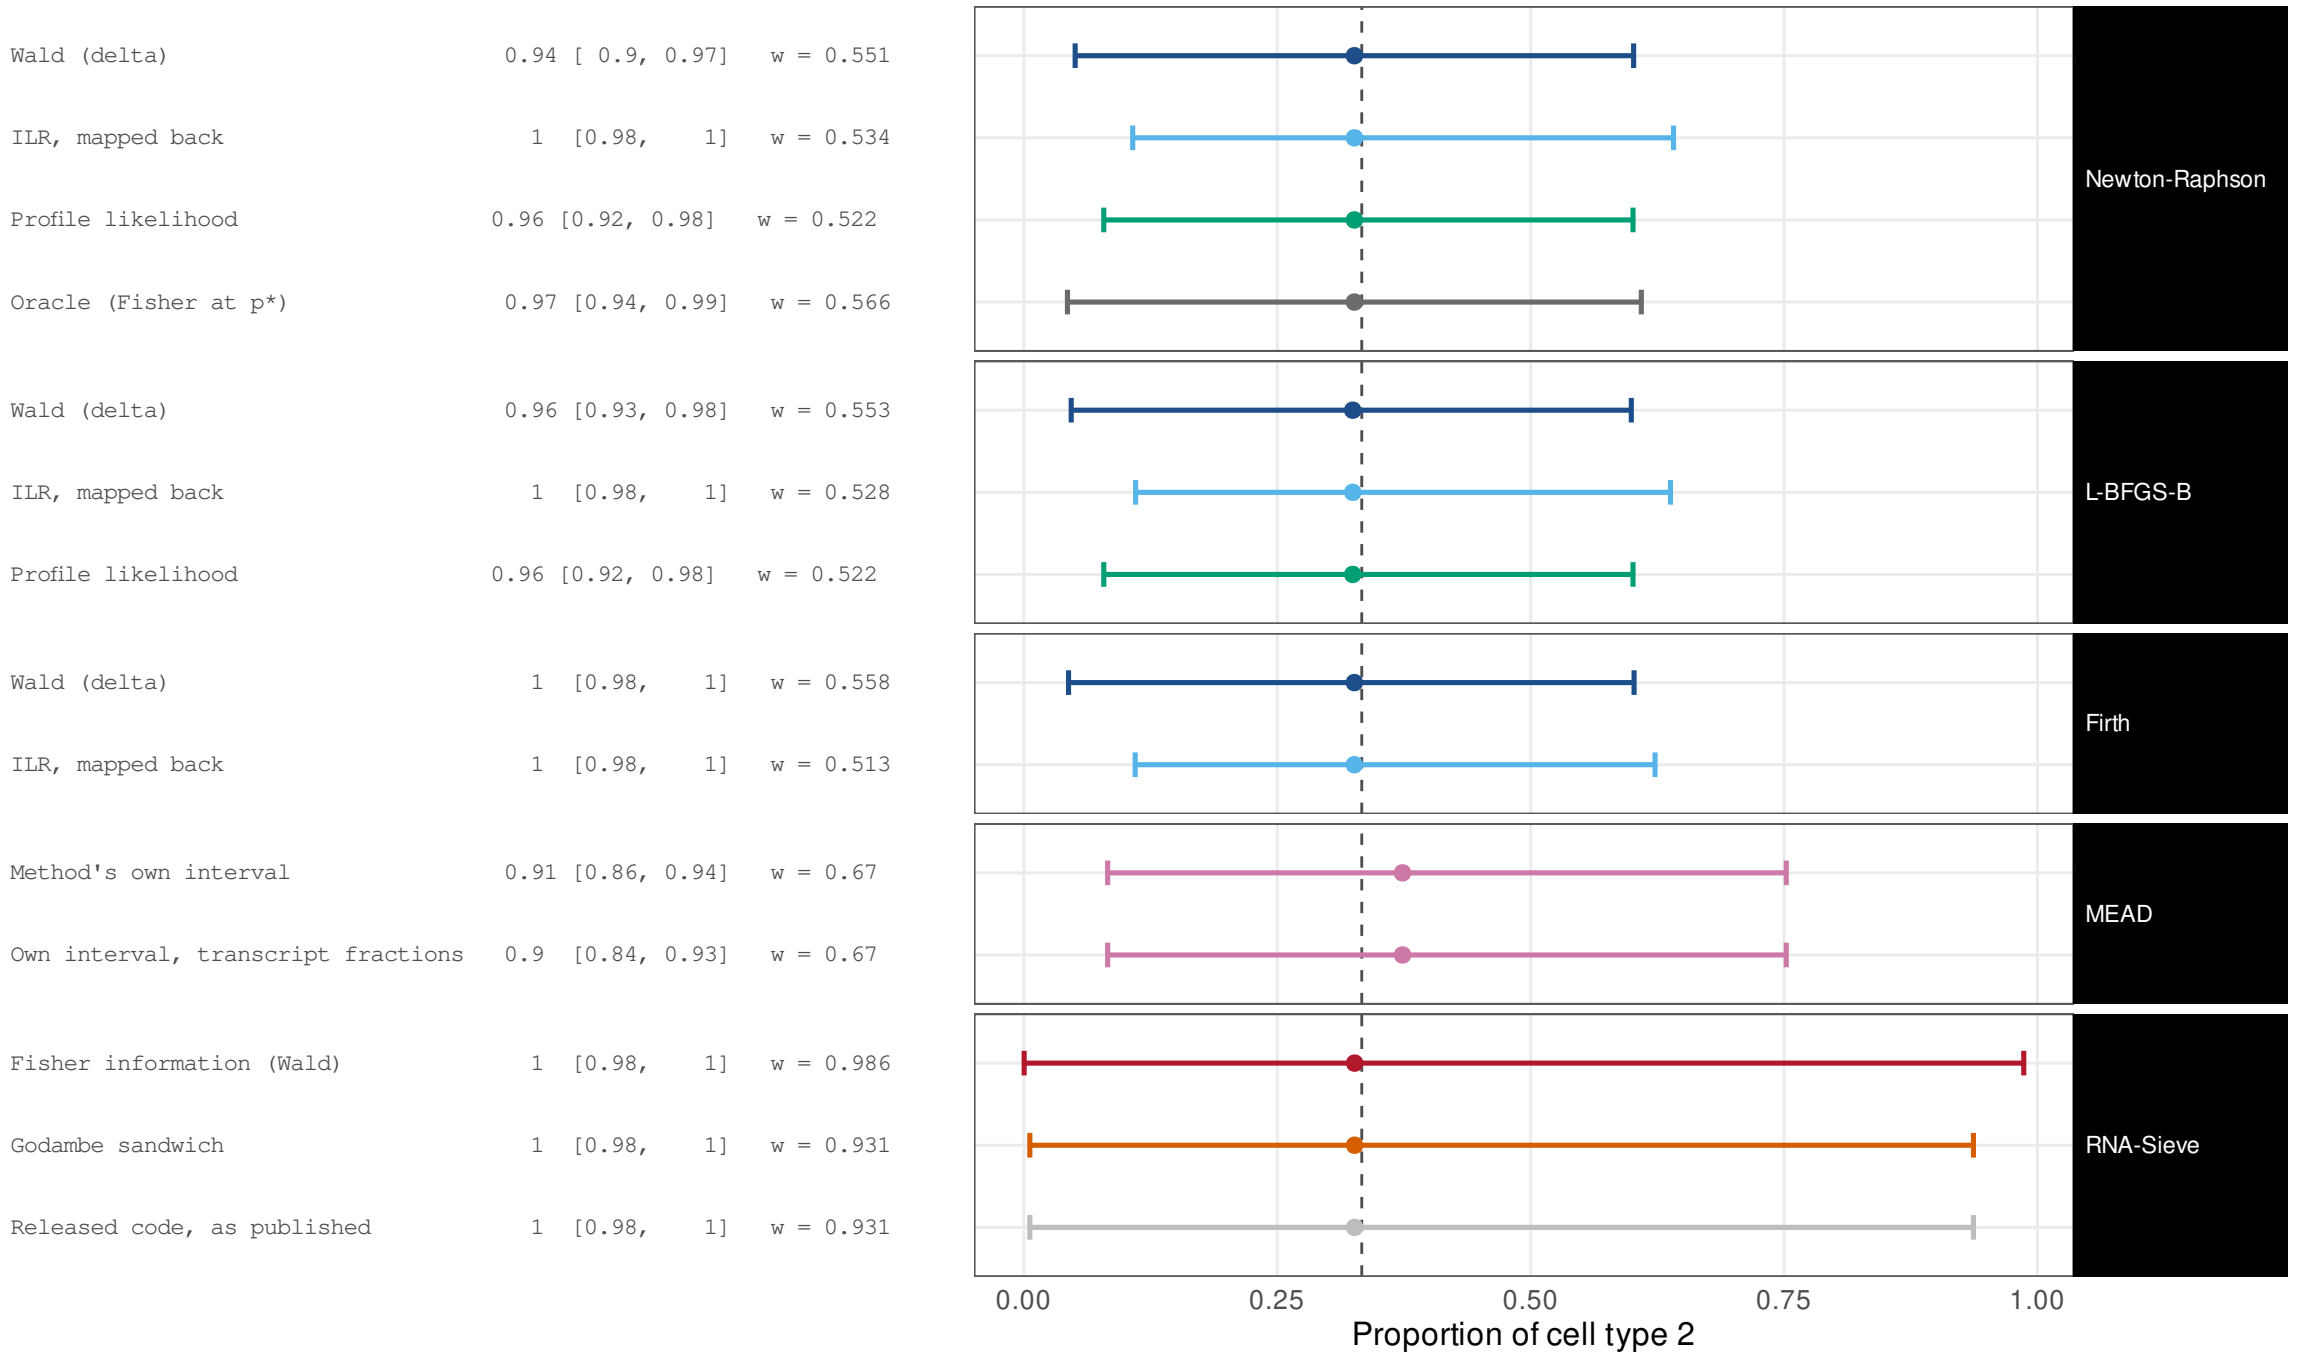


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.96 [0.92, 0.98]	w = 0.262
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.281
Profile likelihood	0.96 [0.92, 0.98]	w = 0.269
Oracle (Fisher at p*)	0.96 [0.92, 0.98]	w = 0.253
Wald (delta)	0.96 [0.92, 0.98]	w = 0.261
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.277
Profile likelihood	0.96 [0.92, 0.98]	w = 0.269
Wald (delta)	0.97 [0.93, 0.99]	w = 0.258
ILR, mapped back	0.99 [0.96, 1]	w = 0.265
Method's own interval	0.66 [0.59, 0.72]	w = 0.285
Own interval, transcript fractions	0.86 [0.81, 0.91]	w = 0.285
Fisher information (Wald)	1 [0.98, 1]	w = 0.799
Godambe sandwich	1 [0.97, 1]	w = 0.622
Released code, as published	1 [0.97, 1]	w = 0.622

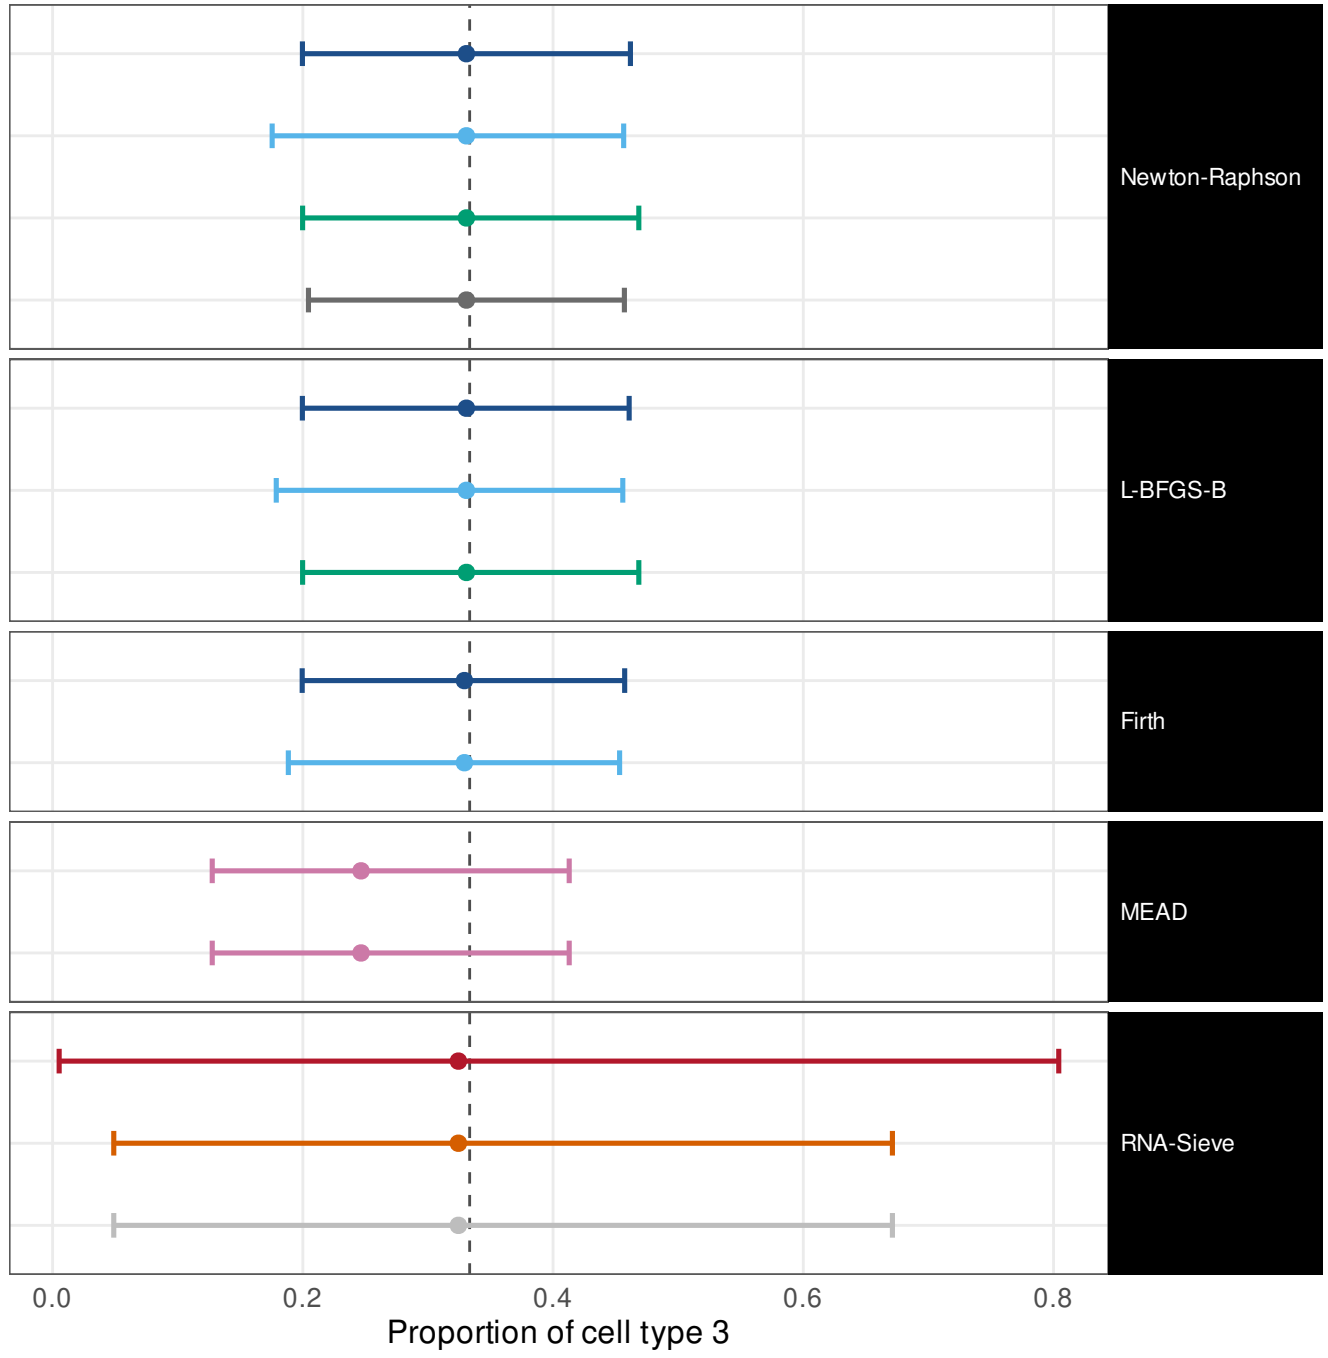


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 Scale-free


Wald (delta)	0.96 [0.92, 0.98]	w = 0.782
ILR, mapped back	1 [0.98, 1]	w = 0.703
Profile likelihood	0.99 [0.96, 1]	w = 0.65
Oracle (Fisher at p*)	1 [0.98, 1]	w = 0.831
Wald (delta)	0.97 [0.94, 0.99]	w = 0.787
ILR, mapped back	1 [0.98, 1]	w = 0.695
Profile likelihood	0.99 [0.96, 1]	w = 0.65
Wald (delta)	1 [0.98, 1]	w = 0.795
ILR, mapped back	1 [0.98, 1]	w = 0.678
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.97, 1]	w = 0.977
Godambe sandwich	1 [0.97, 1]	w = 0.917
Released code, as published	1 [0.97, 1]	w = 0.917

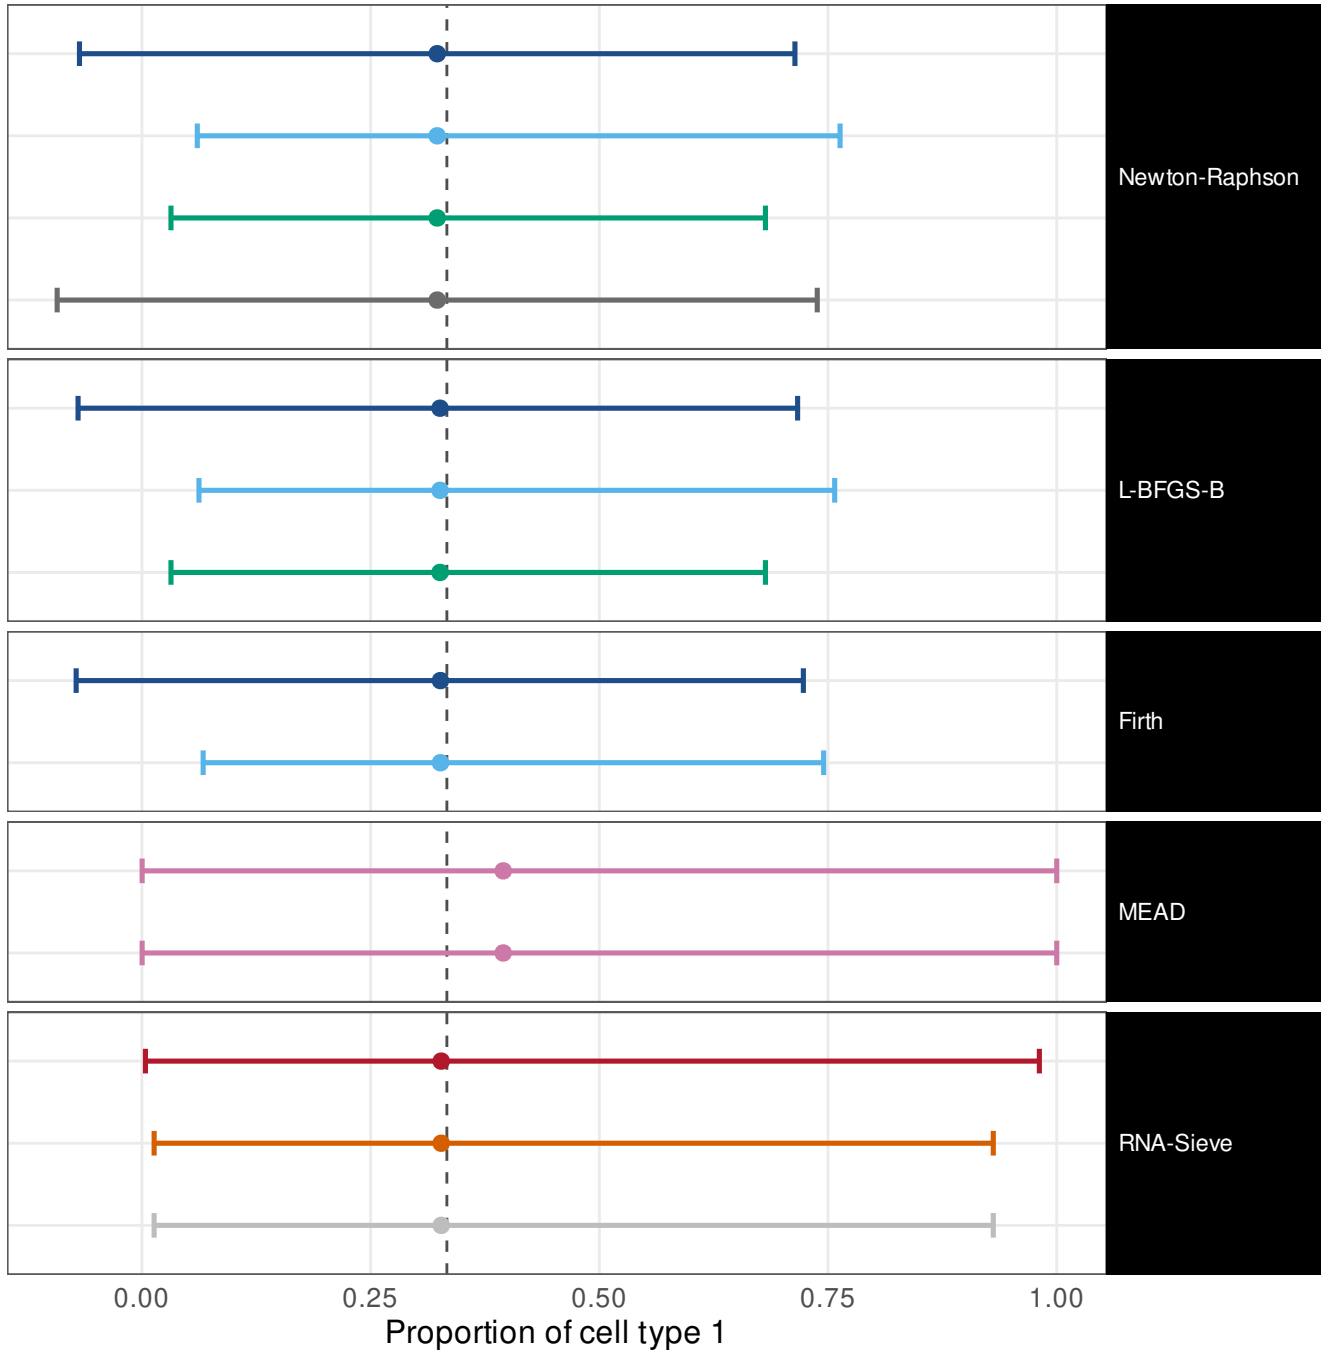

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

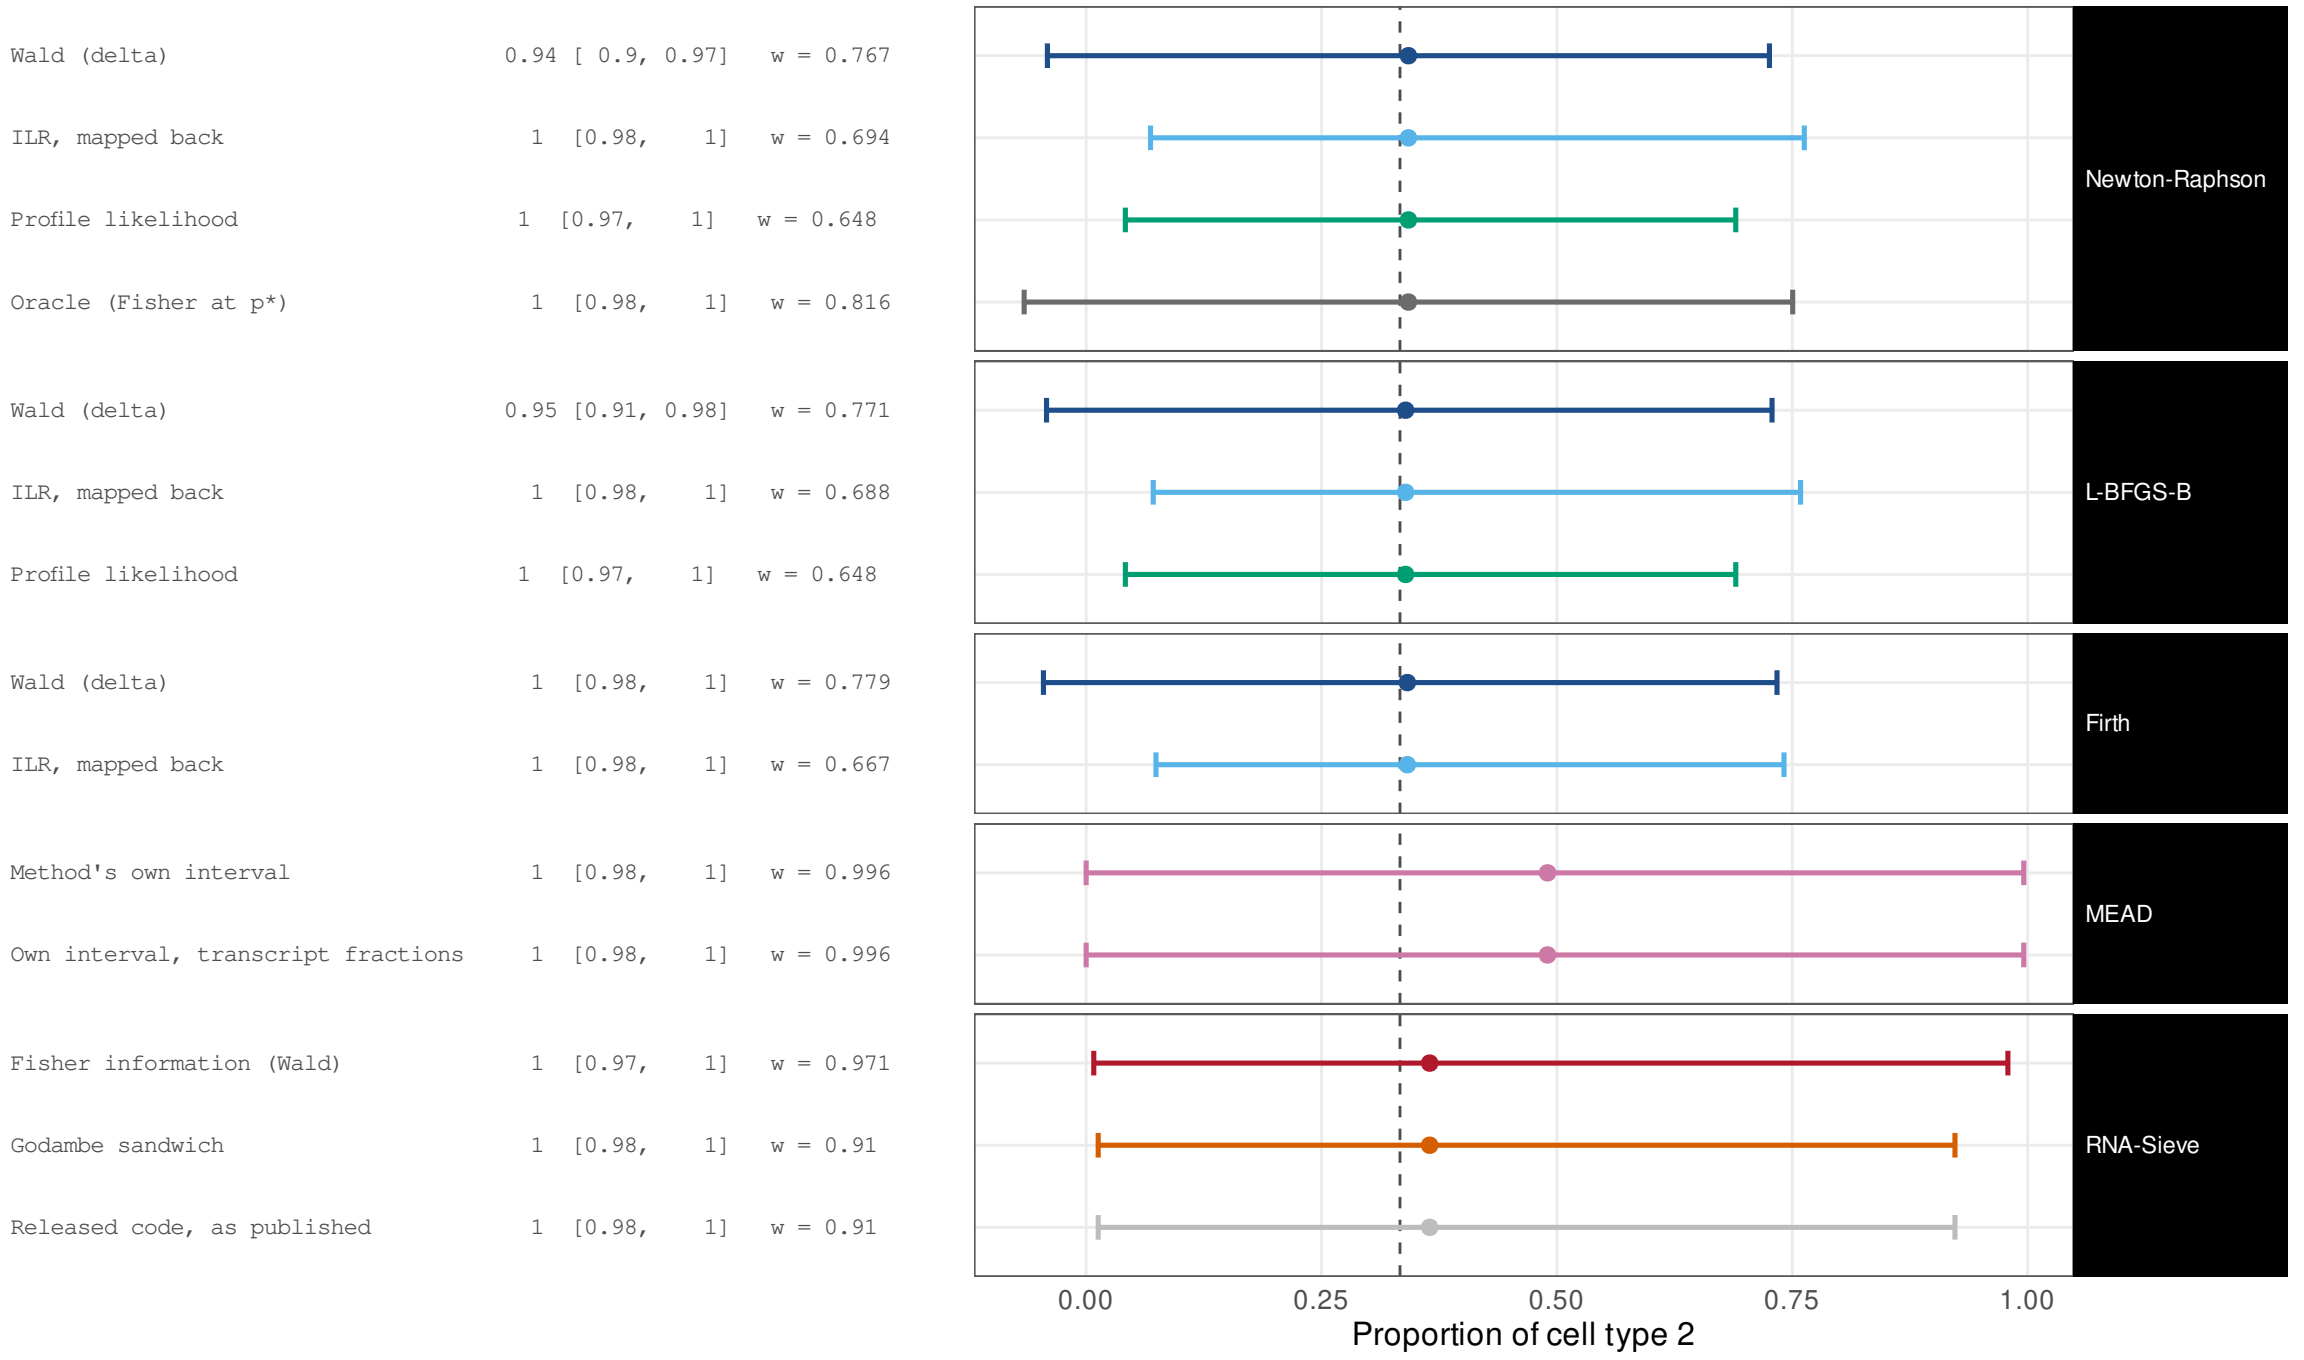


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.96 [0.92, 0.98]	w = 0.495
ILR, mapped back	1 [0.98, 1]	w = 0.505
Profile likelihood	0.96 [0.92, 0.98]	w = 0.478
Oracle (Fisher at p*)	0.96 [0.93, 0.98]	w = 0.477
Wald (delta)	0.97 [0.93, 0.99]	w = 0.493
ILR, mapped back	1 [0.98, 1]	w = 0.497
Profile likelihood	0.96 [0.92, 0.98]	w = 0.478
Wald (delta)	0.99 [0.97, 1]	w = 0.486
ILR, mapped back	1 [0.98, 1]	w = 0.473
Method's own interval	0.99 [0.96, 1]	w = 0.891
Own interval, transcript fractions	1 [0.97, 1]	w = 0.891
Fisher information (Wald)	1 [0.98, 1]	w = 0.778
Godambe sandwich	0.96 [0.92, 0.98]	w = 0.672
Released code, as published	0.96 [0.92, 0.98]	w = 0.672

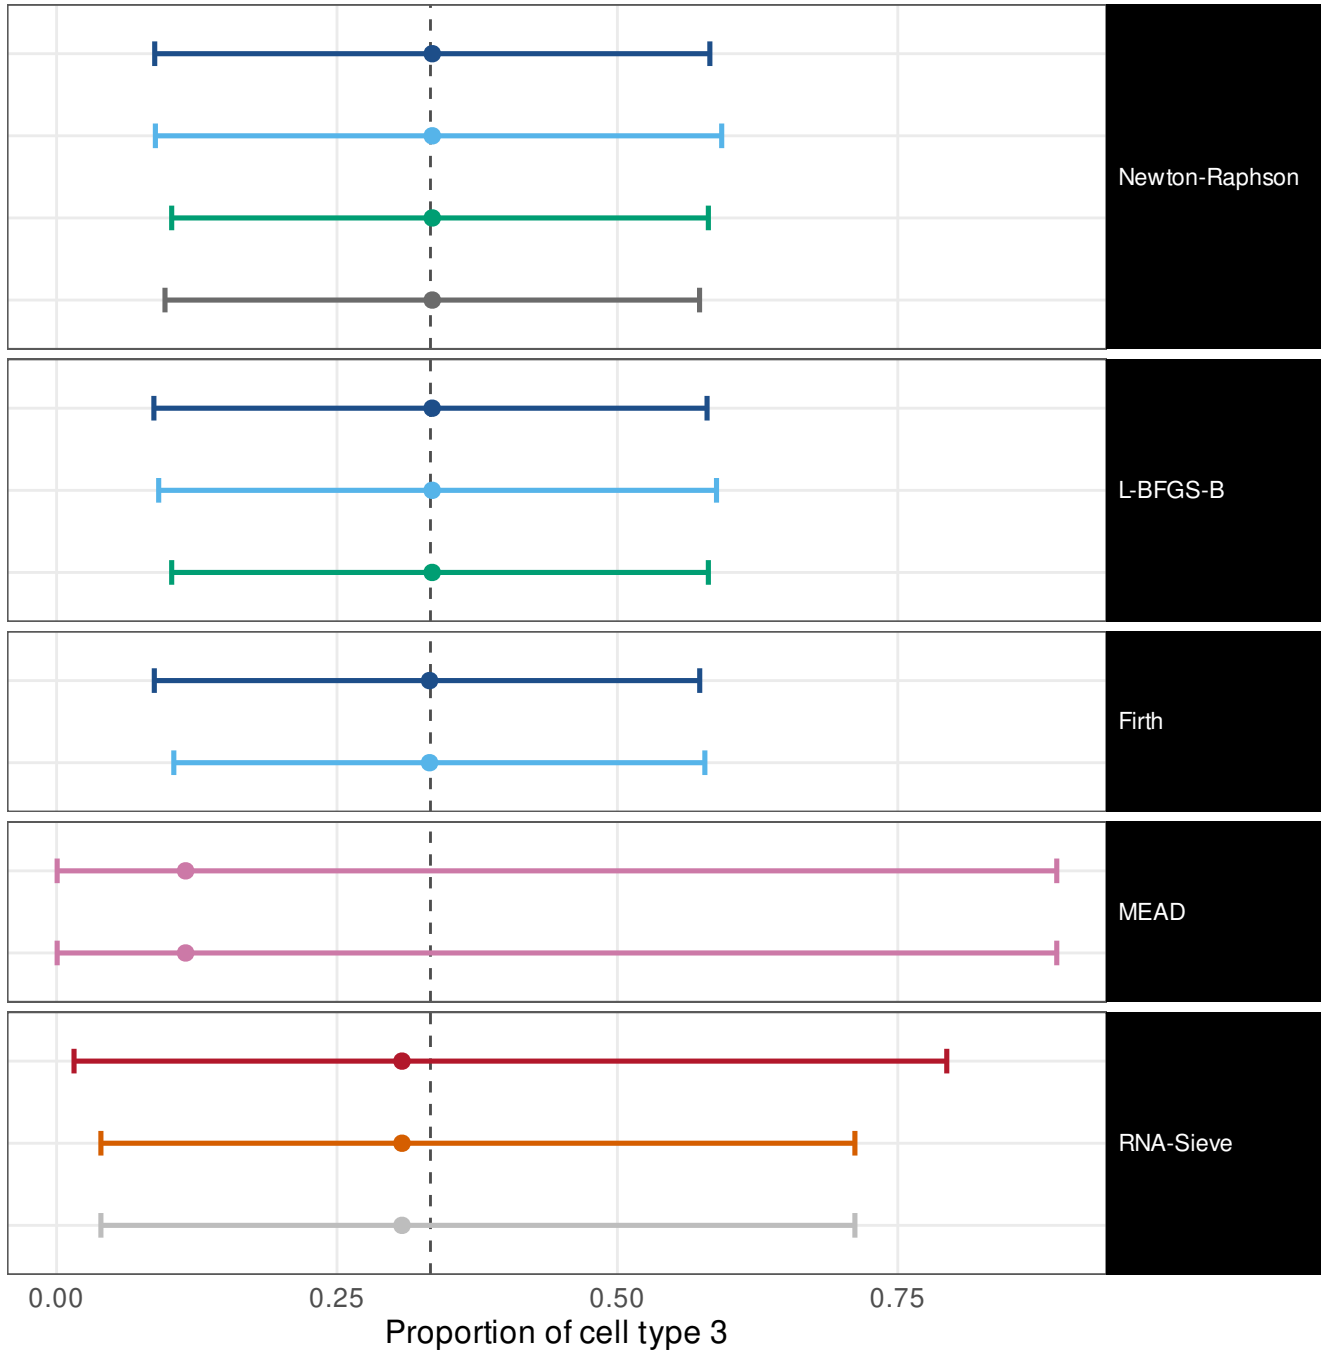


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96	[0.93, 0.98]	w = 0.742
ILR, mapped back	1	[0.98, 1]	w = 0.686
Profile likelihood	0.98	[0.95, 0.99]	w = 0.617
Oracle (Fisher at p*)	1	[0.97, 1]	w = 0.77
Wald (delta)	0.97	[0.94, 0.99]	w = 0.744
ILR, mapped back	1	[0.98, 1]	w = 0.682
Profile likelihood	0.98	[0.95, 0.99]	w = 0.617
Wald (delta)	1	[0.98, 1]	w = 0.748
ILR, mapped back	1	[0.98, 1]	w = 0.649
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	1	[0.98, 1]	w = 0.969
Godambe sandwich	1	[0.97, 1]	w = 0.848
Released code, as published	1	[0.97, 1]	w = 0.848

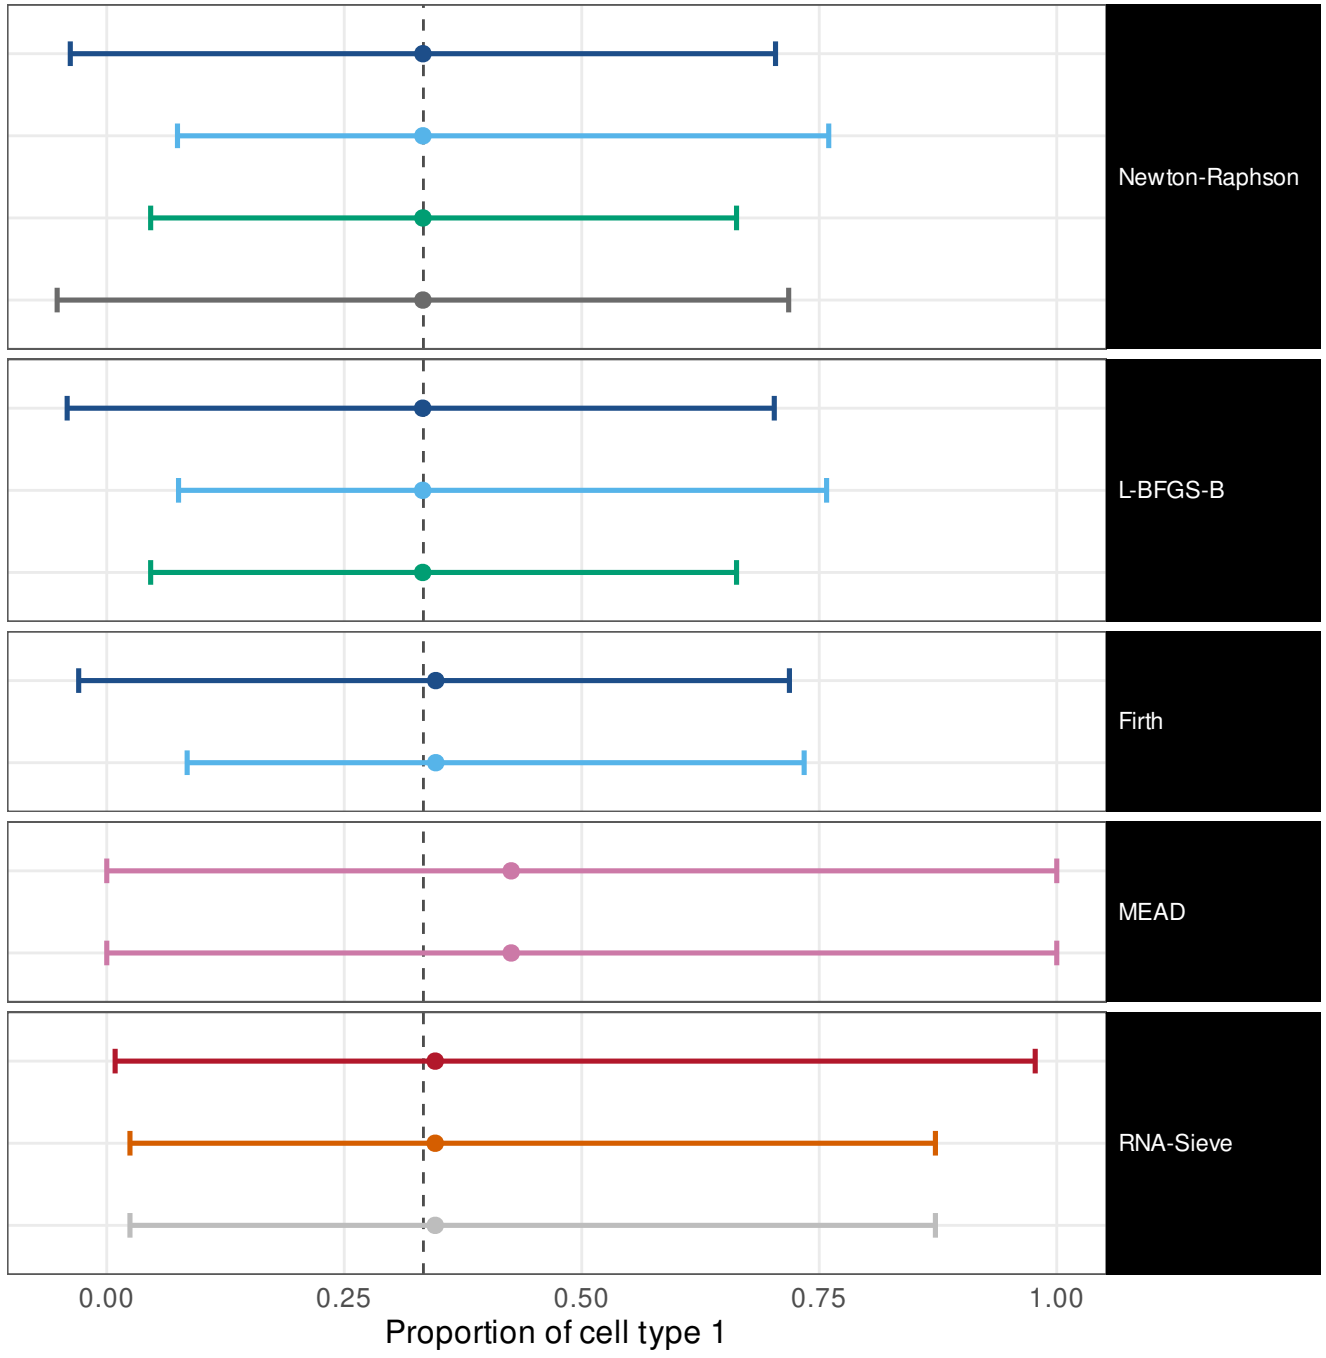


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.98	[0.96, 0.99]	w = 0.767
ILR, mapped back	1	[0.98, 1]	w = 0.685
Profile likelihood	0.98	[0.96, 0.99]	w = 0.651
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.781
Wald (delta)	0.99	[0.96, 1]	w = 0.768
ILR, mapped back	1	[0.98, 1]	w = 0.68
Profile likelihood	0.98	[0.96, 0.99]	w = 0.651
Wald (delta)	1	[0.98, 1]	w = 0.769
ILR, mapped back	1	[0.98, 1]	w = 0.66
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	0.99	[0.96, 1]	w = 0.975
Godambe sandwich	0.98	[0.94, 0.99]	w = 0.921
Released code, as published	0.98	[0.94, 0.99]	w = 0.921

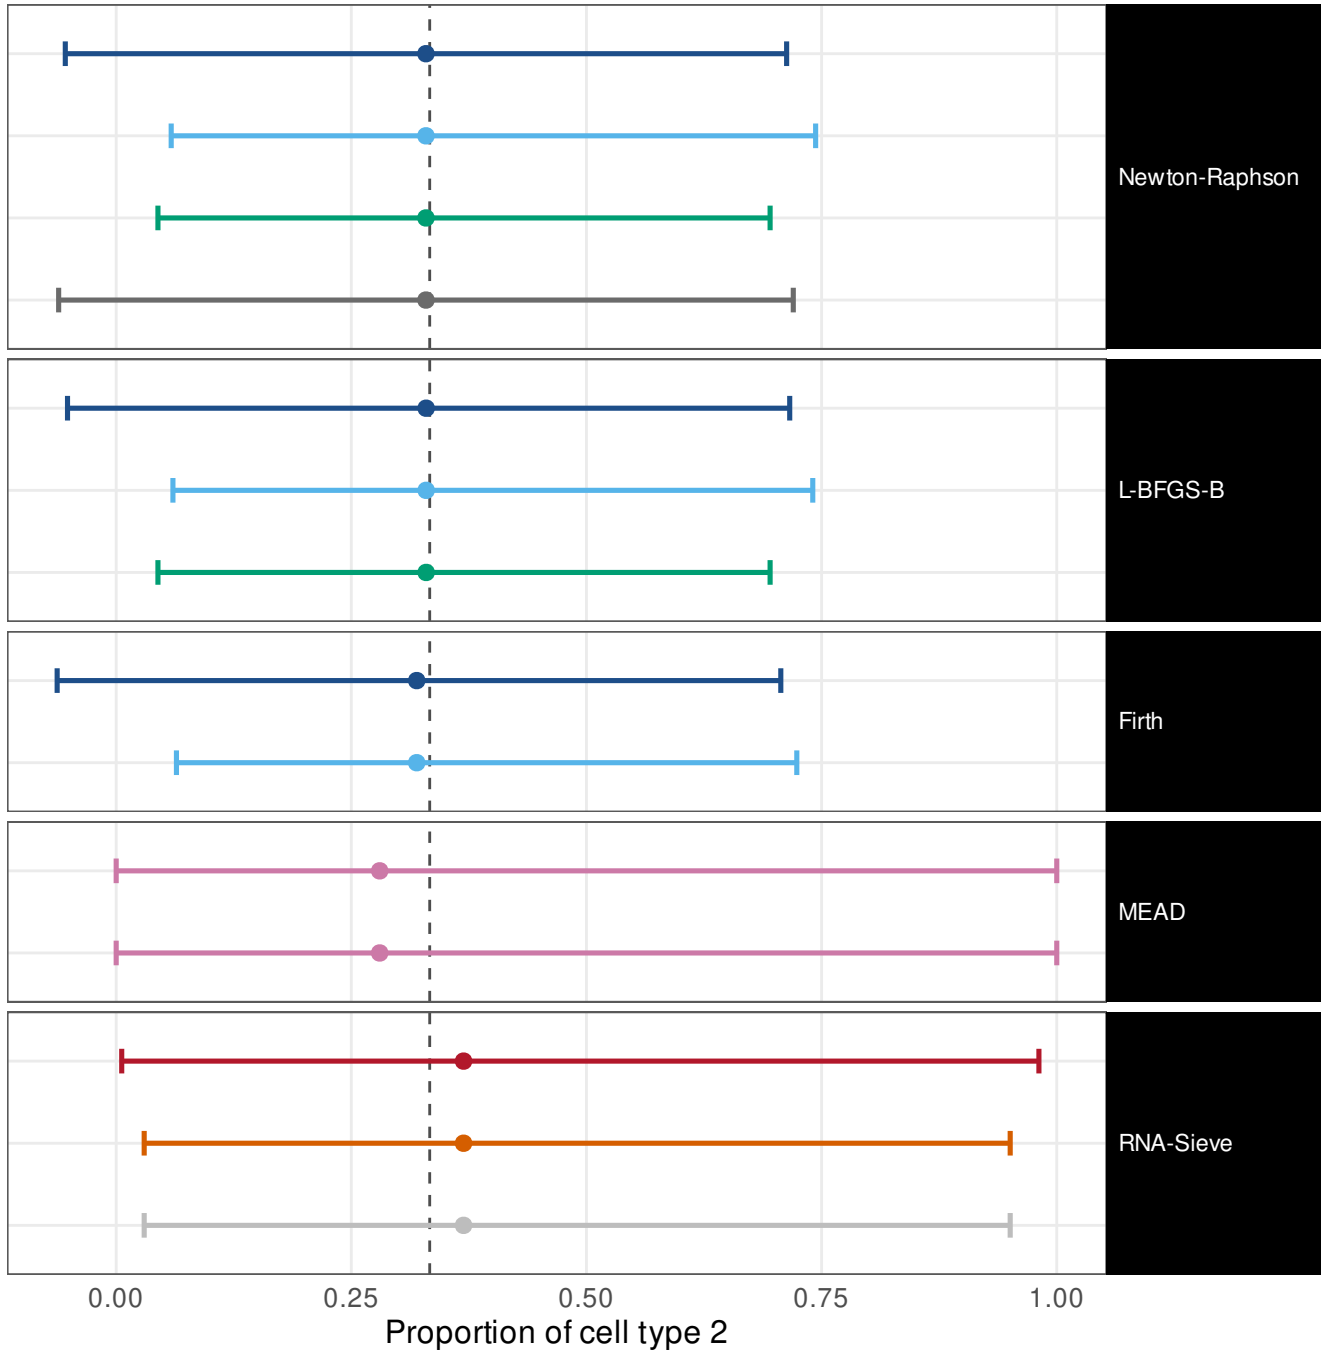


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1 [0.97, 1]	w = 0.528
ILR, mapped back	1 [0.98, 1]	w = 0.523
Profile likelihood	0.98 [0.96, 0.99]	w = 0.504
Oracle (Fisher at p*)	0.99 [0.96, 1]	w = 0.505
Wald (delta)	0.99 [0.97, 1]	w = 0.526
ILR, mapped back	1 [0.98, 1]	w = 0.519
Profile likelihood	0.98 [0.96, 0.99]	w = 0.504
Wald (delta)	1 [0.98, 1]	w = 0.518
ILR, mapped back	1 [0.98, 1]	w = 0.491
Method's own interval	1 [0.98, 1]	w = 0.975
Own interval, transcript fractions	1 [0.98, 1]	w = 0.975
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.801
Godambe sandwich	0.98 [0.94, 0.99]	w = 0.706
Released code, as published	0.98 [0.94, 0.99]	w = 0.706

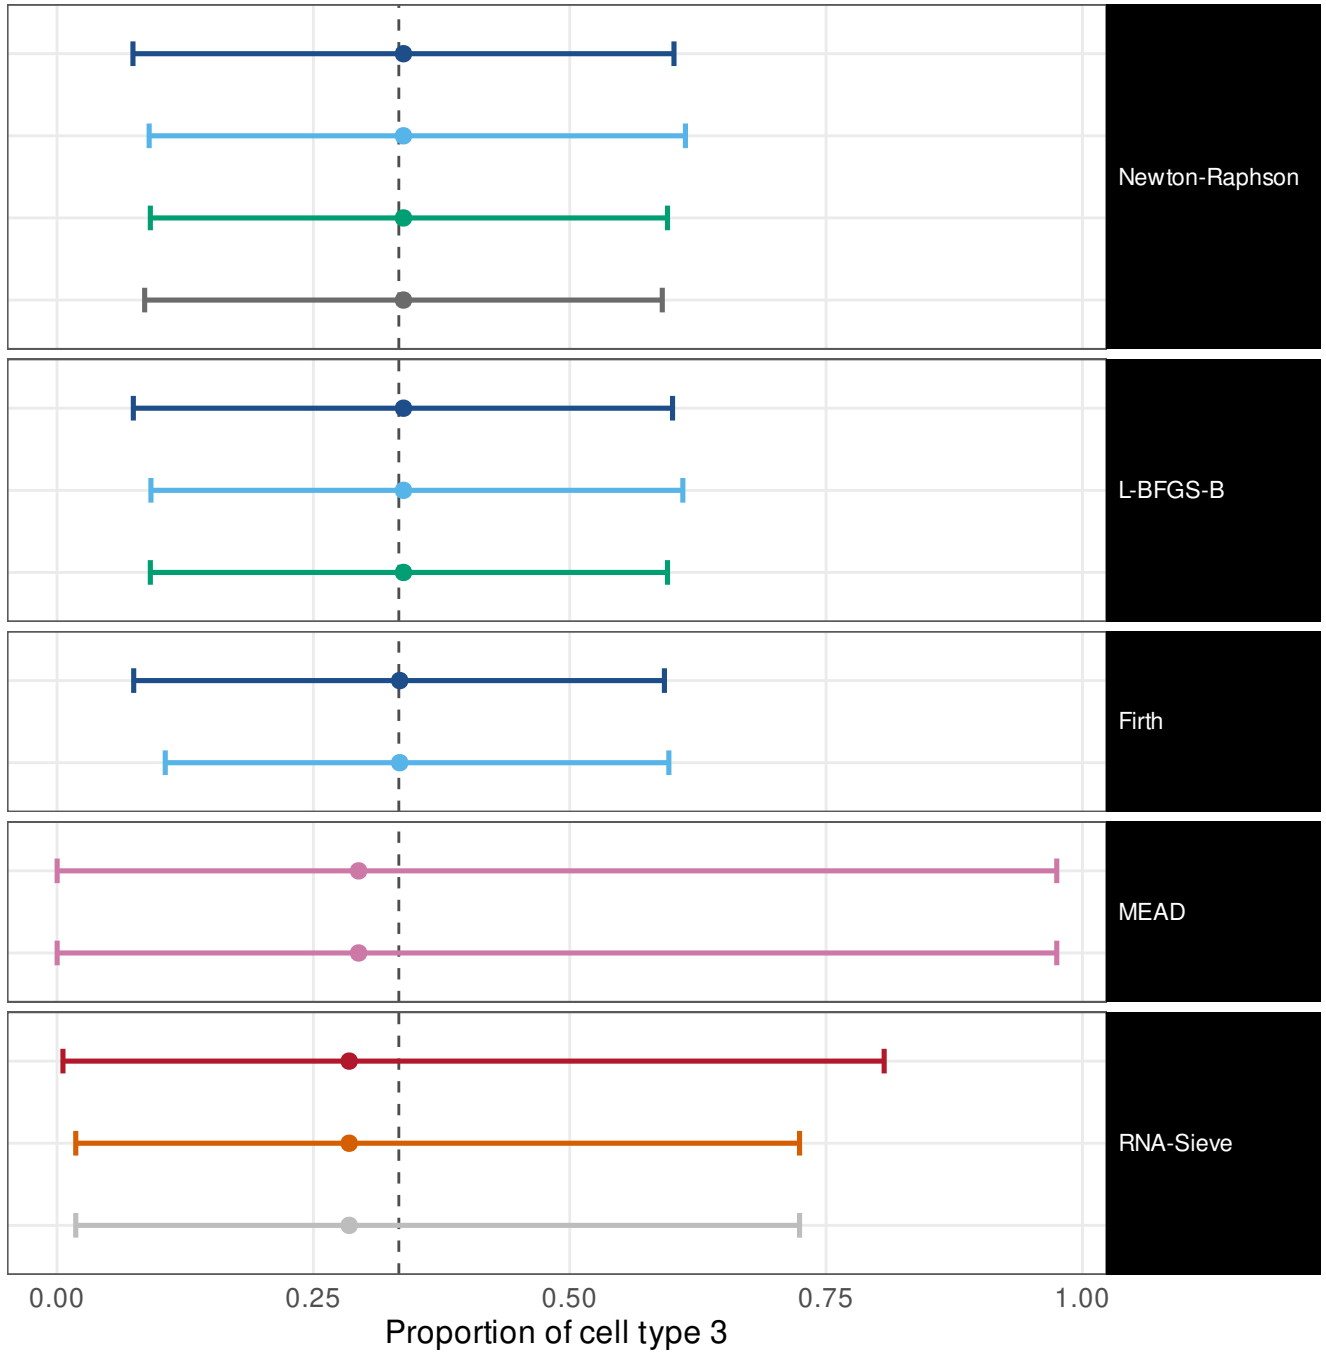


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.97	[0.94, 0.99]	w = 0.767
ILR, mapped back	1	[0.98, 1]	w = 0.696
Profile likelihood	1	[0.97, 1]	w = 0.656
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.797
Wald (delta)	0.98	[0.95, 0.99]	w = 0.768
ILR, mapped back	1	[0.98, 1]	w = 0.695
Profile likelihood	1	[0.97, 1]	w = 0.656
Wald (delta)	1	[0.98, 1]	w = 0.774
ILR, mapped back	1	[0.98, 1]	w = 0.667
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	1	[0.97, 1]	w = 0.979
Godambe sandwich	0.98	[0.94, 0.99]	w = 0.869
Released code, as published	0.98	[0.94, 0.99]	w = 0.869

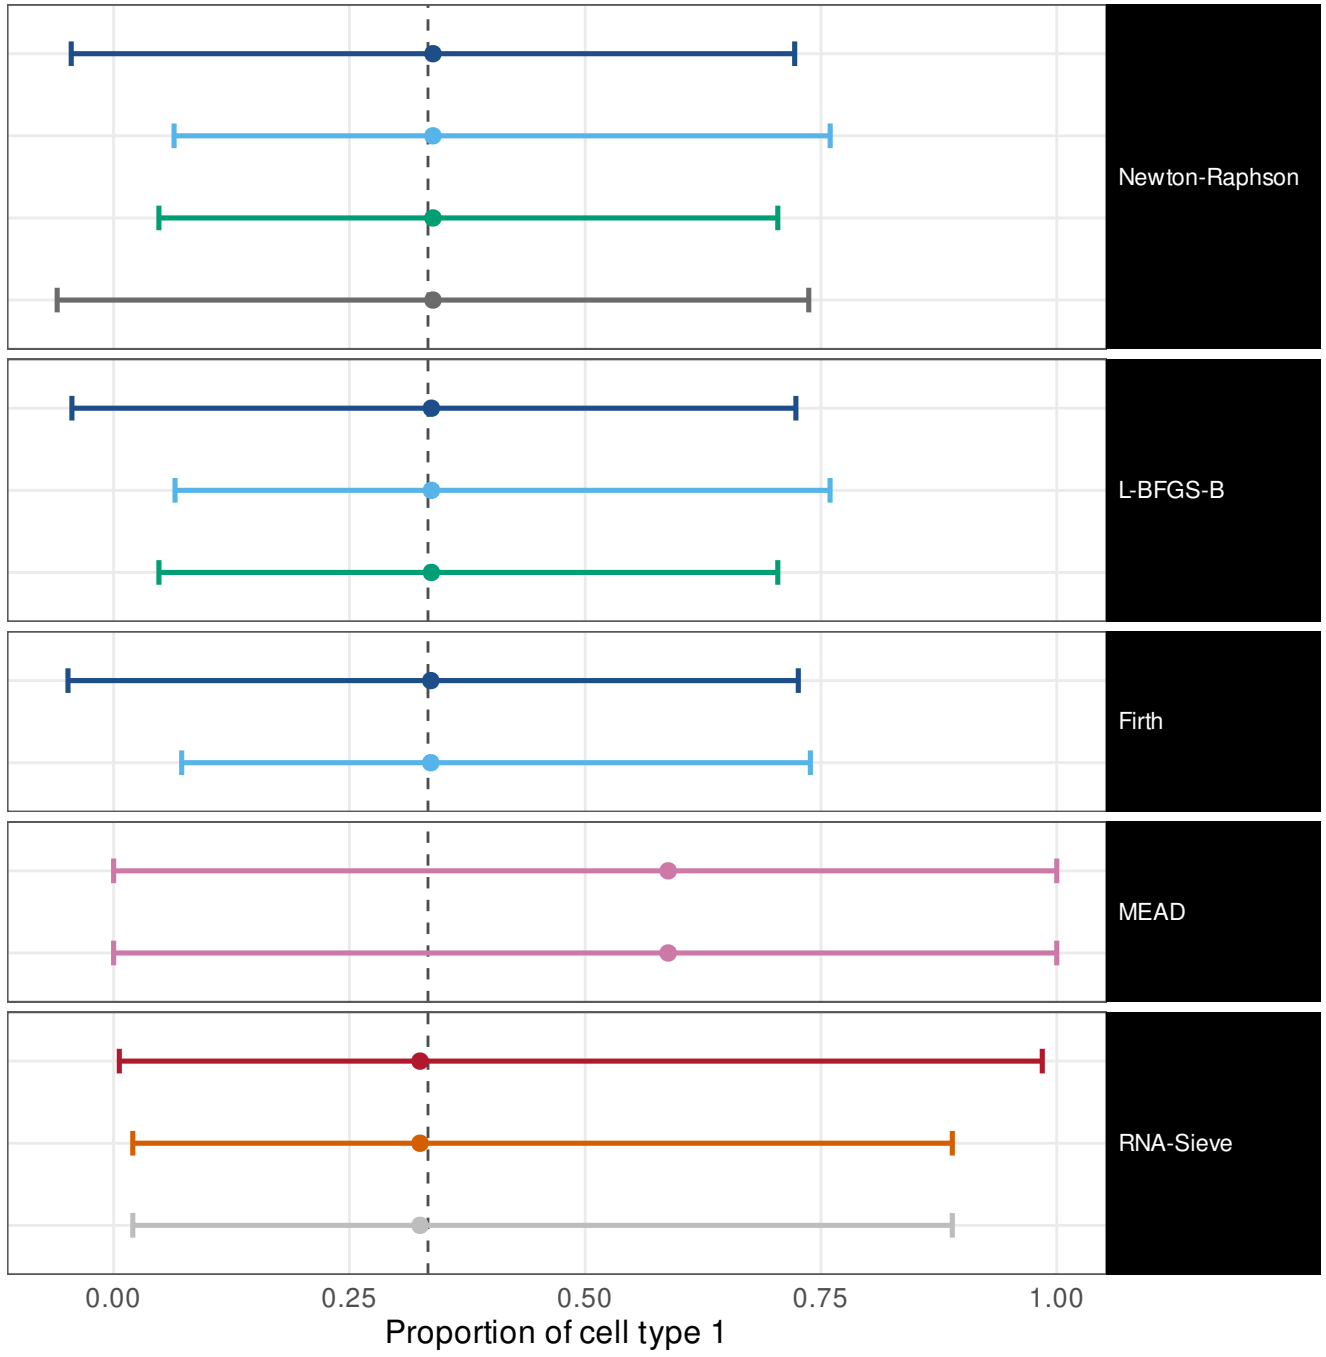


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.96	[0.93, 0.98]	w = 0.766
ILR, mapped back	1	[0.98, 1]	w = 0.706
Profile likelihood	1	[0.97, 1]	w = 0.648
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.794
Wald (delta)	0.97	[0.94, 0.99]	w = 0.768
ILR, mapped back	1	[0.98, 1]	w = 0.703
Profile likelihood	1	[0.97, 1]	w = 0.648
Wald (delta)	1	[0.98, 1]	w = 0.776
ILR, mapped back	1	[0.98, 1]	w = 0.67
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	1	[0.98, 1]	w = 0.982
Godambe sandwich	0.98	[0.94, 0.99]	w = 0.875
Released code, as published	0.98	[0.94, 0.99]	w = 0.875

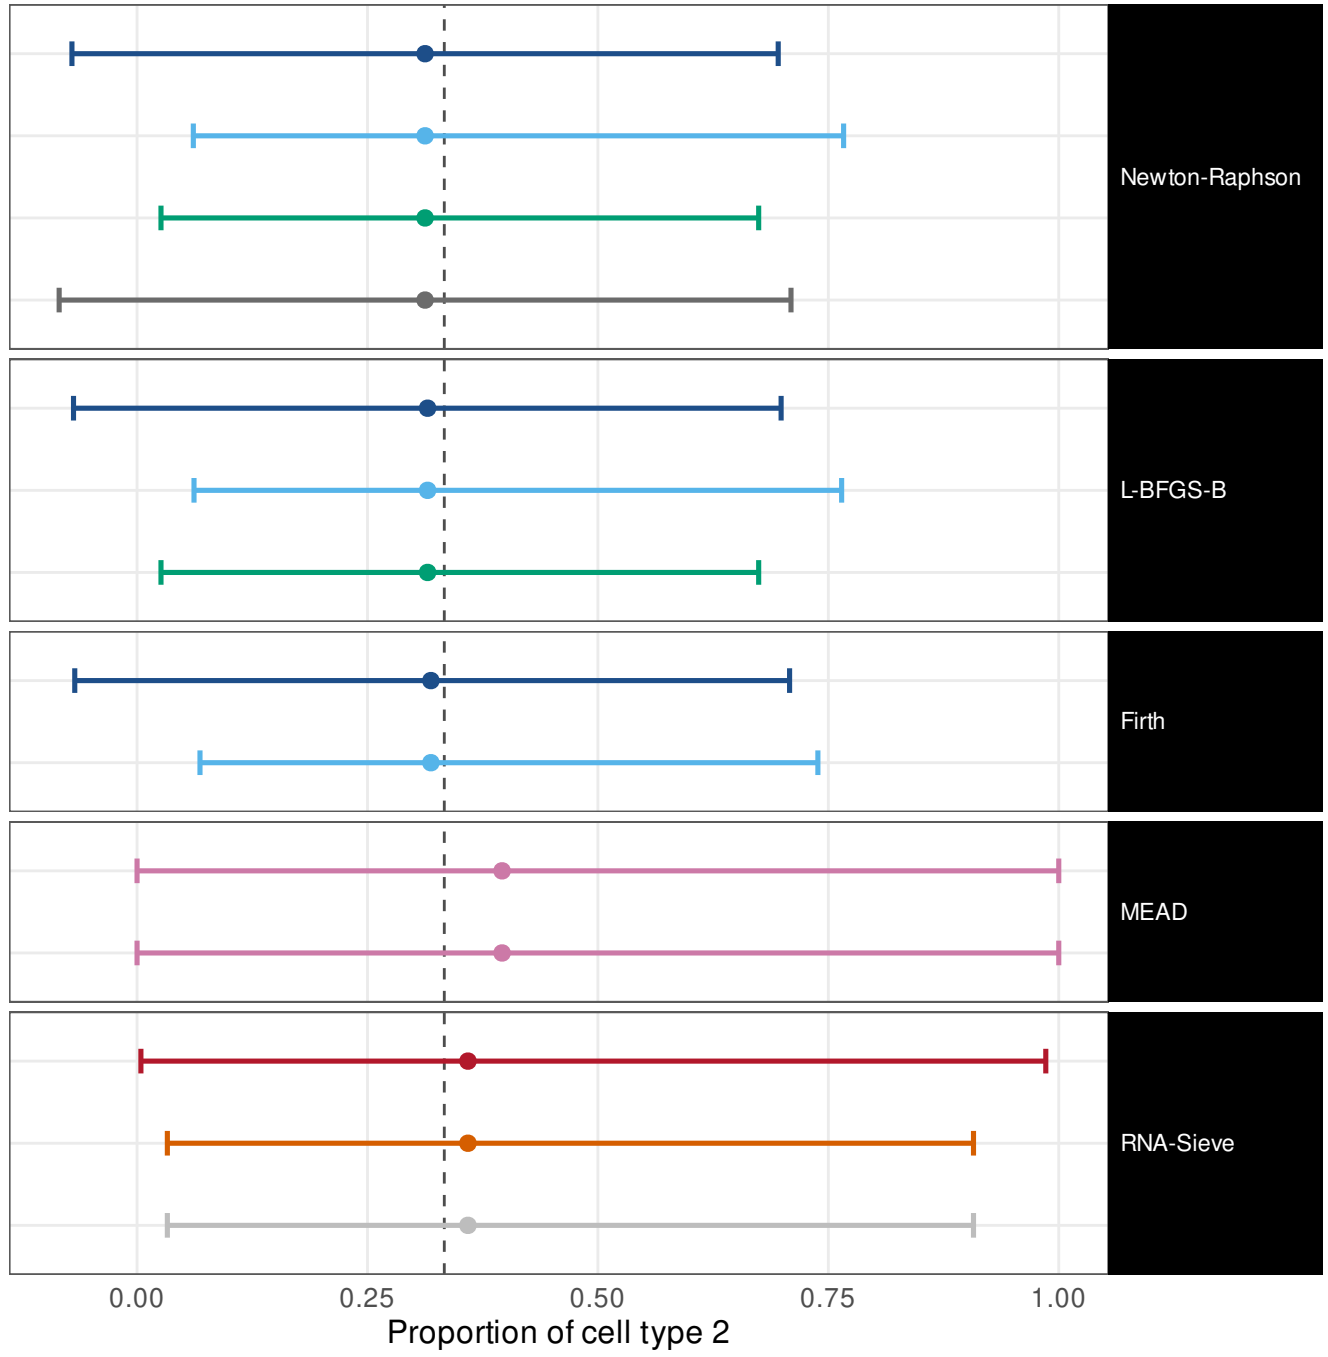


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 SBM


Wald (delta)	0.96 [0.93, 0.98]	w = 0.537
ILR, mapped back	1 [0.98, 1]	w = 0.535
Profile likelihood	0.96 [0.93, 0.98]	w = 0.521
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.521
Wald (delta)	0.97 [0.94, 0.99]	w = 0.537
ILR, mapped back	1 [0.98, 1]	w = 0.532
Profile likelihood	0.96 [0.93, 0.98]	w = 0.521
Wald (delta)	0.99 [0.97, 1]	w = 0.528
ILR, mapped back	1 [0.98, 1]	w = 0.505
Method's own interval	0.98 [0.94, 0.99]	w = 0.885
Own interval, transcript fractions	0.98 [0.96, 0.99]	w = 0.885
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.826
Godambe sandwich	0.98 [0.94, 0.99]	w = 0.705
Released code, as published	0.98 [0.94, 0.99]	w = 0.705

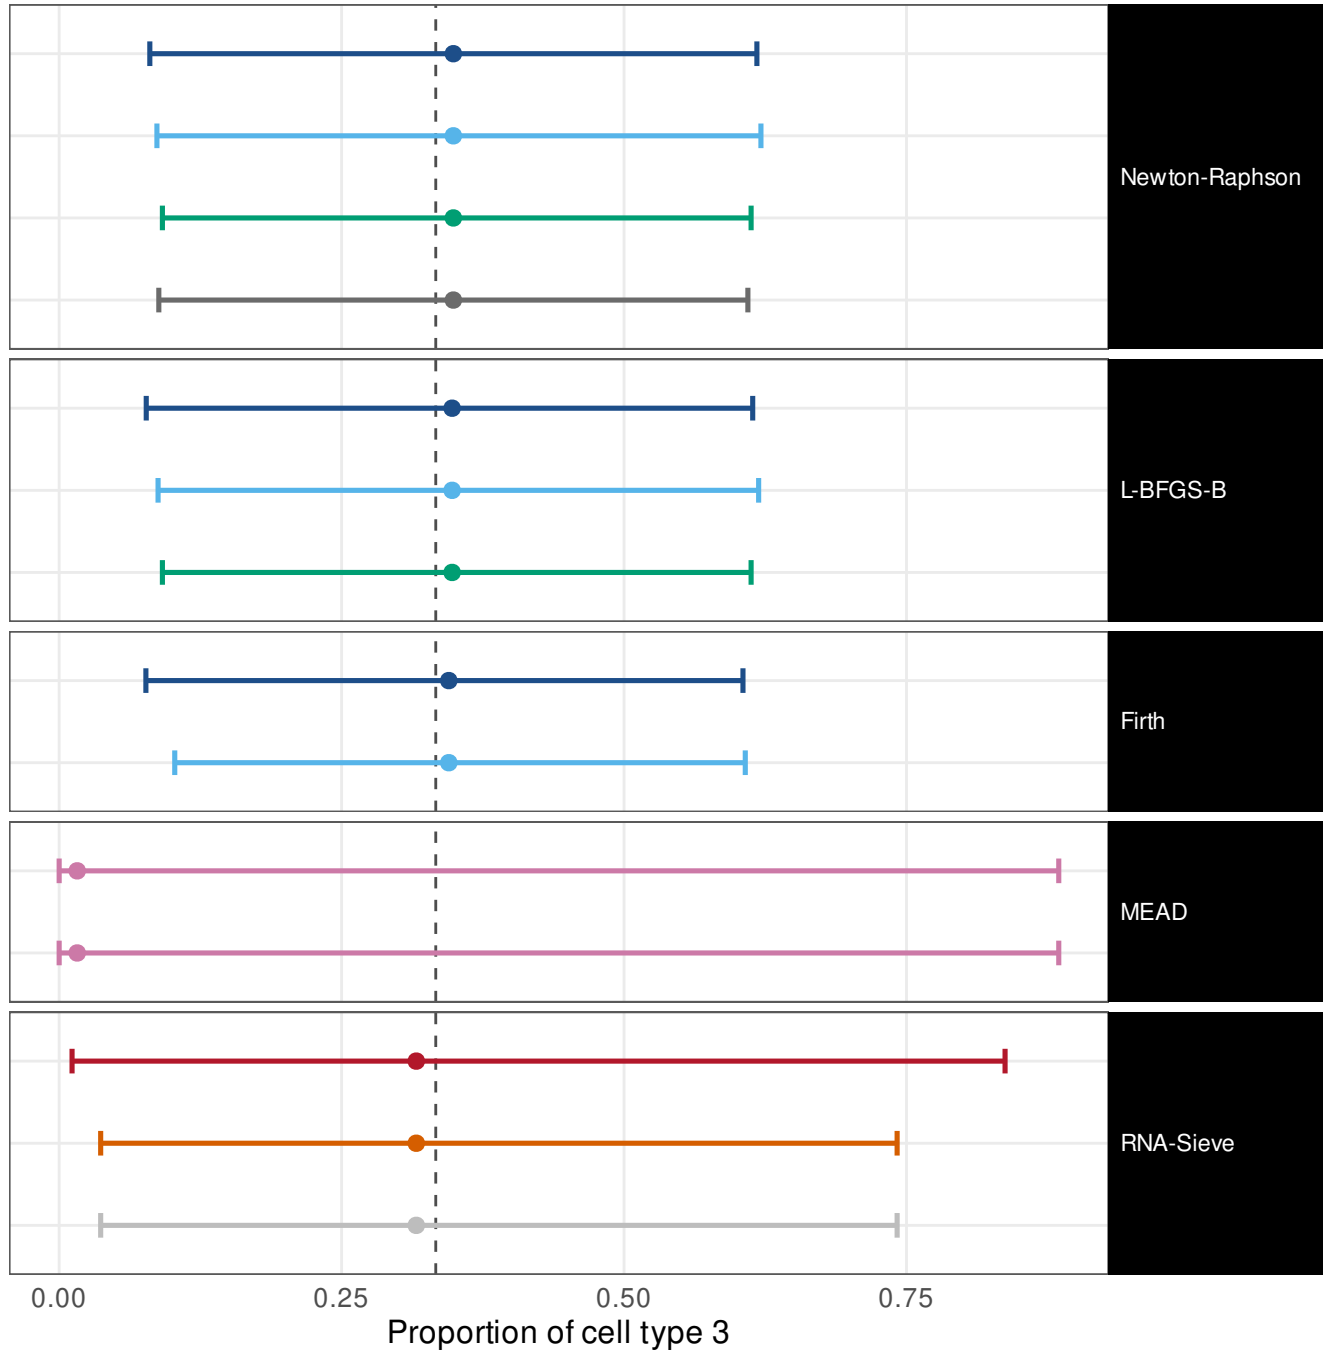

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w


balanced / moderate overlap / CT1 SBM / CT2 SBM

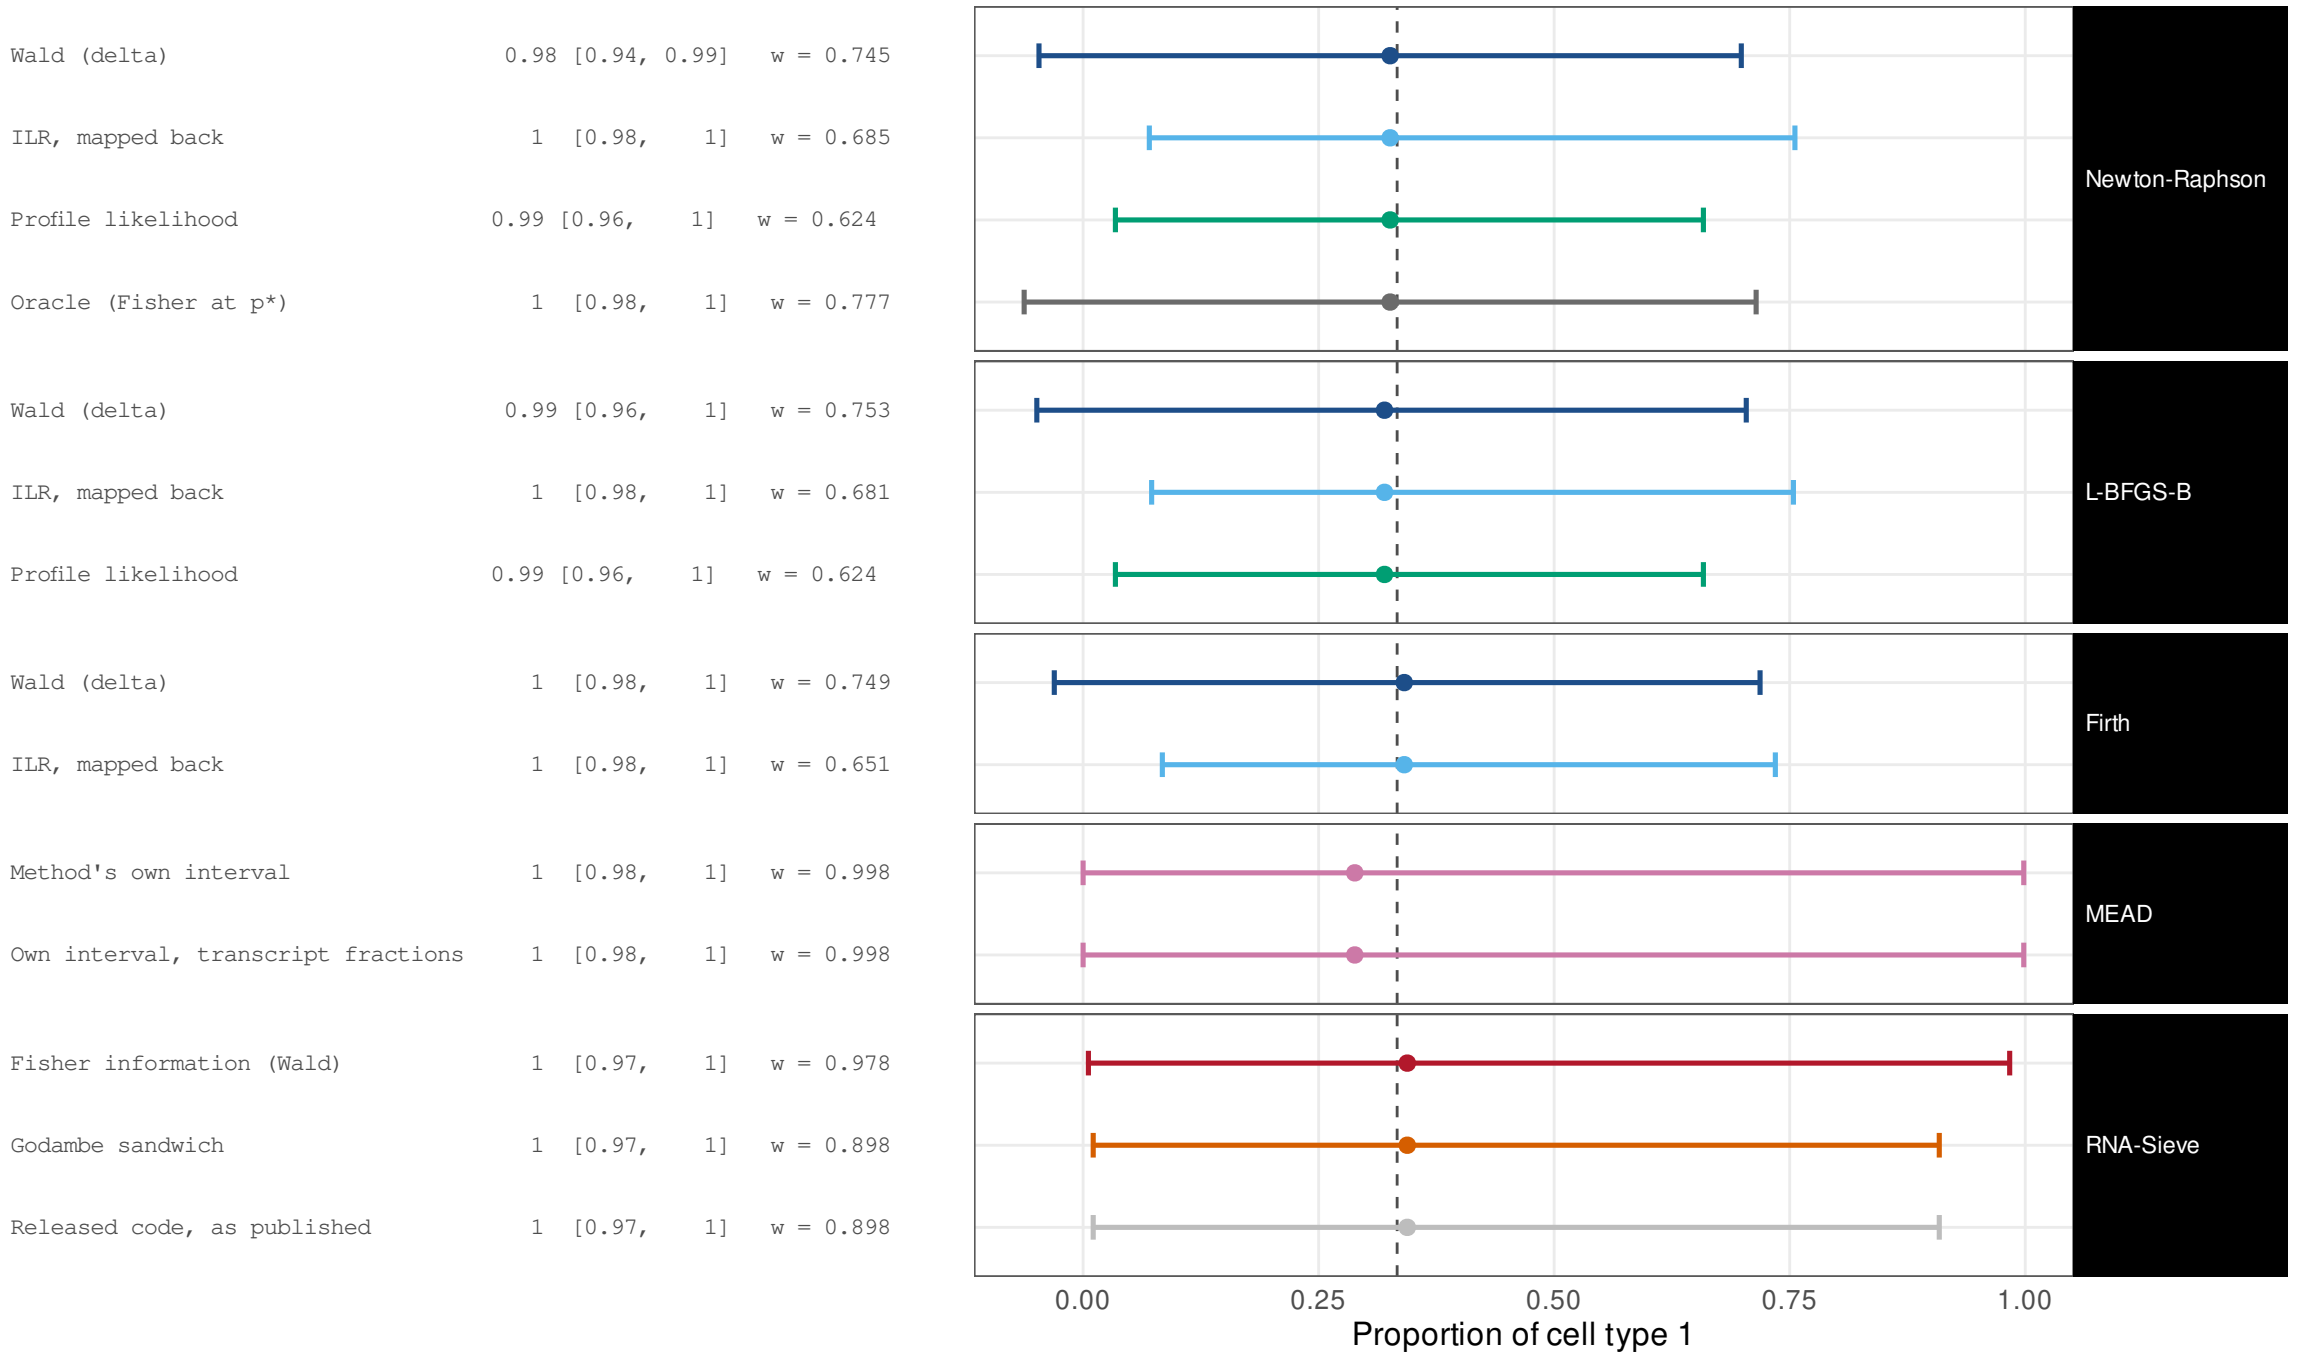

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w


balanced / moderate overlap / CT1 SBM / CT2 SBM

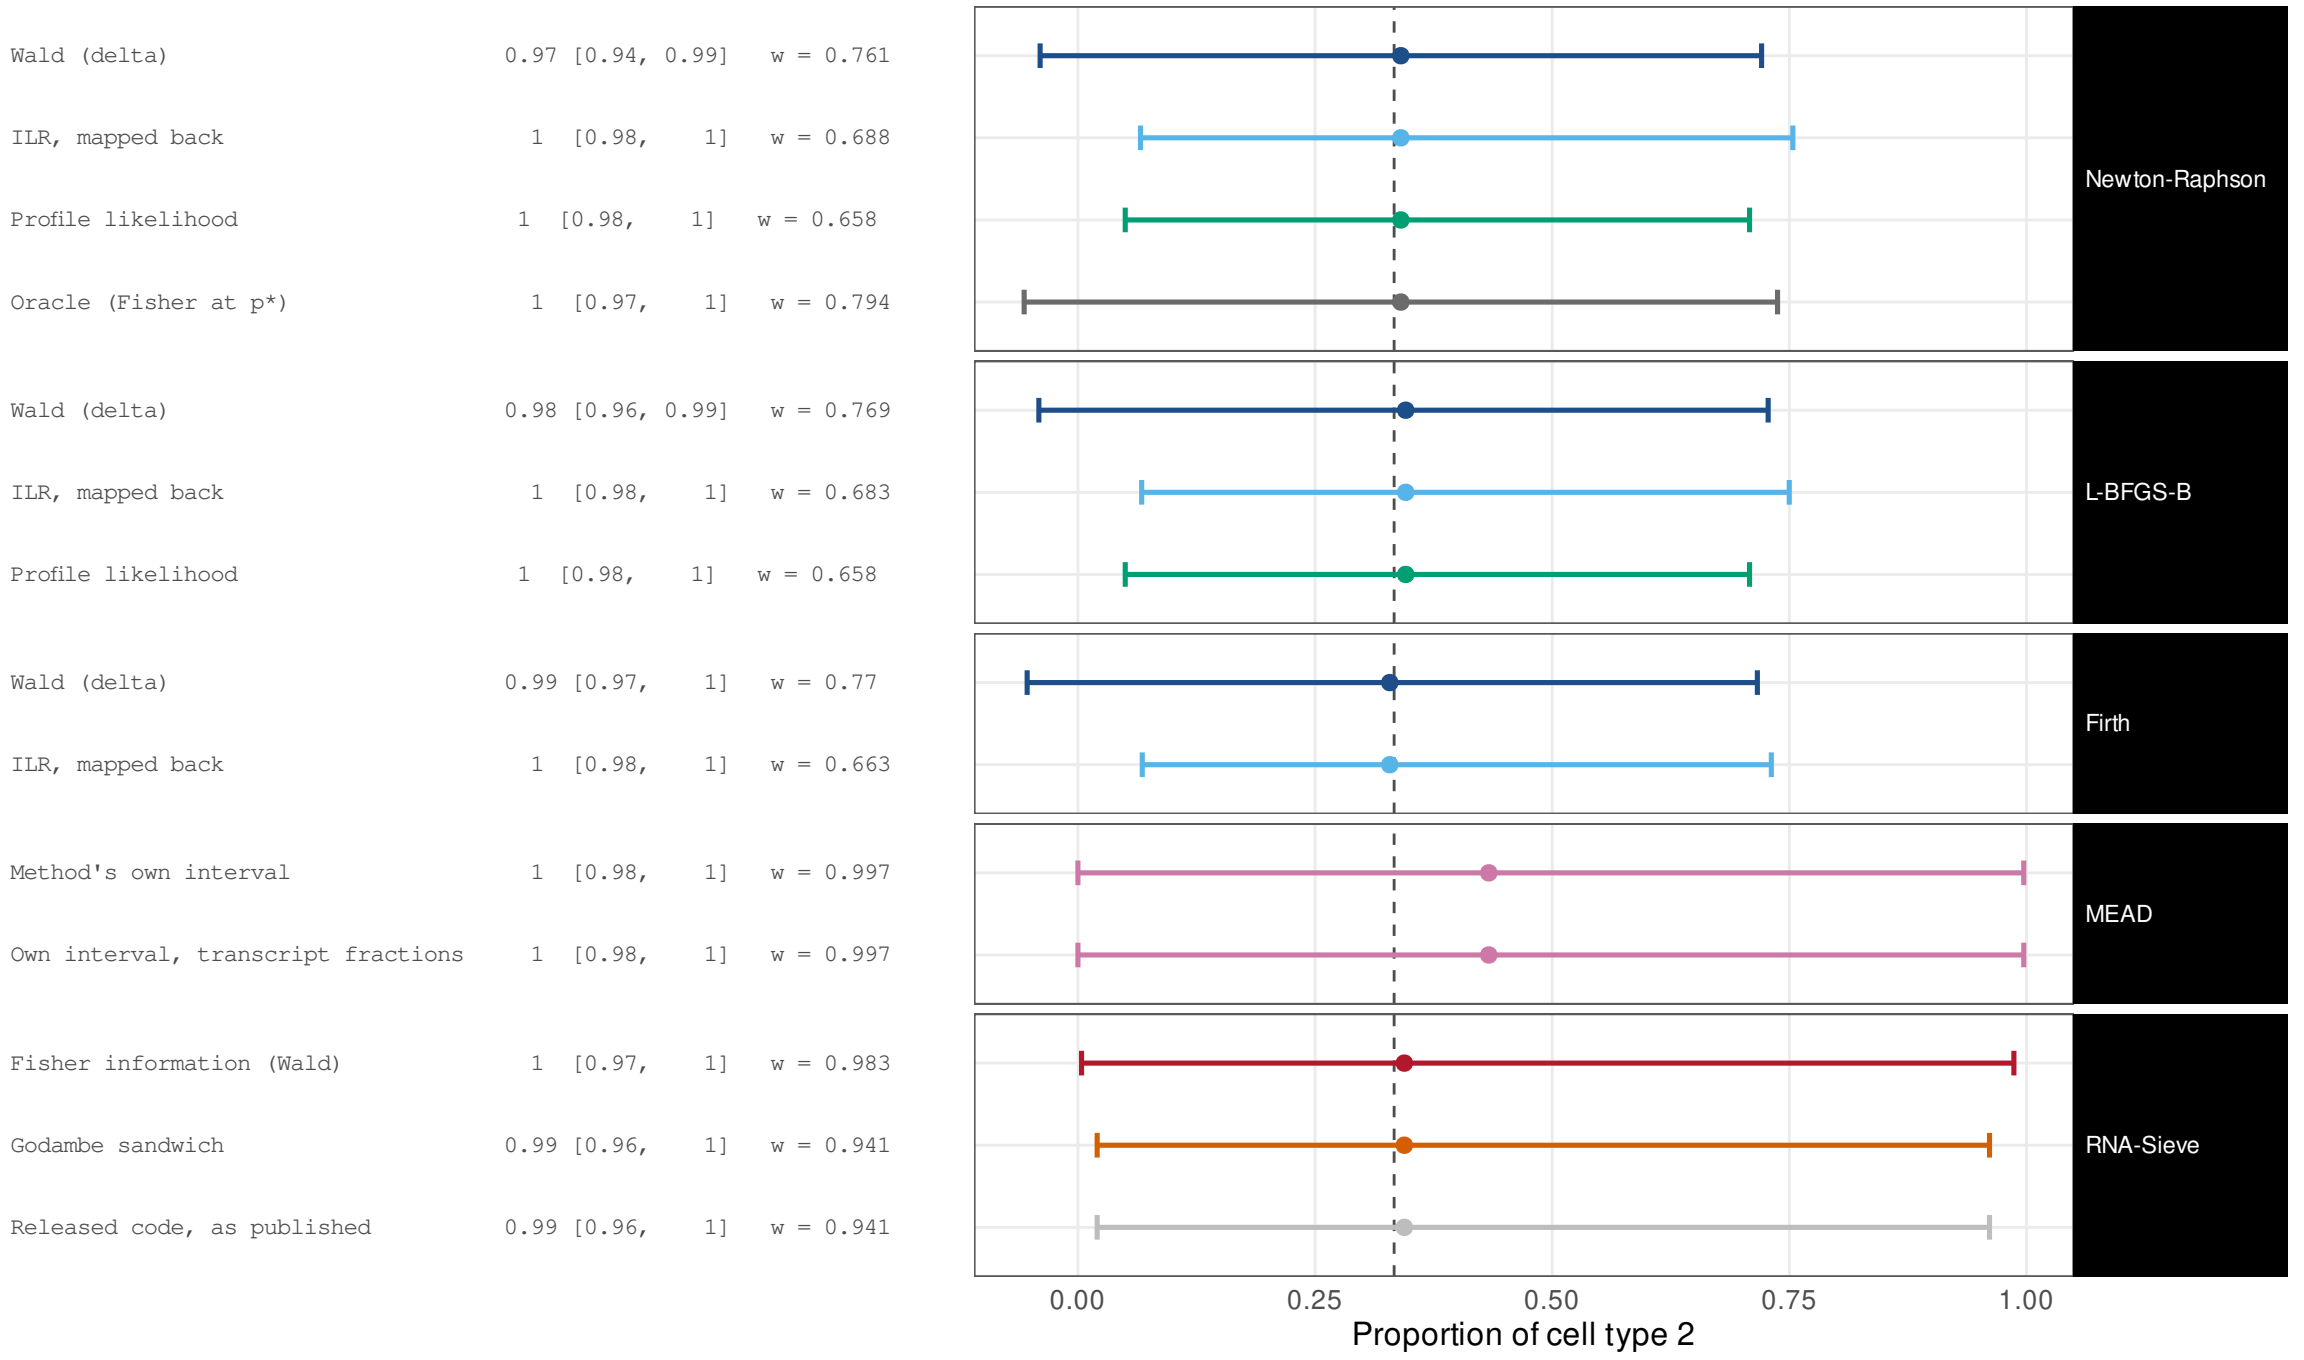

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 SBM

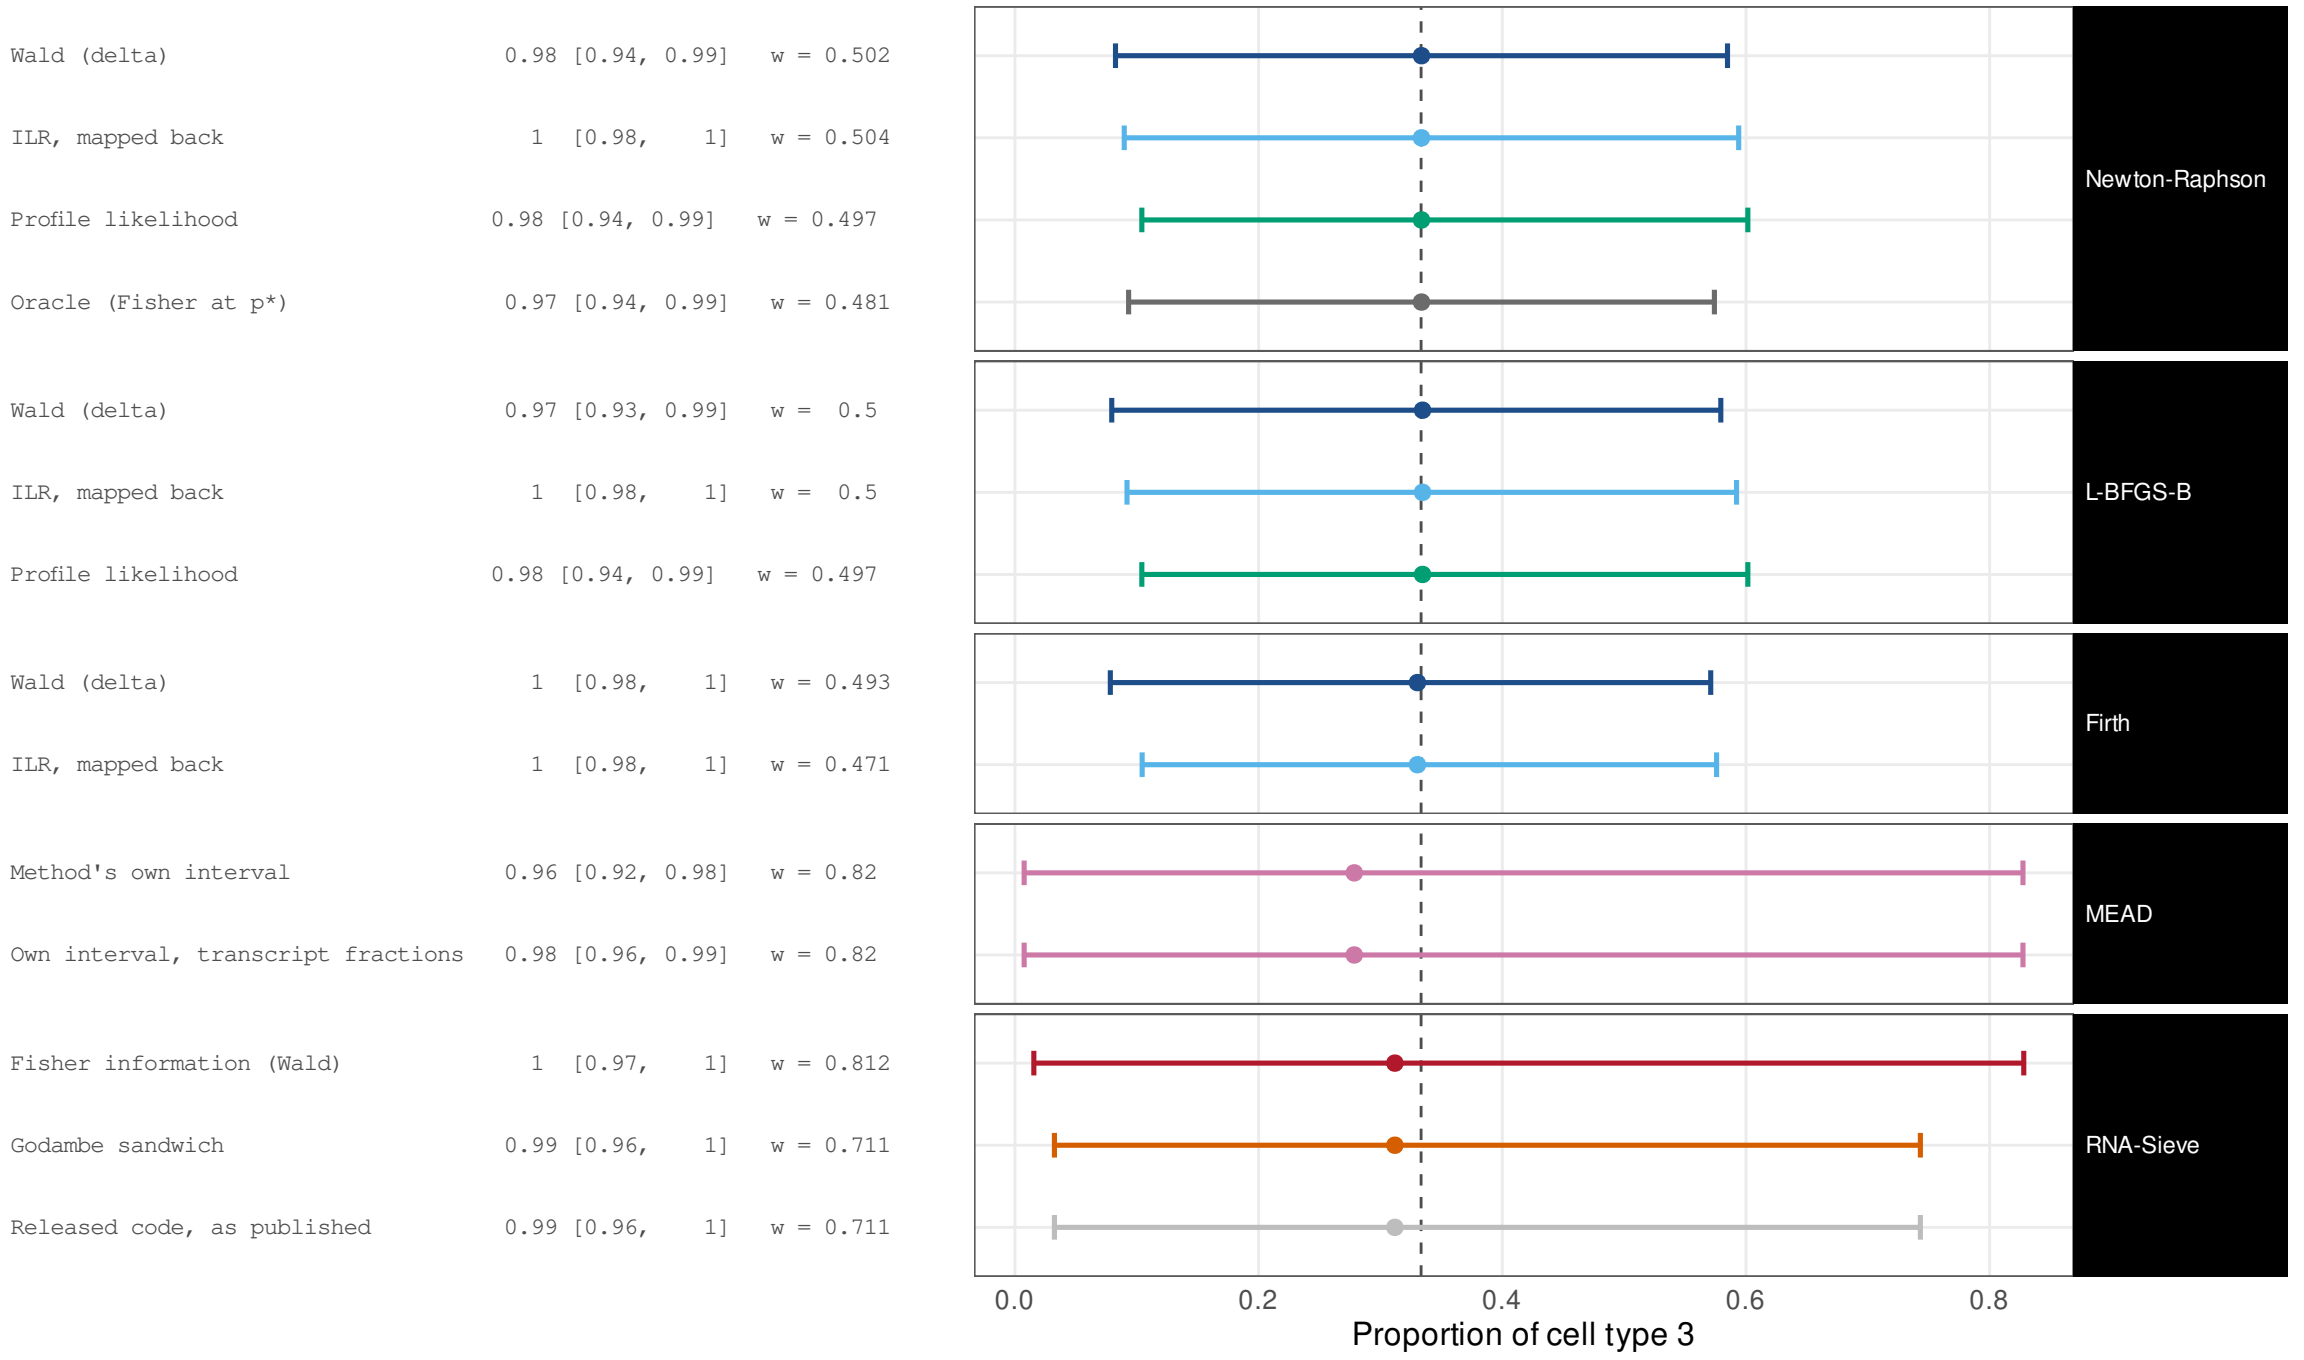


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.97,	1]	w = 0.978
ILR, mapped back	1	[0.98,	1]	w = 0.793
Profile likelihood	1	[0.97,	1]	w = 0.711
Oracle (Fisher at p*)	1	[0.98,	1]	w = 0.998
Wald (delta)	0.99	[0.97,	1]	w = 0.989
ILR, mapped back	1	[0.98,	1]	w = 0.794
Profile likelihood	1	[0.97,	1]	w = 0.711
Wald (delta)	1	[0.98,	1]	w = 0.947
ILR, mapped back	1	[0.98,	1]	w = 0.765
Method's own interval	1	[0.98,	1]	w = 1
Own interval, transcript fractions	1	[0.98,	1]	w = 1
Fisher information (Wald)	1	[0.98,	1]	w = 0.989
Godambe sandwich	1	[0.97,	1]	w = 0.955
Released code, as published	1	[0.97,	1]	w = 0.955

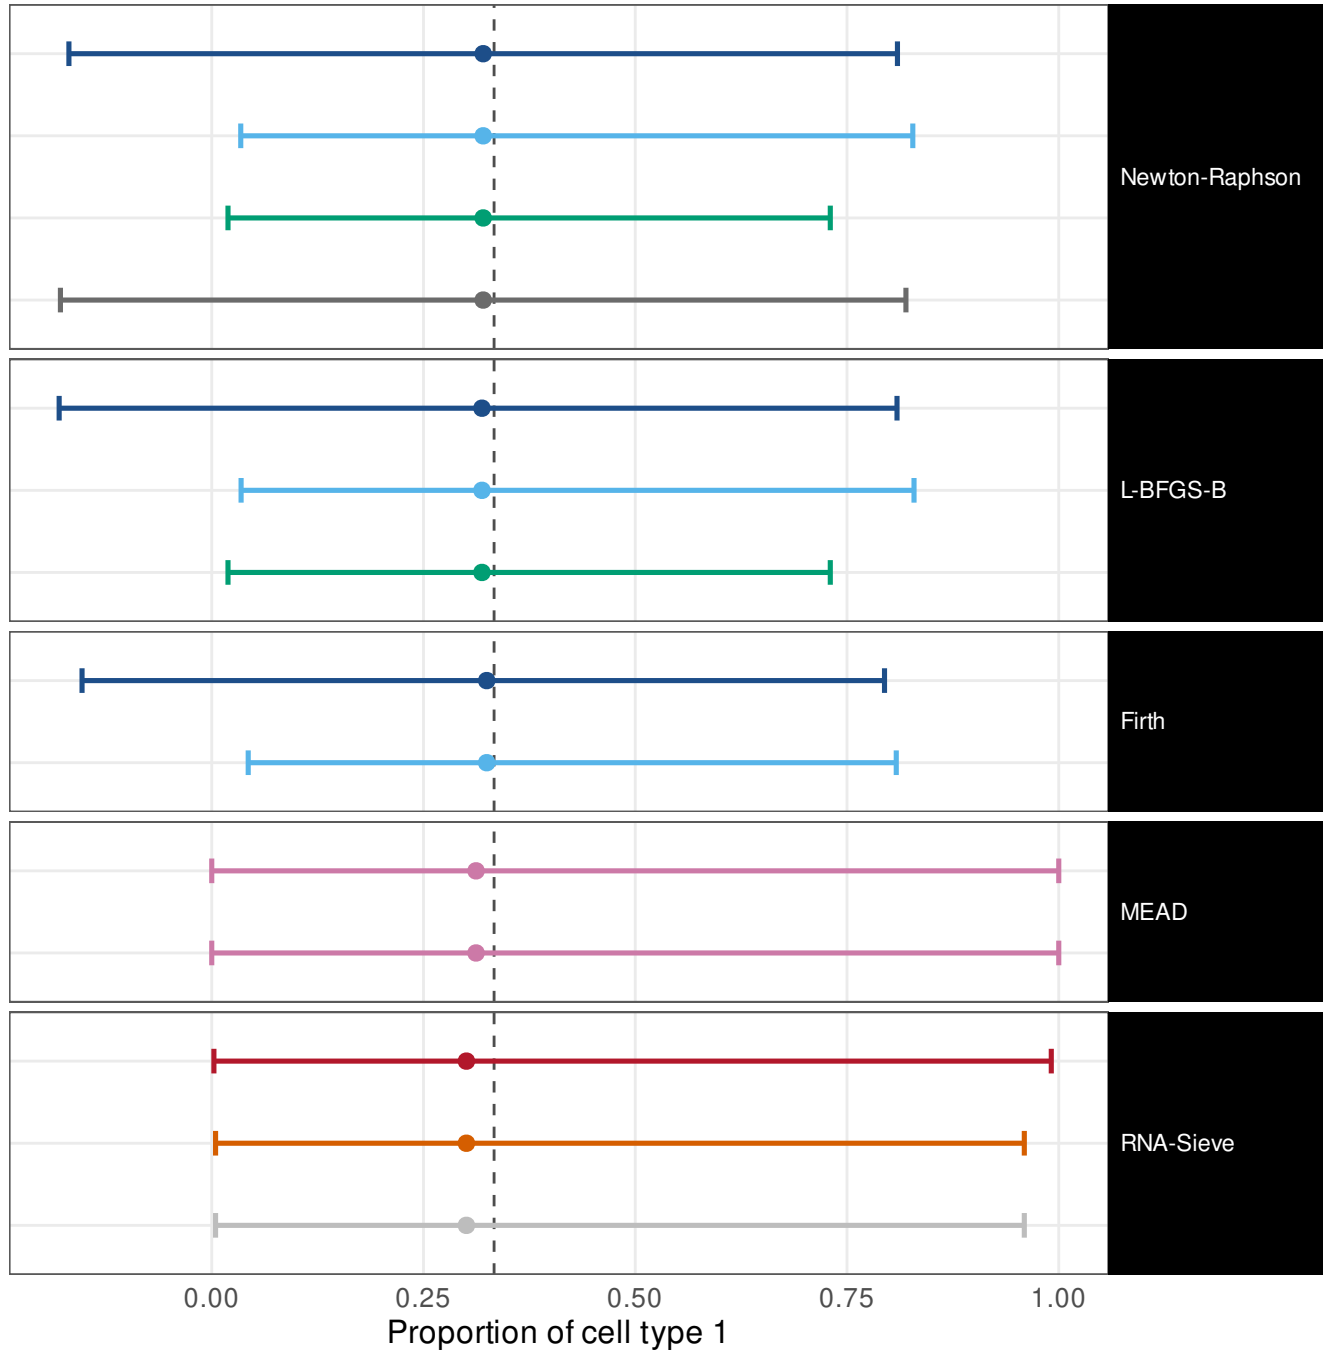


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.98 [0.96, 0.99]	w = 0.937
ILR, mapped back	1 [0.98, 1]	w = 0.781
Profile likelihood	1 [0.98, 1]	w = 0.705
Oracle (Fisher at p*)	1 [0.98, 1]	w = 0.962
Wald (delta)	0.99 [0.96, 1]	w = 0.95
ILR, mapped back	1 [0.98, 1]	w = 0.777
Profile likelihood	1 [0.98, 1]	w = 0.705
Wald (delta)	1 [0.98, 1]	w = 0.915
ILR, mapped back	1 [0.98, 1]	w = 0.748
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.988
Godambe sandwich	0.99 [0.96, 1]	w = 0.956
Released code, as published	0.99 [0.96, 1]	w = 0.956

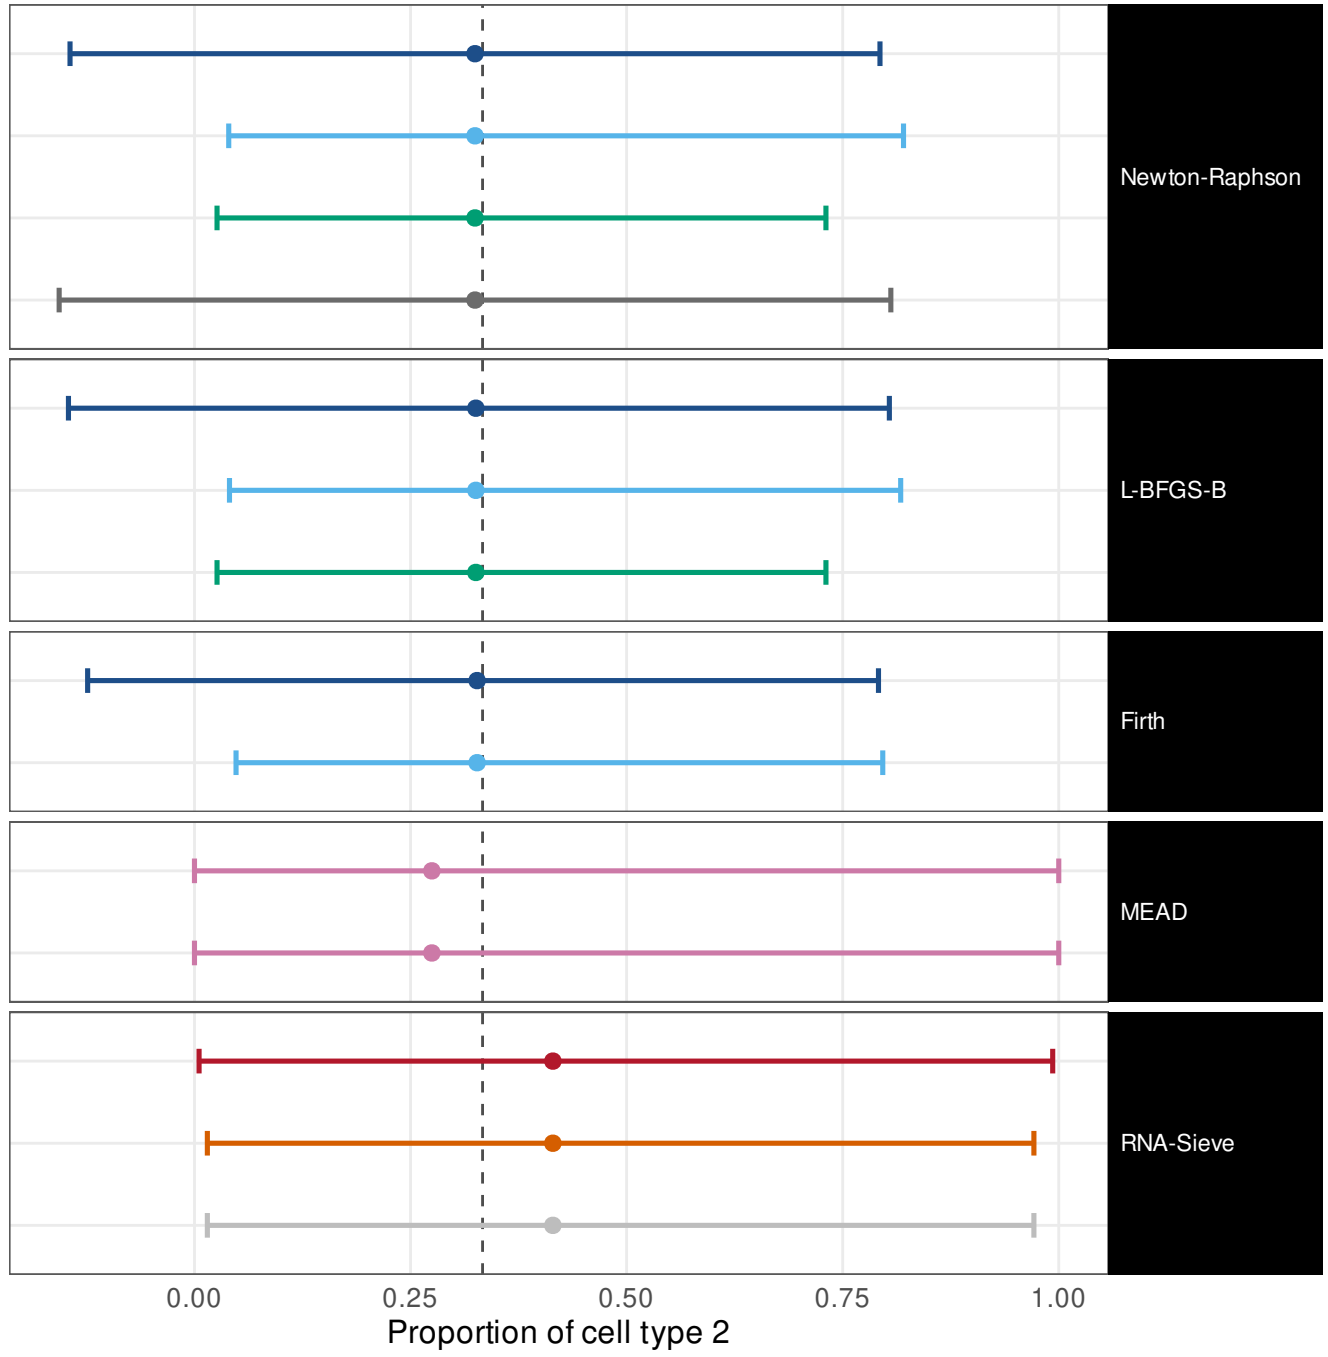


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.98 [0.94, 0.99]	w = 0.792
ILR, mapped back	1 [0.98, 1]	w = 0.715
Profile likelihood	0.98 [0.95, 0.99]	w = 0.658
Oracle (Fisher at p*)	1 [0.97, 1]	w = 0.796
Wald (delta)	0.97 [0.94, 0.99]	w = 0.787
ILR, mapped back	1 [0.98, 1]	w = 0.713
Profile likelihood	0.98 [0.95, 0.99]	w = 0.658
Wald (delta)	1 [0.98, 1]	w = 0.792
ILR, mapped back	1 [0.98, 1]	w = 0.681
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.97, 1]	w = 0.922
Godambe sandwich	0.98 [0.95, 0.99]	w = 0.836
Released code, as published	0.98 [0.95, 0.99]	w = 0.836

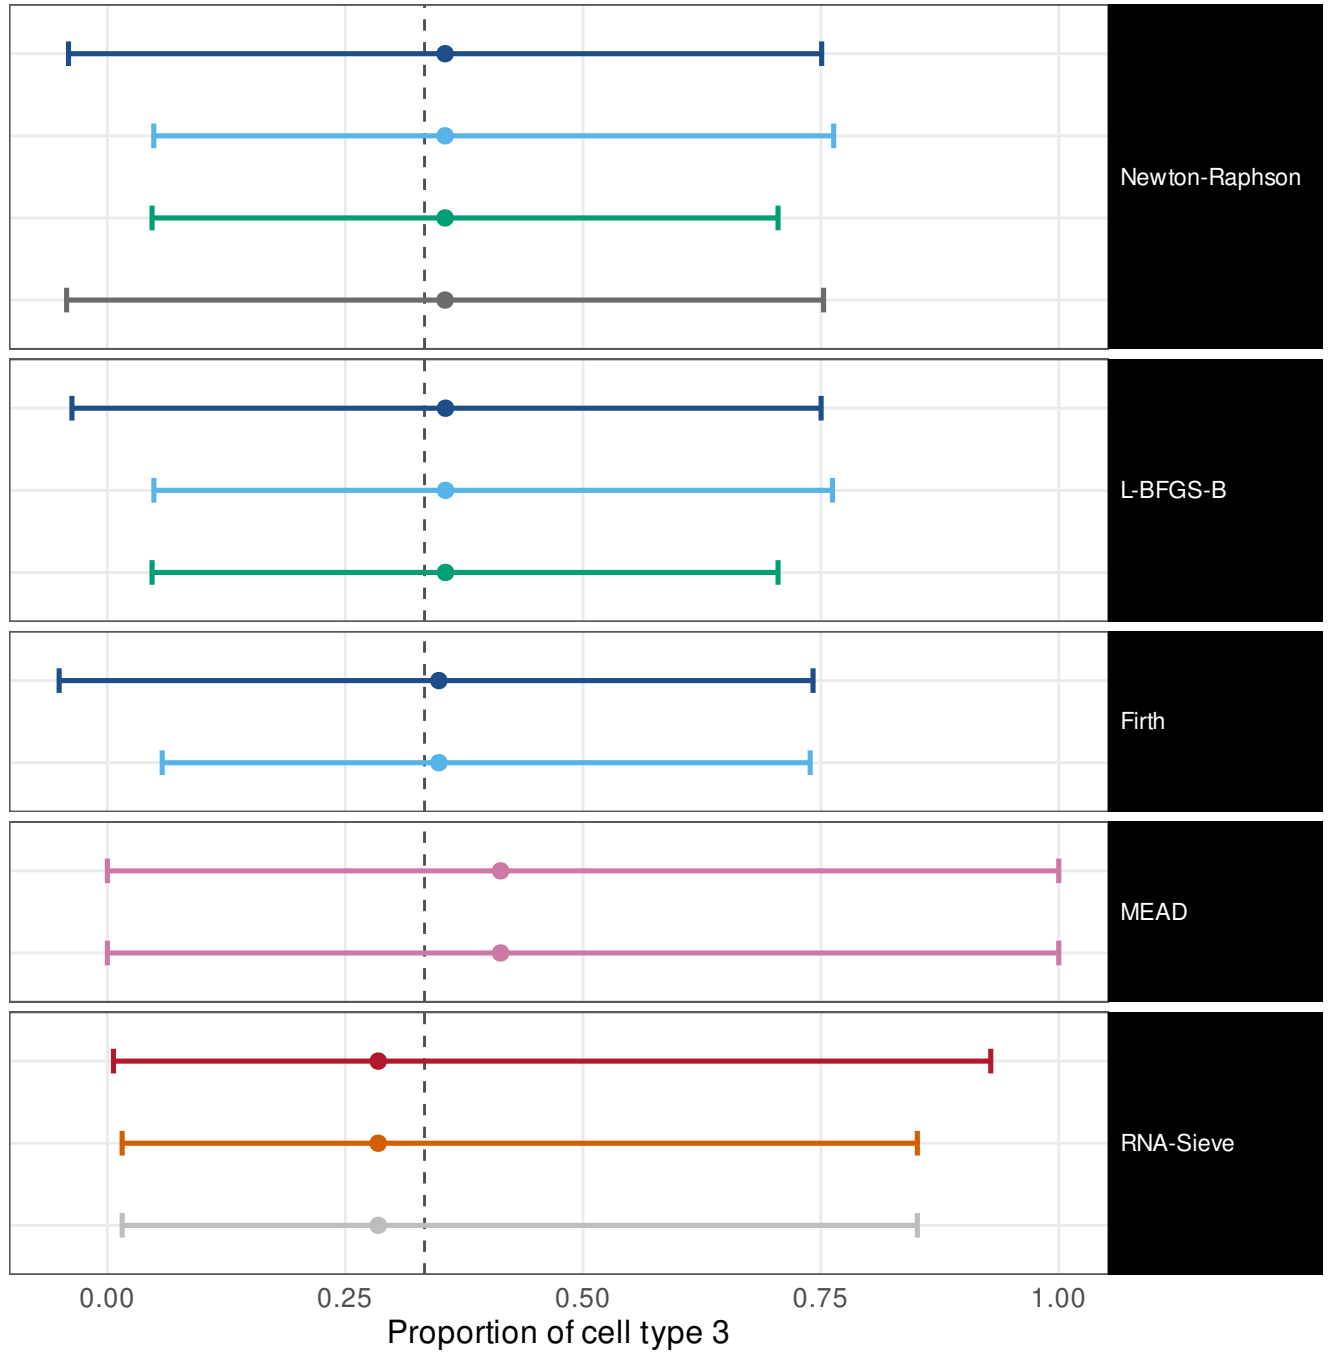


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.99	[0.96, 1]	w = 0.921
ILR, mapped back	1	[0.98, 1]	w = 0.766
Profile likelihood	1	[0.97, 1]	w = 0.665
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.867
Wald (delta)	0.99	[0.96, 1]	w = 0.944
ILR, mapped back	1	[0.98, 1]	w = 0.765
Profile likelihood	1	[0.97, 1]	w = 0.665
Wald (delta)	1	[0.98, 1]	w = 0.873
ILR, mapped back	1	[0.98, 1]	w = 0.718
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1

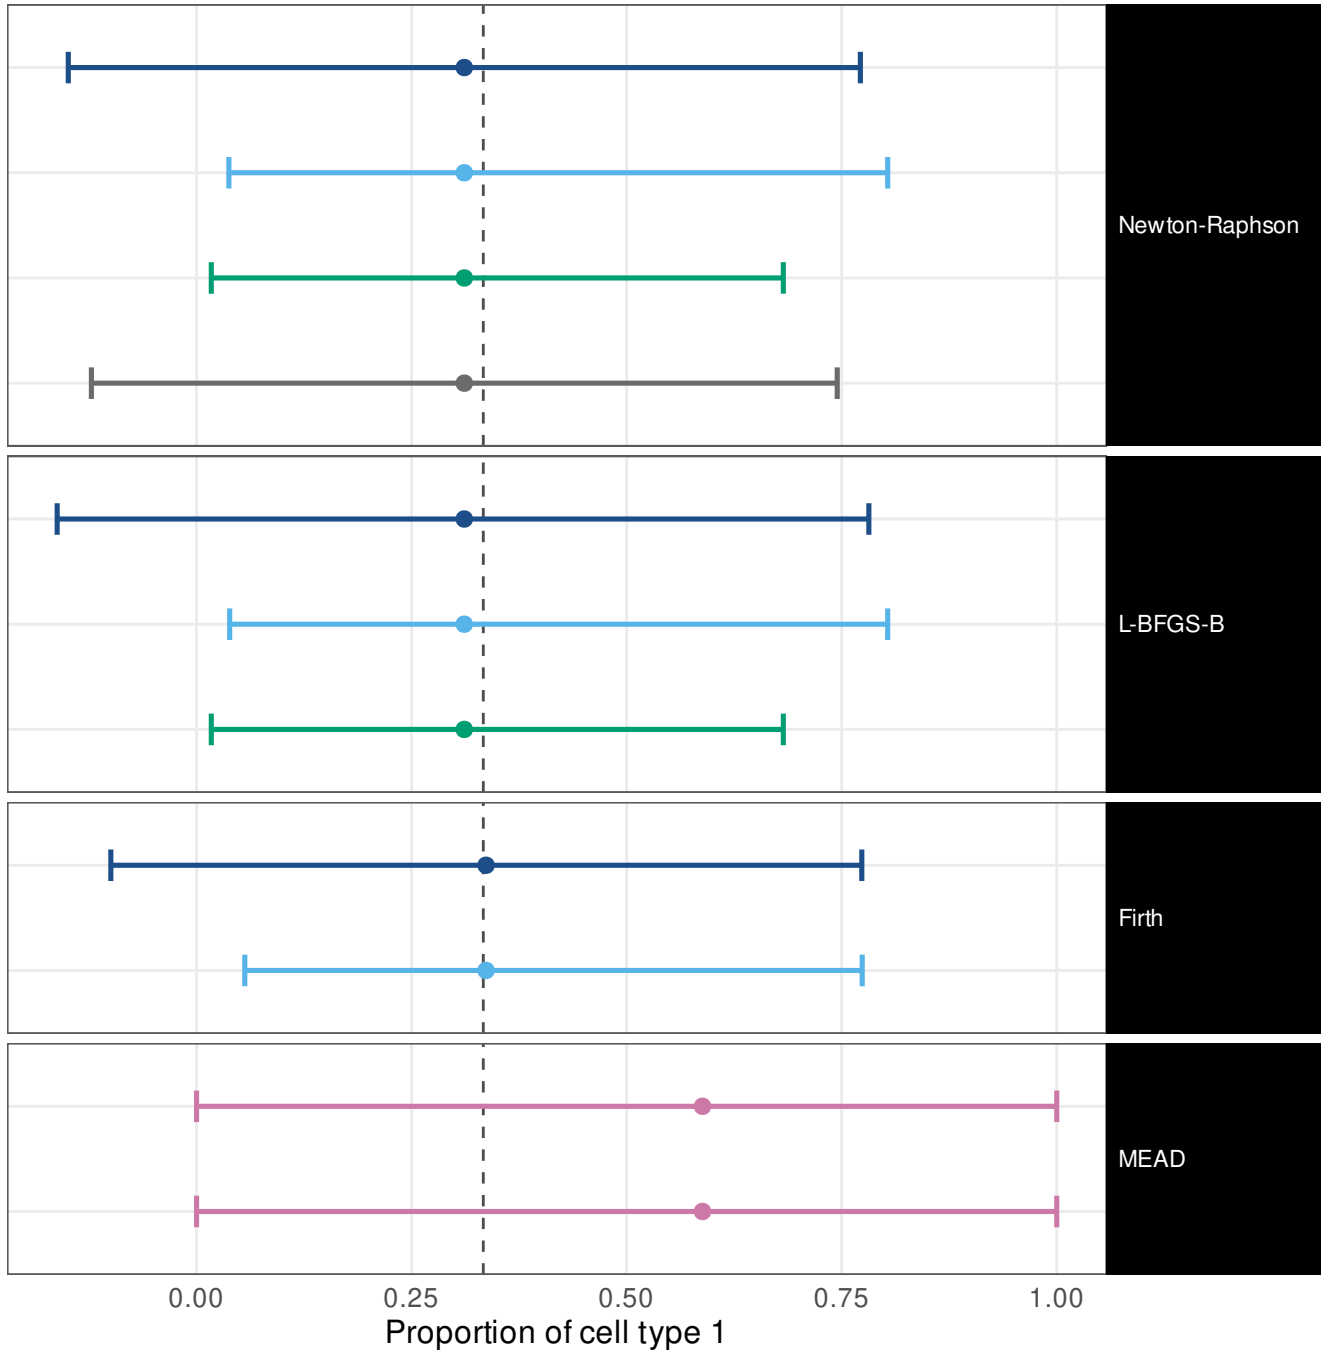


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.99	[0.96, 1]	w = 0.924
ILR, mapped back	1	[0.98, 1]	w = 0.773
Profile likelihood	1	[0.98, 1]	w = 0.729
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.92
Wald (delta)	0.99	[0.96, 1]	w = 0.944
ILR, mapped back	1	[0.98, 1]	w = 0.774
Profile likelihood	1	[0.98, 1]	w = 0.729
Wald (delta)	1	[0.98, 1]	w = 0.907
ILR, mapped back	1	[0.98, 1]	w = 0.741
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1

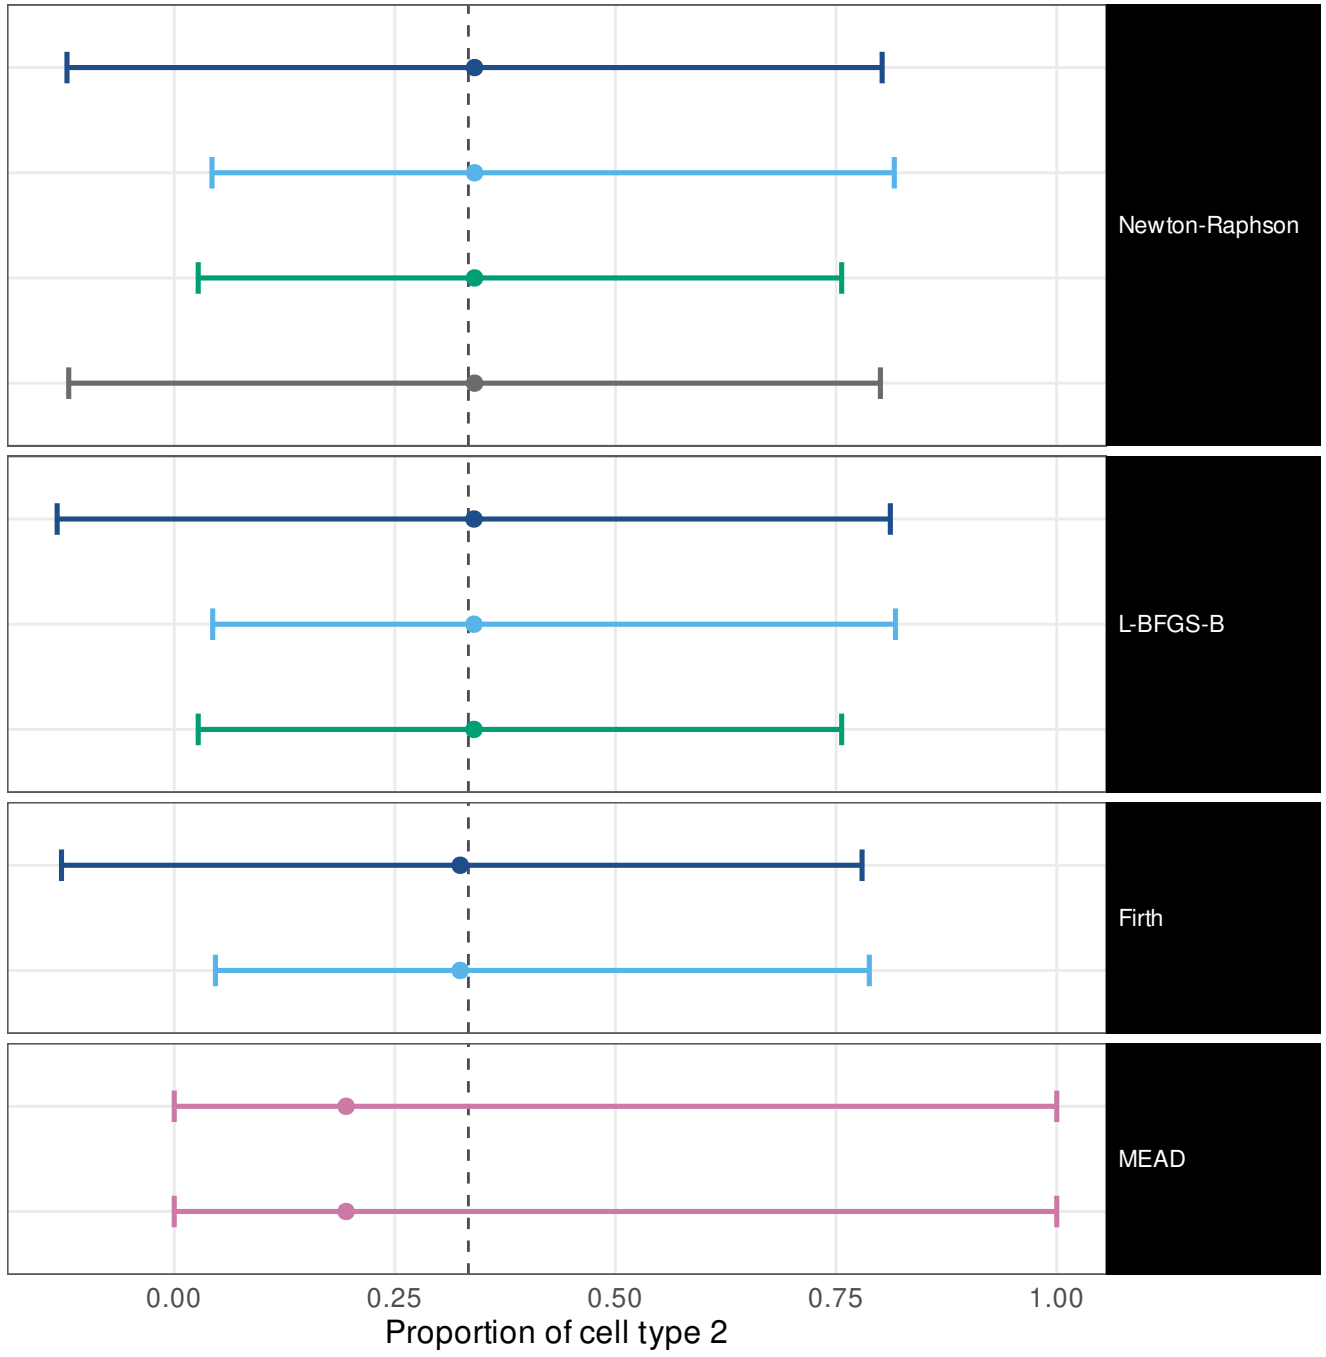


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.97 [0.94, 0.99]	w = 0.826
ILR, mapped back	1 [0.98, 1]	w = 0.731
Profile likelihood	0.99 [0.96, 1]	w = 0.682
Oracle (Fisher at p*)	1 [0.97, 1]	w = 0.826
Wald (delta)	0.96 [0.92, 0.98]	w = 0.826
ILR, mapped back	1 [0.98, 1]	w = 0.73
Profile likelihood	0.99 [0.96, 1]	w = 0.682
Wald (delta)	1 [0.98, 1]	w = 0.824
ILR, mapped back	1 [0.98, 1]	w = 0.697
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1

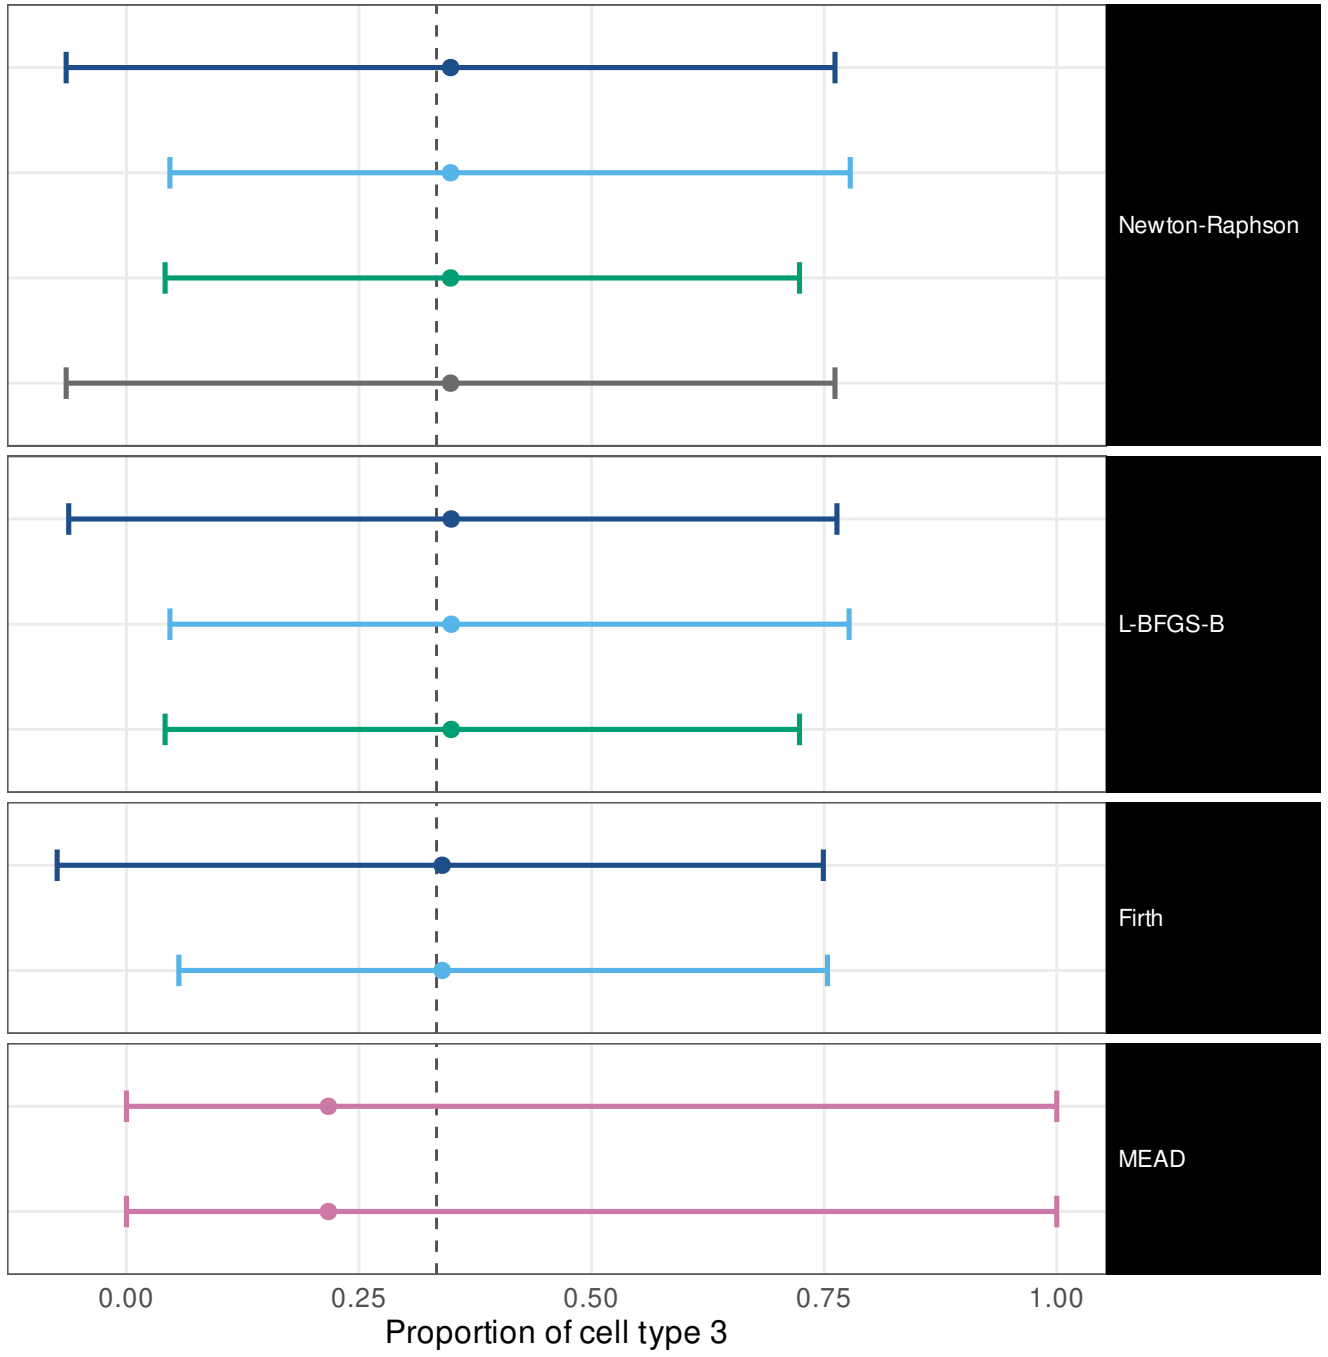


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.98	[0.96, 0.99]	w = 0.9
ILR, mapped back	1	[0.98, 1]	w = 0.762
Profile likelihood	1	[0.98, 1]	w = 0.692
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.912
Wald (delta)	0.98	[0.96, 0.99]	w = 0.902
ILR, mapped back	1	[0.98, 1]	w = 0.756
Profile likelihood	1	[0.98, 1]	w = 0.692
Wald (delta)	1	[0.98, 1]	w = 0.888
ILR, mapped back	1	[0.98, 1]	w = 0.73
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	0.99	[0.96, 1]	w = 0.993
Godambe sandwich	1	[0.98, 1]	w = 0.995
Released code, as published	1	[0.98, 1]	w = 0.995

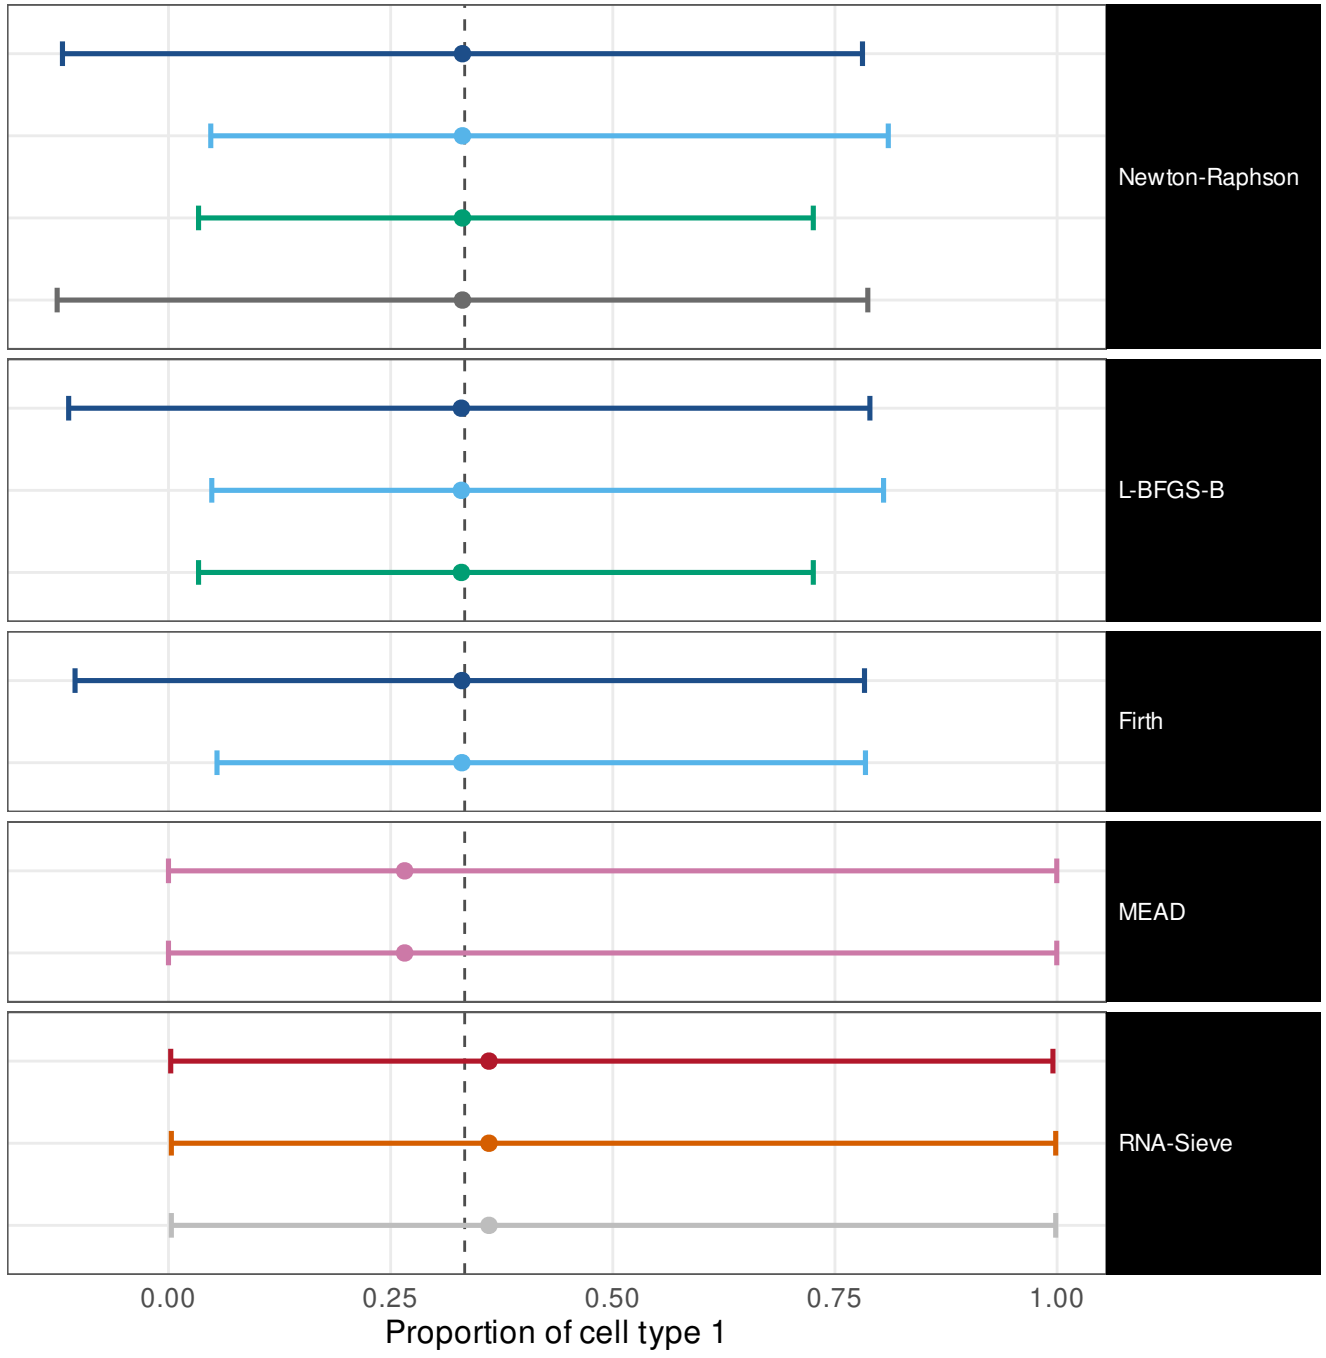

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 SBM


```
Wald (delta)                          1  [0.98,    1]   w = 0.923
ILR, mapped back                      1  [0.98,    1]   w = 0.762
Profile likelihood                    1  [0.98,    1]   w = 0.677
Oracle (Fisher at p*)                 1  [0.98,    1]   w = 0.905

Wald (delta)                          1  [0.98,    1]   w = 0.915
ILR, mapped back                      1  [0.98,    1]   w = 0.759
Profile likelihood                    1  [0.98,    1]   w = 0.677

Wald (delta)                          1  [0.98,    1]   w = 0.897
ILR, mapped back                      1  [0.98,    1]   w = 0.733

Method's own interval                 1  [0.98,    1]   w =    1
Own interval, transcript fractions    1  [0.98,    1]   w =    1

Fisher information (Wald)             1  [0.97,    1]   w = 0.992
Godambe sandwich                      1  [0.97,    1]   w = 0.98
Released code, as published           1  [0.97,    1]   w = 0.98
```

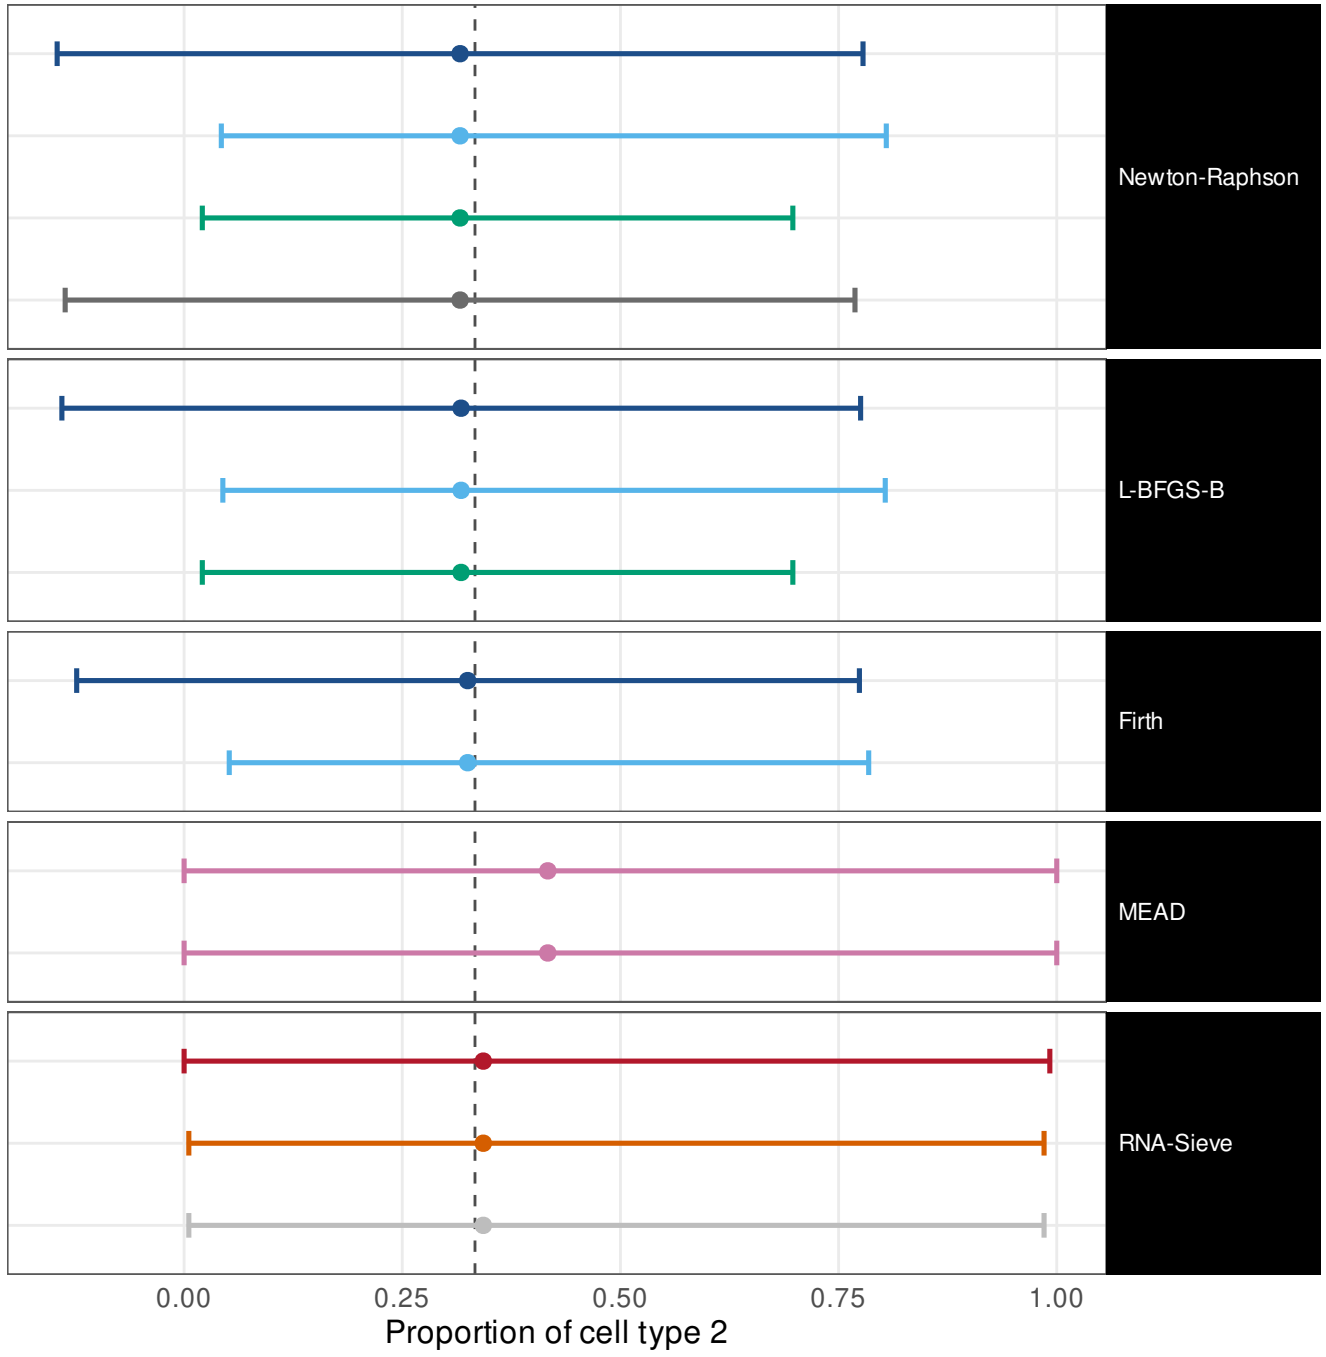


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.96 [0.93, 0.98]	w = 0.801
ILR, mapped back	1 [0.98, 1]	w = 0.711
Profile likelihood	0.98 [0.95, 0.99]	w = 0.664
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.799
Wald (delta)	0.97 [0.94, 0.99]	w = 0.799
ILR, mapped back	1 [0.98, 1]	w = 0.707
Profile likelihood	0.98 [0.95, 0.99]	w = 0.664
Wald (delta)	0.99 [0.96, 1]	w = 0.797
ILR, mapped back	1 [0.98, 1]	w = 0.681
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.991
Godambe sandwich	1 [0.97, 1]	w = 0.989
Released code, as published	1 [0.97, 1]	w = 0.989

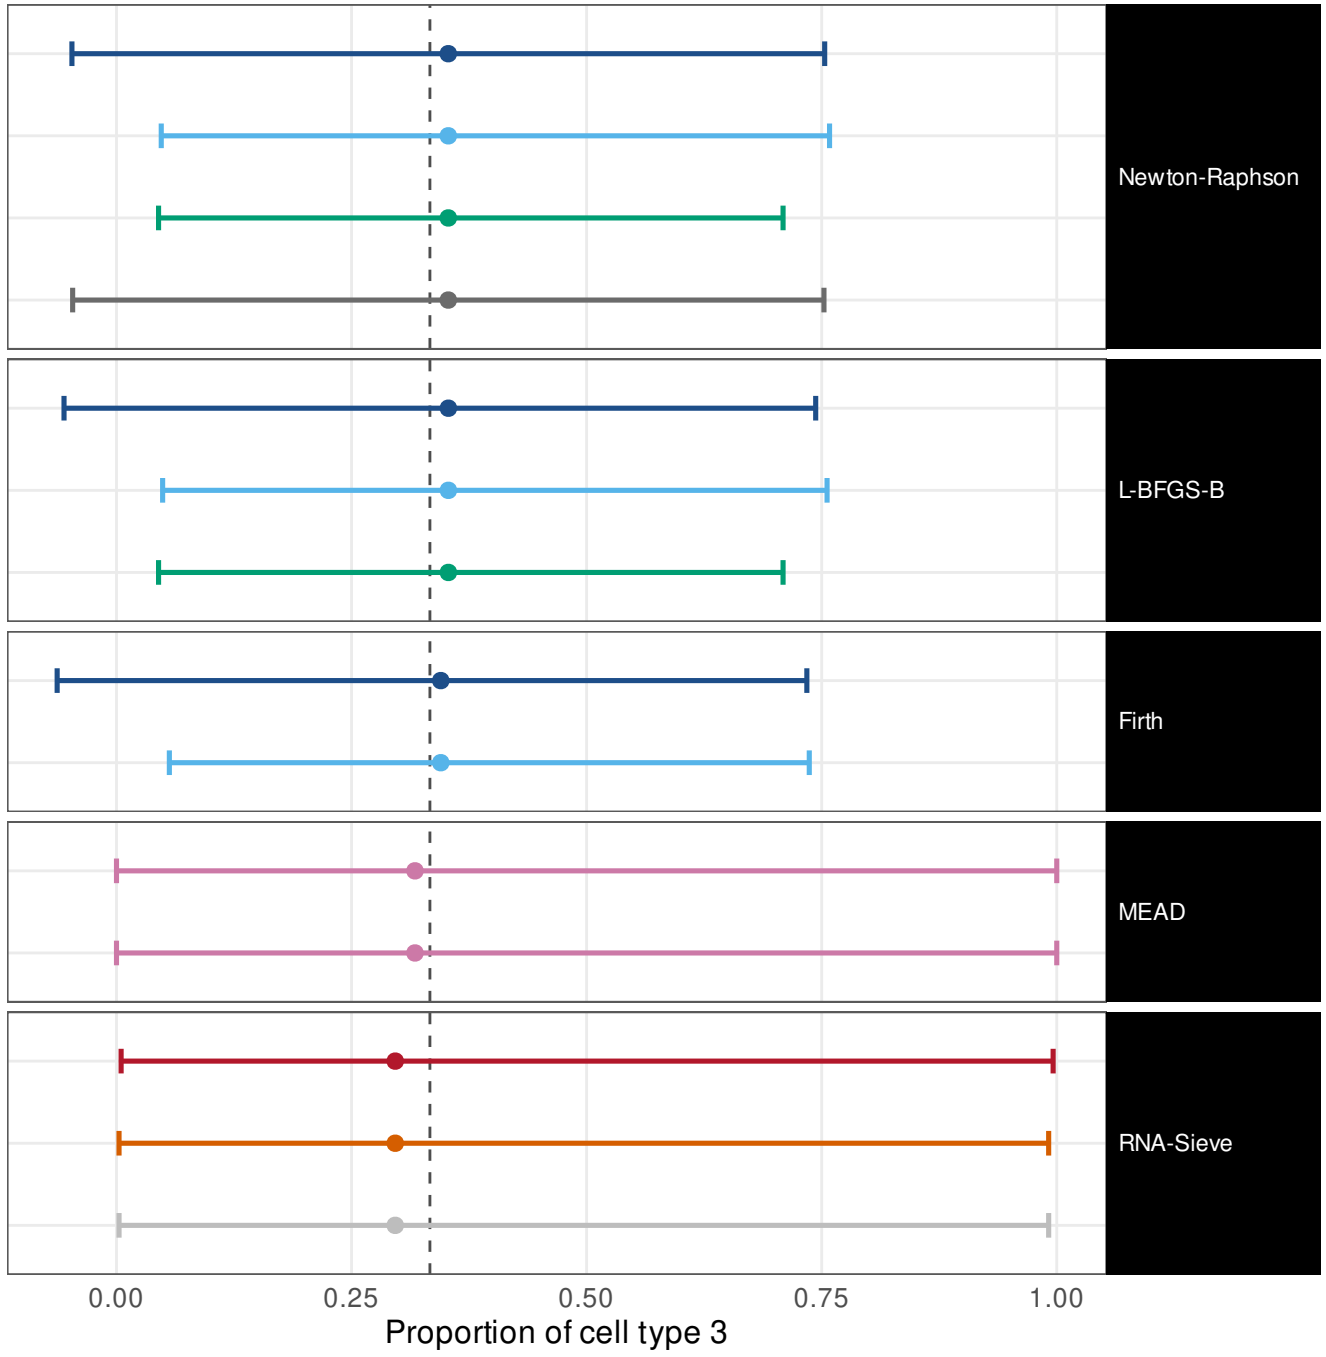


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.98 [0.96, 0.99]	w = 0.921
ILR, mapped back	1 [0.98, 1]	w = 0.772
Profile likelihood	1 [0.98, 1]	w = 0.664
Oracle (Fisher at p*)	1 [0.98, 1]	w = 0.895
Wald (delta)	0.99 [0.97, 1]	w = 0.922
ILR, mapped back	1 [0.98, 1]	w = 0.766
Profile likelihood	1 [0.98, 1]	w = 0.664
Wald (delta)	1 [0.98, 1]	w = 0.88
ILR, mapped back	1 [0.98, 1]	w = 0.722
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.97, 1]	w = 0.995
Godambe sandwich	1 [0.98, 1]	w = 0.996
Released code, as published	1 [0.98, 1]	w = 0.996

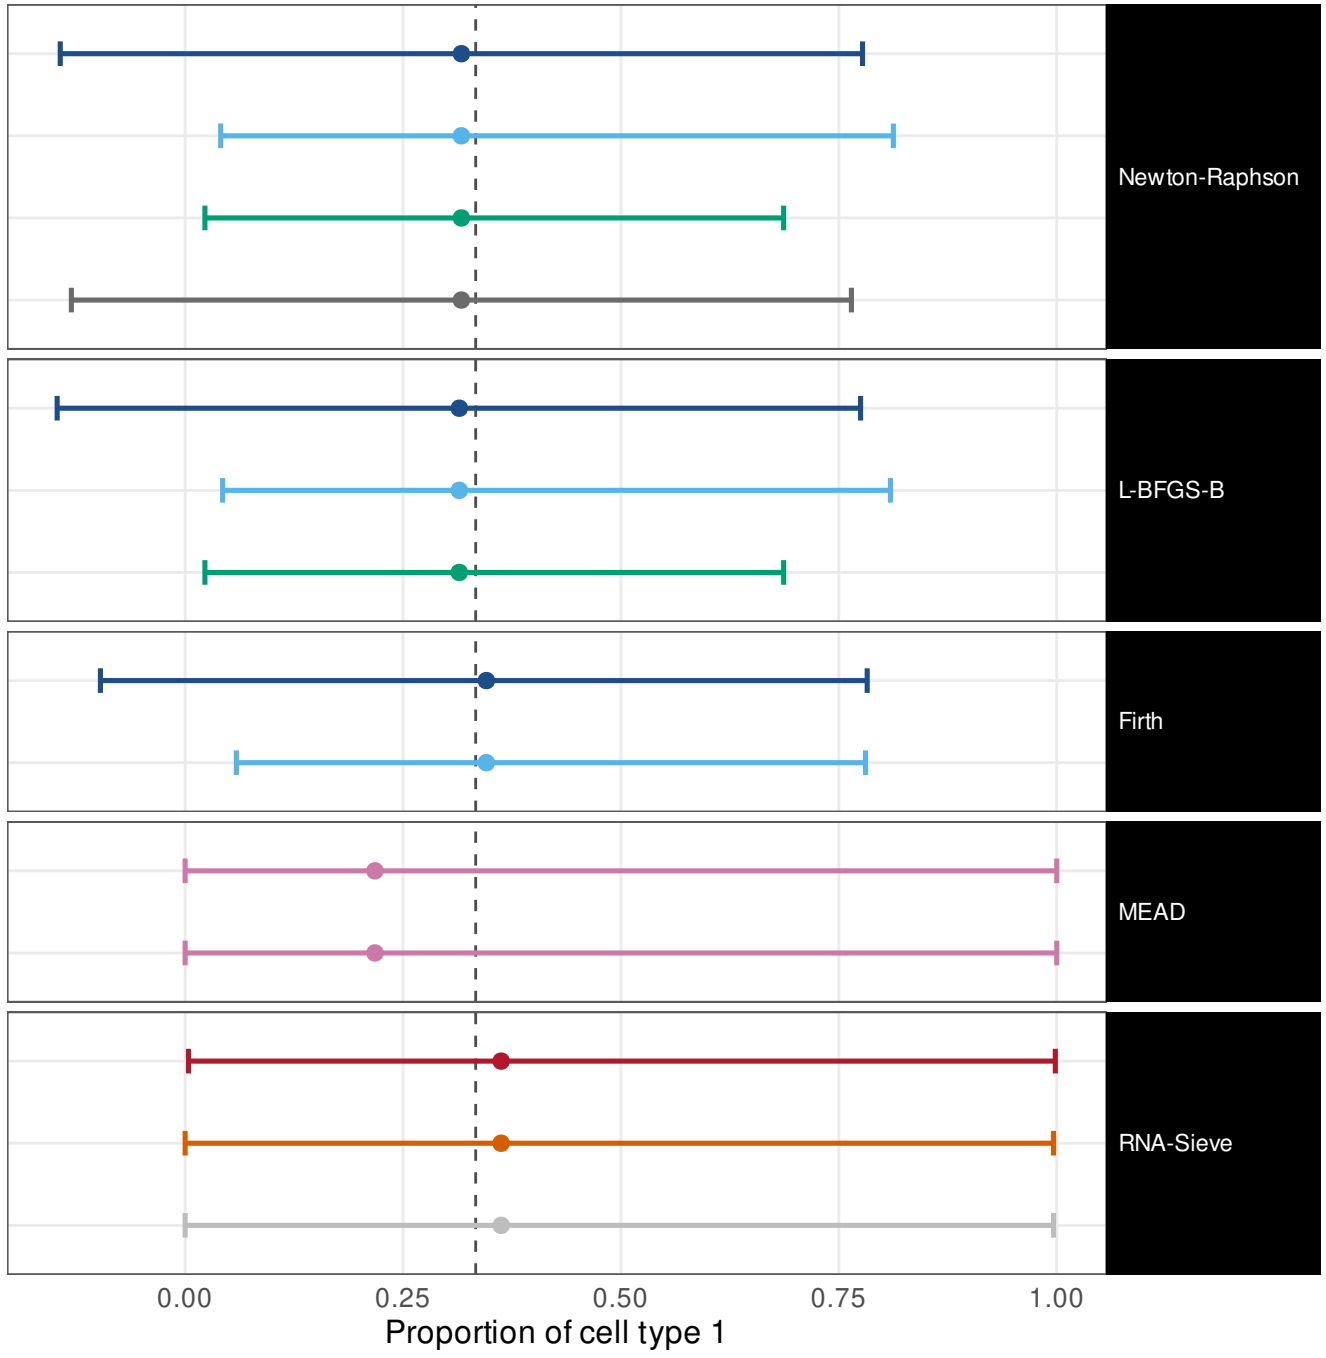


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.99	[0.96, 1]	w = 0.944
ILR, mapped back	1	[0.98, 1]	w = 0.779
Profile likelihood	1	[0.98, 1]	w = 0.725
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.957
Wald (delta)	0.99	[0.97, 1]	w = 0.948
ILR, mapped back	1	[0.98, 1]	w = 0.772
Profile likelihood	1	[0.98, 1]	w = 0.725
Wald (delta)	1	[0.98, 1]	w = 0.928
ILR, mapped back	1	[0.98, 1]	w = 0.749
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	1	[0.97, 1]	w = 0.995
Godambe sandwich	1	[0.97, 1]	w = 0.992
Released code, as published	1	[0.97, 1]	w = 0.992

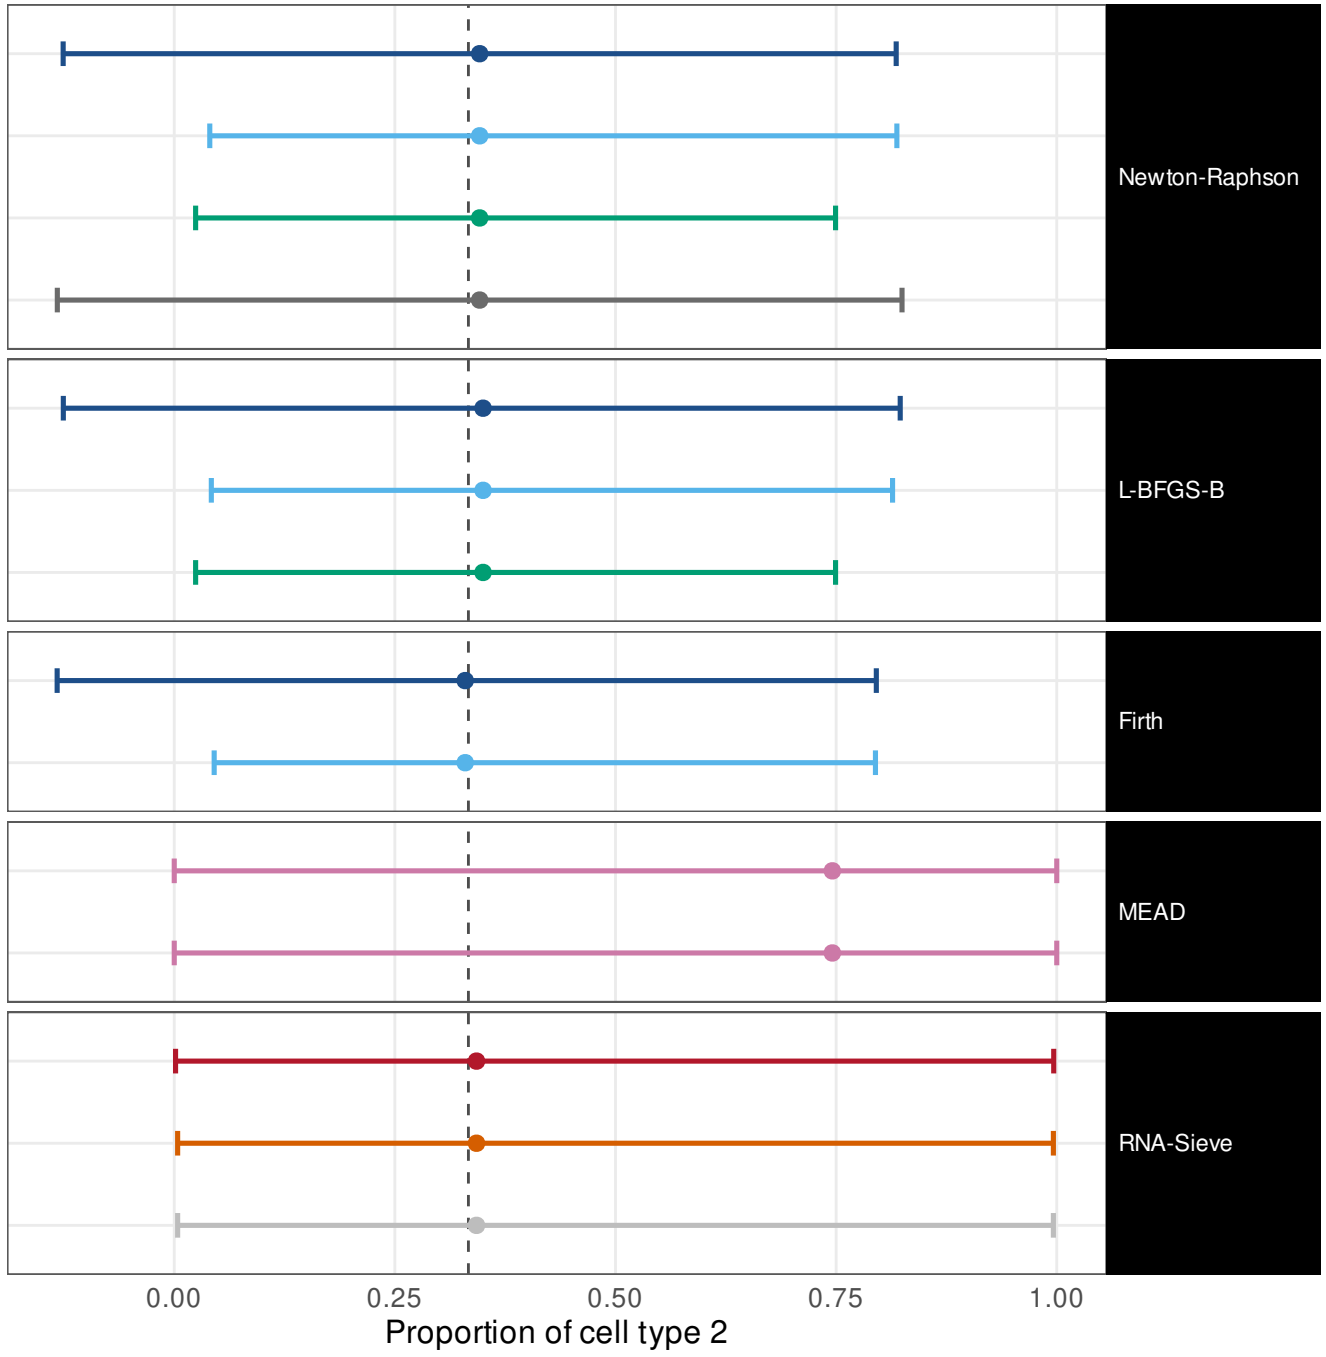


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.98, 1]	w = 0.805
ILR, mapped back	1	[0.98, 1]	w = 0.711
Profile likelihood	1	[0.97, 1]	w = 0.671
Oracle (Fisher at p*)	1	[0.98, 1]	w = 0.789
Wald (delta)	0.99	[0.97, 1]	w = 0.8
ILR, mapped back	1	[0.98, 1]	w = 0.704
Profile likelihood	1	[0.97, 1]	w = 0.671
Wald (delta)	1	[0.98, 1]	w = 0.798
ILR, mapped back	1	[0.98, 1]	w = 0.677
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1
Fisher information (Wald)	0.98	[0.96, 0.99]	w = 0.982
Godambe sandwich	1	[0.97, 1]	w = 0.965
Released code, as published	1	[0.97, 1]	w = 0.965

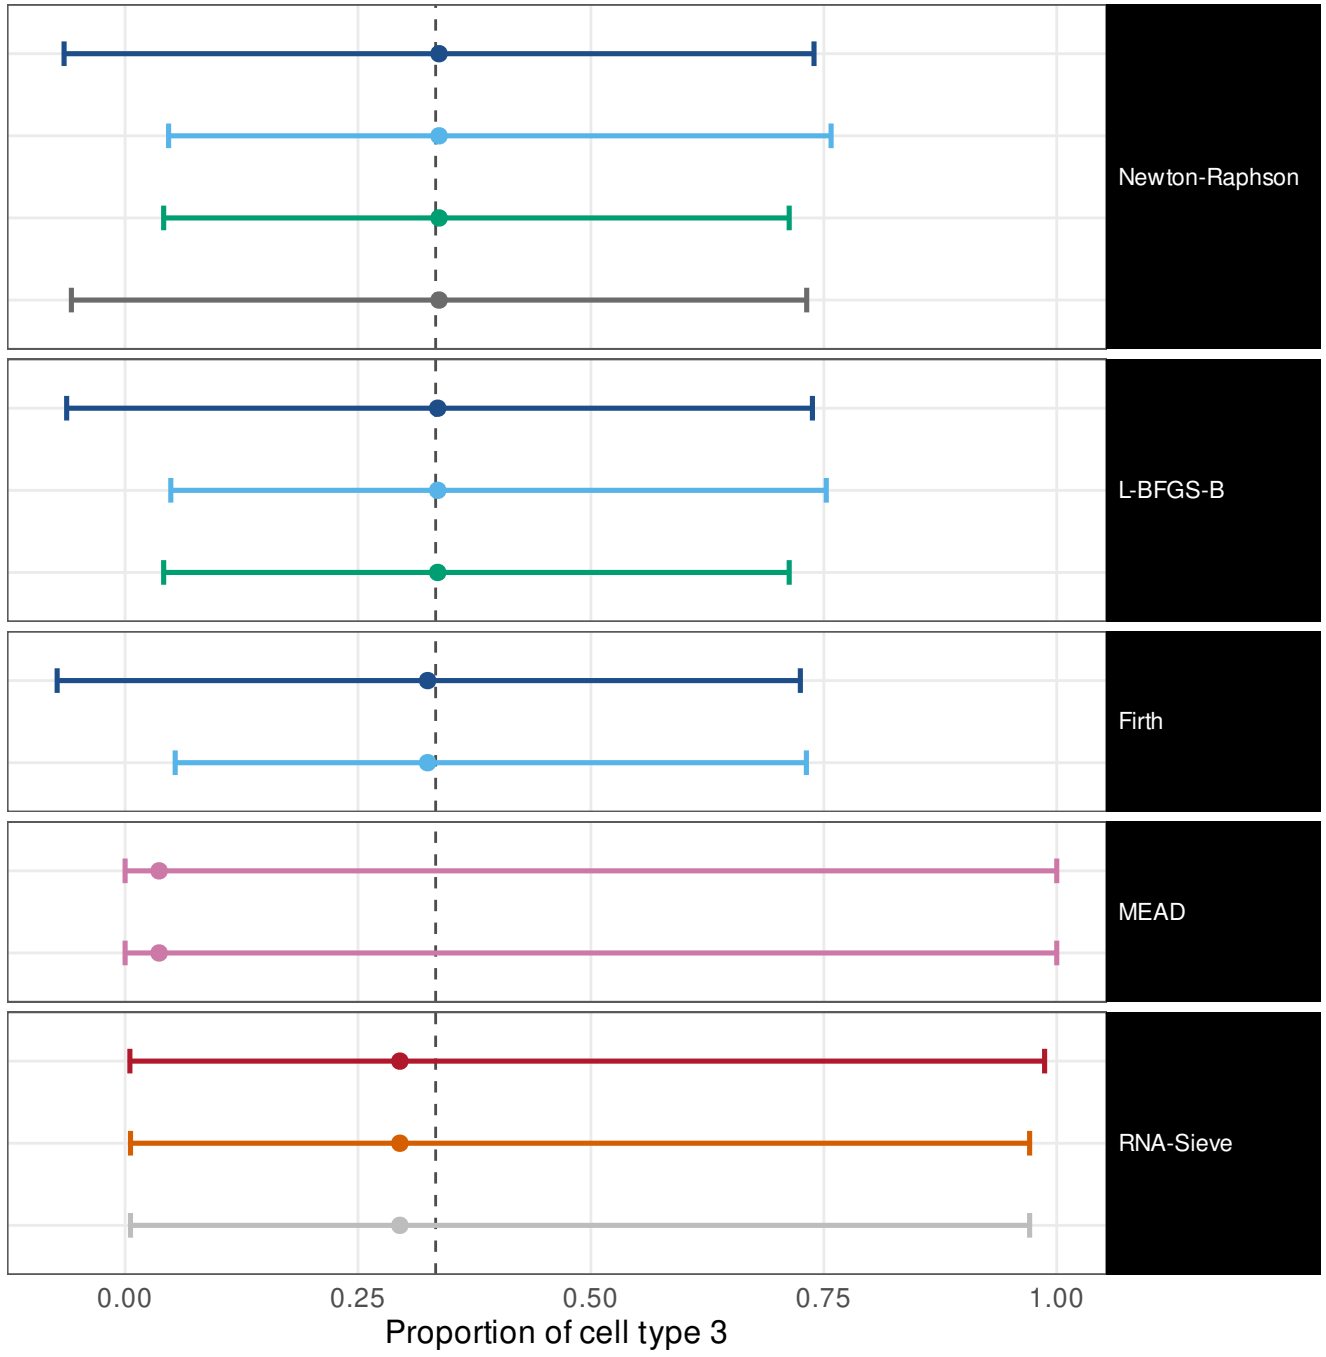


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.94 [0.89, 0.96]	w = 0.533
ILR, mapped back	0.81 [0.75, 0.86]	w = 0.794
Profile likelihood	0.96 [0.92, 0.98]	w = 0.491
Oracle (Fisher at p*)	0.89 [0.84, 0.93]	w = 0.51
Wald (delta)	0.93 [0.88, 0.96]	w = 0.534
ILR, mapped back	0.77 [0.69, 0.83]	w = 0.716
Profile likelihood	0.96 [0.92, 0.98]	w = 0.491
Wald (delta)	0.85 [0.78, 0.9]	w = 0.533
ILR, mapped back	0.62 [0.54, 0.7]	w = 0.553
Method's own interval	0.95 [0.91, 0.97]	w = 0.718
Own interval, transcript fractions	0.94 [0.9, 0.97]	w = 0.718
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.907
Godambe sandwich	0.99 [0.96, 1]	w = 0.891
Released code, as published	0.99 [0.96, 1]	w = 0.891

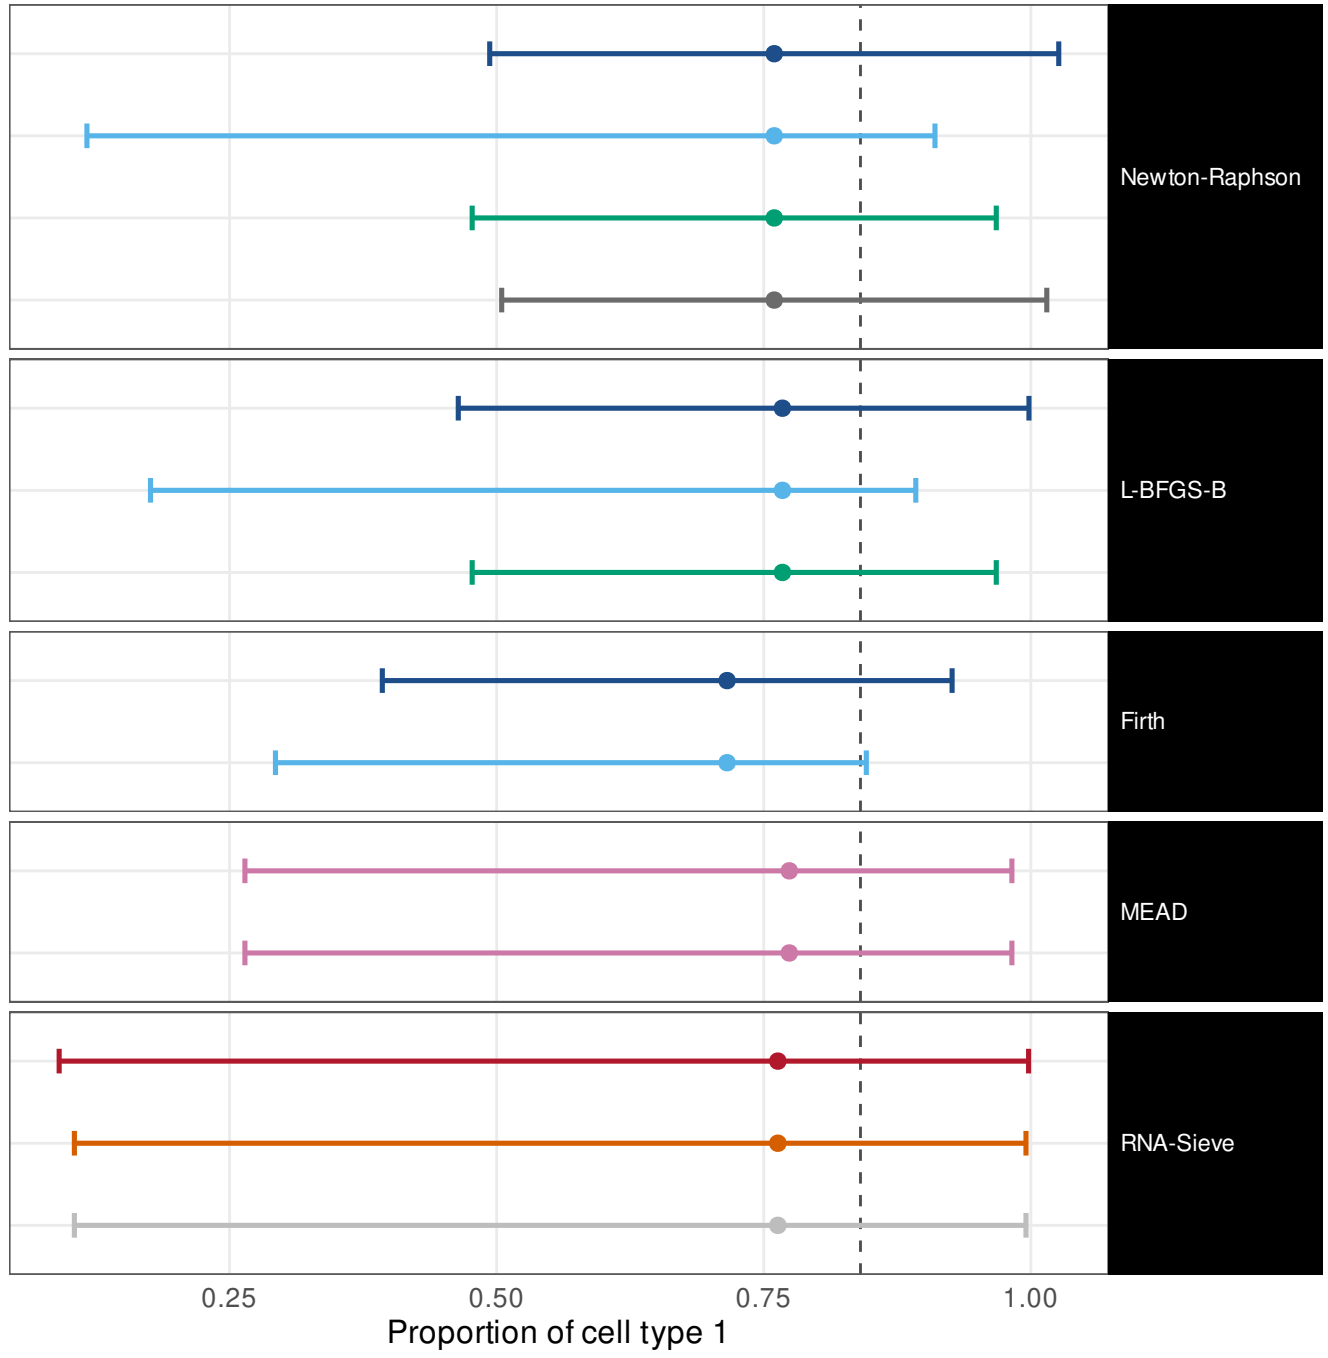


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.94 [0.89, 0.96]	w = 0.591
ILR, mapped back	0.92 [0.87, 0.95]	w = 0.774
Profile likelihood	0.97 [0.94, 0.99]	w = 0.441
Oracle (Fisher at p*)	0.92 [0.88, 0.95]	w = 0.59
Wald (delta)	0.94 [0.88, 0.97]	w = 0.589
ILR, mapped back	0.88 [0.81, 0.92]	w = 0.7
Profile likelihood	0.97 [0.94, 0.99]	w = 0.441
Wald (delta)	0.95 [0.9, 0.97]	w = 0.575
ILR, mapped back	0.83 [0.76, 0.89]	w = 0.577
Method's own interval	0.96 [0.93, 0.98]	w = 0.653
Own interval, transcript fractions	0.96 [0.93, 0.98]	w = 0.653
Fisher information (Wald)	1 [0.97, 1]	w = 0.88
Godambe sandwich	1 [0.97, 1]	w = 0.884
Released code, as published	1 [0.97, 1]	w = 0.884

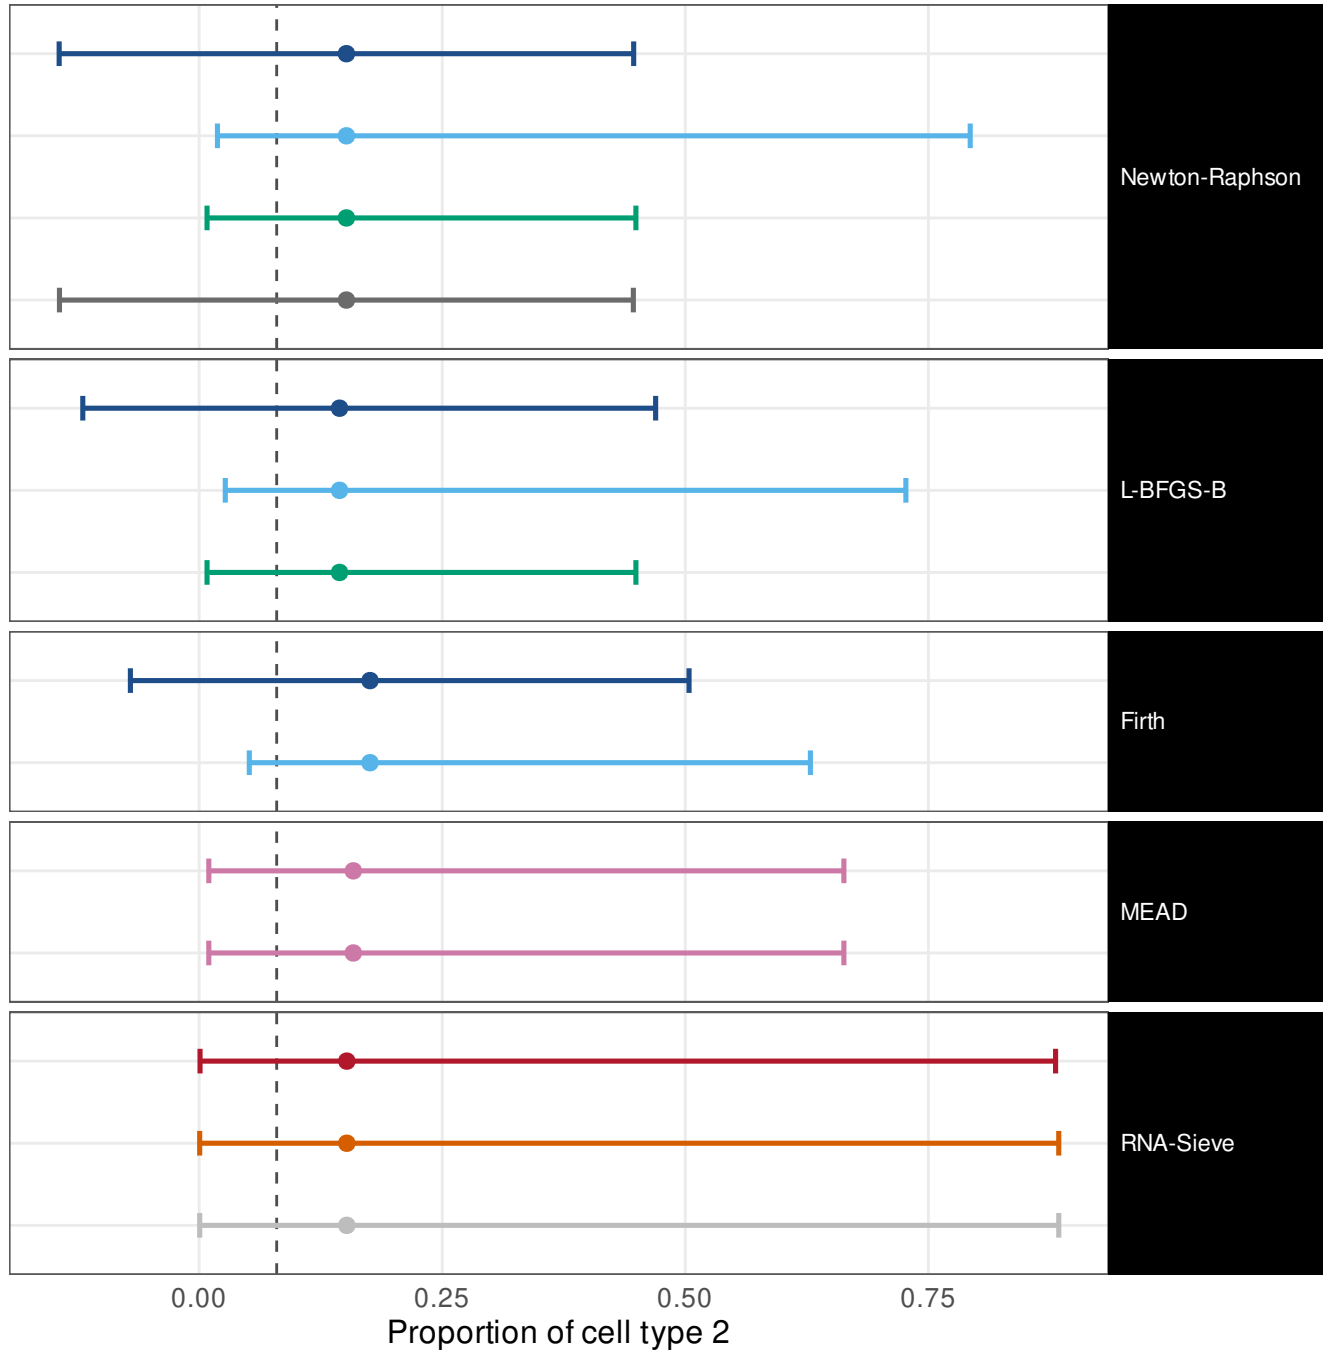


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.98 [0.95, 0.99]	w = 0.341
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.575
Profile likelihood	0.99 [0.96, 1]	w = 0.234
Oracle (Fisher at p*)	0.99 [0.96, 1]	w = 0.354
Wald (delta)	0.98 [0.94, 0.99]	w = 0.327
ILR, mapped back	0.97 [0.92, 0.99]	w = 0.519
Profile likelihood	0.99 [0.96, 1]	w = 0.234
Wald (delta)	0.98 [0.94, 0.99]	w = 0.306
ILR, mapped back	0.92 [0.87, 0.96]	w = 0.342
Method's own interval	0.98 [0.95, 0.99]	w = 0.235
Own interval, transcript fractions	0.95 [0.91, 0.97]	w = 0.235
Fisher information (Wald)	1 [0.98, 1]	w = 0.403
Godambe sandwich	0.92 [0.88, 0.95]	w = 0.416
Released code, as published	0.92 [0.88, 0.95]	w = 0.416

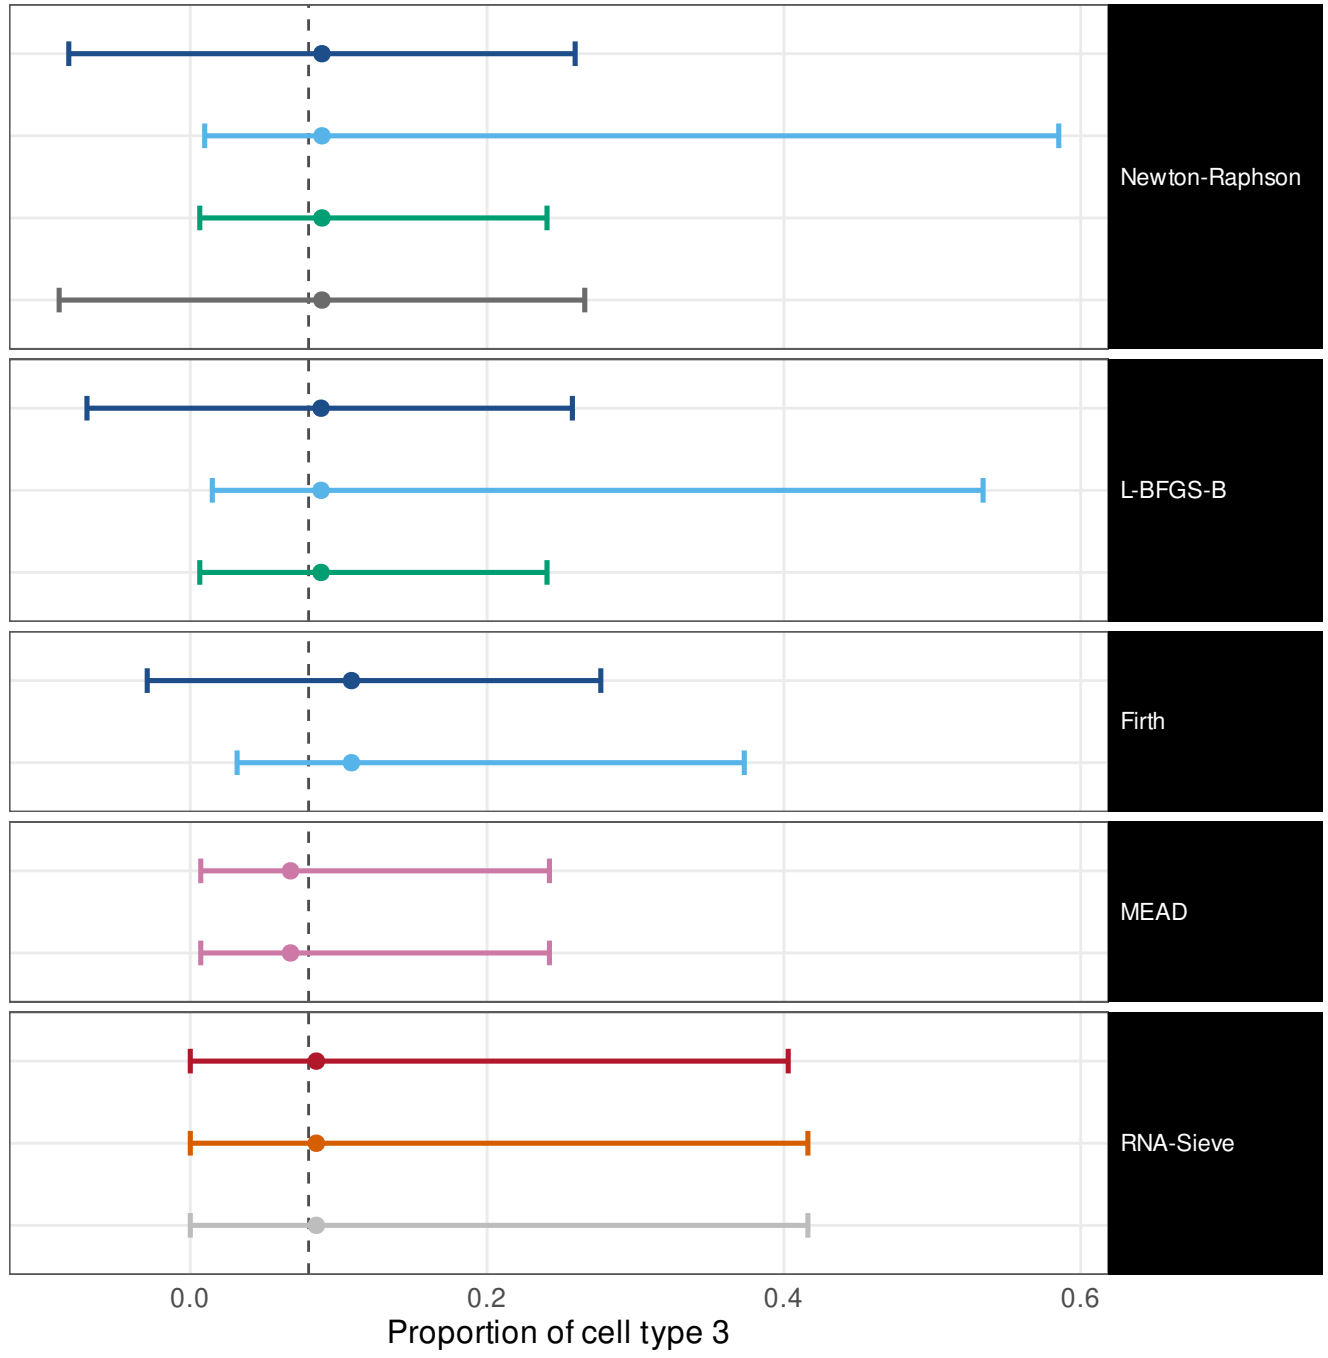


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.9 [0.85, 0.93]	w = 0.543
ILR, mapped back	0.8 [0.74, 0.85]	w = 0.813
Profile likelihood	0.92 [0.87, 0.95]	w = 0.473
Oracle (Fisher at p*)	0.89 [0.84, 0.93]	w = 0.526
Wald (delta)	0.87 [0.8, 0.92]	w = 0.542
ILR, mapped back	0.72 [0.63, 0.79]	w = 0.736
Profile likelihood	0.92 [0.87, 0.95]	w = 0.473
Wald (delta)	0.81 [0.73, 0.87]	w = 0.533
ILR, mapped back	0.54 [0.45, 0.62]	w = 0.552
Method's own interval	0.88 [0.83, 0.92]	w = 0.739
Own interval, transcript fractions	0.88 [0.82, 0.91]	w = 0.739
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.916
Godambe sandwich	0.99 [0.96, 1]	w = 0.904
Released code, as published	0.99 [0.96, 1]	w = 0.904

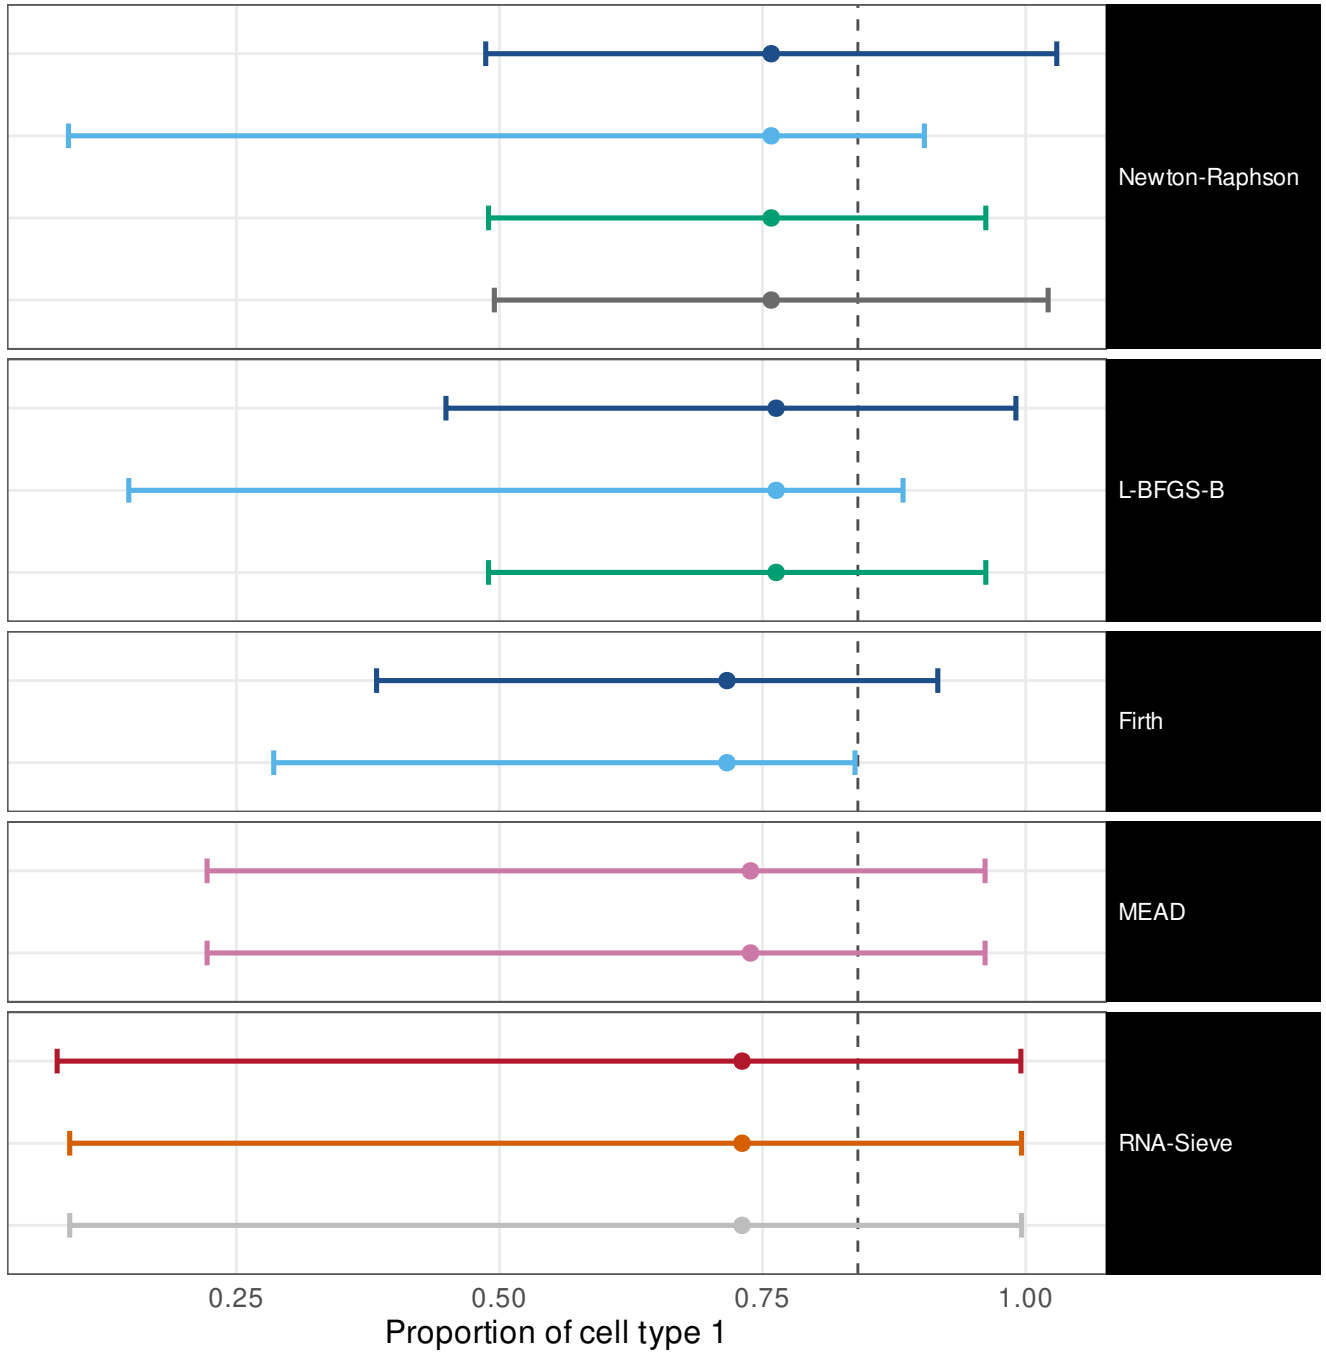


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.94 [0.9, 0.97]	w = 0.6
ILR, mapped back	0.9 [0.84, 0.93]	w = 0.788
Profile likelihood	0.95 [0.91, 0.97]	w = 0.423
Oracle (Fisher at p*)	0.93 [0.89, 0.96]	w = 0.601
Wald (delta)	0.94 [0.89, 0.97]	w = 0.595
ILR, mapped back	0.83 [0.75, 0.88]	w = 0.716
Profile likelihood	0.95 [0.91, 0.97]	w = 0.423
Wald (delta)	0.94 [0.89, 0.97]	w = 0.575
ILR, mapped back	0.74 [0.65, 0.81]	w = 0.579
Method's own interval	0.9 [0.85, 0.93]	w = 0.693
Own interval, transcript fractions	0.9 [0.85, 0.93]	w = 0.693
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.902
Godambe sandwich	0.99 [0.96, 1]	w = 0.89
Released code, as published	0.99 [0.96, 1]	w = 0.89

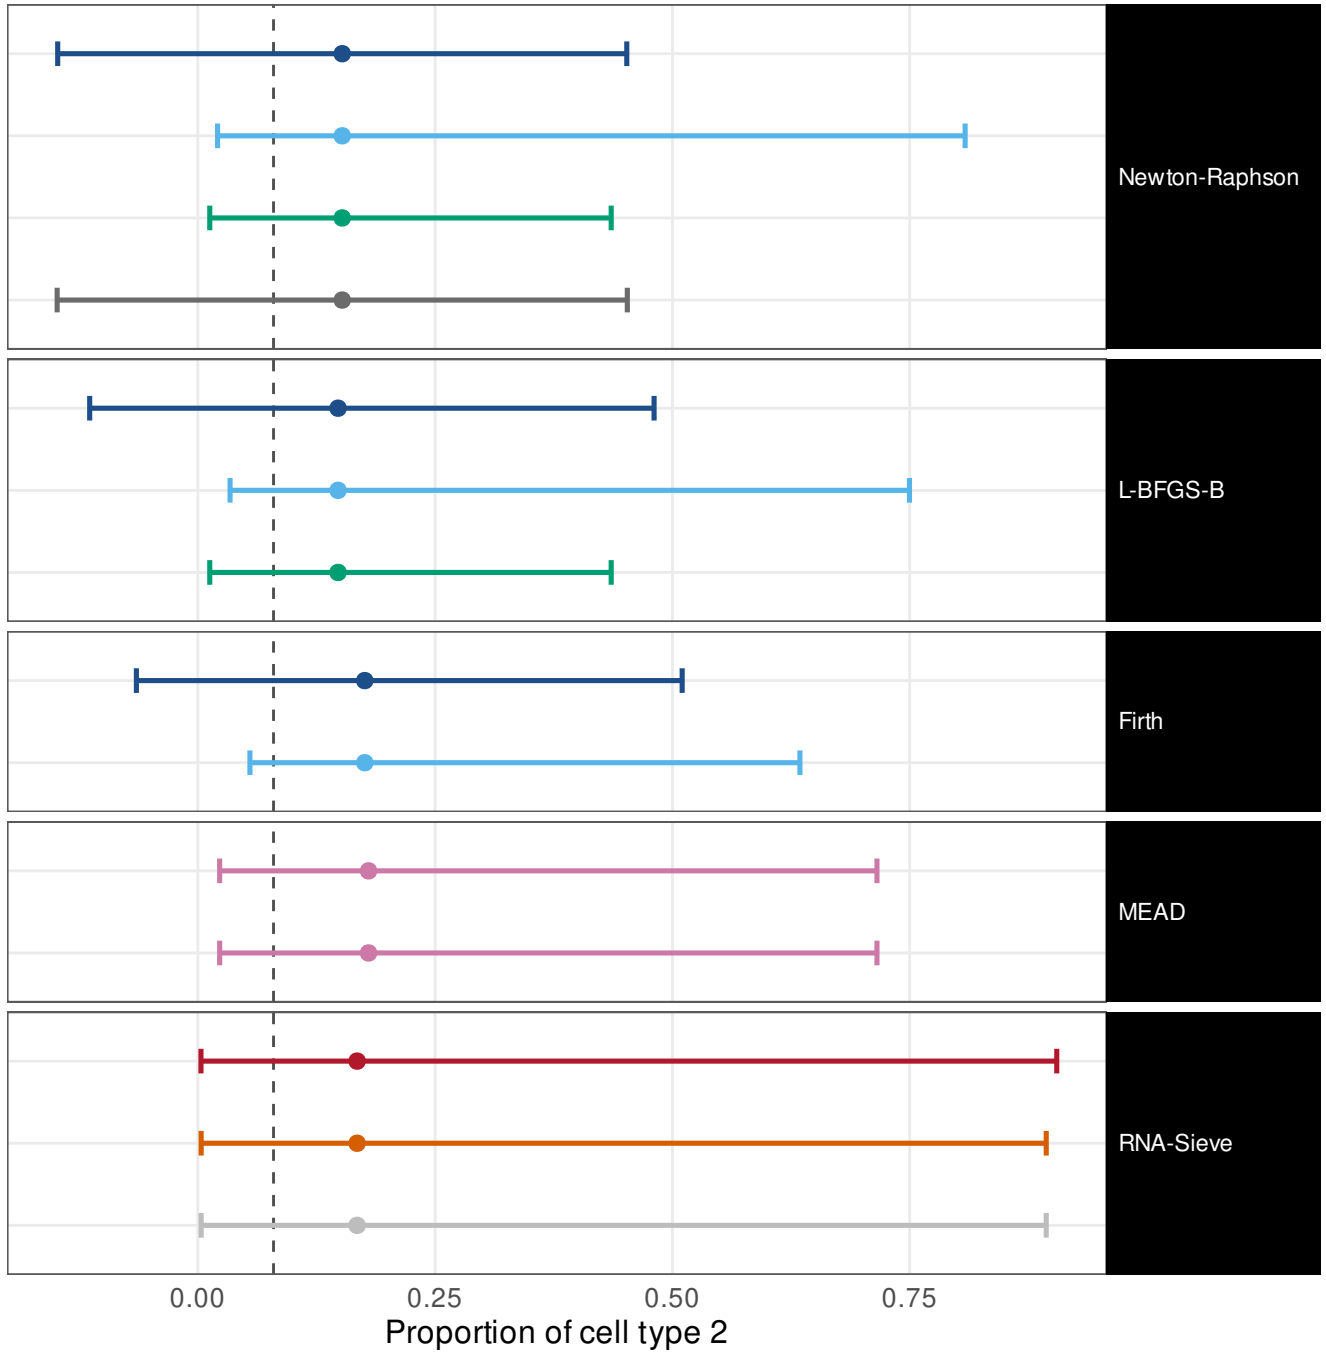


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96 [0.93, 0.98]	w = 0.344
ILR, mapped back	0.98 [0.95, 0.99]	w = 0.597
Profile likelihood	0.98 [0.94, 0.99]	w = 0.233
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.364
Wald (delta)	0.96 [0.91, 0.98]	w = 0.328
ILR, mapped back	0.97 [0.92, 0.99]	w = 0.54
Profile likelihood	0.98 [0.94, 0.99]	w = 0.233
Wald (delta)	0.95 [0.9, 0.98]	w = 0.302
ILR, mapped back	0.89 [0.82, 0.94]	w = 0.337
Method's own interval	0.91 [0.86, 0.94]	w = 0.502
Own interval, transcript fractions	0.91 [0.86, 0.94]	w = 0.502
Fisher information (Wald)	1 [0.98, 1]	w = 0.451
Godambe sandwich	0.98 [0.94, 0.99]	w = 0.525
Released code, as published	0.98 [0.94, 0.99]	w = 0.525

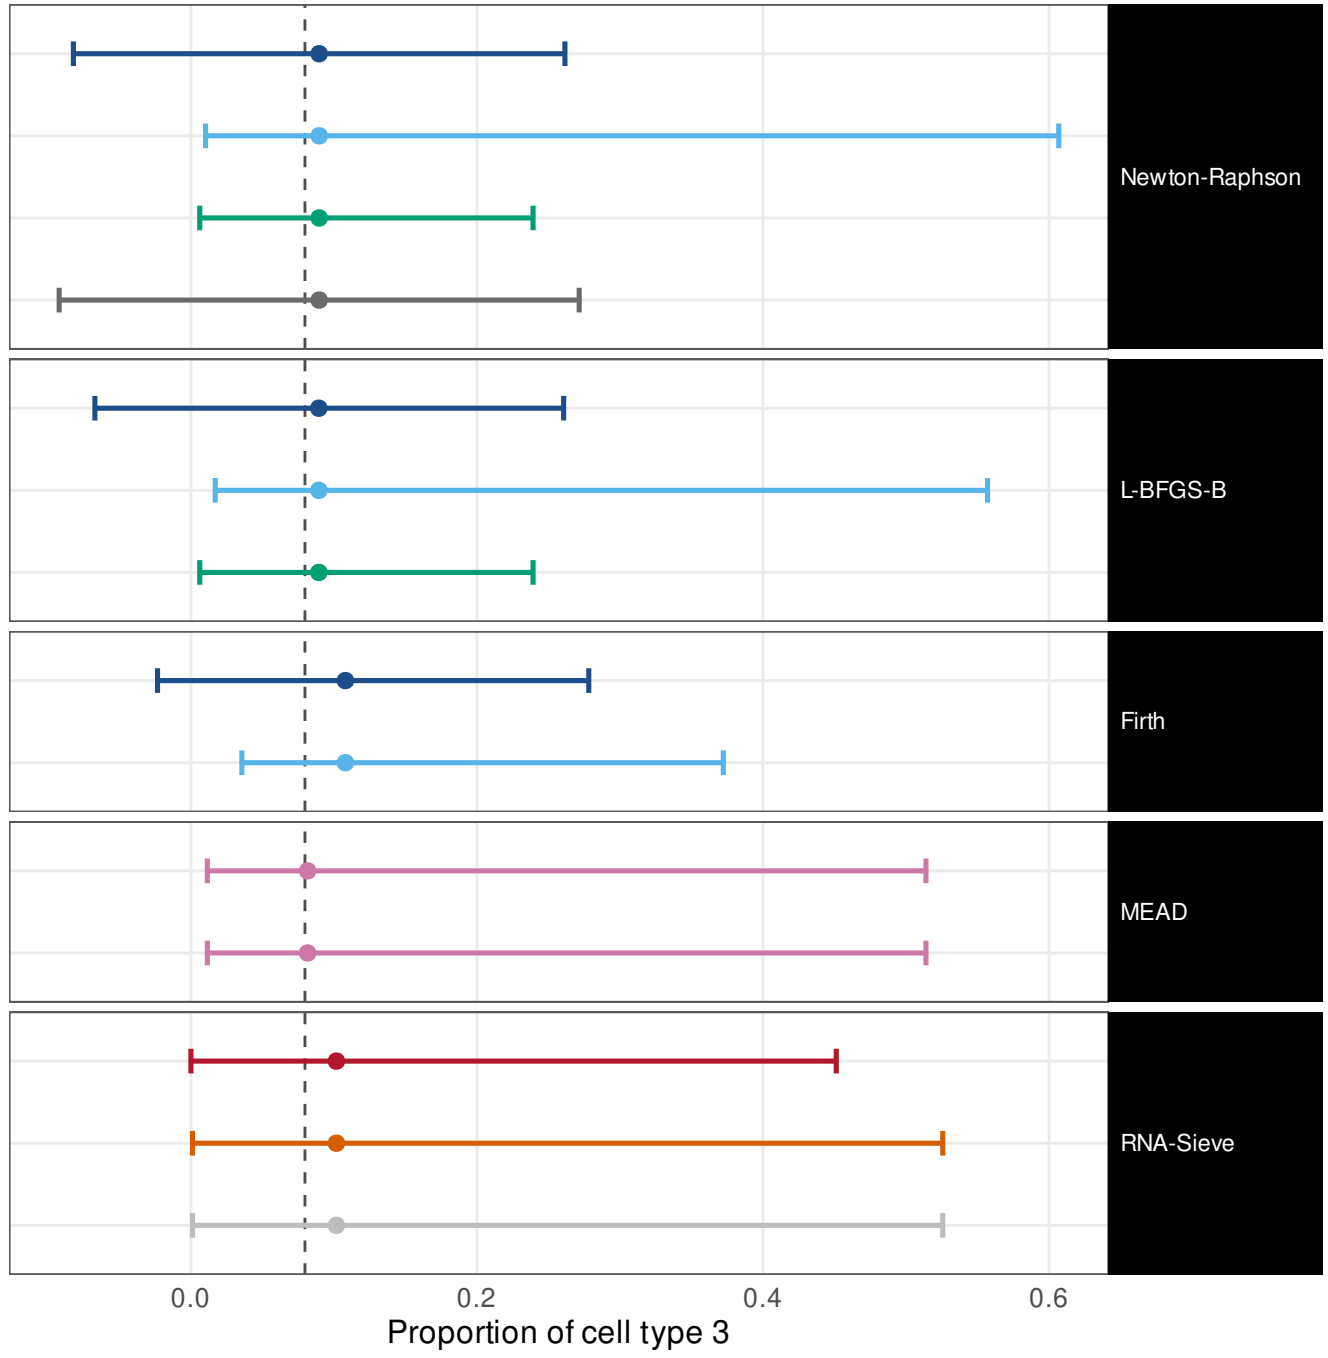


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.92 [0.87, 0.95]	w = 0.561
ILR, mapped back	0.82 [0.76, 0.87]	w = 0.804
Profile likelihood	0.94 [0.9, 0.97]	w = 0.487
Oracle (Fisher at p*)	0.9 [0.85, 0.93]	w = 0.539
Wald (delta)	0.87 [0.81, 0.92]	w = 0.566
ILR, mapped back	0.72 [0.63, 0.79]	w = 0.711
Profile likelihood	0.94 [0.9, 0.97]	w = 0.487
Wald (delta)	0.83 [0.76, 0.89]	w = 0.564
ILR, mapped back	0.56 [0.48, 0.65]	w = 0.57
Method's own interval	0.92 [0.88, 0.95]	w = 0.735
Own interval, transcript fractions	0.94 [0.89, 0.96]	w = 0.735
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.898
Godambe sandwich	0.98 [0.95, 0.99]	w = 0.86
Released code, as published	0.98 [0.95, 0.99]	w = 0.86

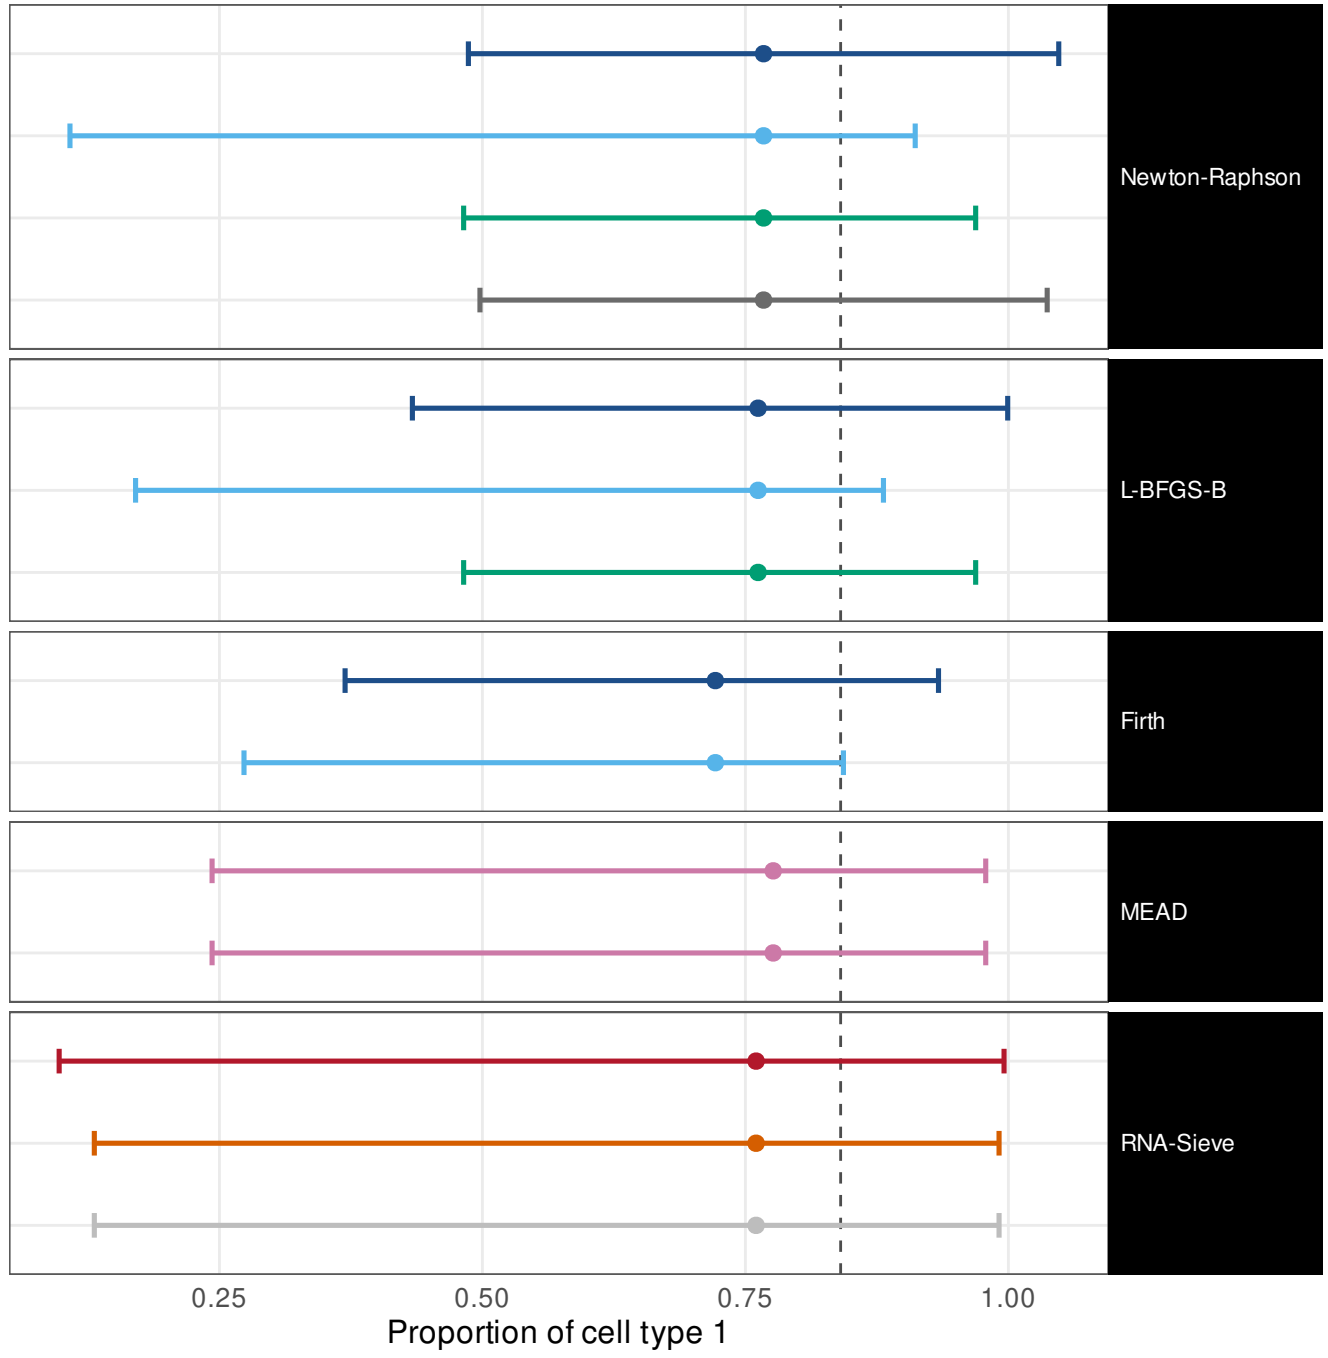


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.94 [0.89, 0.96]	w = 0.611
ILR, mapped back	0.92 [0.87, 0.95]	w = 0.774
Profile likelihood	0.97 [0.94, 0.99]	w = 0.444
Oracle (Fisher at p*)	0.92 [0.88, 0.95]	w = 0.602
Wald (delta)	0.93 [0.87, 0.96]	w = 0.608
ILR, mapped back	0.85 [0.78, 0.9]	w = 0.699
Profile likelihood	0.97 [0.94, 0.99]	w = 0.444
Wald (delta)	0.94 [0.88, 0.97]	w = 0.598
ILR, mapped back	0.82 [0.74, 0.88]	w = 0.594
Method's own interval	0.96 [0.92, 0.98]	w = 0.68
Own interval, transcript fractions	0.96 [0.92, 0.98]	w = 0.68
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.875
Godambe sandwich	0.98 [0.96, 0.99]	w = 0.853
Released code, as published	0.98 [0.96, 0.99]	w = 0.853

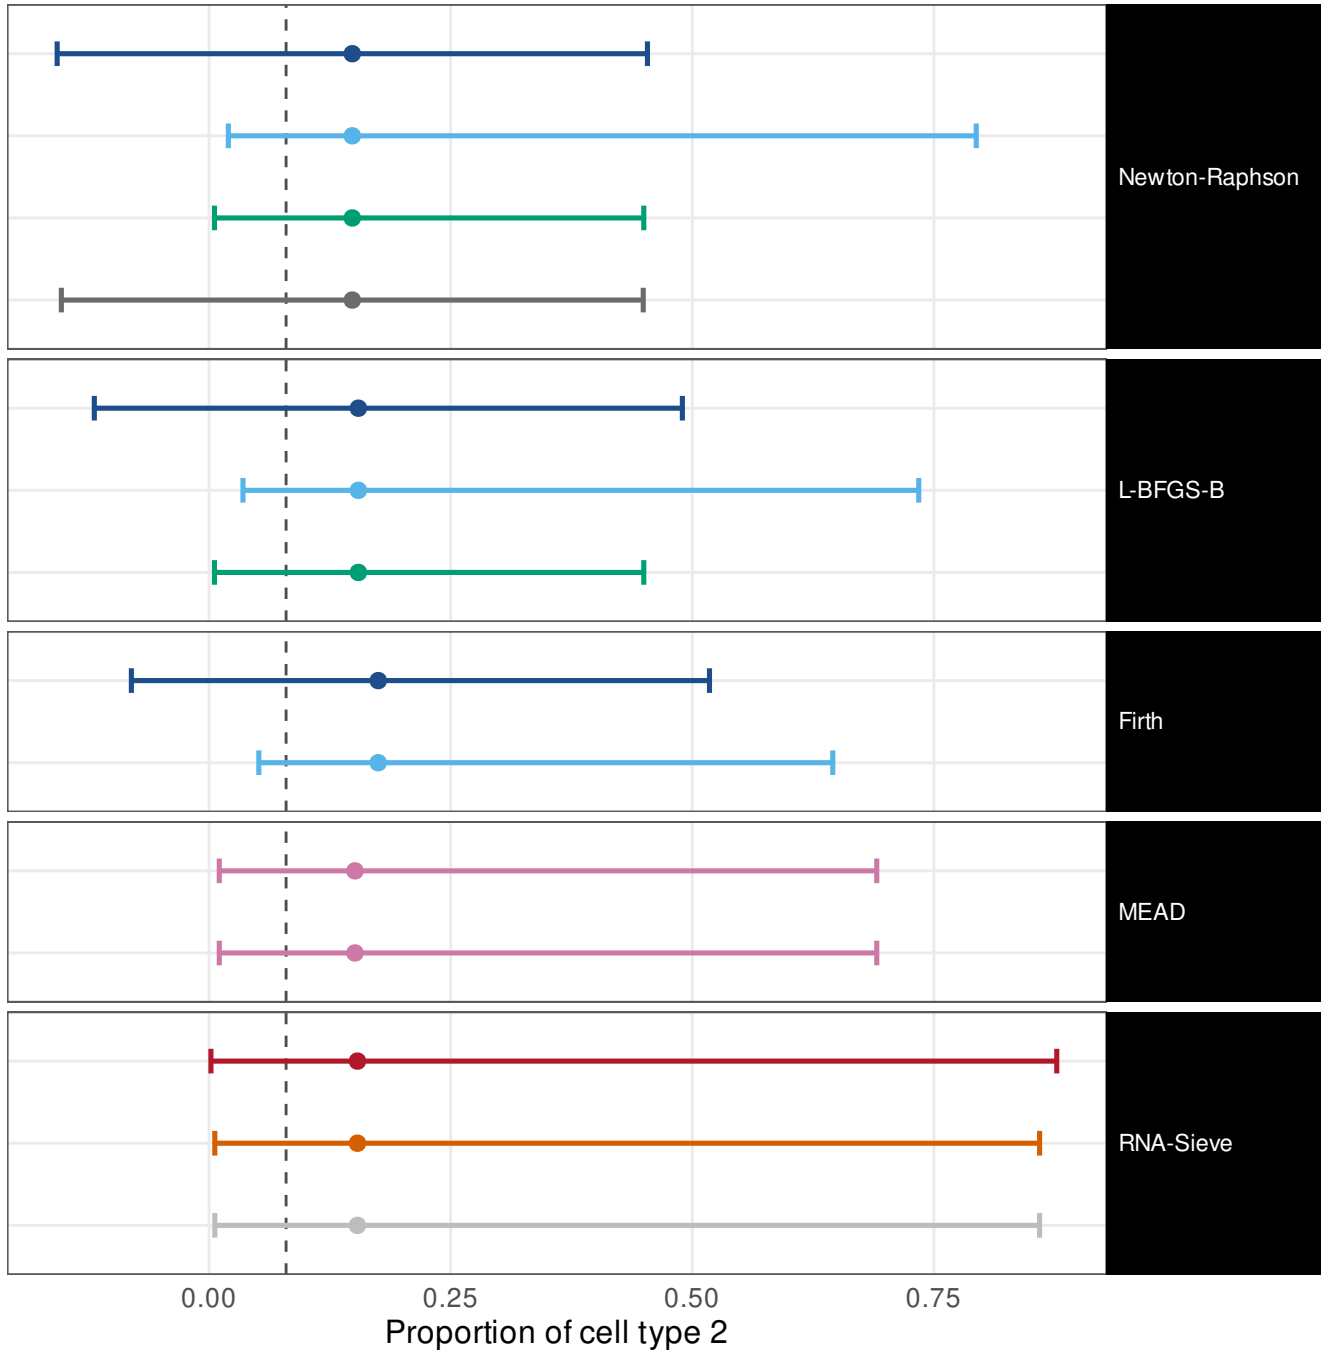


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.96 [0.93, 0.98]	w = 0.323
ILR, mapped back	0.96 [0.93, 0.98]	w = 0.583
Profile likelihood	0.96 [0.92, 0.98]	w = 0.22
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.33
Wald (delta)	0.95 [0.9, 0.98]	w = 0.308
ILR, mapped back	0.94 [0.89, 0.97]	w = 0.502
Profile likelihood	0.96 [0.92, 0.98]	w = 0.22
Wald (delta)	0.95 [0.9, 0.98]	w = 0.29
ILR, mapped back	0.9 [0.83, 0.94]	w = 0.323
Method's own interval	0.96 [0.92, 0.98]	w = 0.224
Own interval, transcript fractions	0.92 [0.88, 0.95]	w = 0.224
Fisher information (Wald)	1 [0.98, 1]	w = 0.413
Godambe sandwich	0.96 [0.93, 0.98]	w = 0.409
Released code, as published	0.96 [0.93, 0.98]	w = 0.409

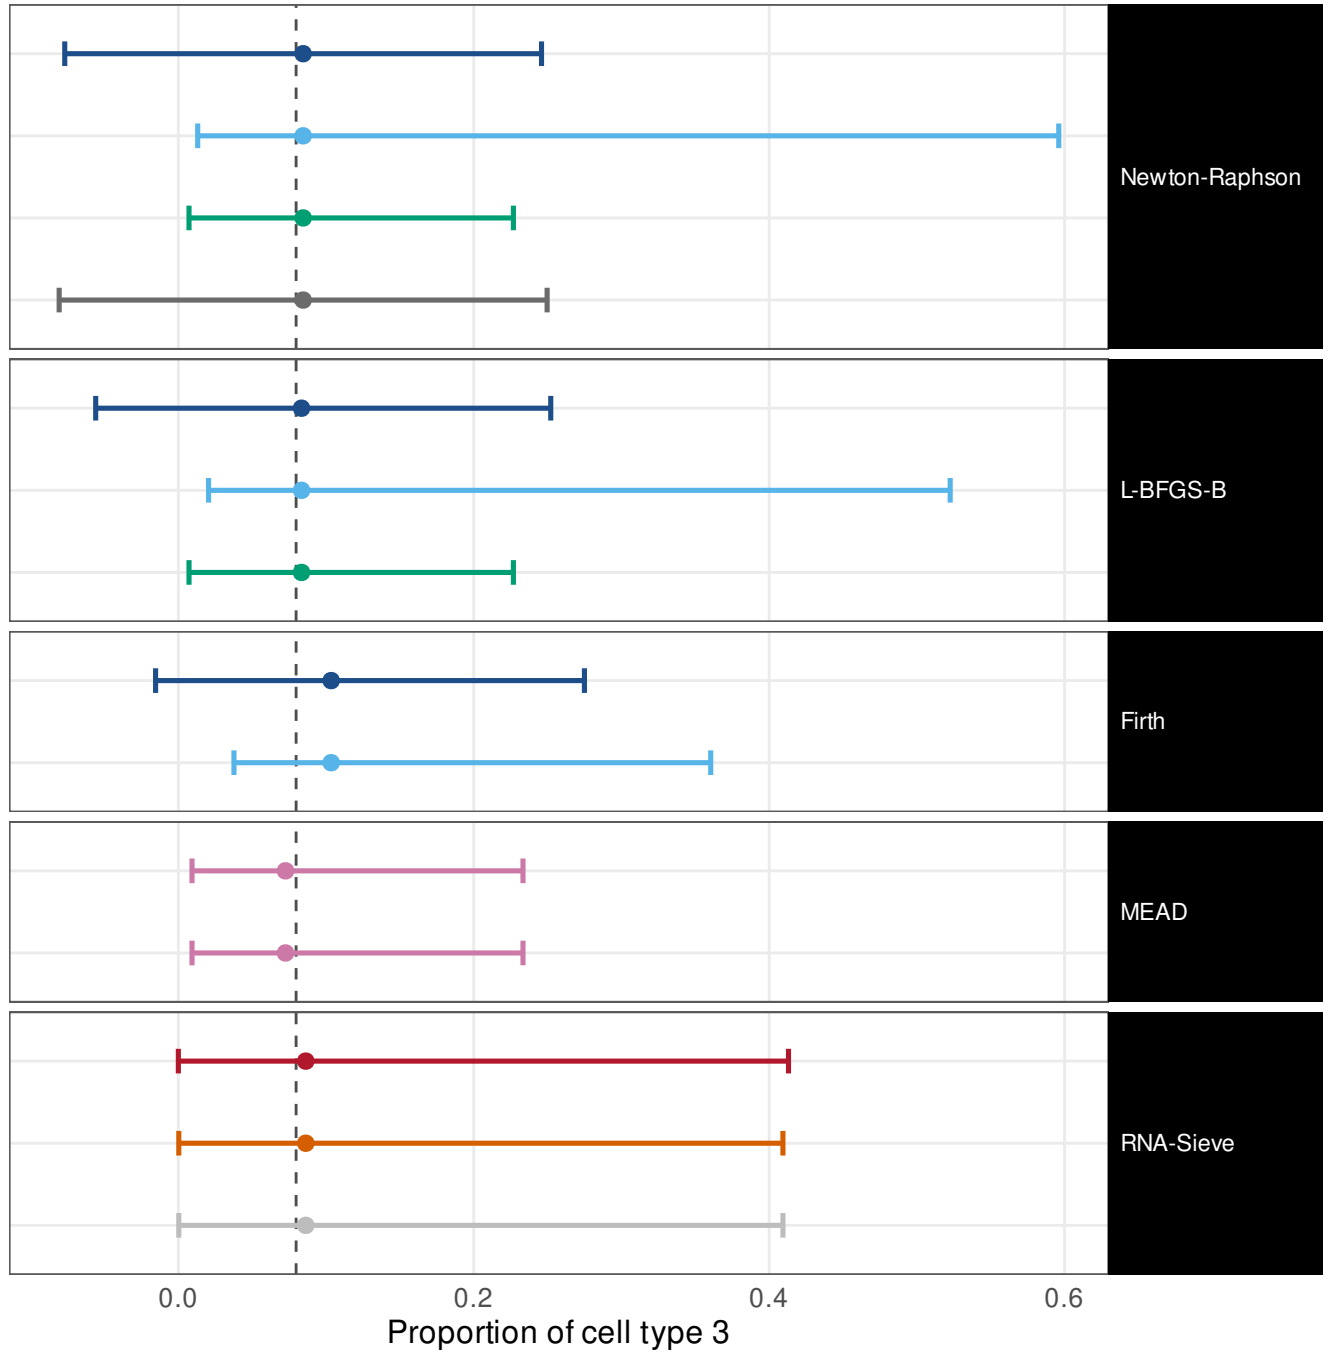


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.94 [0.9, 0.97]	w = 0.536
ILR, mapped back	0.79 [0.73, 0.84]	w = 0.81
Profile likelihood	0.92 [0.88, 0.95]	w = 0.452
Oracle (Fisher at p*)	0.9 [0.86, 0.94]	w = 0.519
Wald (delta)	0.91 [0.85, 0.95]	w = 0.533
ILR, mapped back	0.73 [0.65, 0.8]	w = 0.739
Profile likelihood	0.92 [0.88, 0.95]	w = 0.452
Wald (delta)	0.85 [0.78, 0.9]	w = 0.526
ILR, mapped back	0.61 [0.53, 0.69]	w = 0.557
Method's own interval	0.88 [0.83, 0.92]	w = 0.735
Own interval, transcript fractions	0.87 [0.82, 0.91]	w = 0.735
Fisher information (Wald)	0.98 [0.94, 0.99]	w = 0.92
Godambe sandwich	0.98 [0.96, 0.99]	w = 0.933
Released code, as published	0.98 [0.96, 0.99]	w = 0.933

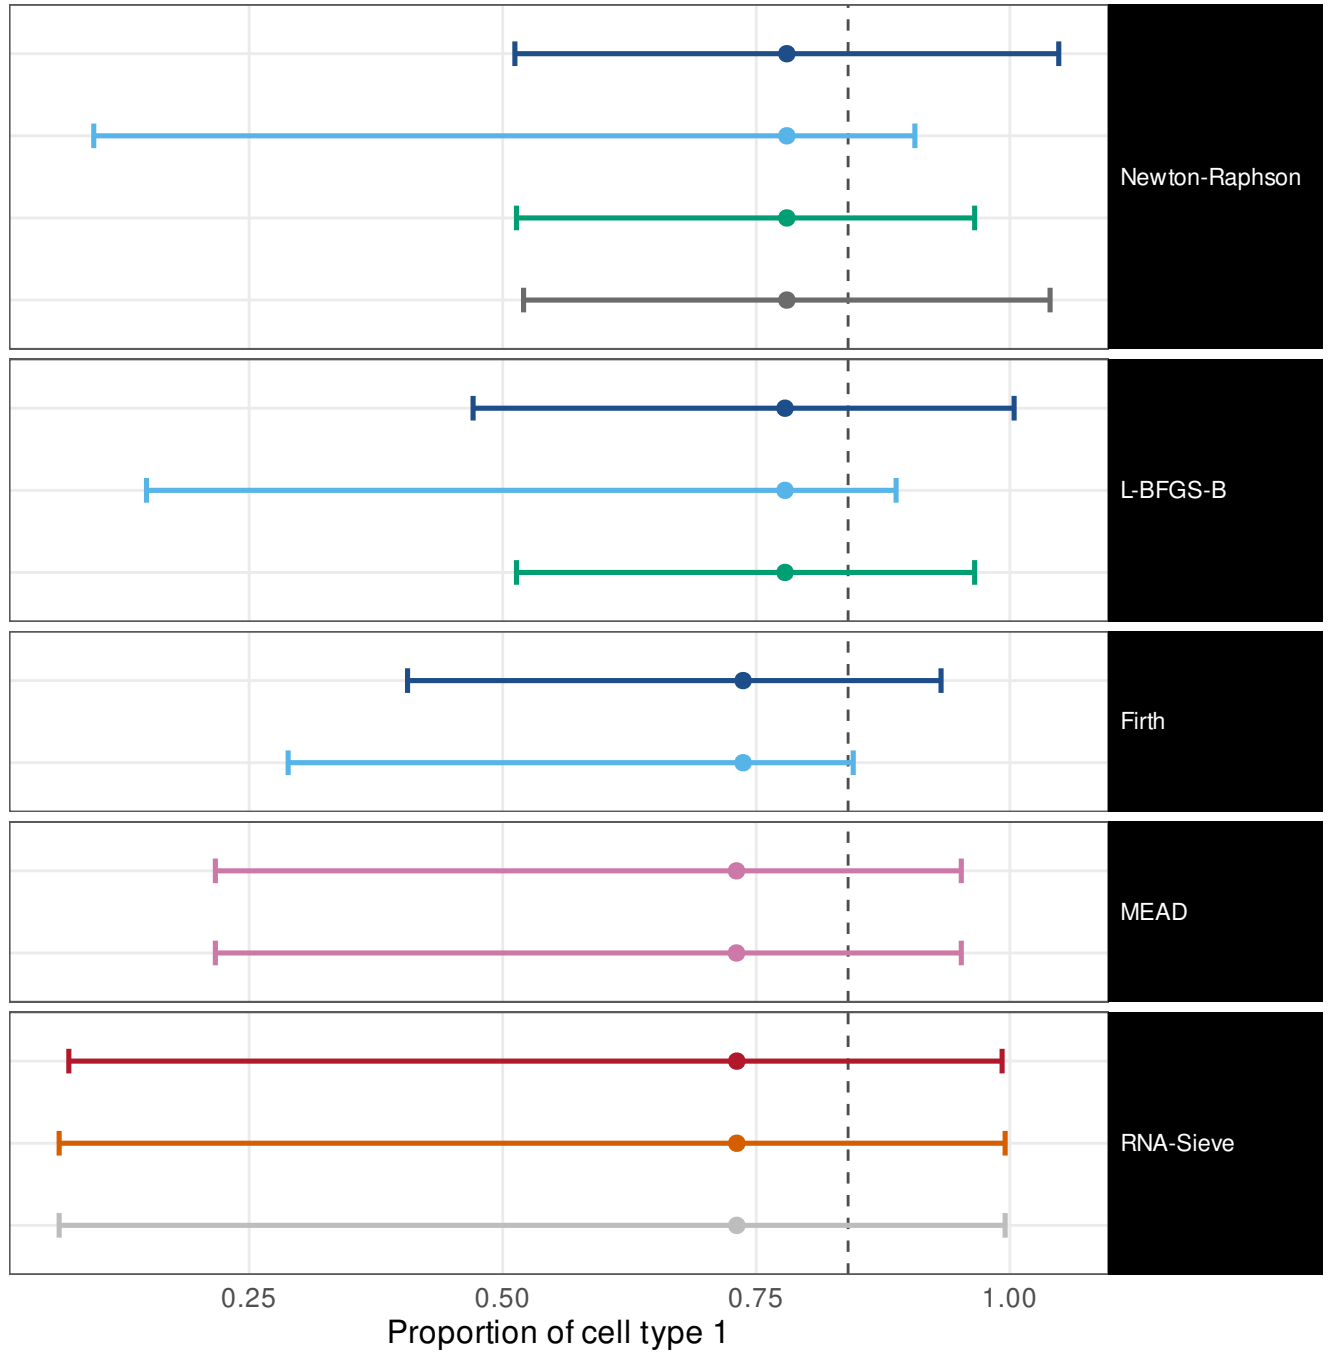


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.94 [0.9, 0.97]	w = 0.616
ILR, mapped back	0.91 [0.86, 0.94]	w = 0.797
Profile likelihood	0.96 [0.93, 0.98]	w = 0.418
Oracle (Fisher at p*)	0.93 [0.89, 0.96]	w = 0.611
Wald (delta)	0.94 [0.89, 0.97]	w = 0.608
ILR, mapped back	0.84 [0.77, 0.9]	w = 0.737
Profile likelihood	0.96 [0.93, 0.98]	w = 0.418
Wald (delta)	0.95 [0.9, 0.98]	w = 0.591
ILR, mapped back	0.8 [0.72, 0.86]	w = 0.598
Method's own interval	0.87 [0.82, 0.91]	w = 0.686
Own interval, transcript fractions	0.87 [0.82, 0.91]	w = 0.686
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.915
Godambe sandwich	0.99 [0.96, 1]	w = 0.919
Released code, as published	0.99 [0.96, 1]	w = 0.919

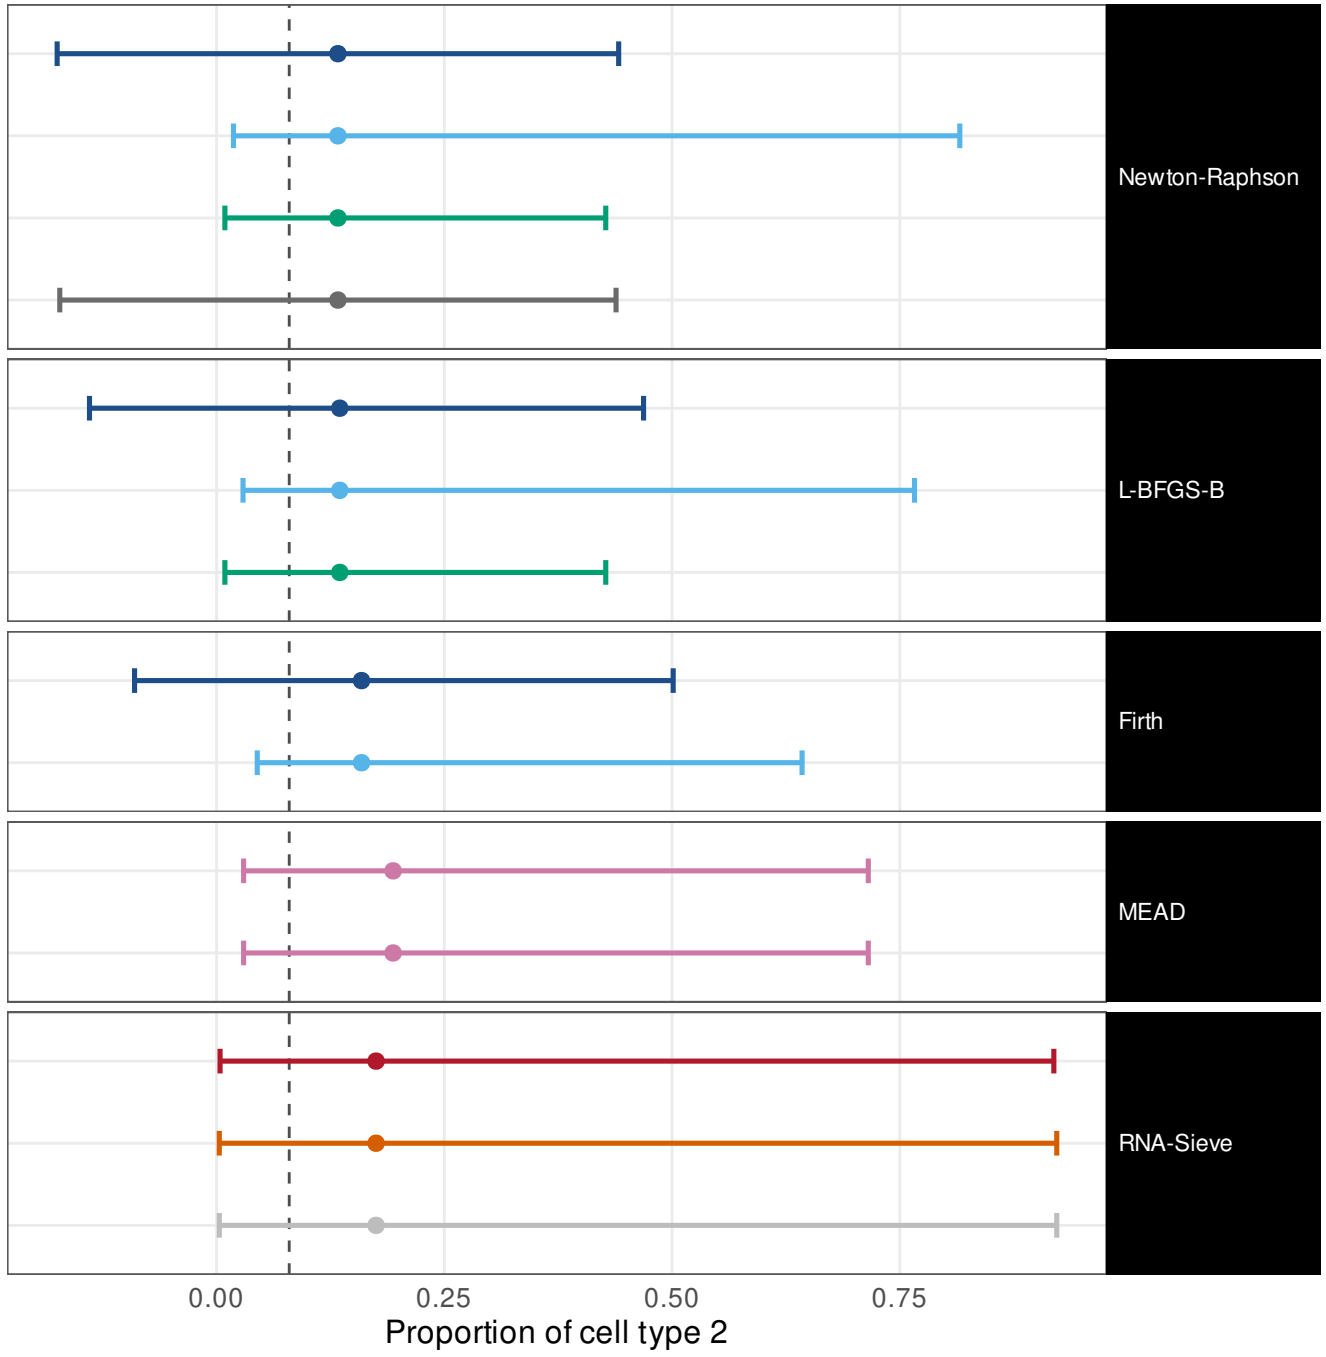


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.96 [0.92, 0.98]	w = 0.341
ILR, mapped back	0.98 [0.94, 0.99]	w = 0.596
Profile likelihood	0.97 [0.94, 0.99]	w = 0.233
Oracle (Fisher at p*)	0.96 [0.93, 0.98]	w = 0.355
Wald (delta)	0.95 [0.9, 0.98]	w = 0.327
ILR, mapped back	0.96 [0.91, 0.98]	w = 0.515
Profile likelihood	0.97 [0.94, 0.99]	w = 0.233
Wald (delta)	0.94 [0.89, 0.97]	w = 0.303
ILR, mapped back	0.94 [0.88, 0.97]	w = 0.339
Method's own interval	0.88 [0.82, 0.91]	w = 0.347
Own interval, transcript fractions	0.86 [0.8, 0.9]	w = 0.347
Fisher information (Wald)	1 [0.98, 1]	w = 0.449
Godambe sandwich	0.98 [0.95, 0.99]	w = 0.469
Released code, as published	0.98 [0.95, 0.99]	w = 0.469

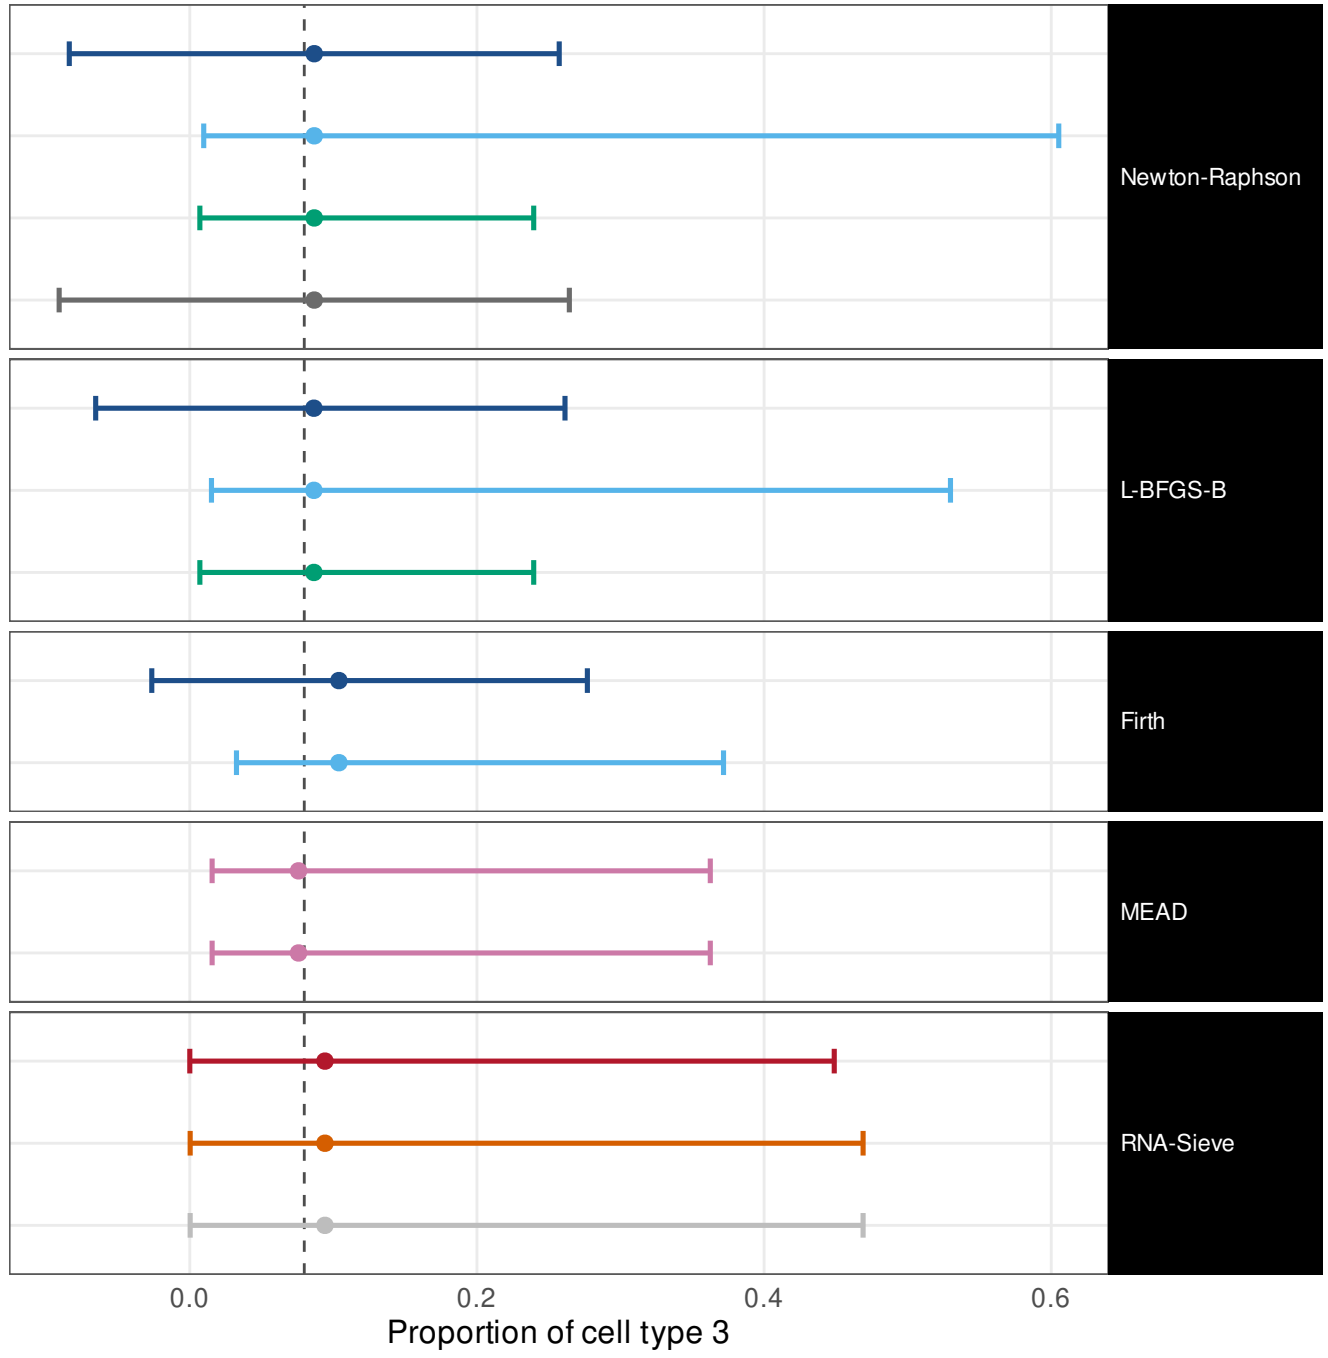


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.86 [0.81, 0.91]	w = 0.643
ILR, mapped back	0.82 [0.76, 0.86]	w = 0.877
Profile likelihood	0.94 [0.9, 0.97]	w = 0.652
Oracle (Fisher at p*)	0.82 [0.76, 0.87]	w = 0.575
Wald (delta)	0.85 [0.77, 0.9]	w = 0.656
ILR, mapped back	0.71 [0.62, 0.79]	w = 0.812
Profile likelihood	0.94 [0.9, 0.97]	w = 0.652
Wald (delta)	0.78 [0.69, 0.85]	w = 0.658
ILR, mapped back	0.44 [0.35, 0.53]	w = 0.671
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.98 [0.94, 0.99]	w = 0.971
Godambe sandwich	0.96 [0.93, 0.98]	w = 0.954
Released code, as published	0.96 [0.93, 0.98]	w = 0.954

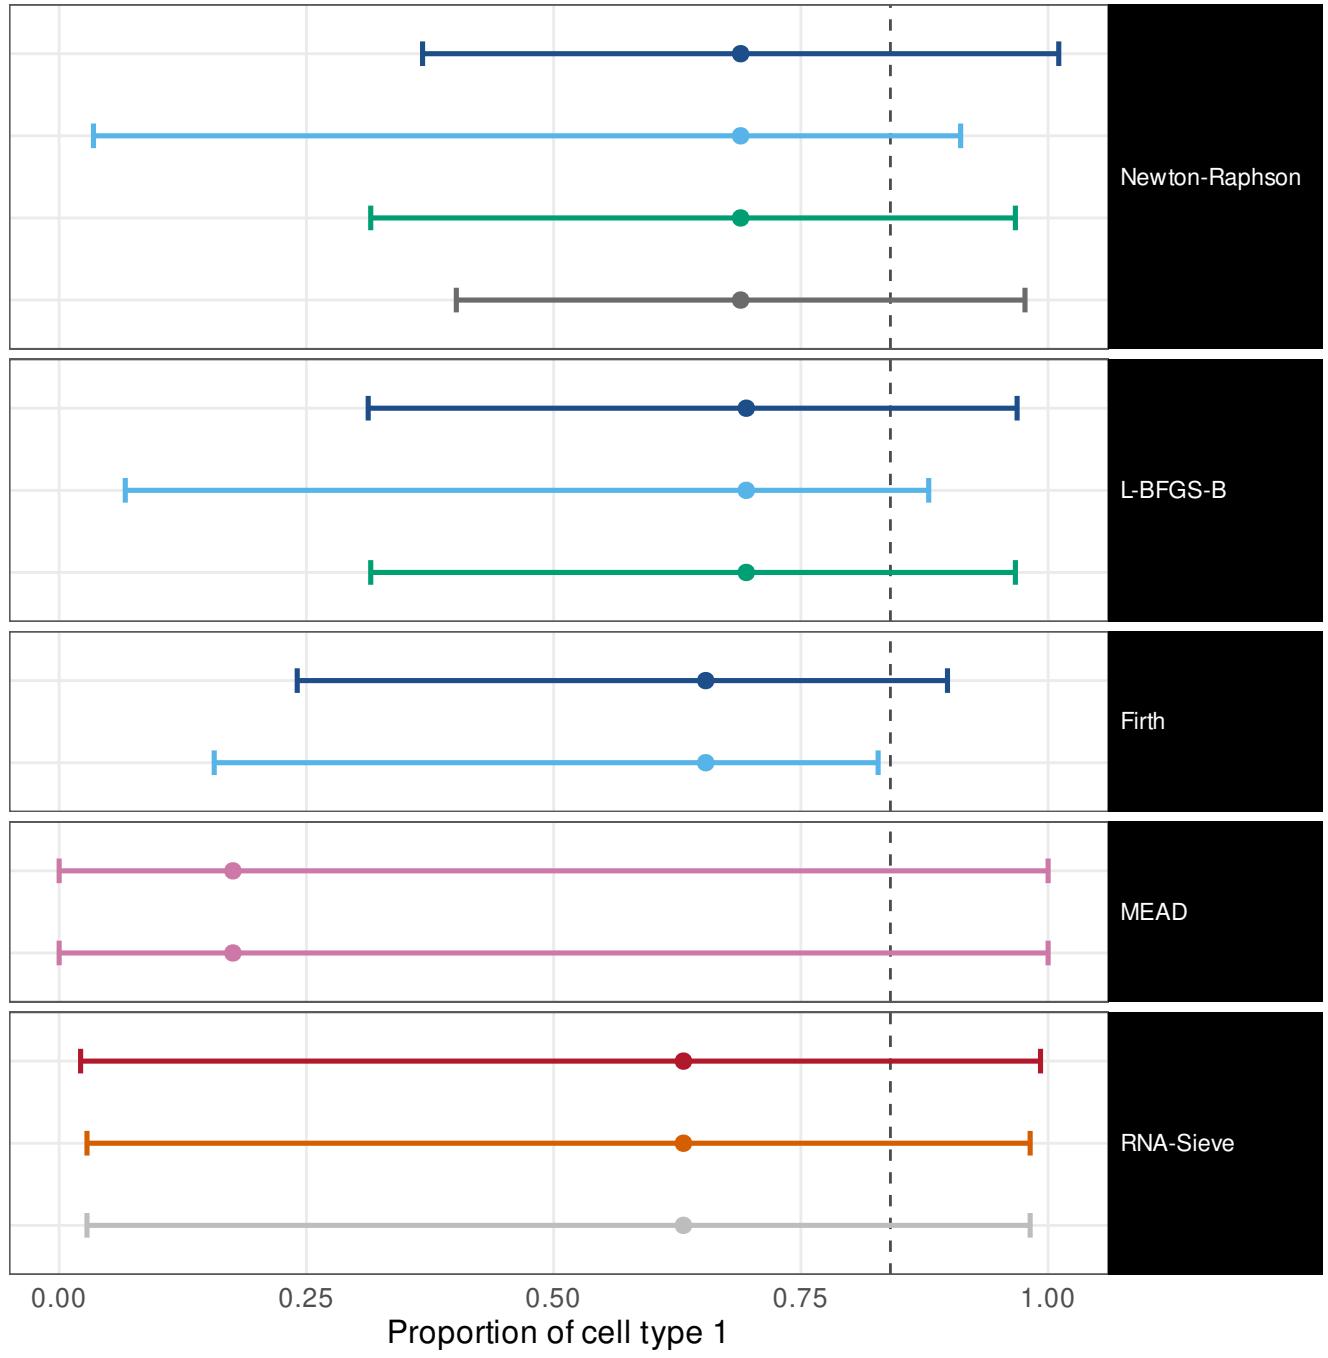


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.88 [0.83, 0.92]	w = 0.823
ILR, mapped back	0.96 [0.92, 0.98]	w = 0.88
Profile likelihood	0.98 [0.95, 0.99]	w = 0.606
Oracle (Fisher at p*)	0.88 [0.83, 0.92]	w = 0.879
Wald (delta)	0.89 [0.81, 0.93]	w = 0.801
ILR, mapped back	0.91 [0.85, 0.95]	w = 0.828
Profile likelihood	0.98 [0.95, 0.99]	w = 0.606
Wald (delta)	0.87 [0.8, 0.92]	w = 0.763
ILR, mapped back	0.85 [0.77, 0.91]	w = 0.719
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.976
Godambe sandwich	0.98 [0.94, 0.99]	w = 0.951
Released code, as published	0.98 [0.94, 0.99]	w = 0.951

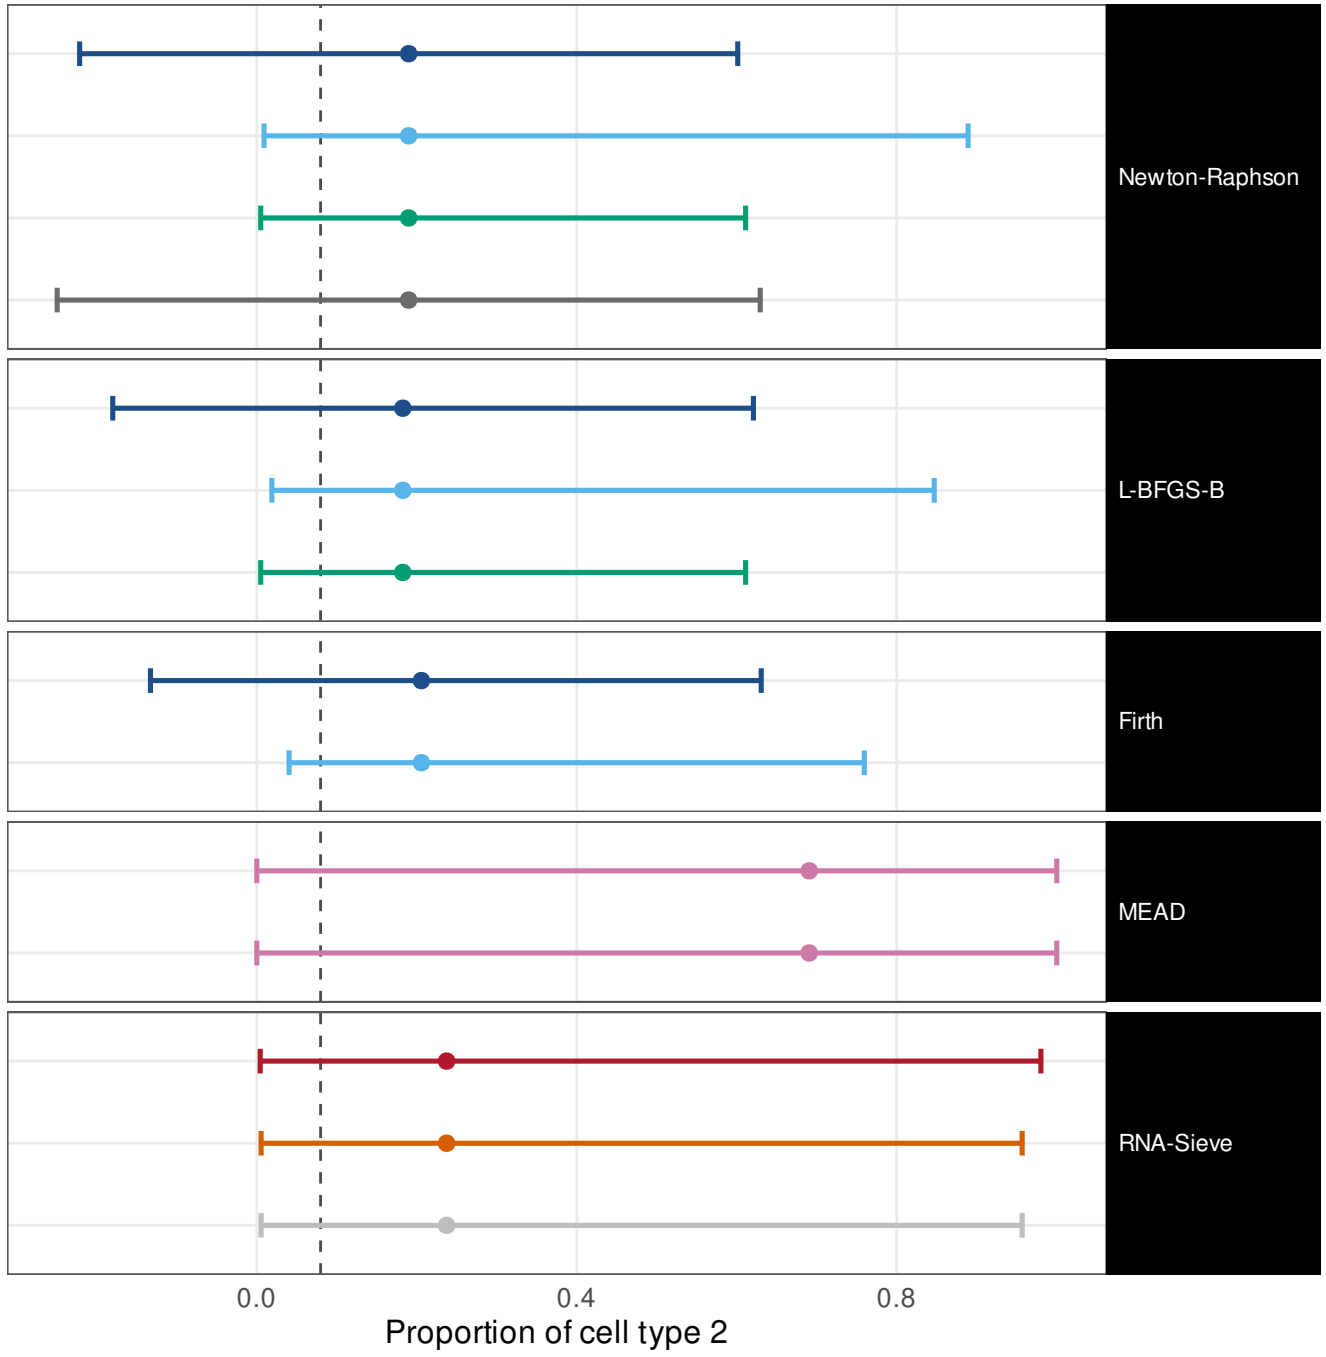


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.94 [0.89, 0.96]	w = 0.645
ILR, mapped back	0.98 [0.95, 0.99]	w = 0.801
Profile likelihood	0.94 [0.9, 0.97]	w = 0.368
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.702
Wald (delta)	0.93 [0.87, 0.97]	w = 0.599
ILR, mapped back	0.96 [0.91, 0.99]	w = 0.74
Profile likelihood	0.94 [0.9, 0.97]	w = 0.368
Wald (delta)	0.93 [0.87, 0.97]	w = 0.557
ILR, mapped back	0.91 [0.84, 0.95]	w = 0.569
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.637
Godambe sandwich	0.98 [0.96, 0.99]	w = 0.538
Released code, as published	0.98 [0.96, 0.99]	w = 0.538

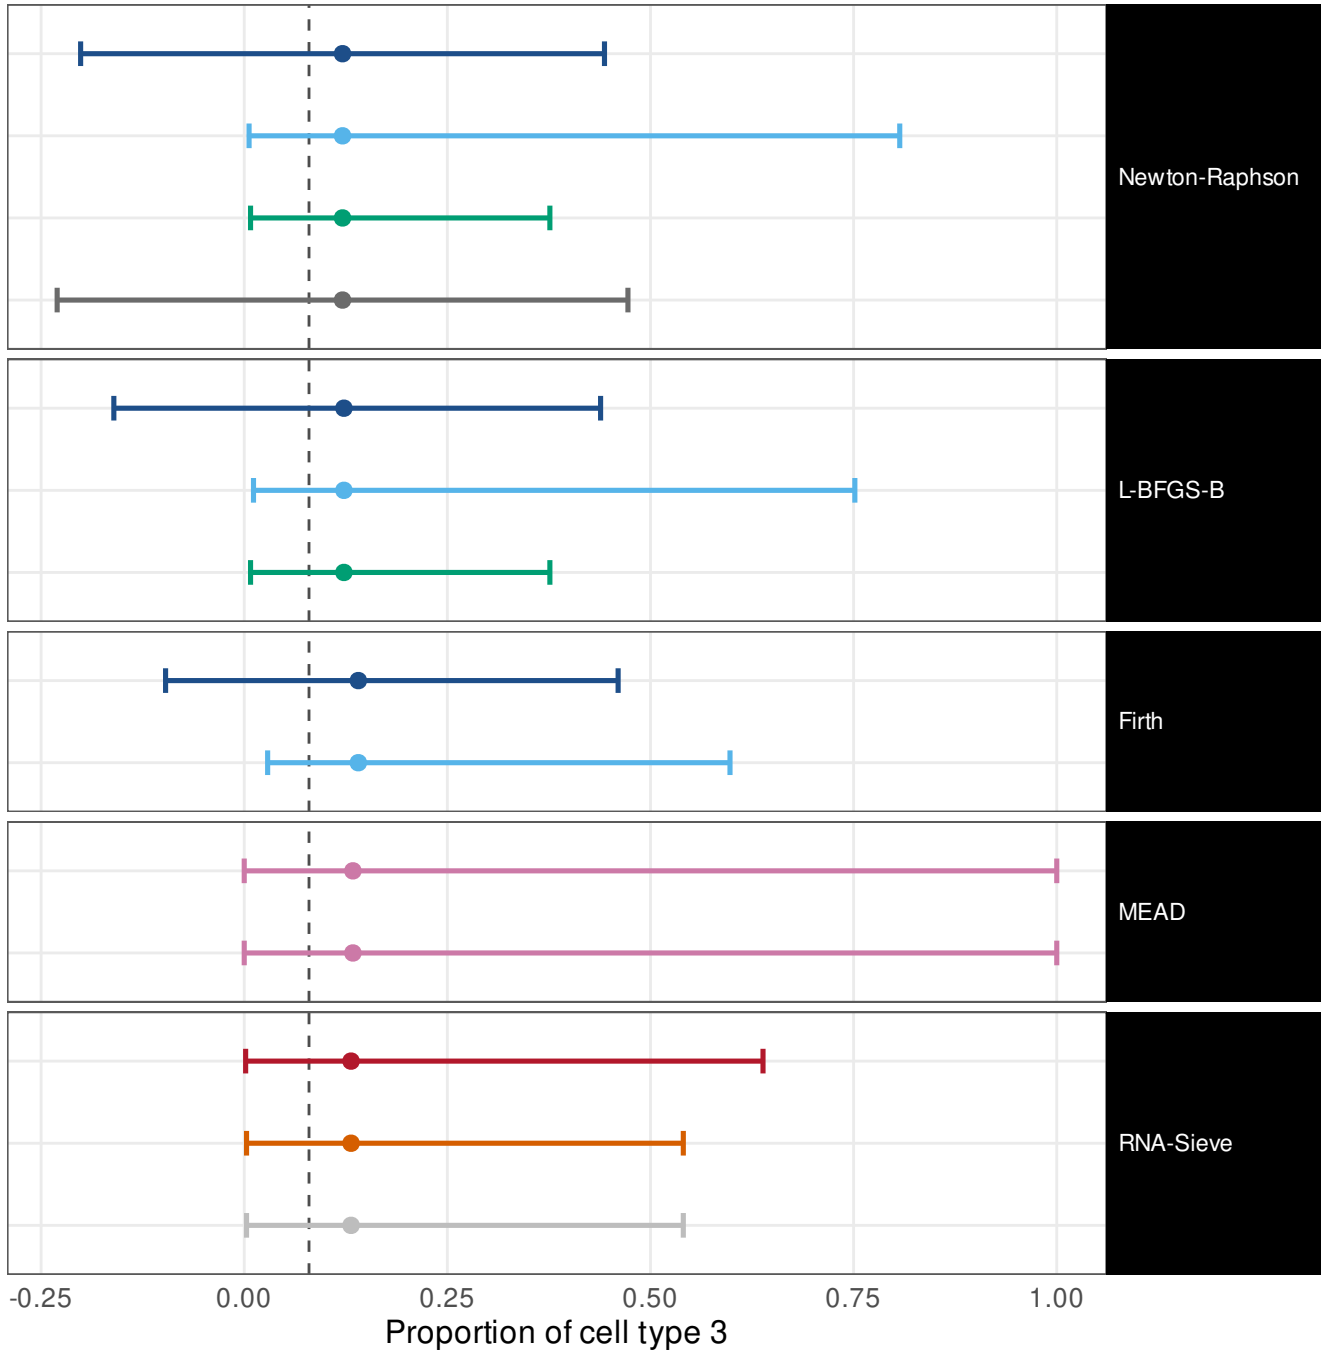


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.89 [0.84, 0.93]	w = 0.645
ILR, mapped back	0.78 [0.72, 0.83]	w = 0.886
Profile likelihood	0.9 [0.86, 0.94]	w = 0.629
Oracle (Fisher at p*)	0.82 [0.76, 0.87]	w = 0.574
Wald (delta)	0.91 [0.82, 0.95]	w = 0.631
ILR, mapped back	0.69 [0.58, 0.79]	w = 0.826
Profile likelihood	0.9 [0.86, 0.94]	w = 0.629
Wald (delta)	0.78 [0.67, 0.86]	w = 0.624
ILR, mapped back	0.43 [0.32, 0.55]	w = 0.675
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.98 [0.94, 0.99]	w = 0.963
Godambe sandwich	0.88 [0.83, 0.92]	w = 0.877
Released code, as published	0.88 [0.83, 0.92]	w = 0.877

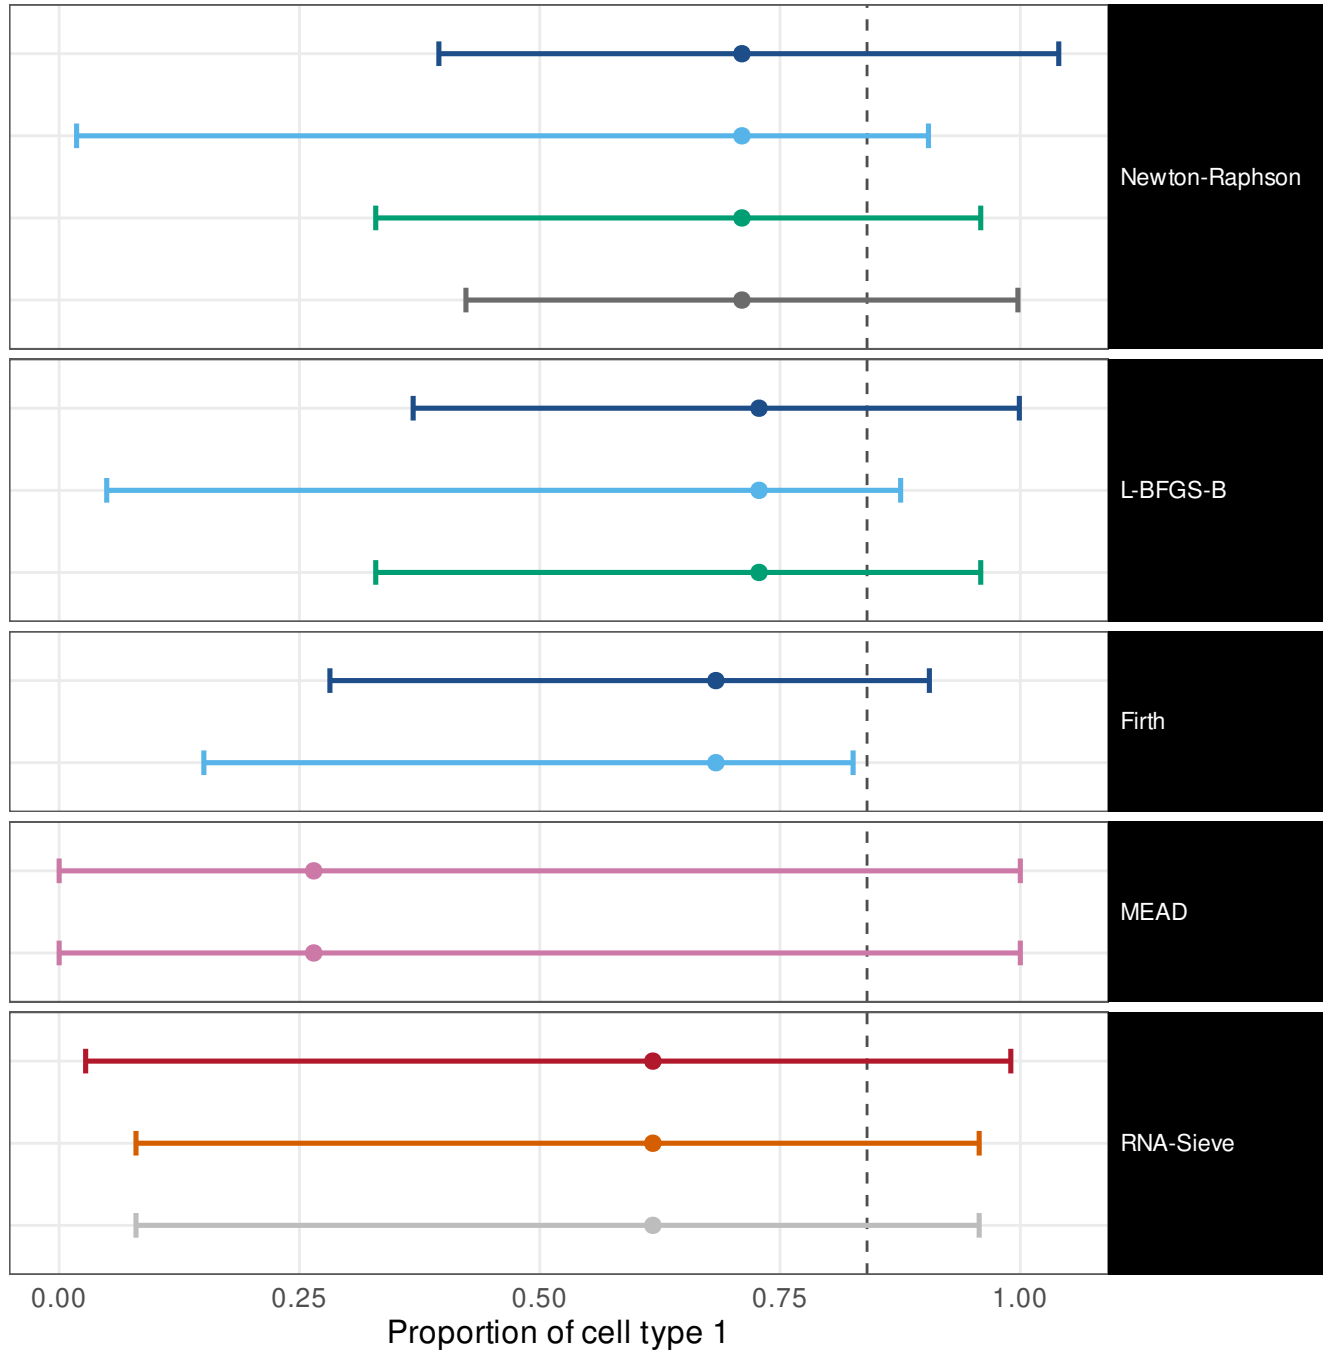


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.91 [0.87, 0.95]	w = 0.931
ILR, mapped back	0.99 [0.96, 1]	w = 0.912
Profile likelihood	0.96 [0.92, 0.98]	w = 0.591
Oracle (Fisher at p*)	0.93 [0.89, 0.96]	w = 1
Wald (delta)	0.92 [0.84, 0.96]	w = 0.885
ILR, mapped back	0.97 [0.91, 0.99]	w = 0.875
Profile likelihood	0.96 [0.92, 0.98]	w = 0.591
Wald (delta)	0.96 [0.88, 0.99]	w = 0.813
ILR, mapped back	0.92 [0.83, 0.96]	w = 0.757
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.98 [0.94, 0.99]	w = 0.976
Godambe sandwich	0.86 [0.81, 0.9]	w = 0.881
Released code, as published	0.86 [0.81, 0.9]	w = 0.881

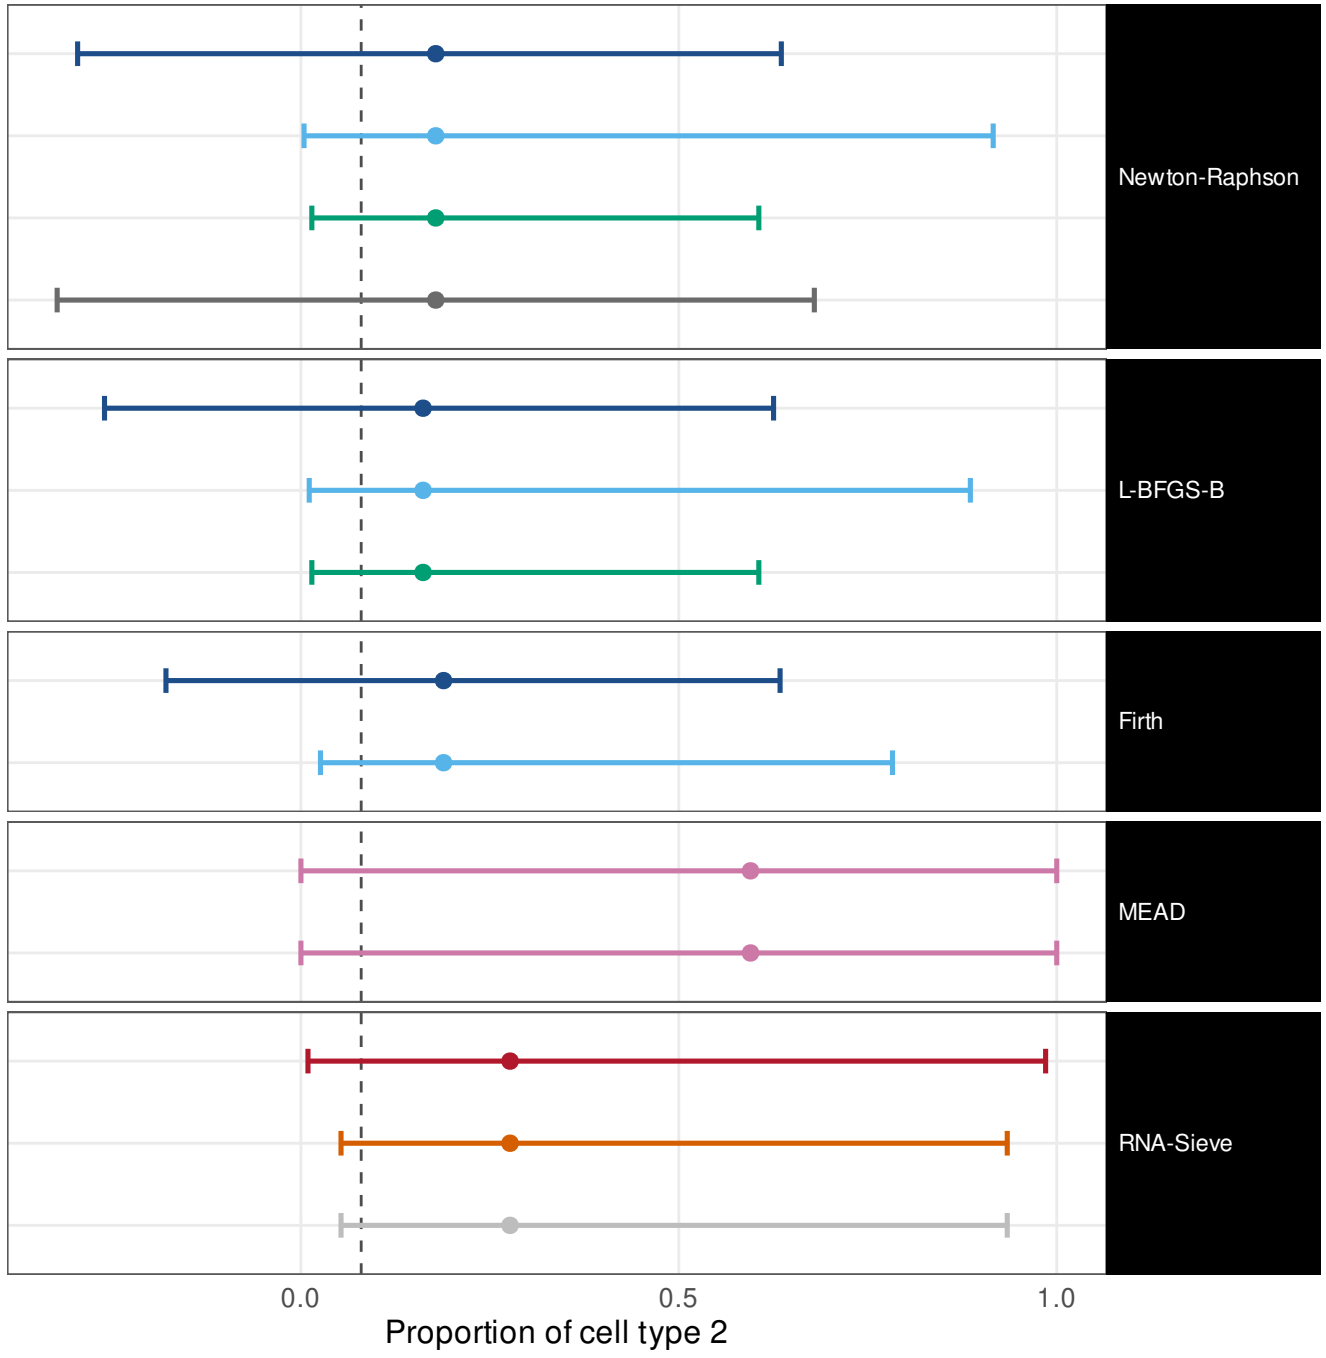


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.95 [0.91, 0.97]	w = 0.766
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.862
Profile likelihood	0.96 [0.92, 0.98]	w = 0.39
Oracle (Fisher at p*)	0.99 [0.96, 1]	w = 0.859
Wald (delta)	0.95 [0.87, 0.98]	w = 0.713
ILR, mapped back	0.96 [0.89, 0.99]	w = 0.806
Profile likelihood	0.96 [0.92, 0.98]	w = 0.39
Wald (delta)	0.96 [0.88, 0.99]	w = 0.645
ILR, mapped back	0.92 [0.83, 0.96]	w = 0.642
Method's own interval	1 [0.98, 1]	w = 0.999
Own interval, transcript fractions	1 [0.98, 1]	w = 0.999
Fisher information (Wald)	1 [0.97, 1]	w = 0.702
Godambe sandwich	0.99 [0.96, 1]	w = 0.647
Released code, as published	0.99 [0.96, 1]	w = 0.647

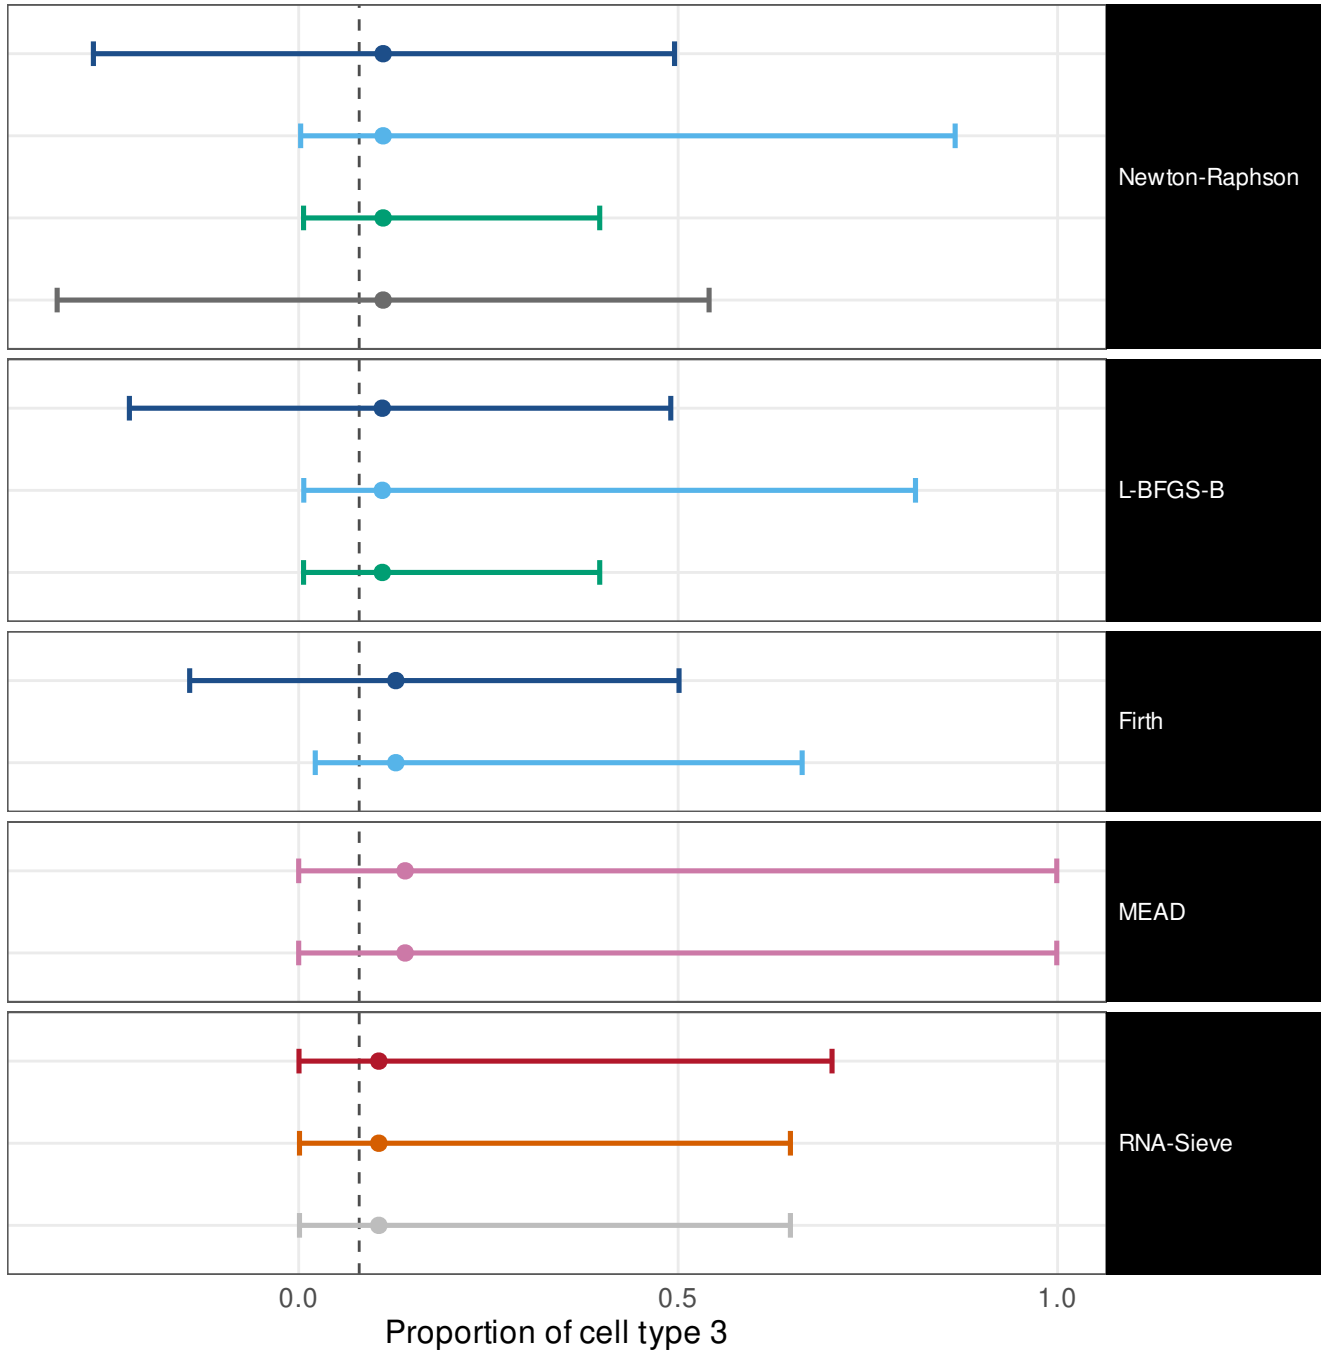


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.88 [0.83, 0.92]	w = 0.677
ILR, mapped back	0.86 [0.8, 0.9]	w = 0.889
Profile likelihood	0.92 [0.87, 0.95]	w = 0.633
Oracle (Fisher at p*)	0.84 [0.78, 0.88]	w = 0.598
Wald (delta)	0.86 [0.78, 0.91]	w = 0.692
ILR, mapped back	0.78 [0.7, 0.85]	w = 0.846
Profile likelihood	0.92 [0.87, 0.95]	w = 0.633
Wald (delta)	0.83 [0.75, 0.89]	w = 0.681
ILR, mapped back	0.61 [0.51, 0.69]	w = 0.711
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.98 [0.94, 0.99]	w = 0.977
Godambe sandwich	0.81 [0.75, 0.86]	w = 0.806
Released code, as published	0.81 [0.75, 0.86]	w = 0.806

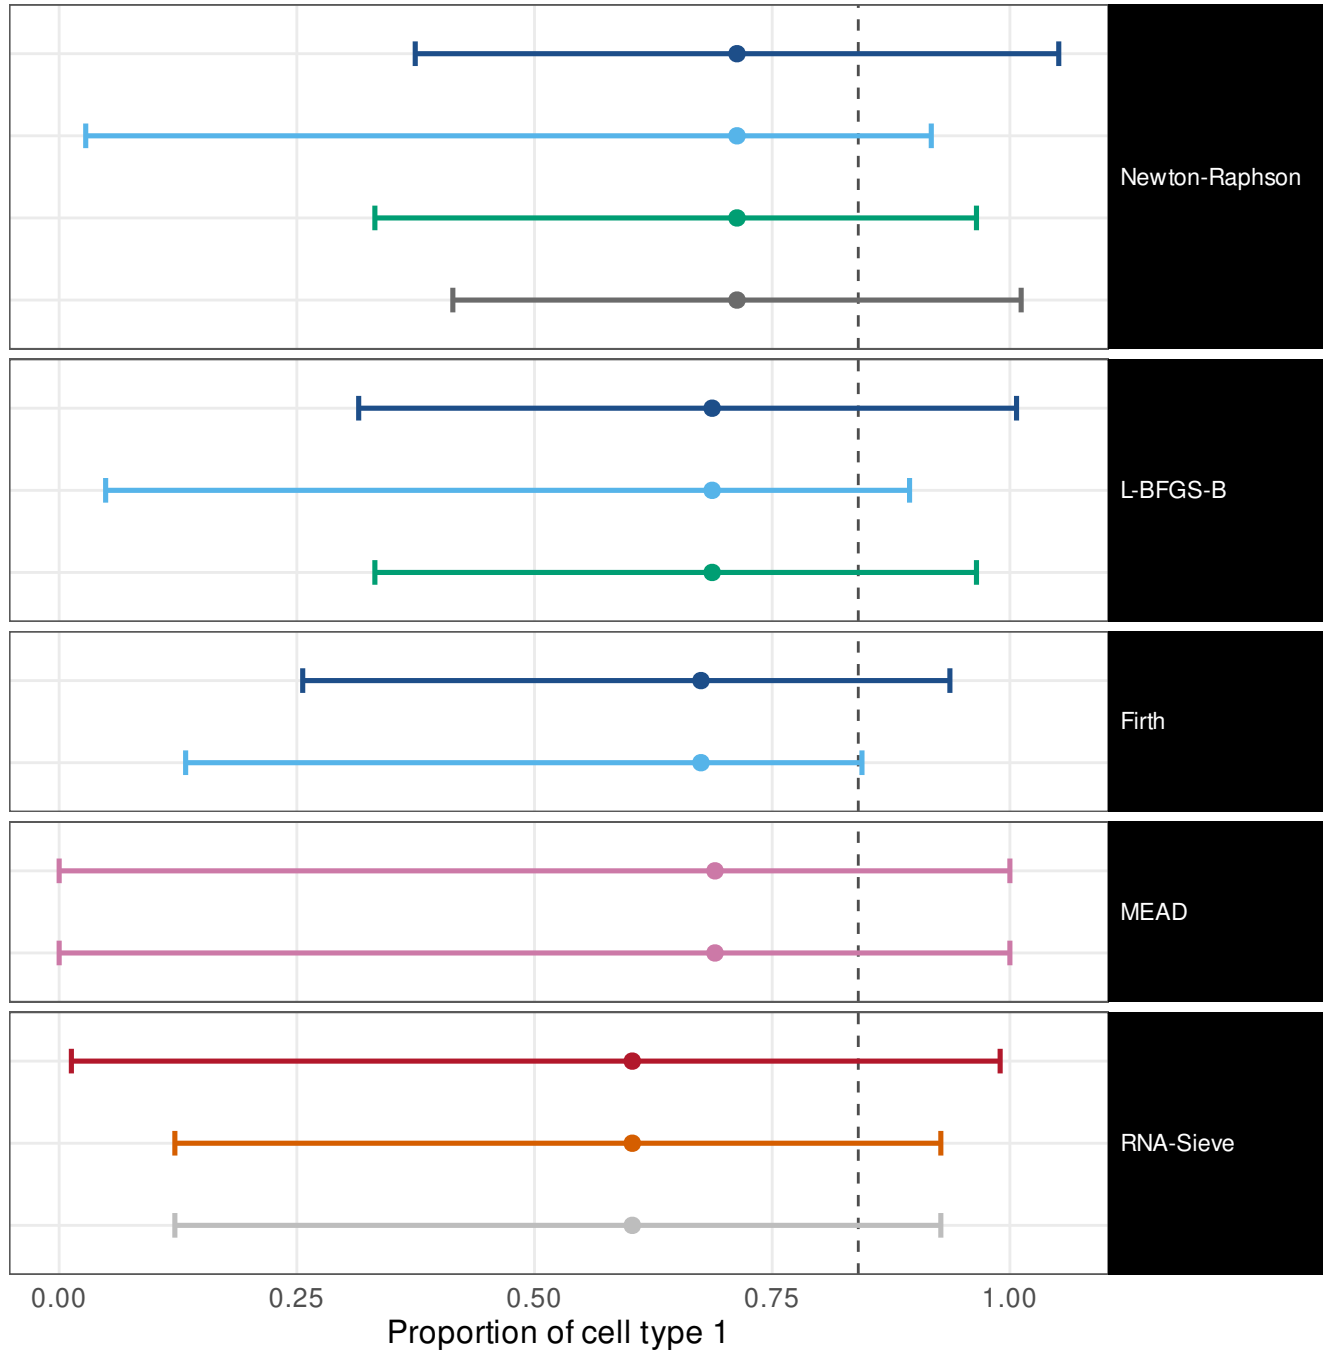


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM


Wald (delta)	0.88 [0.83, 0.92]	w = 0.884
ILR, mapped back	0.94 [0.9, 0.97]	w = 0.895
Profile likelihood	0.97 [0.94, 0.99]	w = 0.599
Oracle (Fisher at p*)	0.92 [0.87, 0.95]	w = 0.931
Wald (delta)	0.84 [0.76, 0.9]	w = 0.864
ILR, mapped back	0.89 [0.81, 0.93]	w = 0.853
Profile likelihood	0.97 [0.94, 0.99]	w = 0.599
Wald (delta)	0.87 [0.79, 0.92]	w = 0.813
ILR, mapped back	0.83 [0.75, 0.89]	w = 0.762
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.97 [0.94, 0.99]	w = 0.979
Godambe sandwich	0.86 [0.81, 0.91]	w = 0.838
Released code, as published	0.86 [0.81, 0.91]	w = 0.838

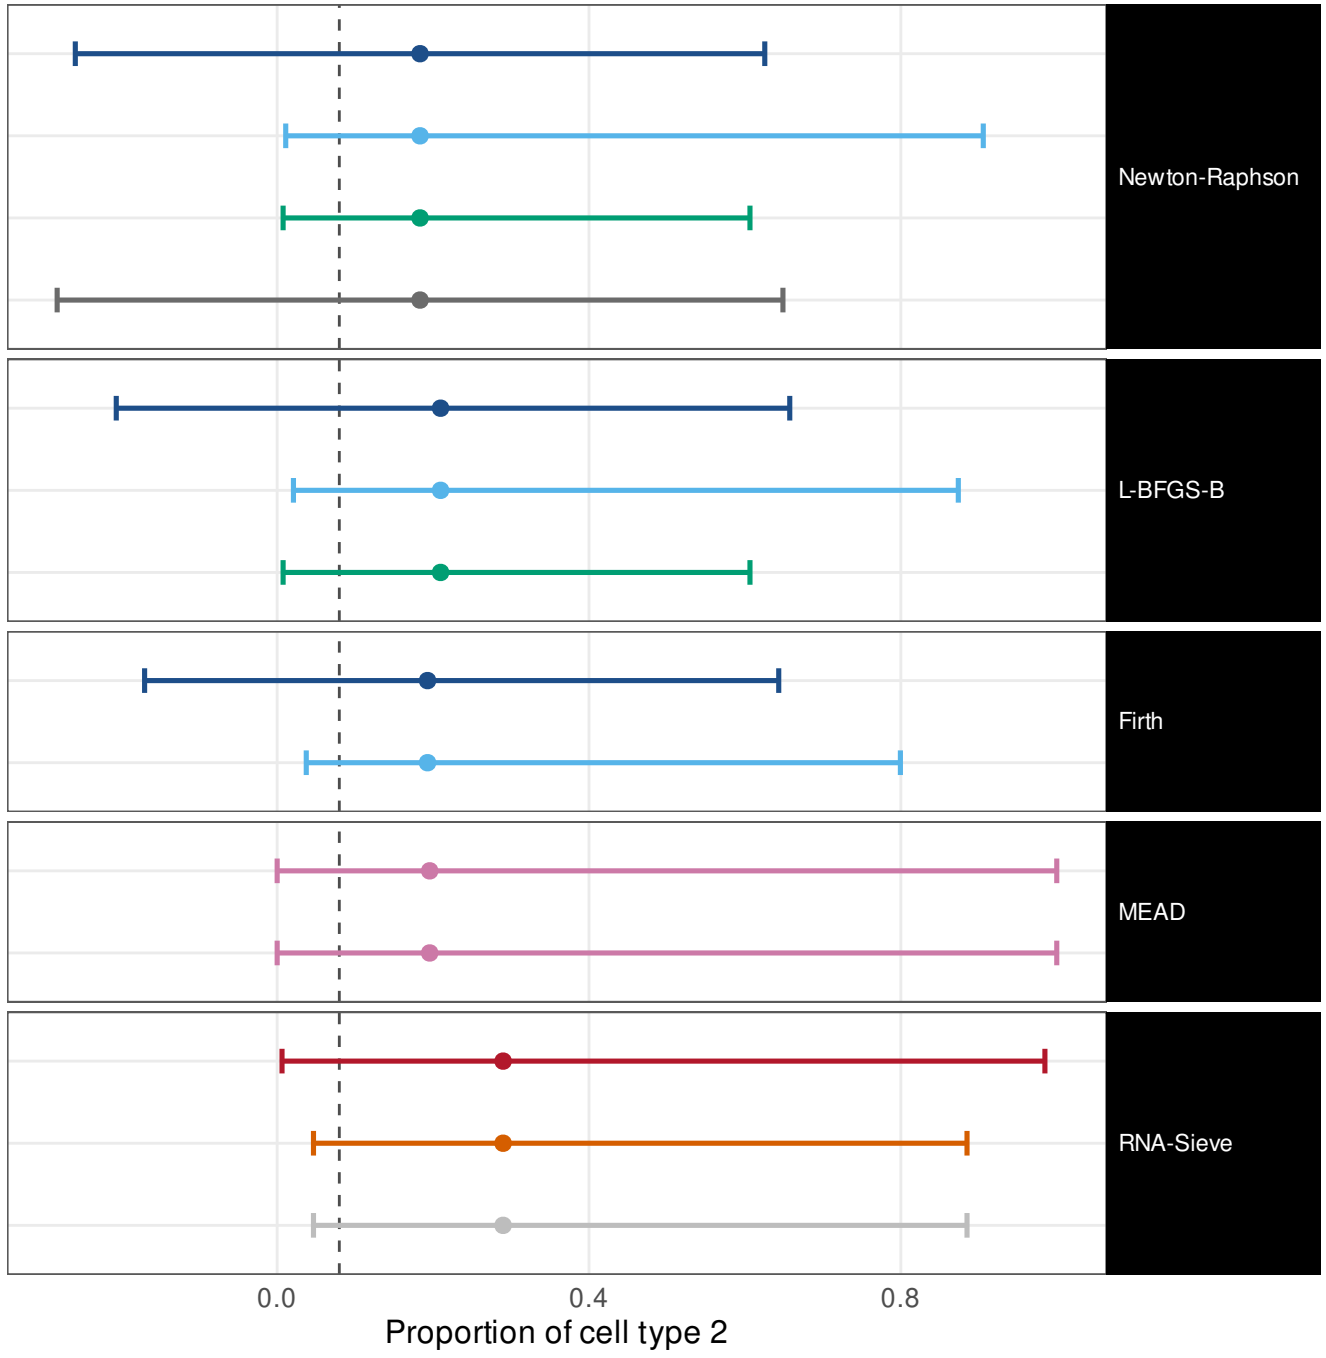

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

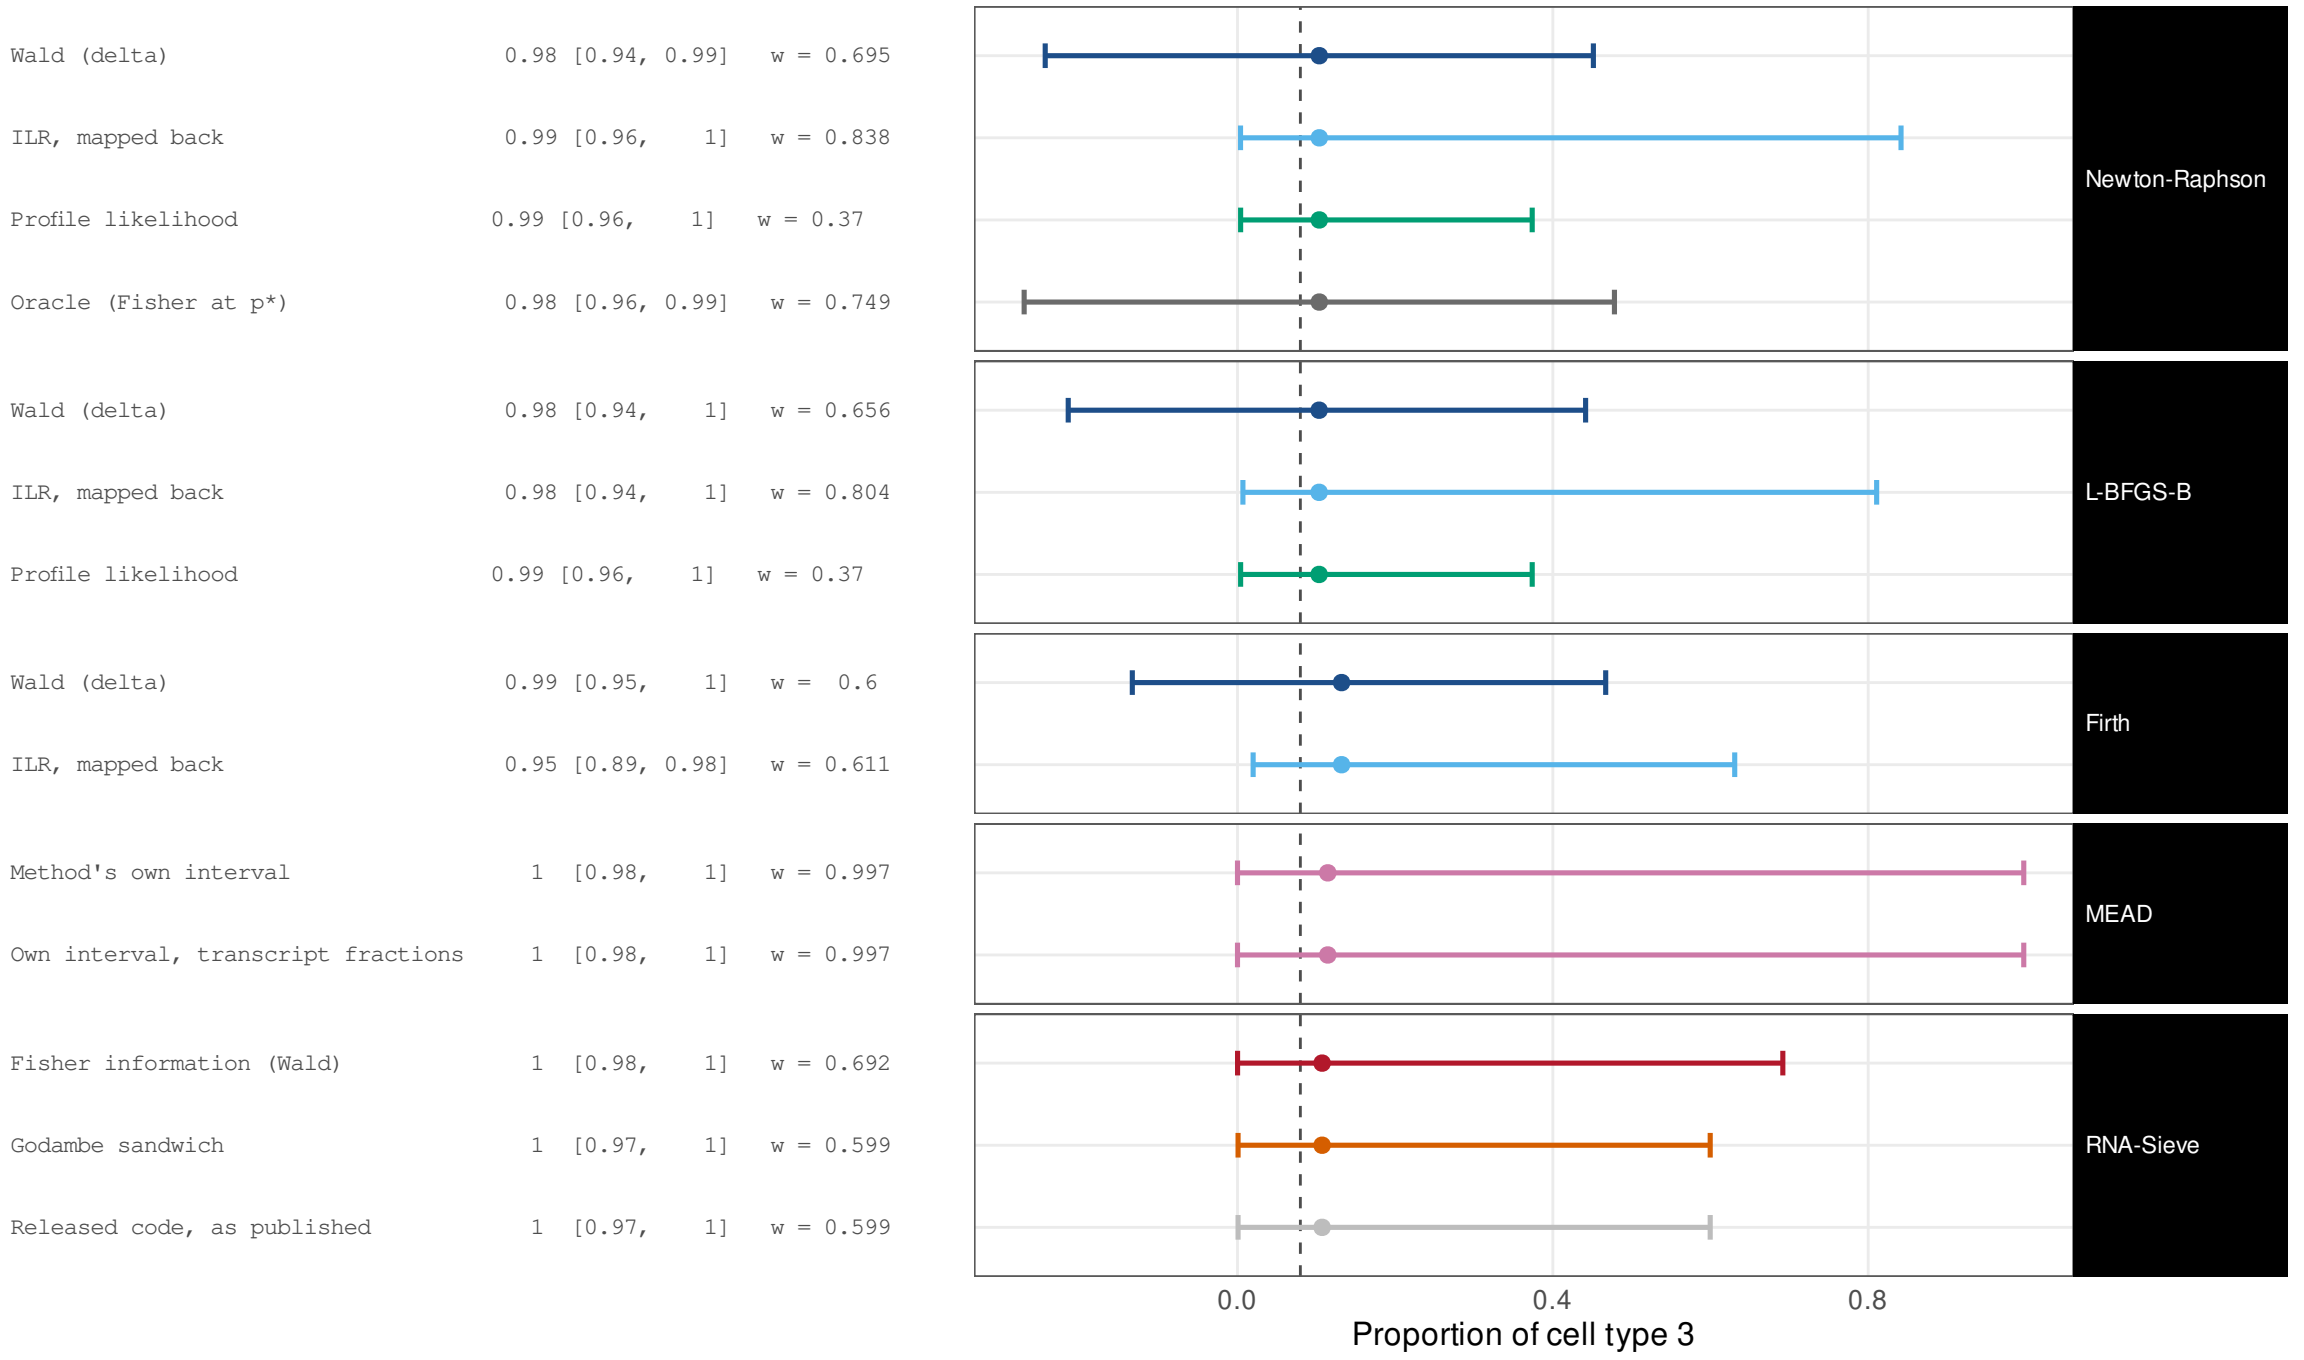


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.88 [0.83, 0.92]	w = 0.642
ILR, mapped back	0.76 [0.7, 0.81]	w = 0.871
Profile likelihood	0.9 [0.86, 0.94]	w = 0.62
Oracle (Fisher at p*)	0.84 [0.78, 0.88]	w = 0.569
Wald (delta)	0.81 [0.71, 0.88]	w = 0.646
ILR, mapped back	0.64 [0.53, 0.73]	w = 0.79
Profile likelihood	0.9 [0.86, 0.94]	w = 0.62
Wald (delta)	0.78 [0.68, 0.85]	w = 0.629
ILR, mapped back	0.39 [0.3, 0.5]	w = 0.66
Method's own interval	0.98 [0.94, 0.99]	w = 0.988
Own interval, transcript fractions	0.98 [0.94, 0.99]	w = 0.988
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.982
Godambe sandwich	0.94 [0.89, 0.96]	w = 0.947
Released code, as published	0.94 [0.89, 0.96]	w = 0.947

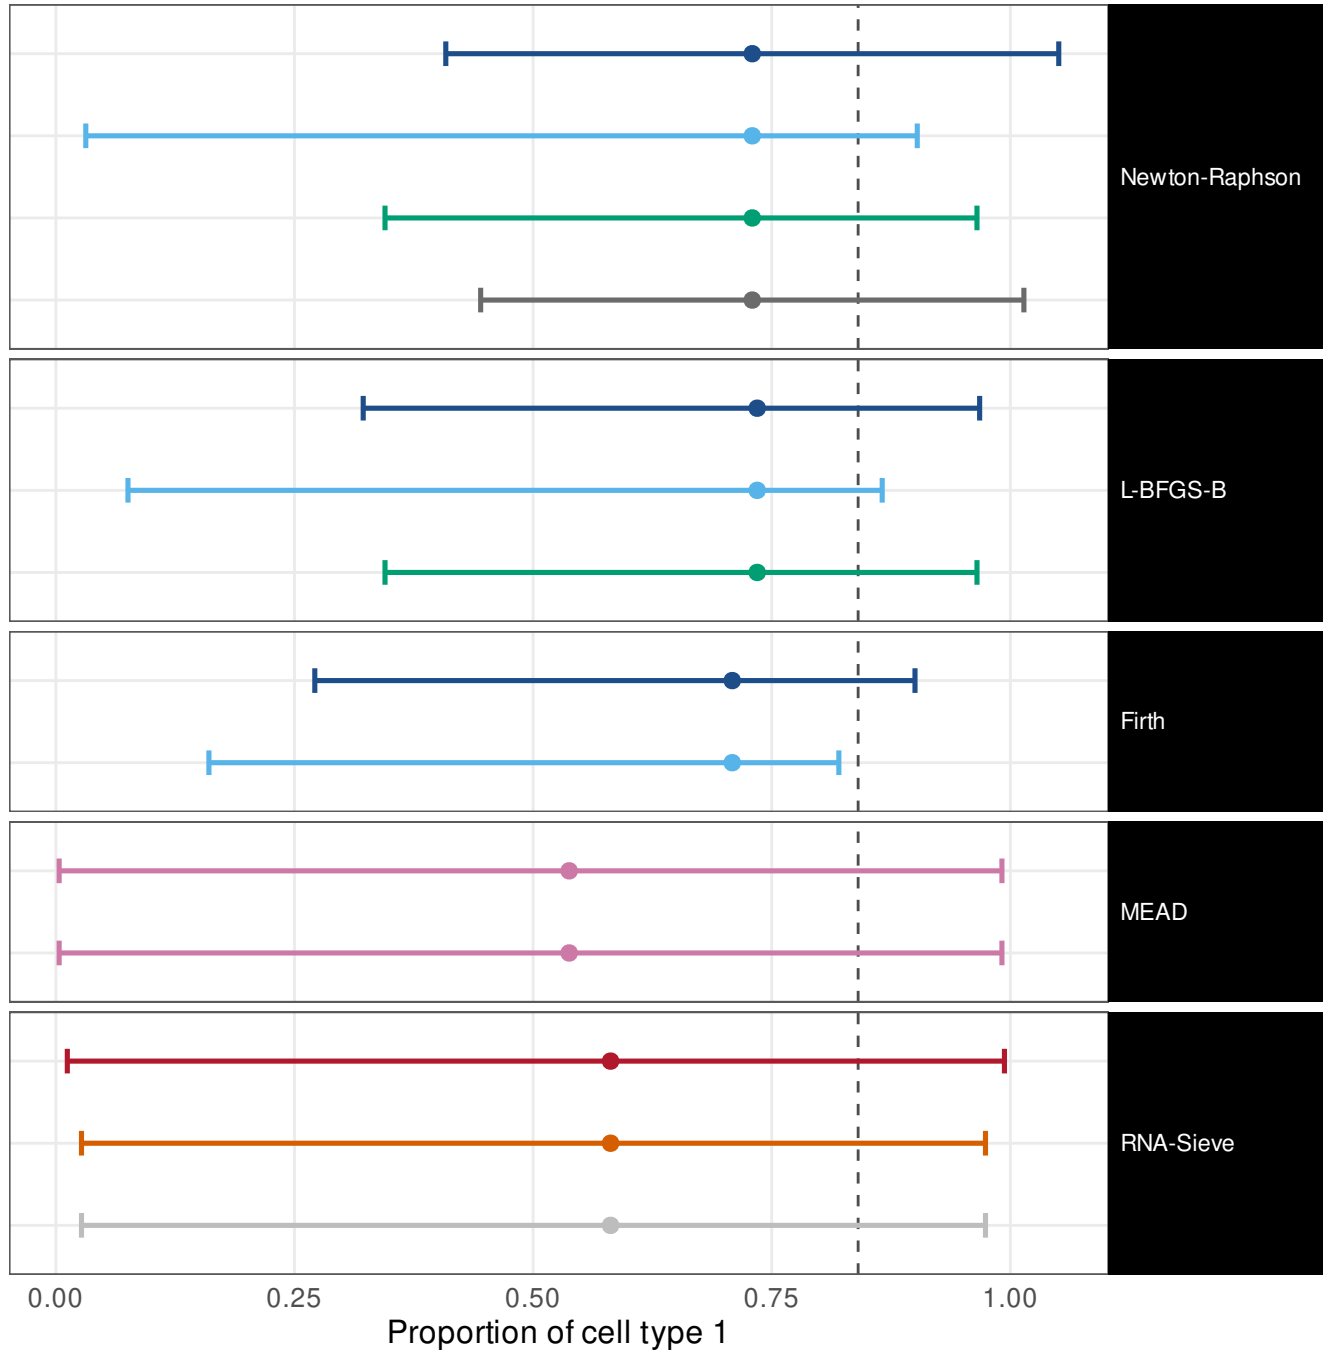


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.93 [0.89, 0.96]	w = 0.89
ILR, mapped back	0.98 [0.94, 0.99]	w = 0.895
Profile likelihood	0.98 [0.95, 0.99]	w = 0.581
Oracle (Fisher at p*)	0.94 [0.89, 0.96]	w = 0.915
Wald (delta)	0.93 [0.86, 0.97]	w = 0.851
ILR, mapped back	0.94 [0.87, 0.98]	w = 0.828
Profile likelihood	0.98 [0.95, 0.99]	w = 0.581
Wald (delta)	0.94 [0.88, 0.98]	w = 0.799
ILR, mapped back	0.93 [0.86, 0.97]	w = 0.737
Method's own interval	0.98 [0.96, 0.99]	w = 0.979
Own interval, transcript fractions	0.98 [0.96, 0.99]	w = 0.979
Fisher information (Wald)	0.98 [0.95, 0.99]	w = 0.982
Godambe sandwich	0.92 [0.87, 0.95]	w = 0.926
Released code, as published	0.92 [0.87, 0.95]	w = 0.926

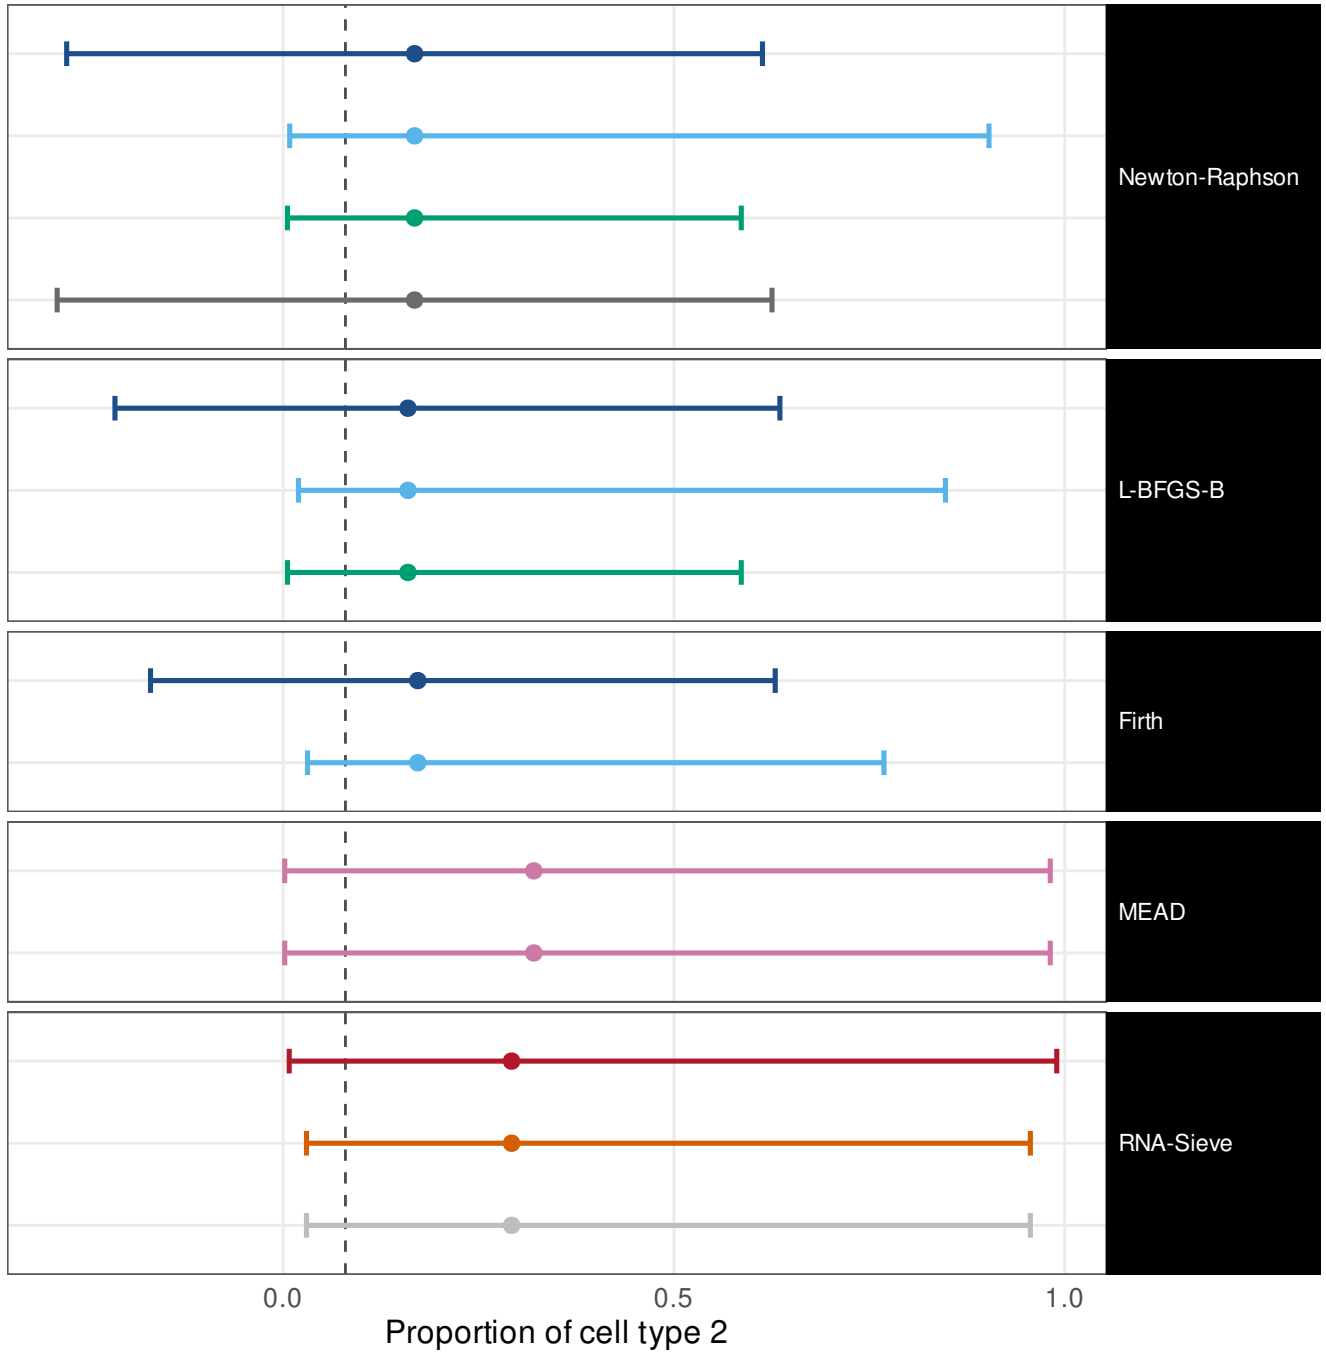


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.96 [0.93, 0.98]	w = 0.677
ILR, mapped back	0.97 [0.94, 0.99]	w = 0.828
Profile likelihood	0.97 [0.94, 0.99]	w = 0.366
Oracle (Fisher at p*)	0.97 [0.94, 0.99]	w = 0.739
Wald (delta)	0.93 [0.86, 0.97]	w = 0.612
ILR, mapped back	0.93 [0.86, 0.97]	w = 0.731
Profile likelihood	0.97 [0.94, 0.99]	w = 0.366
Wald (delta)	0.93 [0.86, 0.97]	w = 0.57
ILR, mapped back	0.92 [0.85, 0.96]	w = 0.575
Method's own interval	0.97 [0.94, 0.99]	w = 0.656
Own interval, transcript fractions	0.96 [0.92, 0.98]	w = 0.656
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.694
Godambe sandwich	0.98 [0.95, 0.99]	w = 0.617
Released code, as published	0.98 [0.95, 0.99]	w = 0.617

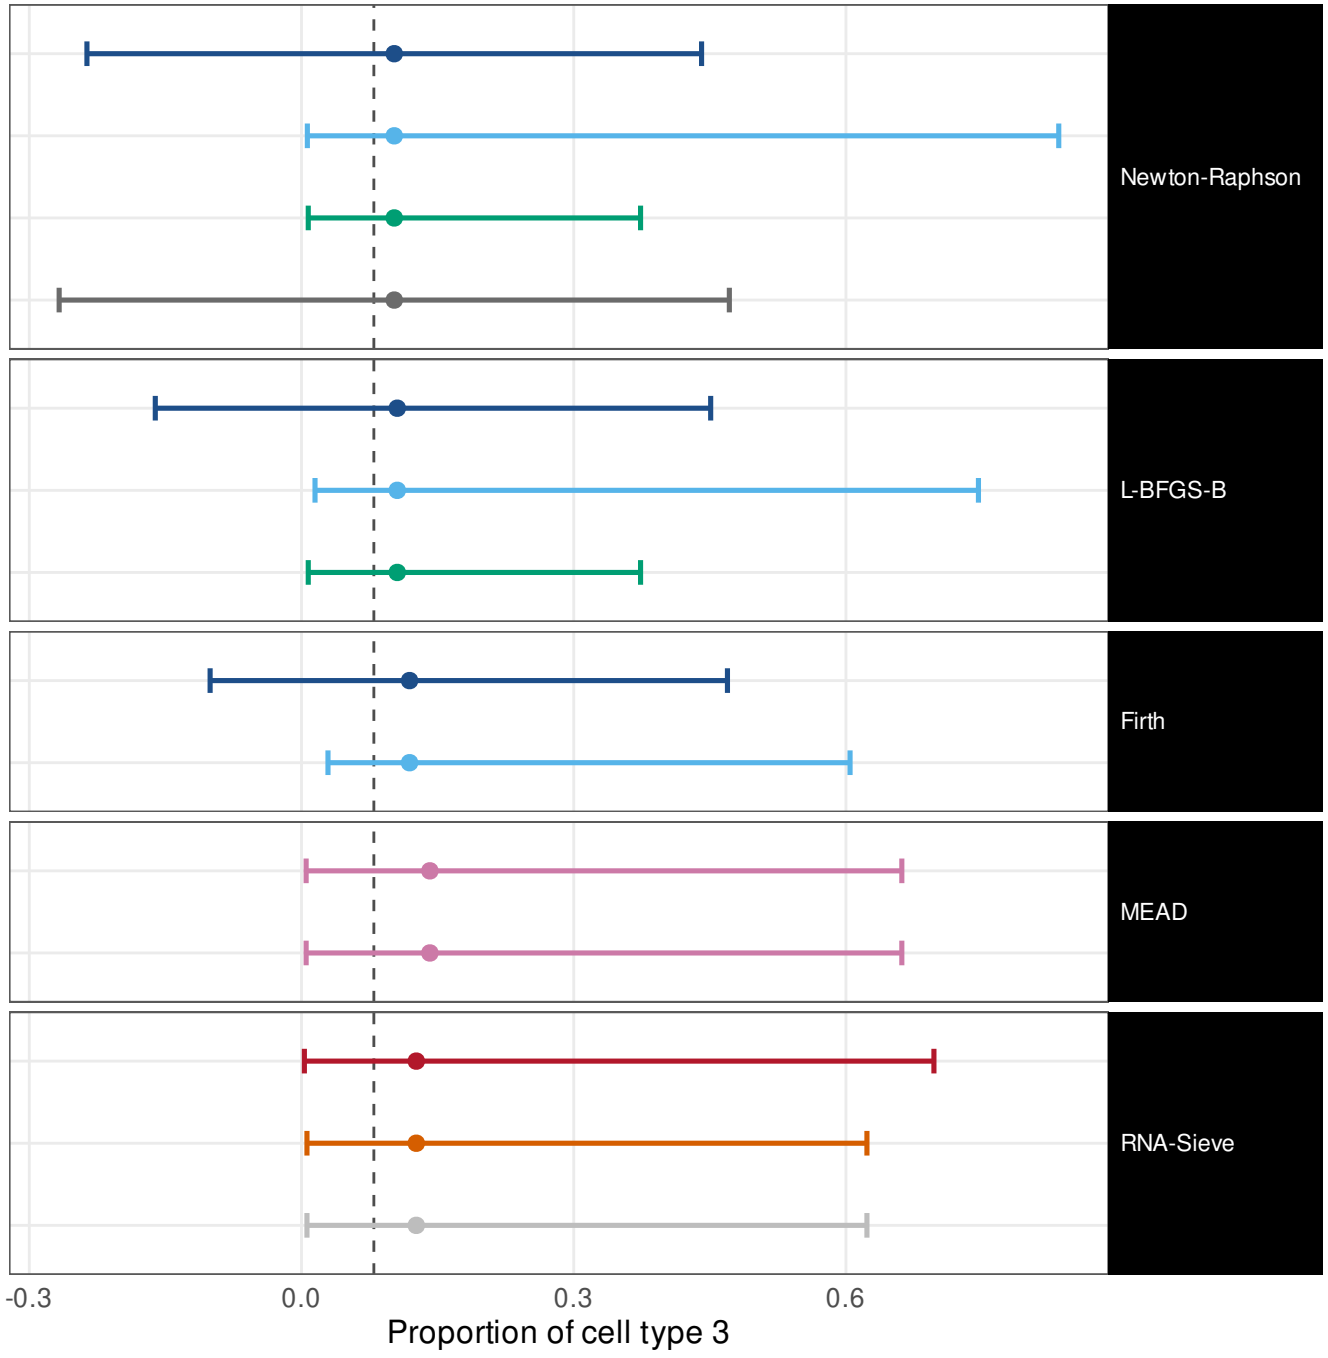


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.9 [0.86, 0.94]	w = 0.904
ILR, mapped back	0.84 [0.78, 0.88]	w = 0.905
Profile likelihood	0.88 [0.82, 0.91]	w = 0.764
Oracle (Fisher at p*)	0.7 [0.63, 0.75]	w = 0.597
Wald (delta)	0.89 [0.82, 0.94]	w = 0.872
ILR, mapped back	0.73 [0.64, 0.81]	w = 0.856
Profile likelihood	0.88 [0.82, 0.91]	w = 0.764
Wald (delta)	0.82 [0.73, 0.89]	w = 0.81
ILR, mapped back	0.37 [0.28, 0.48]	w = 0.775
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1

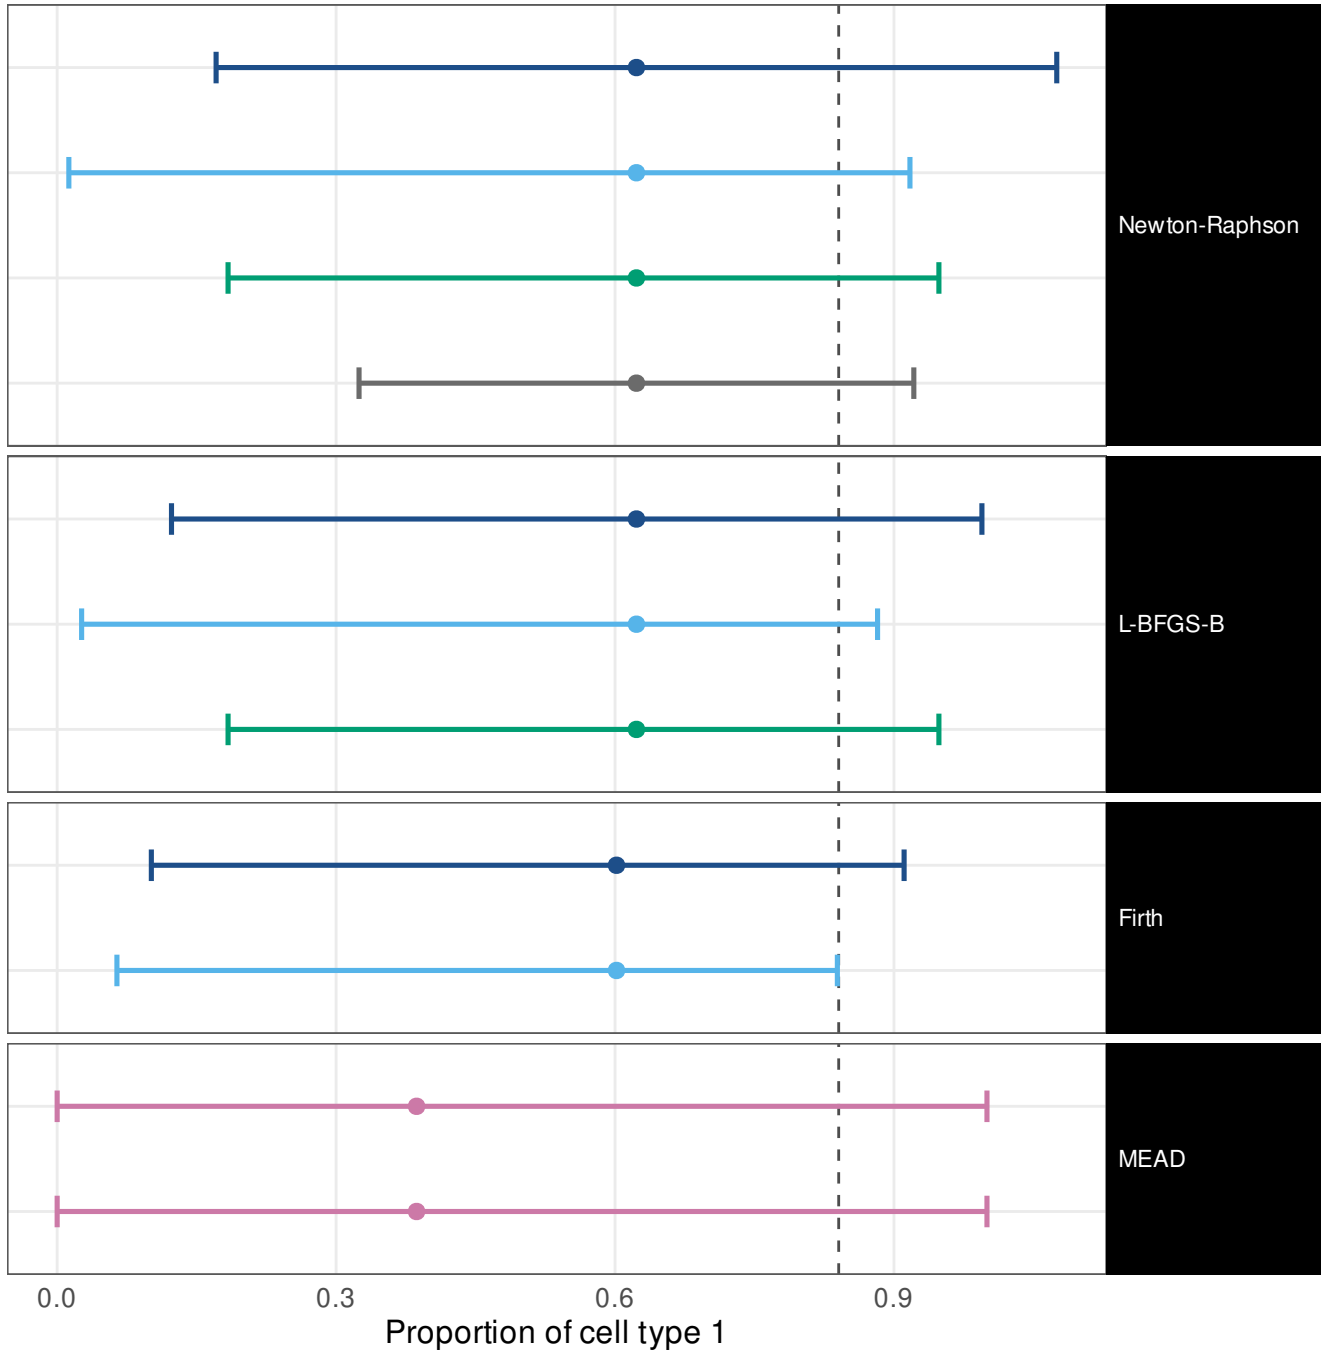


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.87 [0.82, 0.91]	w = 1.31
ILR, mapped back	0.98 [0.95, 0.99]	w = 0.938
Profile likelihood	0.96 [0.93, 0.98]	w = 0.69
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 1.58
Wald (delta)	0.89 [0.82, 0.94]	w = 1.14
ILR, mapped back	0.96 [0.9, 0.98]	w = 0.9
Profile likelihood	0.96 [0.93, 0.98]	w = 0.69
Wald (delta)	0.91 [0.84, 0.95]	w = 1.03
ILR, mapped back	0.93 [0.86, 0.97]	w = 0.833
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1

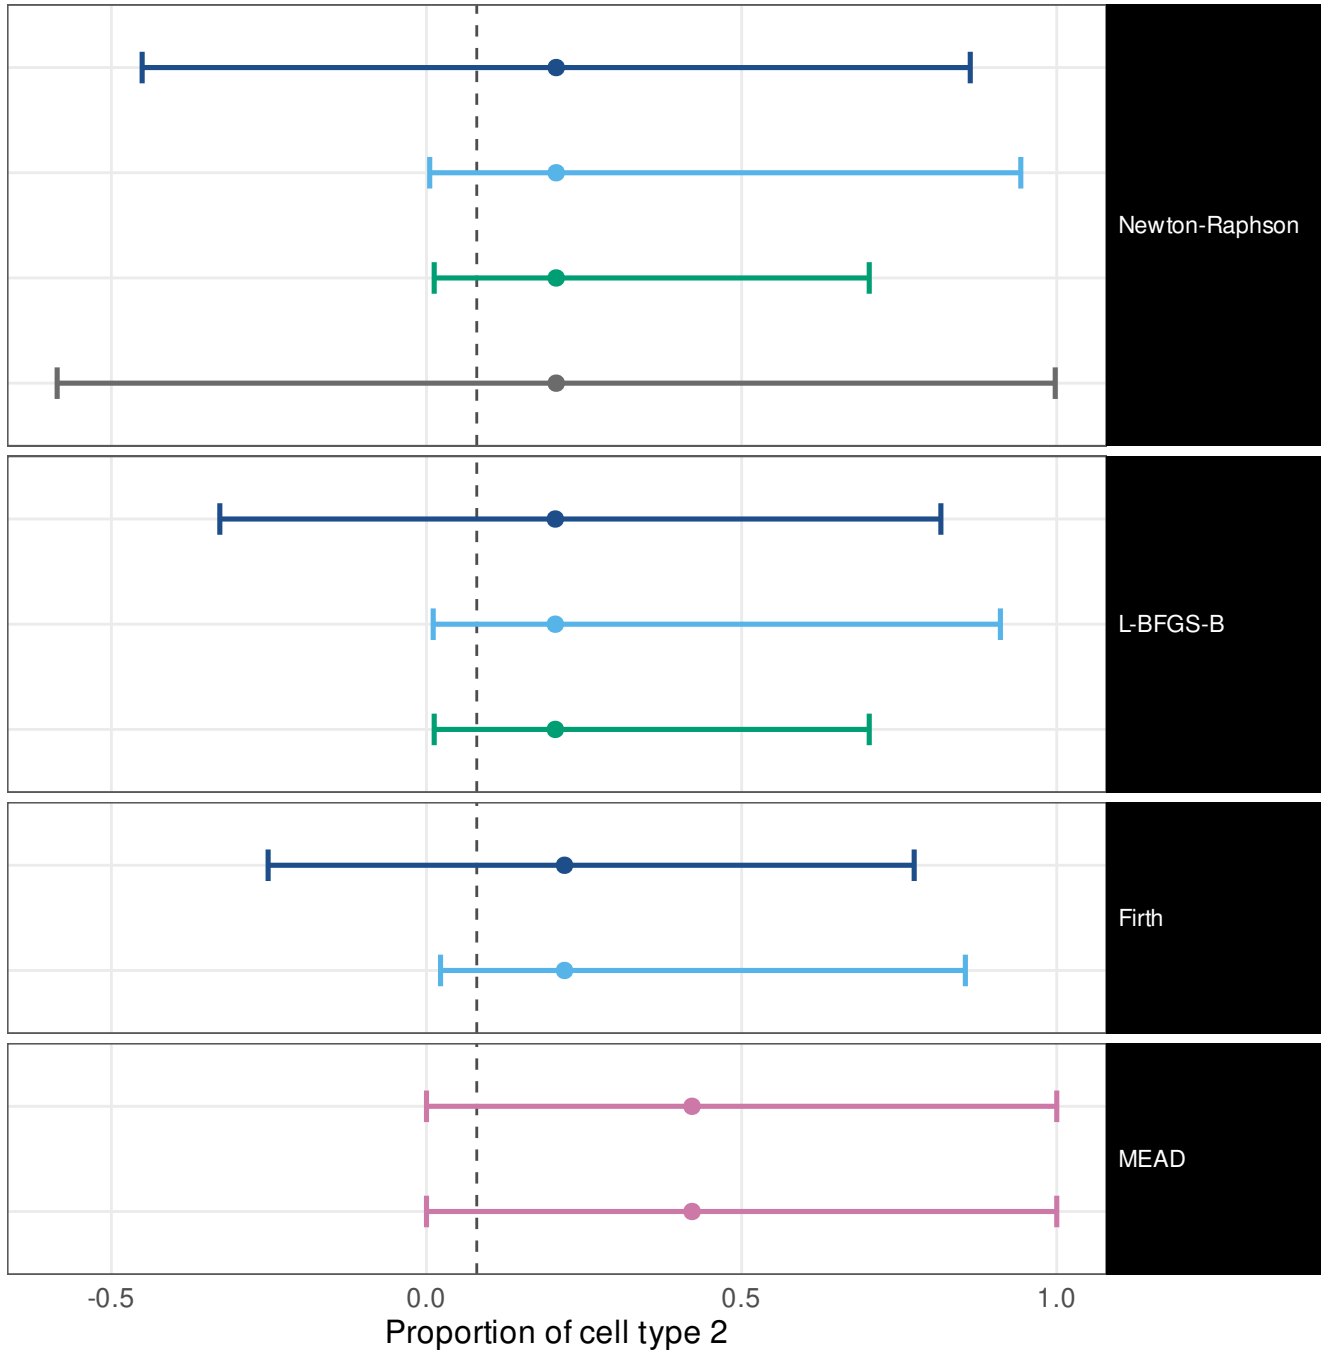


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.91 [0.86, 0.94]	w = 1.21
ILR, mapped back	0.99 [0.96, 1]	w = 0.913
Profile likelihood	0.98 [0.94, 0.99]	w = 0.58
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 1.49
Wald (delta)	0.9 [0.83, 0.95]	w = 1.05
ILR, mapped back	0.98 [0.93, 0.99]	w = 0.883
Profile likelihood	0.98 [0.94, 0.99]	w = 0.58
Wald (delta)	0.91 [0.84, 0.95]	w = 0.932
ILR, mapped back	0.95 [0.88, 0.98]	w = 0.794
Method's own interval	1 [0.98, 1]	w = 0.94
Own interval, transcript fractions	1 [0.98, 1]	w = 0.94

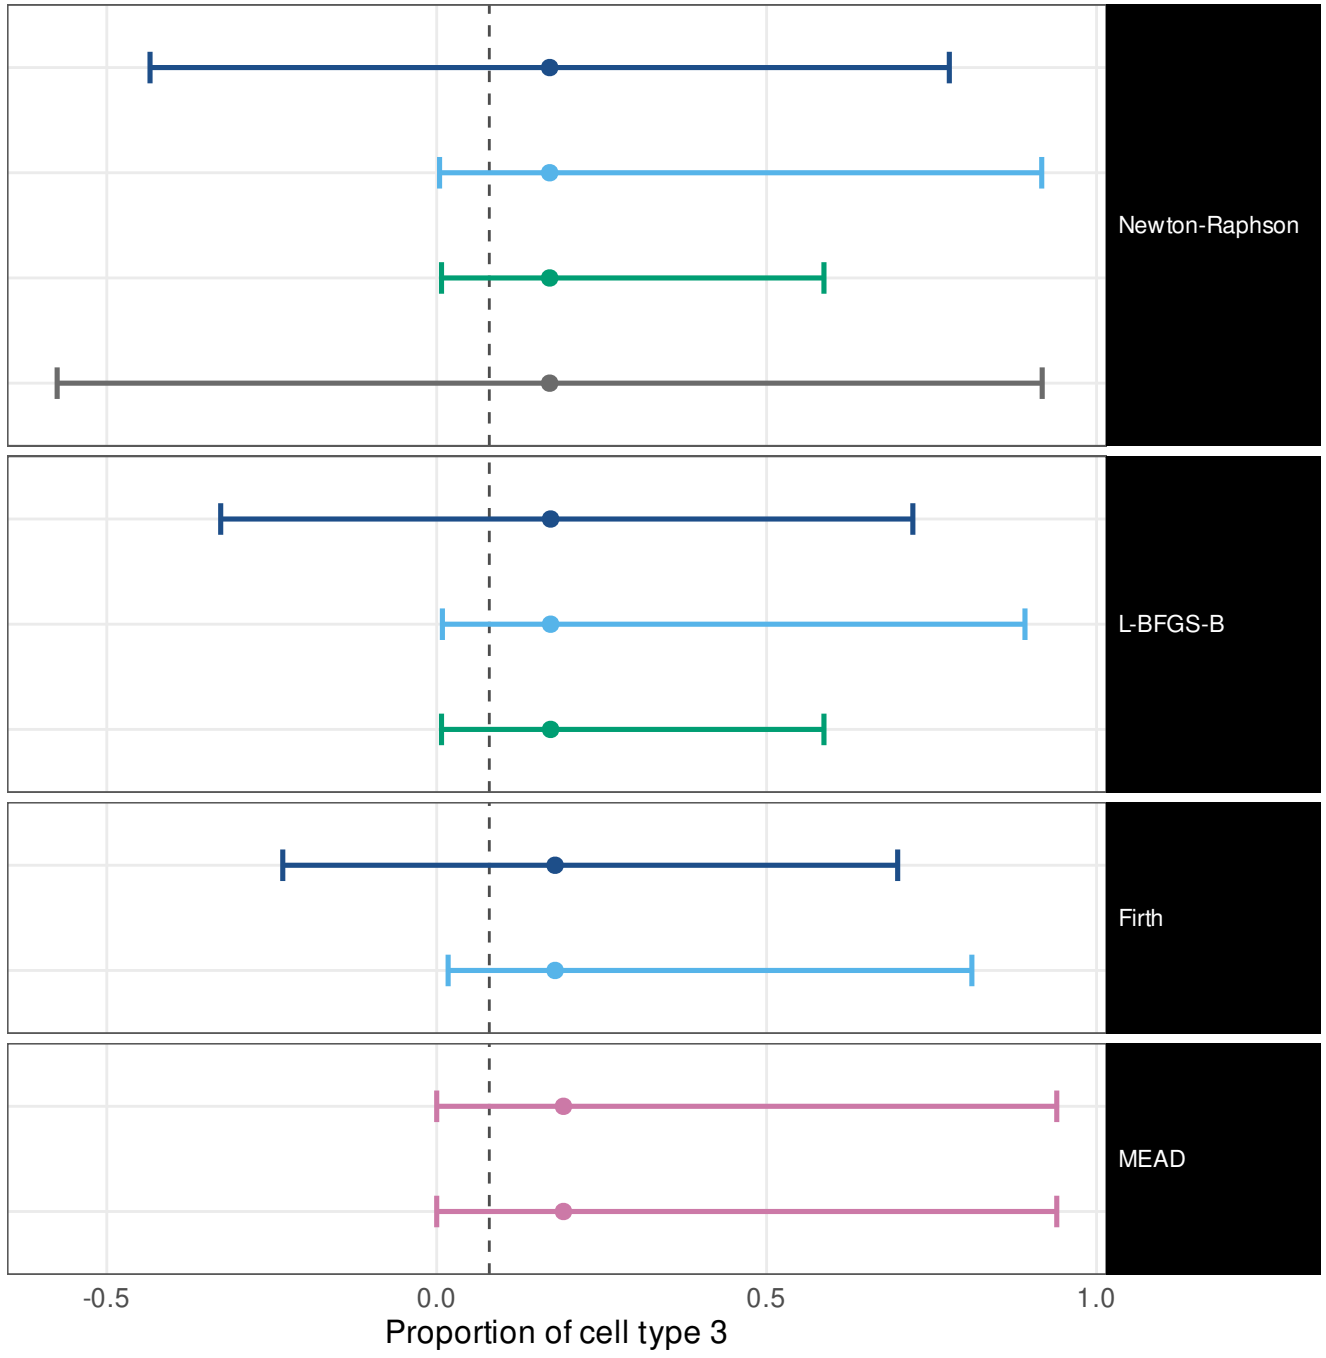


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.93 [0.89, 0.96]	w = 0.807
ILR, mapped back	0.72 [0.66, 0.78]	w = 0.891
Profile likelihood	0.88 [0.83, 0.92]	w = 0.708
Oracle (Fisher at p*)	0.8 [0.74, 0.85]	w = 0.584
Wald (delta)	0.87 [0.79, 0.92]	w = 0.772
ILR, mapped back	0.63 [0.53, 0.72]	w = 0.85
Profile likelihood	0.88 [0.83, 0.92]	w = 0.708
Wald (delta)	0.68 [0.57, 0.77]	w = 0.712
ILR, mapped back	0.26 [0.17, 0.36]	w = 0.746
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1

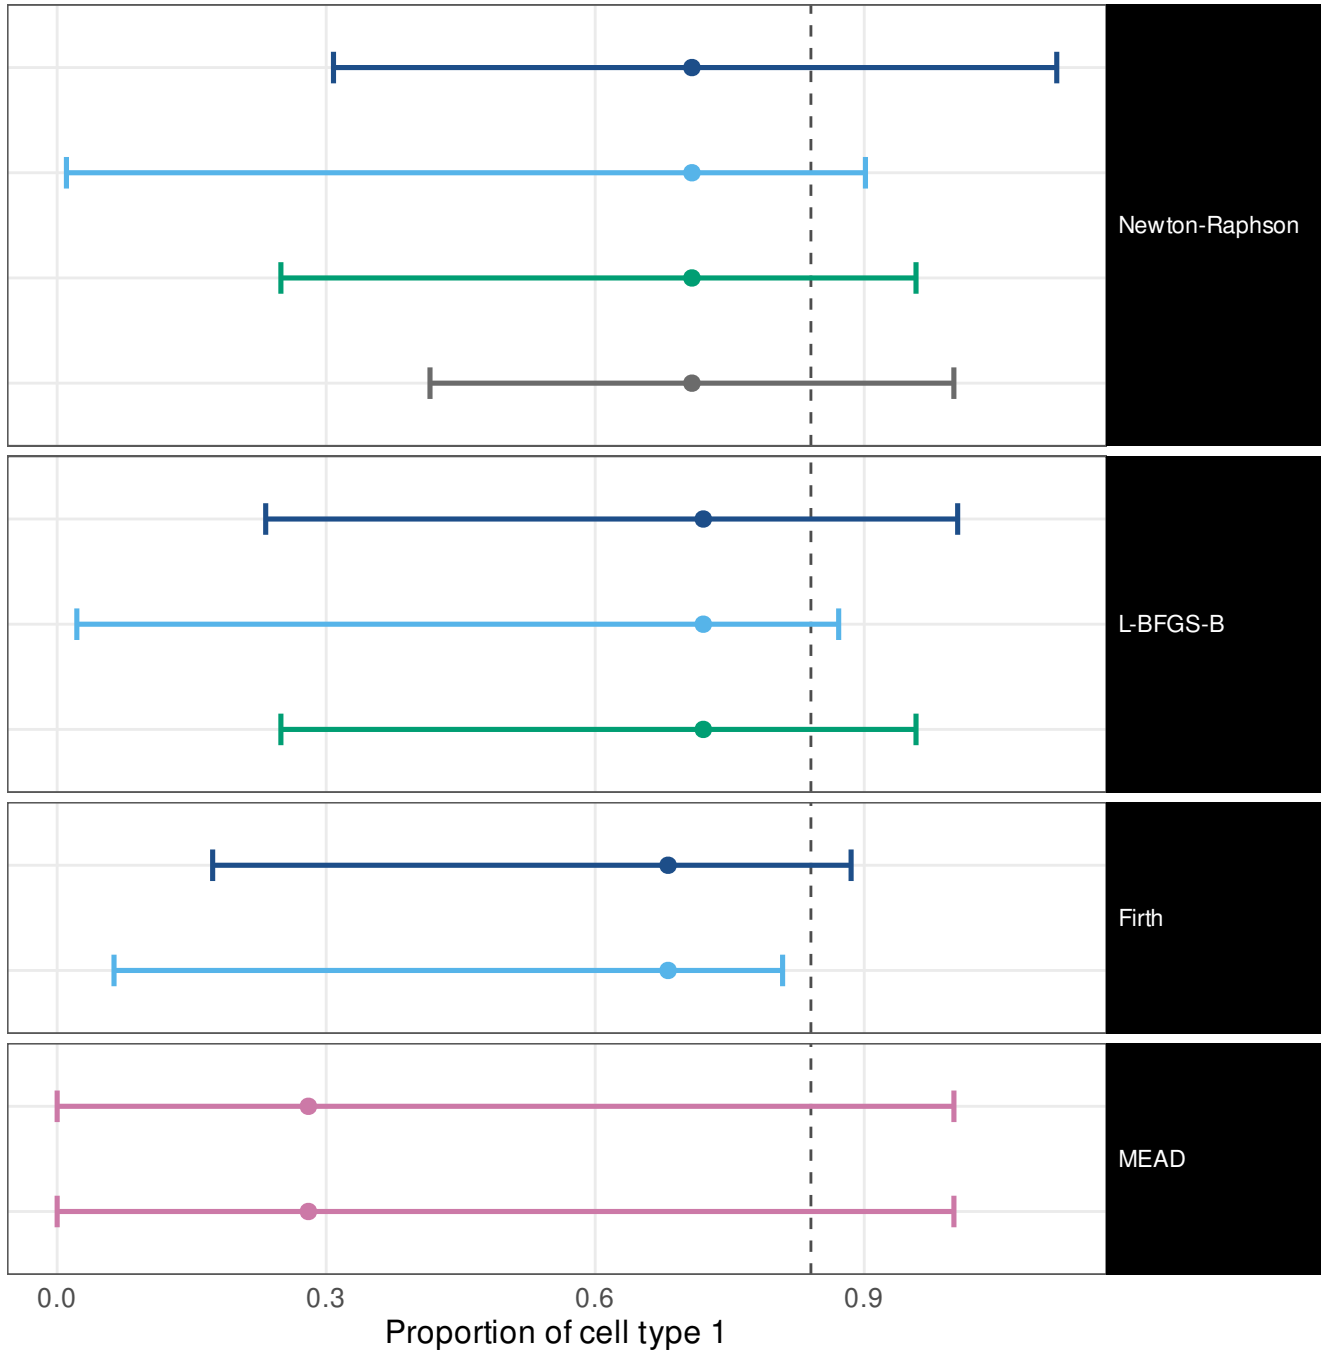


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96	[0.93, 0.98]	w = 1.7
ILR, mapped back	1	[0.98, 1]	w = 0.956
Profile likelihood	0.99	[0.96, 1]	w = 0.658
Oracle (Fisher at p*)	1	[0.98, 1]	w = 2.04
Wald (delta)	0.92	[0.85, 0.96]	w = 1.43
ILR, mapped back	1	[0.96, 1]	w = 0.924
Profile likelihood	0.99	[0.96, 1]	w = 0.658
Wald (delta)	0.95	[0.88, 0.98]	w = 1.12
ILR, mapped back	0.97	[0.91, 0.99]	w = 0.849
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1

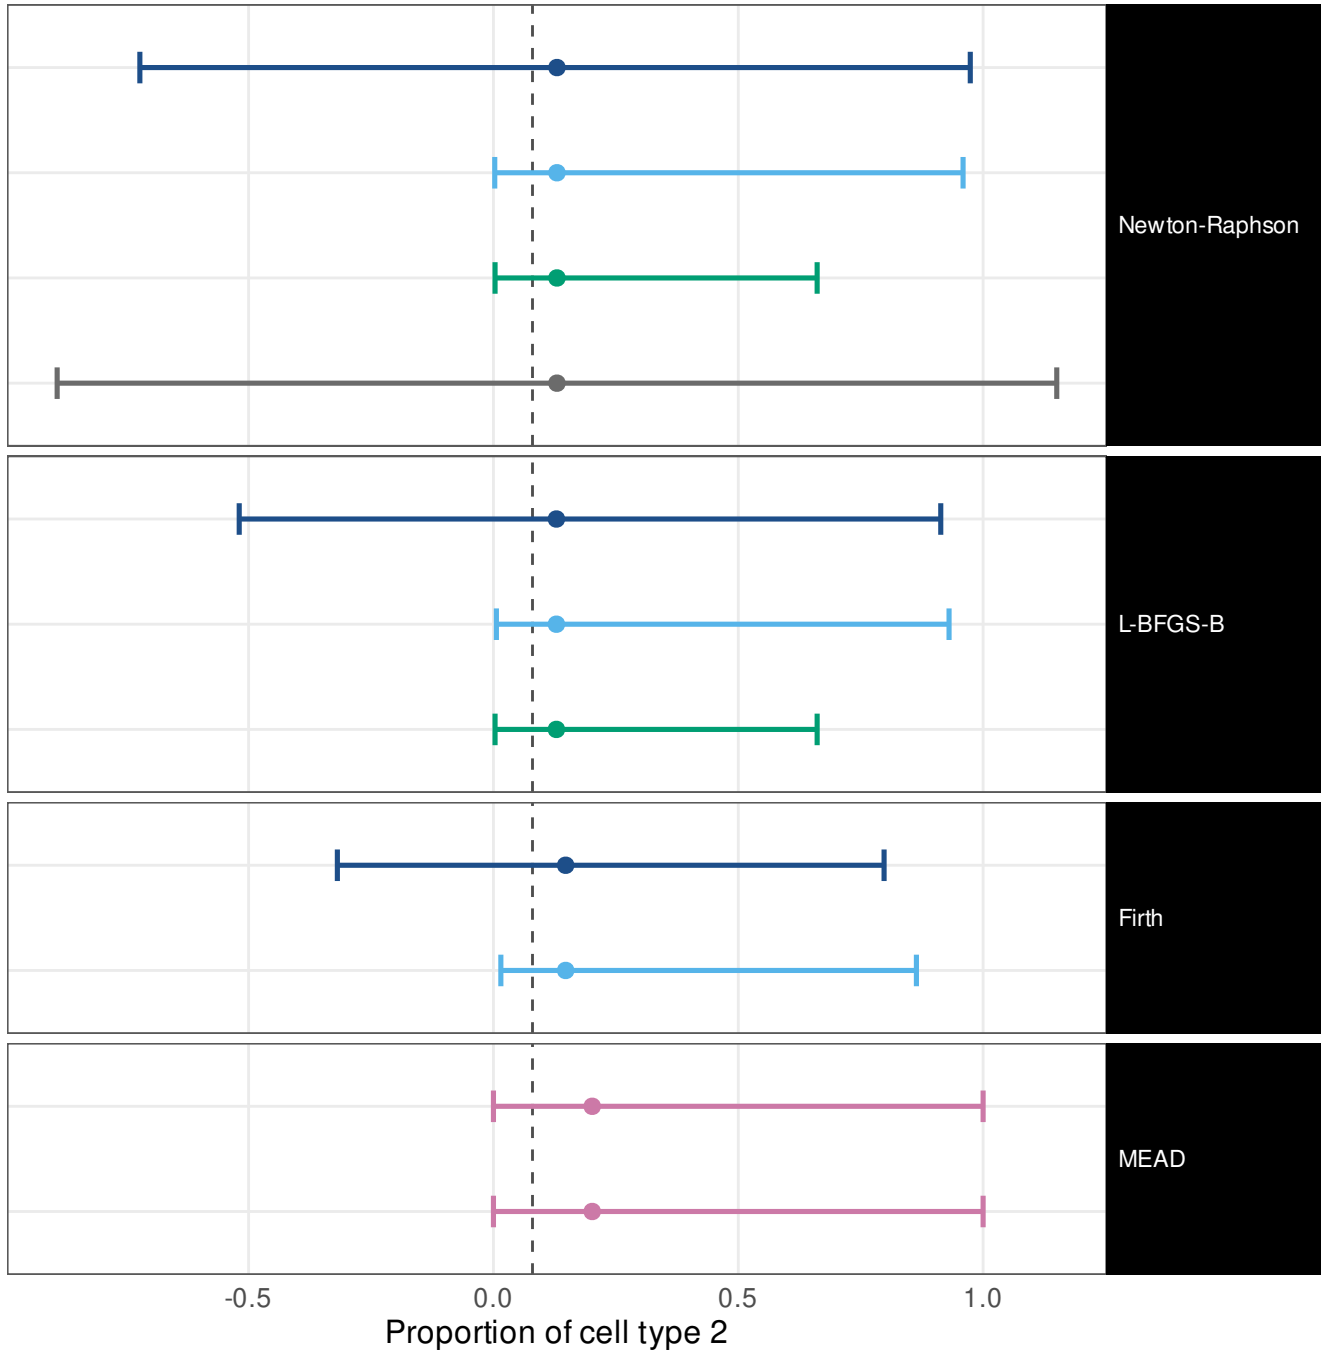


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.93	[0.89, 0.96]	w = 1.59
ILR, mapped back	0.98	[0.96, 0.99]	w = 0.936
Profile likelihood	0.97	[0.94, 0.99]	w = 0.558
Oracle (Fisher at p*)	1	[0.98, 1]	w = 1.98
Wald (delta)	0.93	[0.86, 0.97]	w = 1.38
ILR, mapped back	0.98	[0.92, 0.99]	w = 0.916
Profile likelihood	0.97	[0.94, 0.99]	w = 0.558
Wald (delta)	0.96	[0.89, 0.99]	w = 1.09
ILR, mapped back	0.92	[0.84, 0.96]	w = 0.831
Method's own interval	1	[0.98, 1]	w = 1
Own interval, transcript fractions	1	[0.98, 1]	w = 1

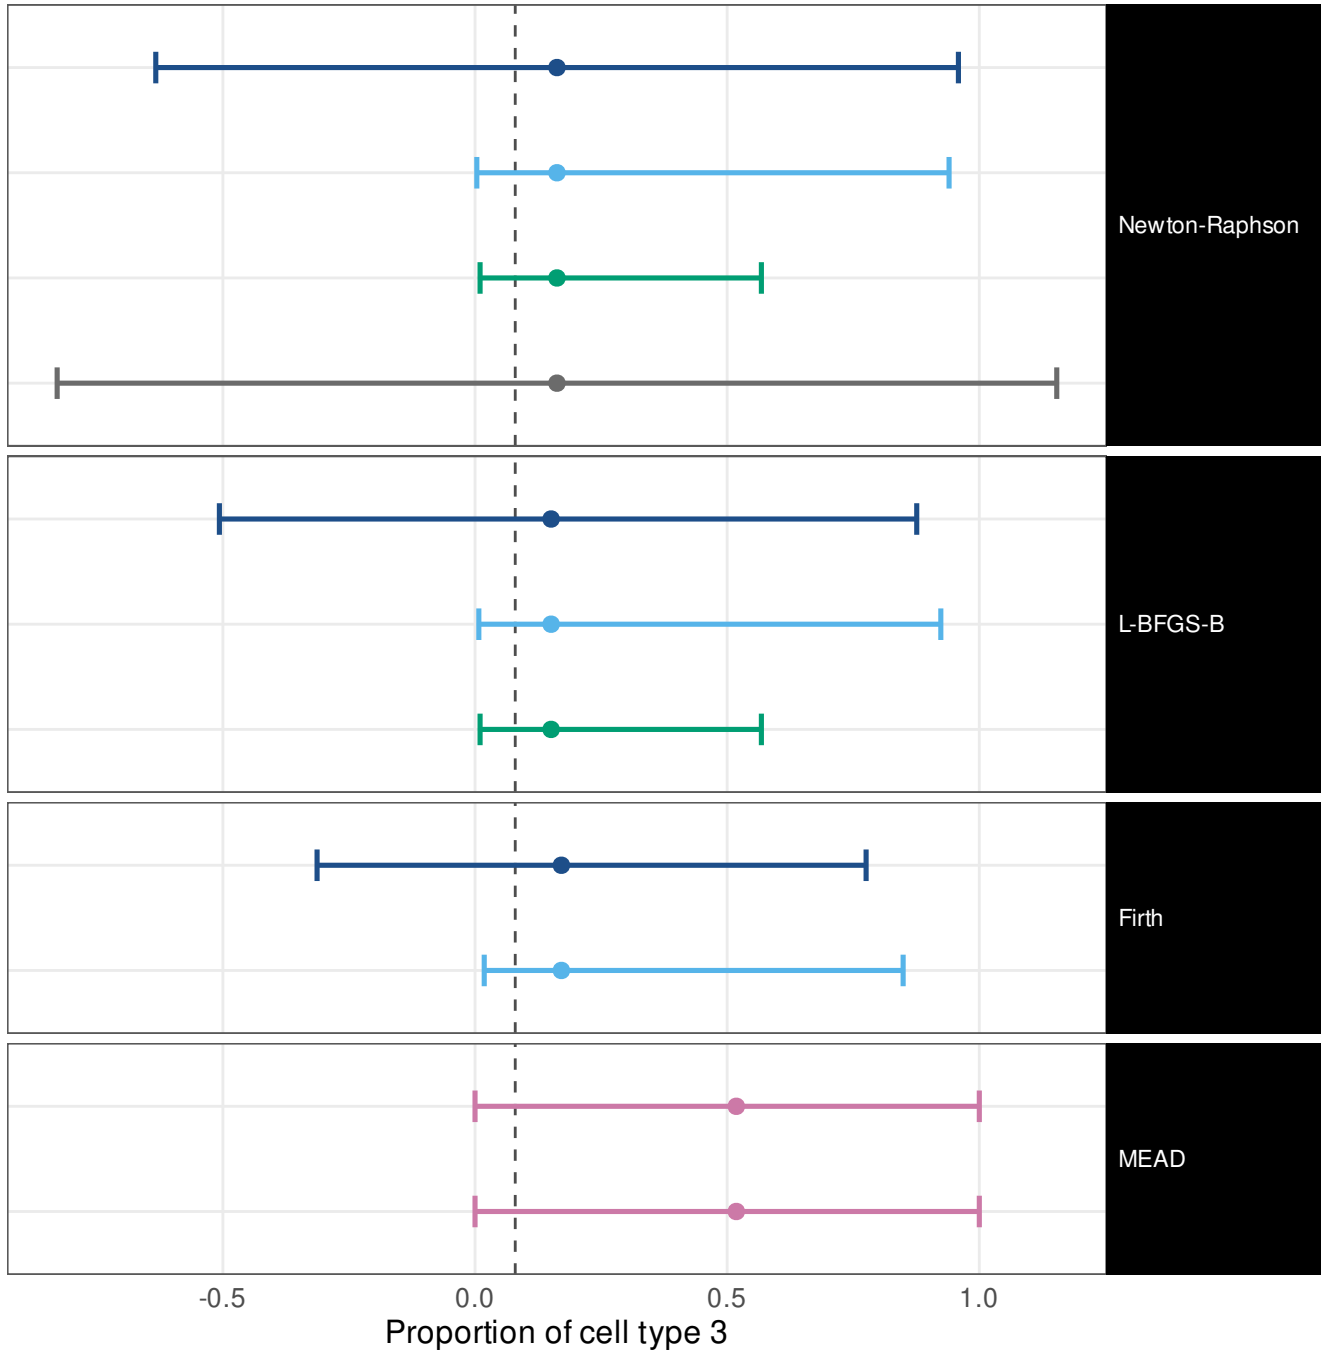


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.93 [0.89, 0.96]	w = 0.885
ILR, mapped back	0.89 [0.84, 0.93]	w = 0.91
Profile likelihood	0.93 [0.89, 0.96]	w = 0.7
Oracle (Fisher at p*)	0.77 [0.71, 0.82]	w = 0.611
Wald (delta)	0.91 [0.84, 0.95]	w = 0.811
ILR, mapped back	0.79 [0.7, 0.86]	w = 0.872
Profile likelihood	0.93 [0.89, 0.96]	w = 0.7
Wald (delta)	0.89 [0.82, 0.94]	w = 0.744
ILR, mapped back	0.48 [0.39, 0.58]	w = 0.771
Method's own interval	1 [0.97, 1]	w = 0.997
Own interval, transcript fractions	1 [0.97, 1]	w = 0.997

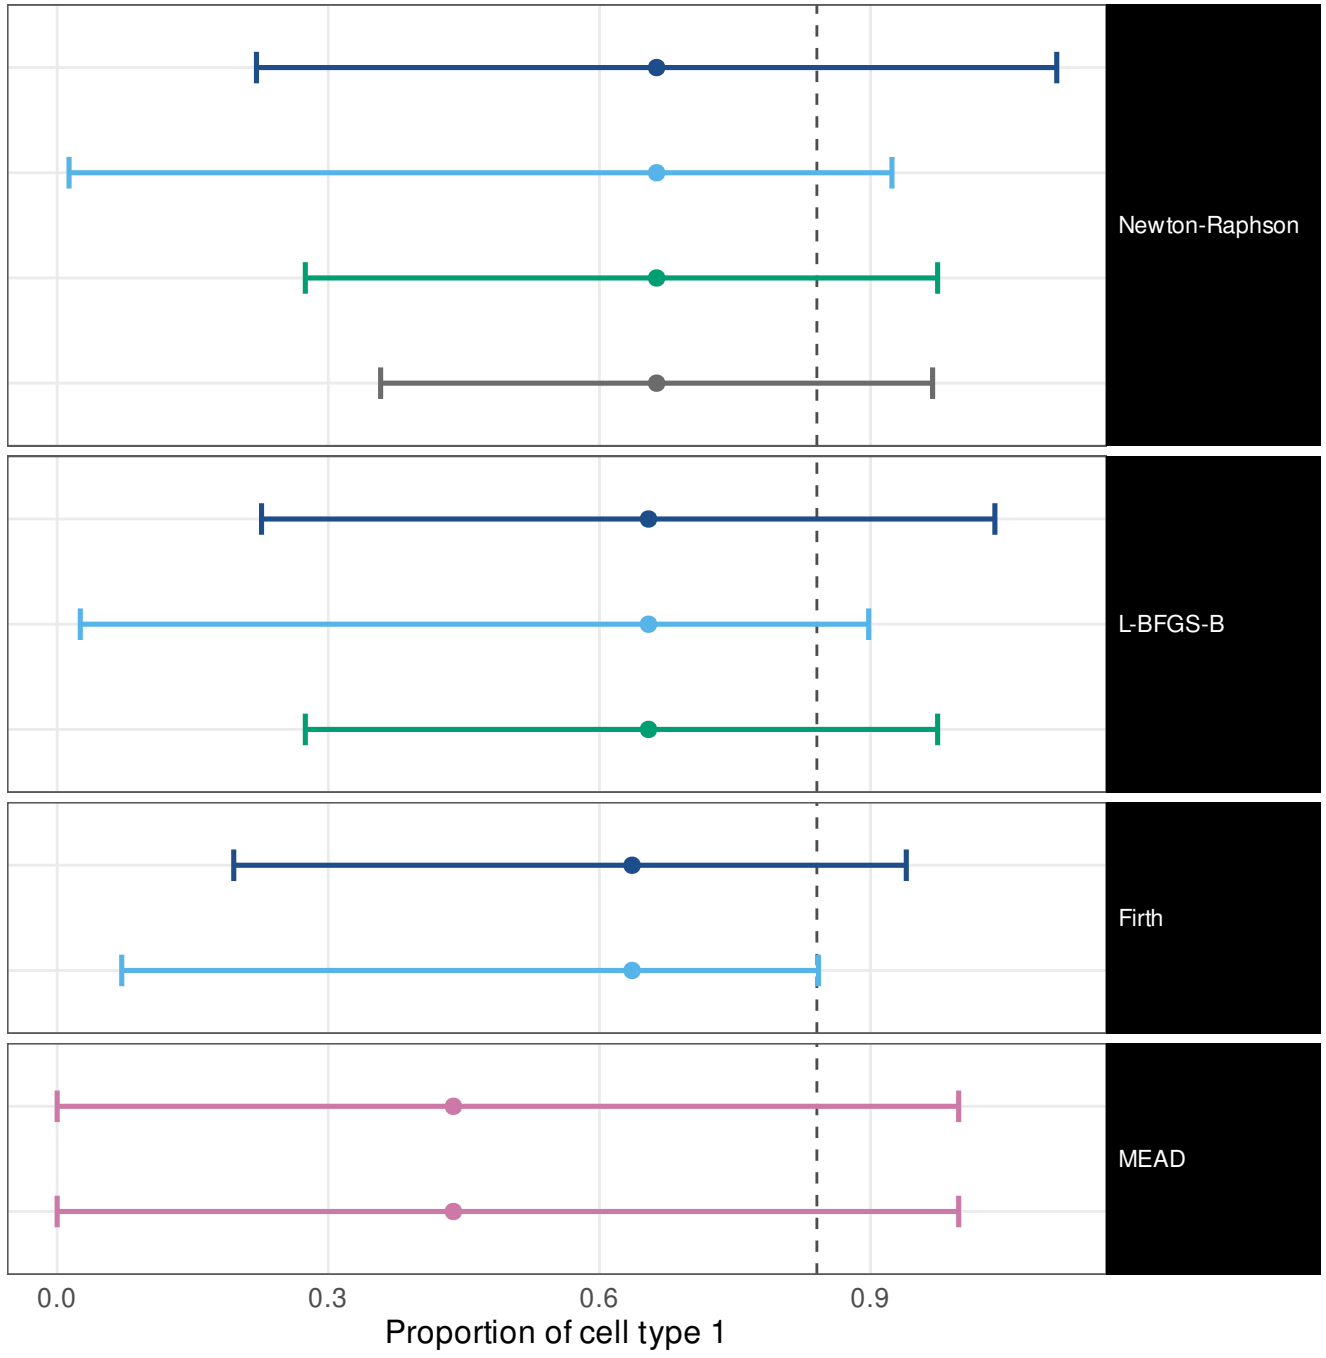


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.88 [0.83, 0.92]	w = 1.4
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.938
Profile likelihood	1 [0.97, 1]	w = 0.651
Oracle (Fisher at p*)	0.97 [0.94, 0.99]	w = 1.62
Wald (delta)	0.94 [0.88, 0.97]	w = 1.27
ILR, mapped back	0.96 [0.9, 0.98]	w = 0.913
Profile likelihood	1 [0.97, 1]	w = 0.651
Wald (delta)	0.96 [0.9, 0.98]	w = 1.05
ILR, mapped back	0.93 [0.86, 0.96]	w = 0.848
Method's own interval	1 [0.97, 1]	w = 0.999
Own interval, transcript fractions	1 [0.97, 1]	w = 0.999

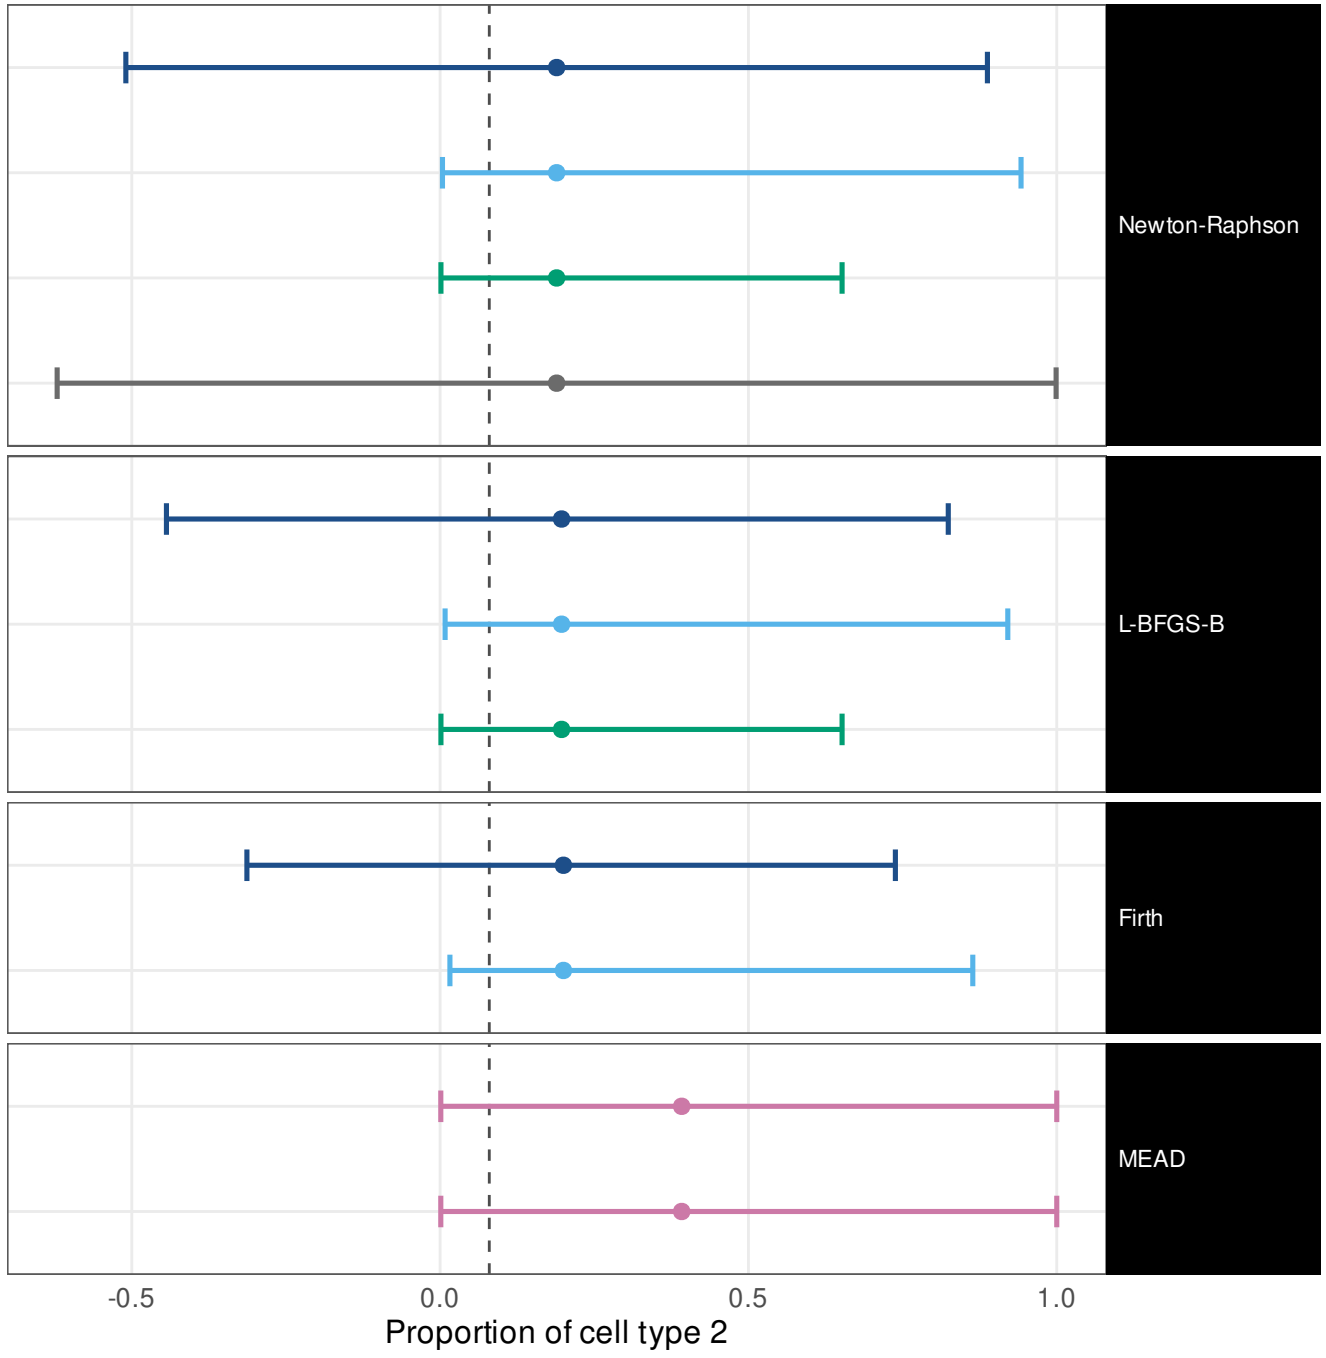


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.93 [0.89, 0.96]	w = 1.28
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.918
Profile likelihood	0.98 [0.96, 0.99]	w = 0.525
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 1.53
Wald (delta)	0.93 [0.86, 0.97]	w = 1.13
ILR, mapped back	0.99 [0.95, 1]	w = 0.893
Profile likelihood	0.98 [0.96, 0.99]	w = 0.525
Wald (delta)	0.93 [0.86, 0.96]	w = 0.946
ILR, mapped back	0.93 [0.86, 0.96]	w = 0.796
Method's own interval	1 [0.98, 1]	w = 0.689
Own interval, transcript fractions	1 [0.98, 1]	w = 0.689

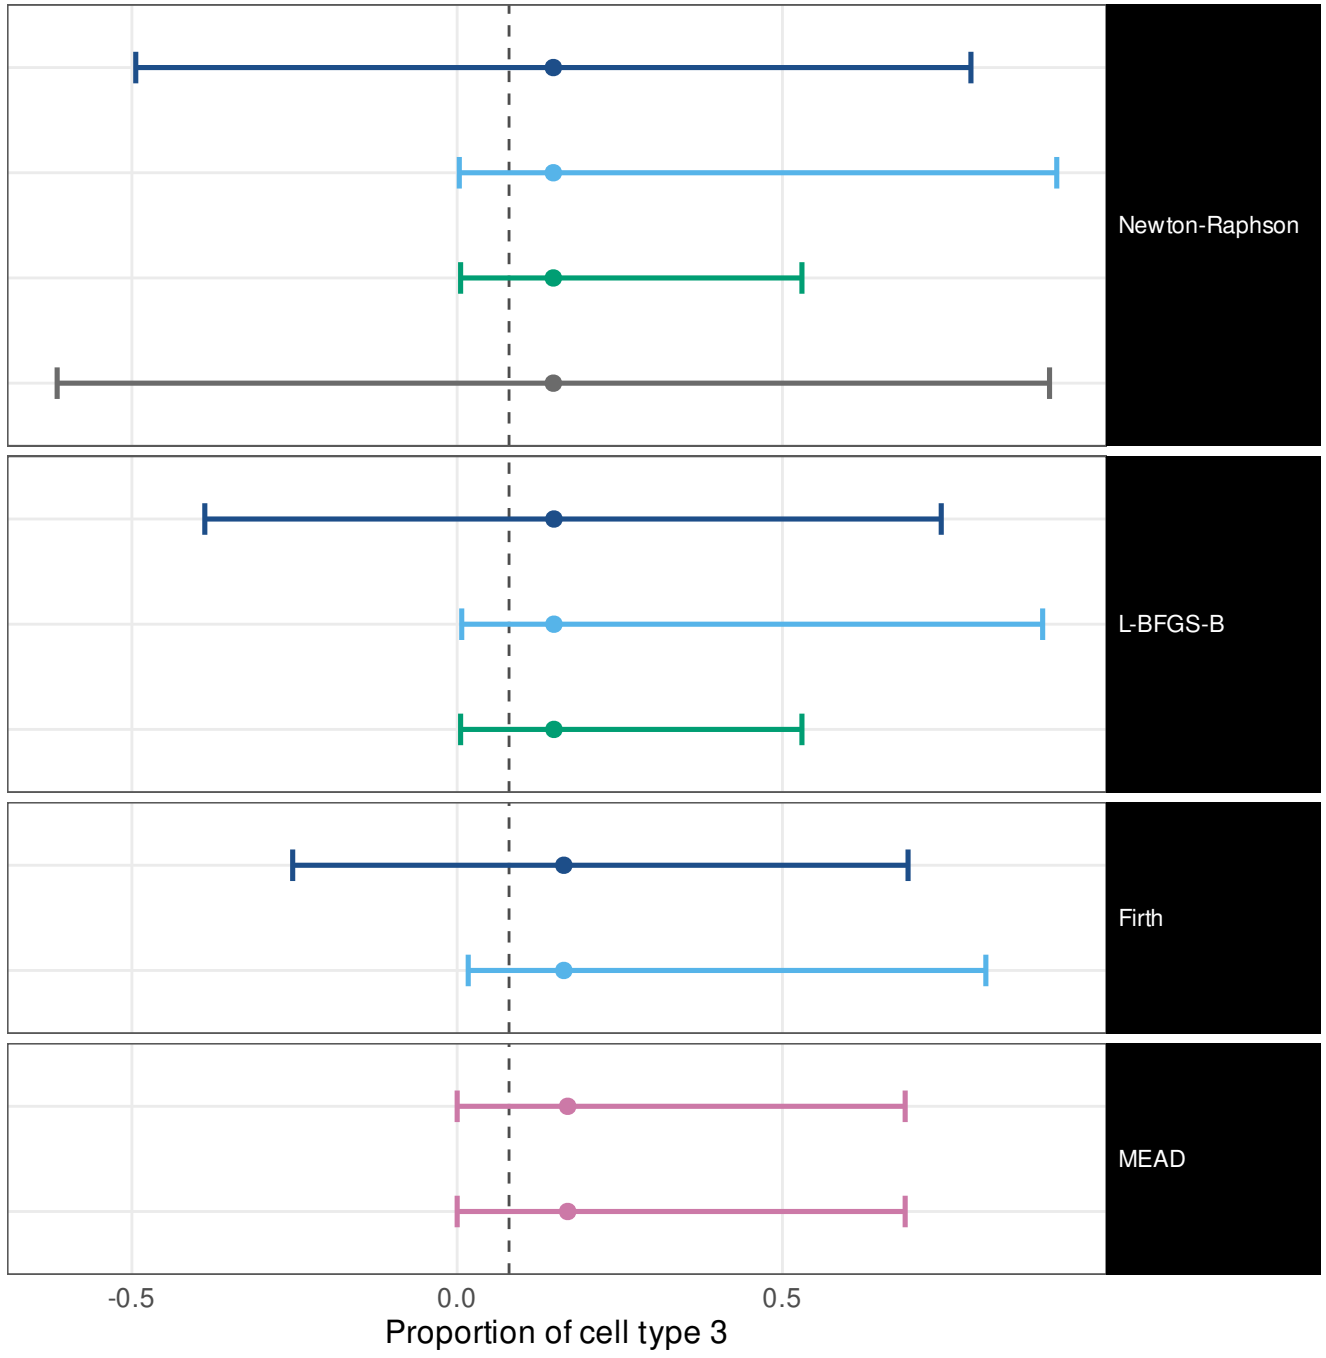


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.94 [0.9, 0.97]	w = 0.715
ILR, mapped back	0.72 [0.66, 0.78]	w = 0.89
Profile likelihood	0.9 [0.84, 0.93]	w = 0.73
Oracle (Fisher at p*)	0.8 [0.74, 0.85]	w = 0.584
Wald (delta)	0.92 [0.85, 0.96]	w = 0.699
ILR, mapped back	0.6 [0.49, 0.69]	w = 0.847
Profile likelihood	0.9 [0.84, 0.93]	w = 0.73
Wald (delta)	0.74 [0.64, 0.83]	w = 0.681
ILR, mapped back	0.37 [0.27, 0.47]	w = 0.752
Method's own interval	0.99 [0.96, 1]	w = 0.997
Own interval, transcript fractions	0.99 [0.96, 1]	w = 0.997
Fisher information (Wald)	1 [0.98, 1]	w = 0.996
Godambe sandwich	0.98 [0.94, 0.99]	w = 0.983
Released code, as published	0.98 [0.94, 0.99]	w = 0.983

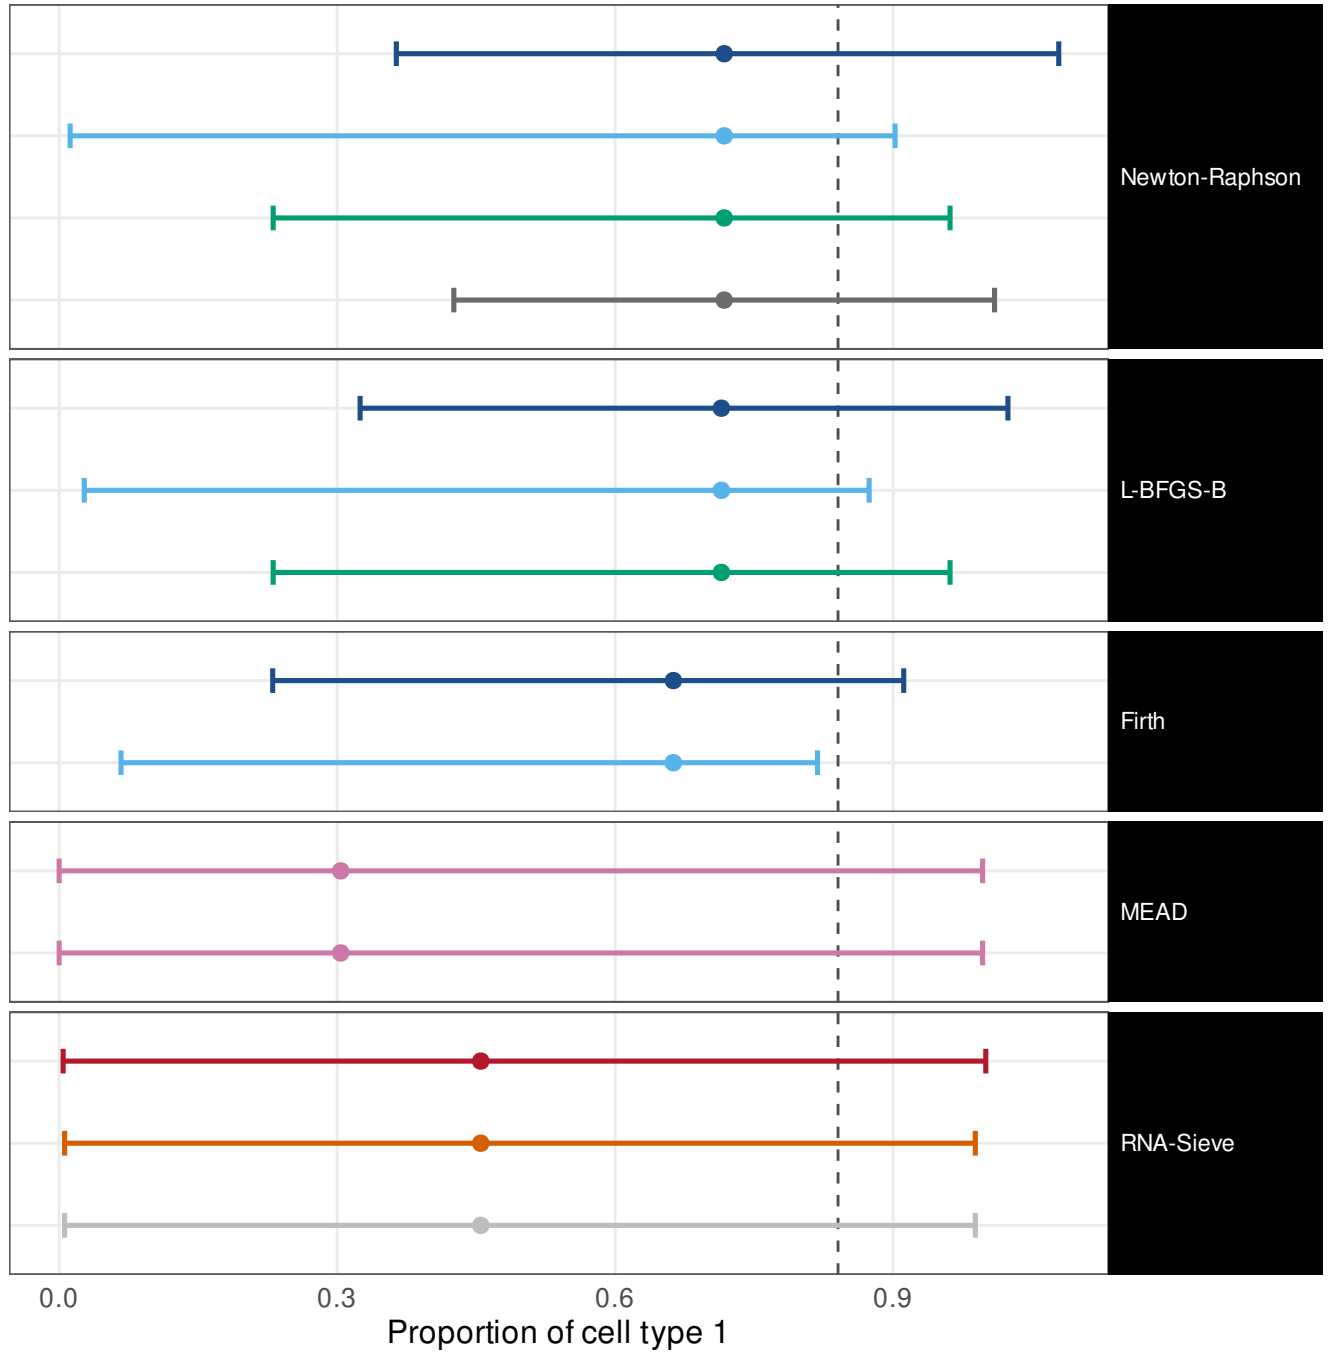


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.95 [0.92, 0.98]	w = 1.47
ILR, mapped back	1 [0.98, 1]	w = 0.95
Profile likelihood	1 [0.97, 1]	w = 0.671
Oracle (Fisher at p*)	1 [0.97, 1]	w = 1.72
Wald (delta)	0.98 [0.92, 0.99]	w = 1.38
ILR, mapped back	1 [0.96, 1]	w = 0.927
Profile likelihood	1 [0.97, 1]	w = 0.671
Wald (delta)	0.96 [0.9, 0.99]	w = 1.13
ILR, mapped back	0.98 [0.92, 0.99]	w = 0.867
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.98, 1]	w = 0.996
Godambe sandwich	0.95 [0.91, 0.97]	w = 0.975
Released code, as published	0.95 [0.91, 0.97]	w = 0.975

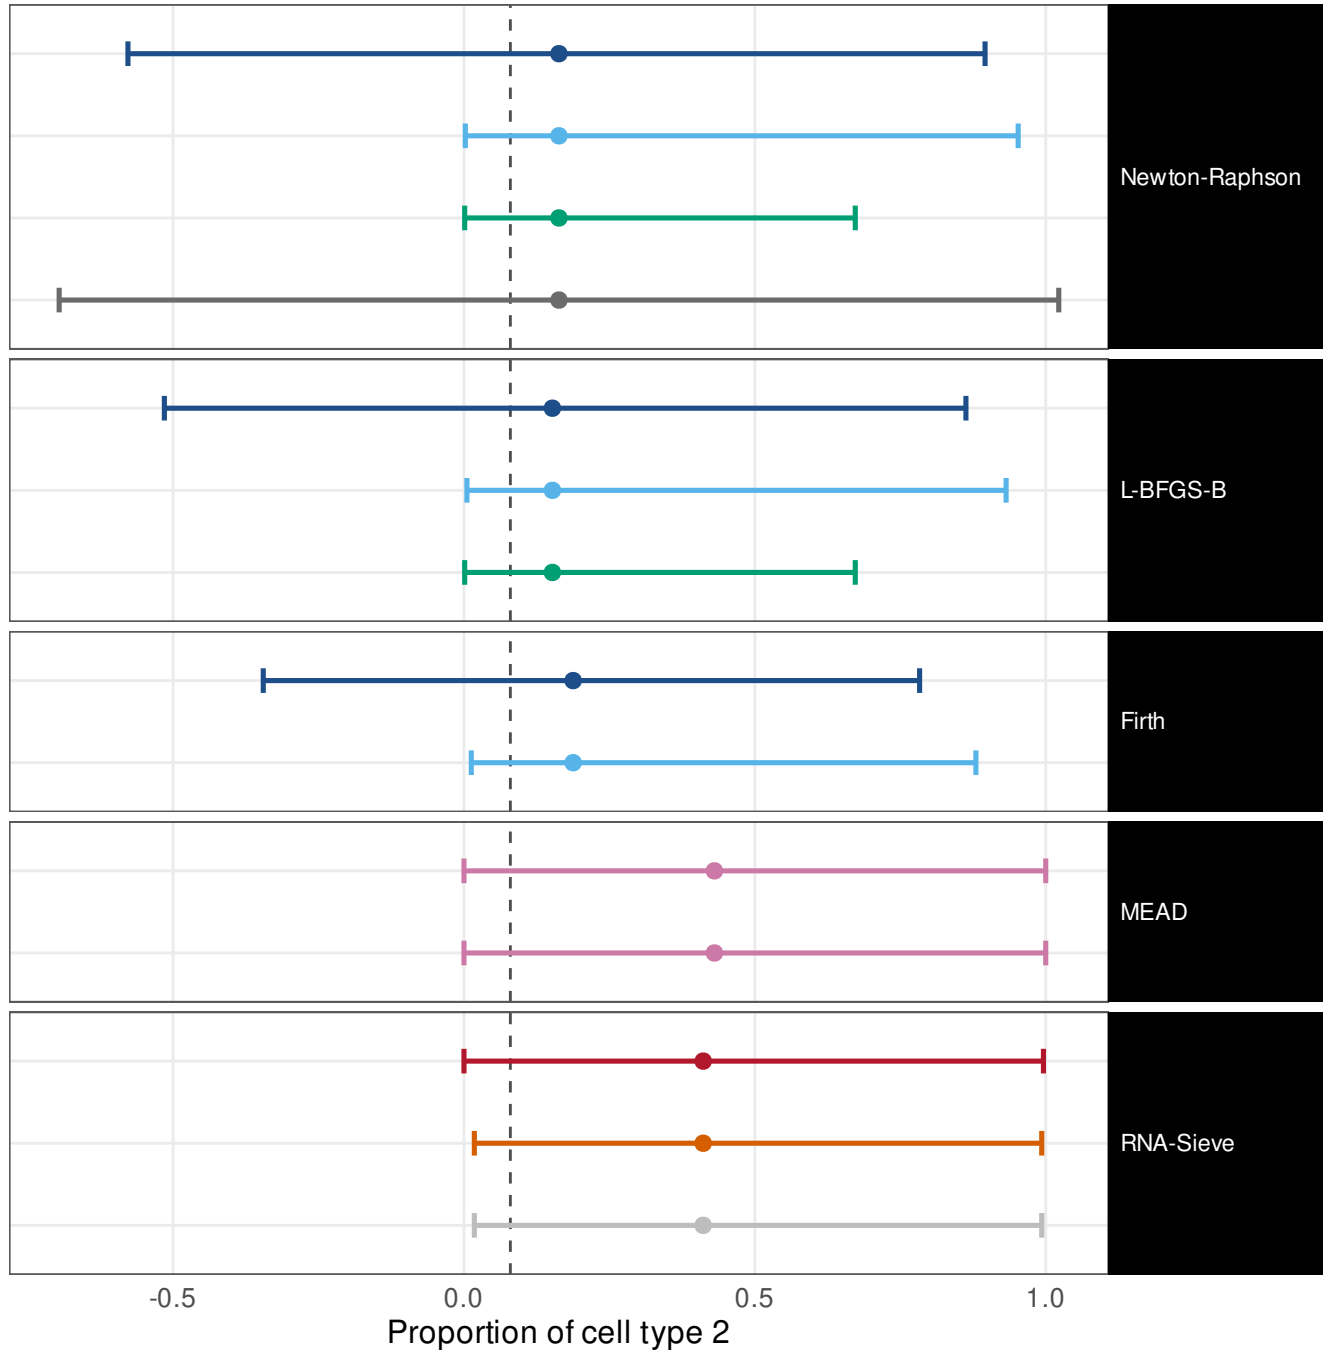


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.97 [0.94, 0.99]	w = 1.35
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.937
Profile likelihood	0.98 [0.94, 0.99]	w = 0.543
Oracle (Fisher at p*)	1 [0.98, 1]	w = 1.64
Wald (delta)	0.97 [0.91, 0.99]	w = 1.24
ILR, mapped back	0.97 [0.91, 0.99]	w = 0.908
Profile likelihood	0.98 [0.94, 0.99]	w = 0.543
Wald (delta)	0.96 [0.9, 0.99]	w = 1.04
ILR, mapped back	0.98 [0.92, 0.99]	w = 0.822
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.97, 1]	w = 0.973
Godambe sandwich	1 [0.97, 1]	w = 0.964
Released code, as published	1 [0.97, 1]	w = 0.964

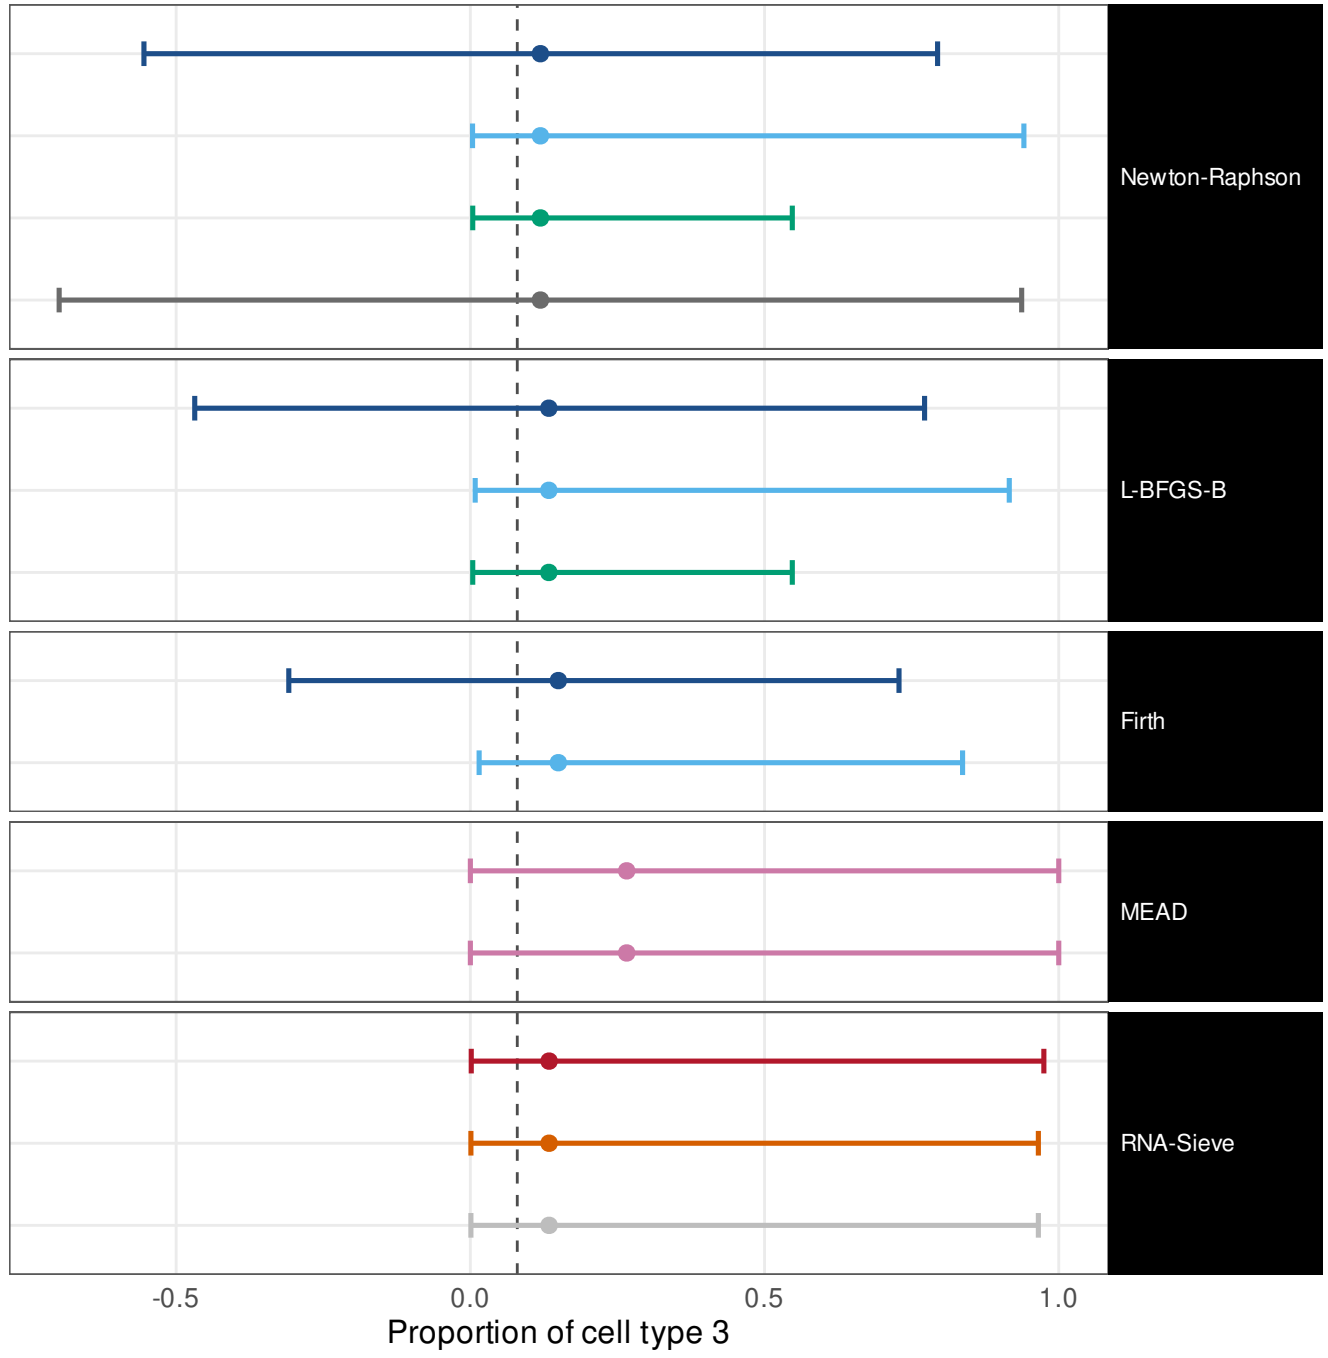


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.88 [0.83, 0.92]	w = 0.543
ILR, mapped back	0.62 [0.55, 0.68]	w = 0.937
Profile likelihood	0.92 [0.87, 0.95]	w = 0.378
Oracle (Fisher at p*)	0.88 [0.82, 0.91]	w = 0.537
Wald (delta)	0.78 [0.66, 0.87]	w = 0.541
ILR, mapped back	0.36 [0.25, 0.48]	w = 0.834
Profile likelihood	0.92 [0.87, 0.95]	w = 0.378
Wald (delta)	0.53 [0.41, 0.65]	w = 0.535
ILR, mapped back	0.017 [0.0029, 0.089]	w = 0.606
Method's own interval	0.94 [0.89, 0.96]	w = 0.717
Own interval, transcript fractions	0.94 [0.89, 0.96]	w = 0.717
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.842
Godambe sandwich	1 [0.97, 1]	w = 0.81
Released code, as published	1 [0.97, 1]	w = 0.81

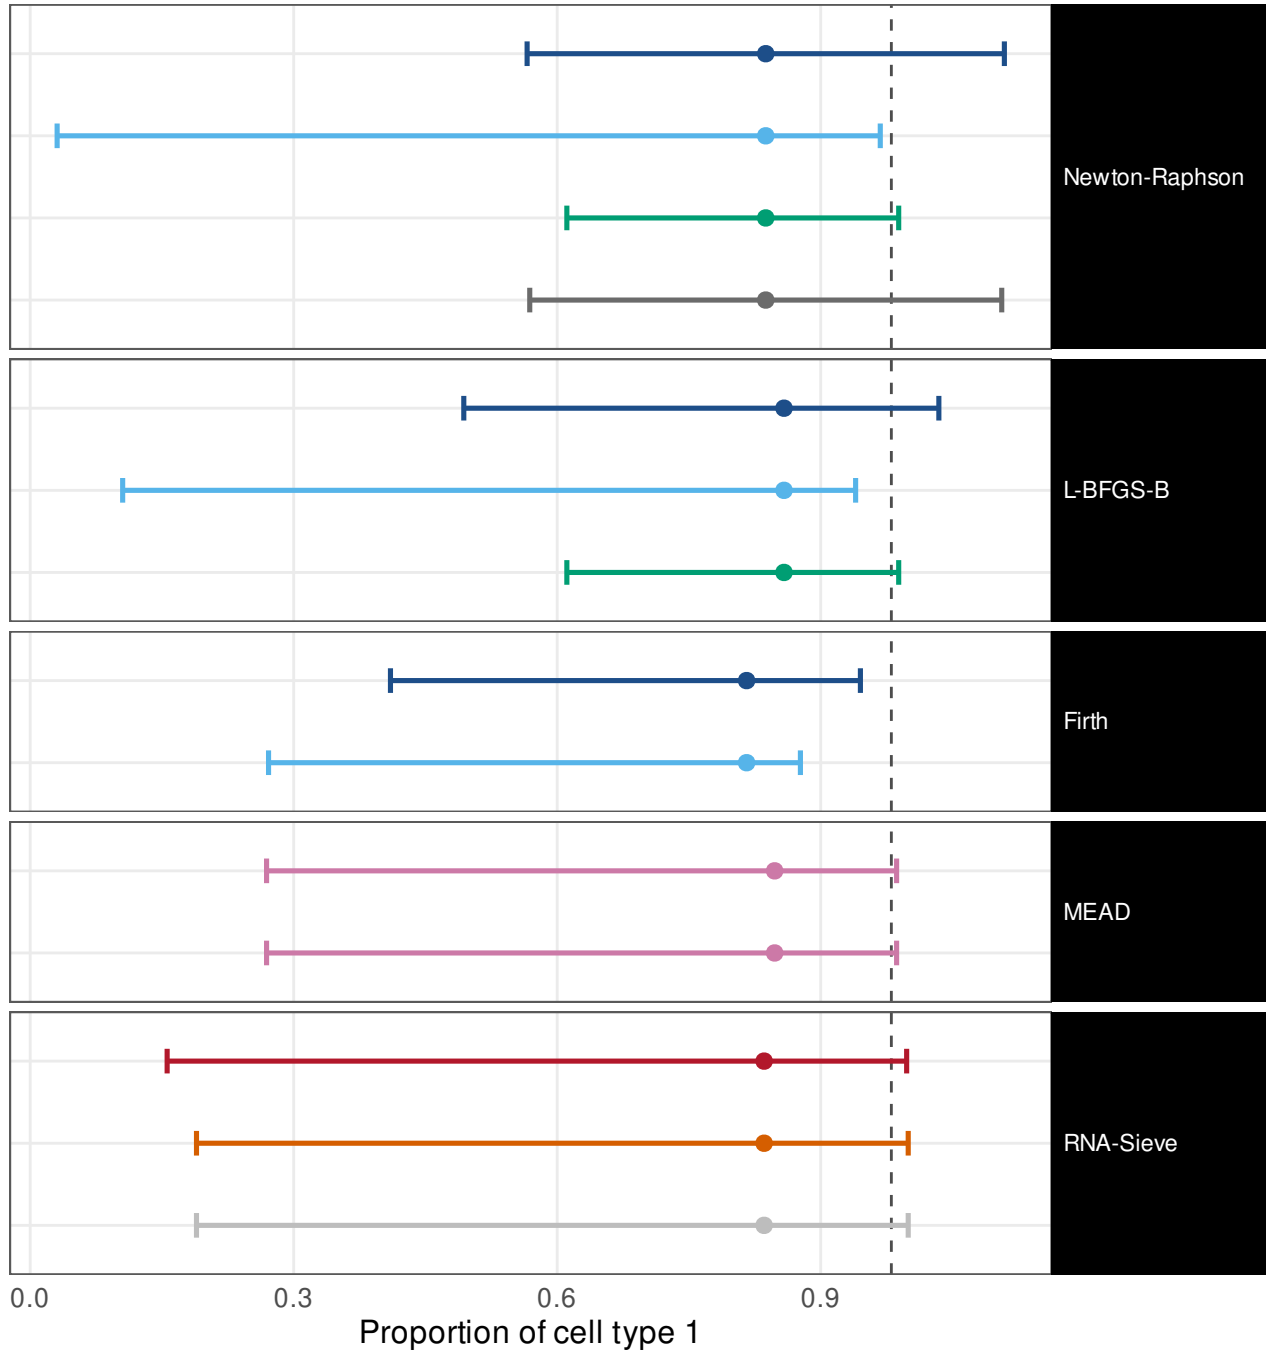


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.92 [0.87, 0.95]	w = 0.619
ILR, mapped back	0.92 [0.87, 0.95]	w = 0.892
Profile likelihood	0.97 [0.94, 0.99]	w = 0.351
Oracle (Fisher at p*)	0.92 [0.87, 0.95]	w = 0.645
Wald (delta)	0.9 [0.8, 0.95]	w = 0.603
ILR, mapped back	0.71 [0.59, 0.81]	w = 0.789
Profile likelihood	0.97 [0.94, 0.99]	w = 0.351
Wald (delta)	0.87 [0.76, 0.93]	w = 0.58
ILR, mapped back	0.28 [0.19, 0.41]	w = 0.626
Method's own interval	0.94 [0.9, 0.97]	w = 0.672
Own interval, transcript fractions	0.94 [0.9, 0.97]	w = 0.672
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.838
Godambe sandwich	1 [0.97, 1]	w = 0.81
Released code, as published	1 [0.97, 1]	w = 0.81

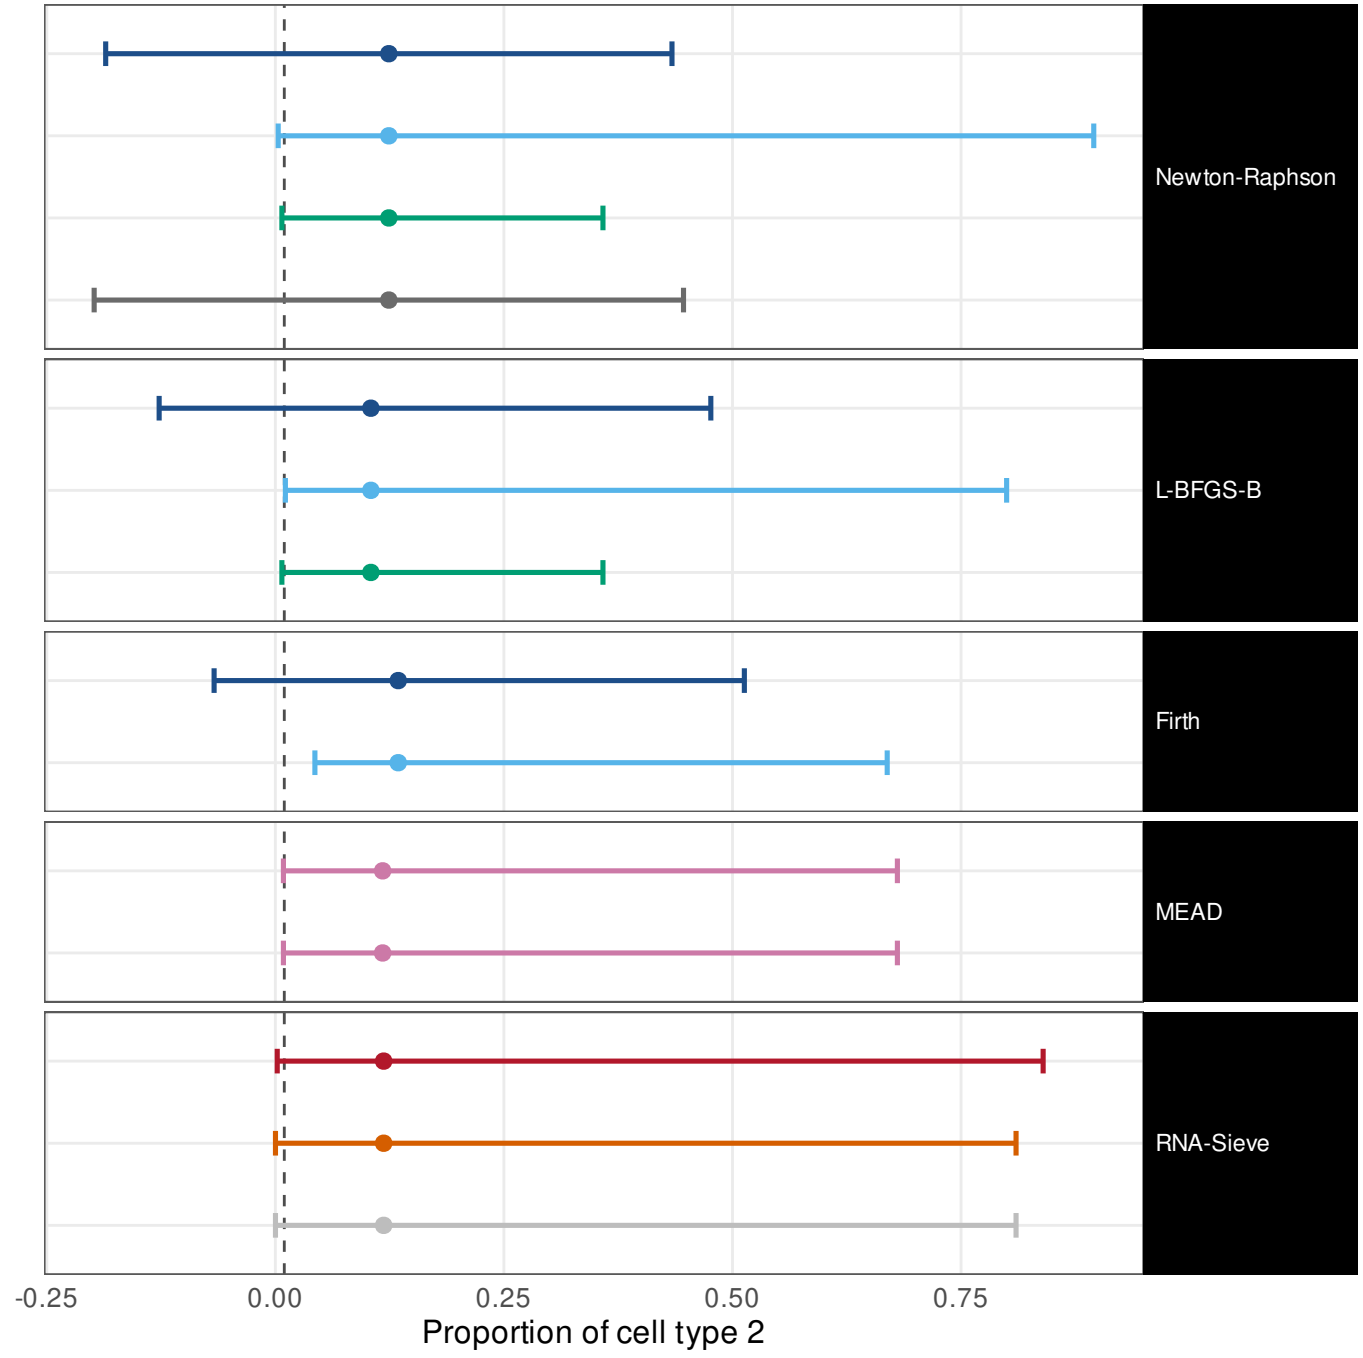


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.97 [0.94, 0.99]	w = 0.38
ILR, mapped back	0.95 [0.91, 0.97]	w = 0.817
Profile likelihood	0.98 [0.95, 0.99]	w = 0.175
Oracle (Fisher at p*)	1 [0.97, 1]	w = 0.408
Wald (delta)	0.93 [0.84, 0.97]	w = 0.352
ILR, mapped back	0.83 [0.72, 0.91]	w = 0.688
Profile likelihood	0.98 [0.95, 0.99]	w = 0.175
Wald (delta)	0.92 [0.82, 0.96]	w = 0.323
ILR, mapped back	0.47 [0.35, 0.59]	w = 0.401
Method's own interval	0.97 [0.94, 0.99]	w = 0.231
Own interval, transcript fractions	0.96 [0.93, 0.98]	w = 0.231
Fisher information (Wald)	1 [0.98, 1]	w = 0.31
Godambe sandwich	1 [0.98, 1]	w = 0.284
Released code, as published	1 [0.98, 1]	w = 0.284

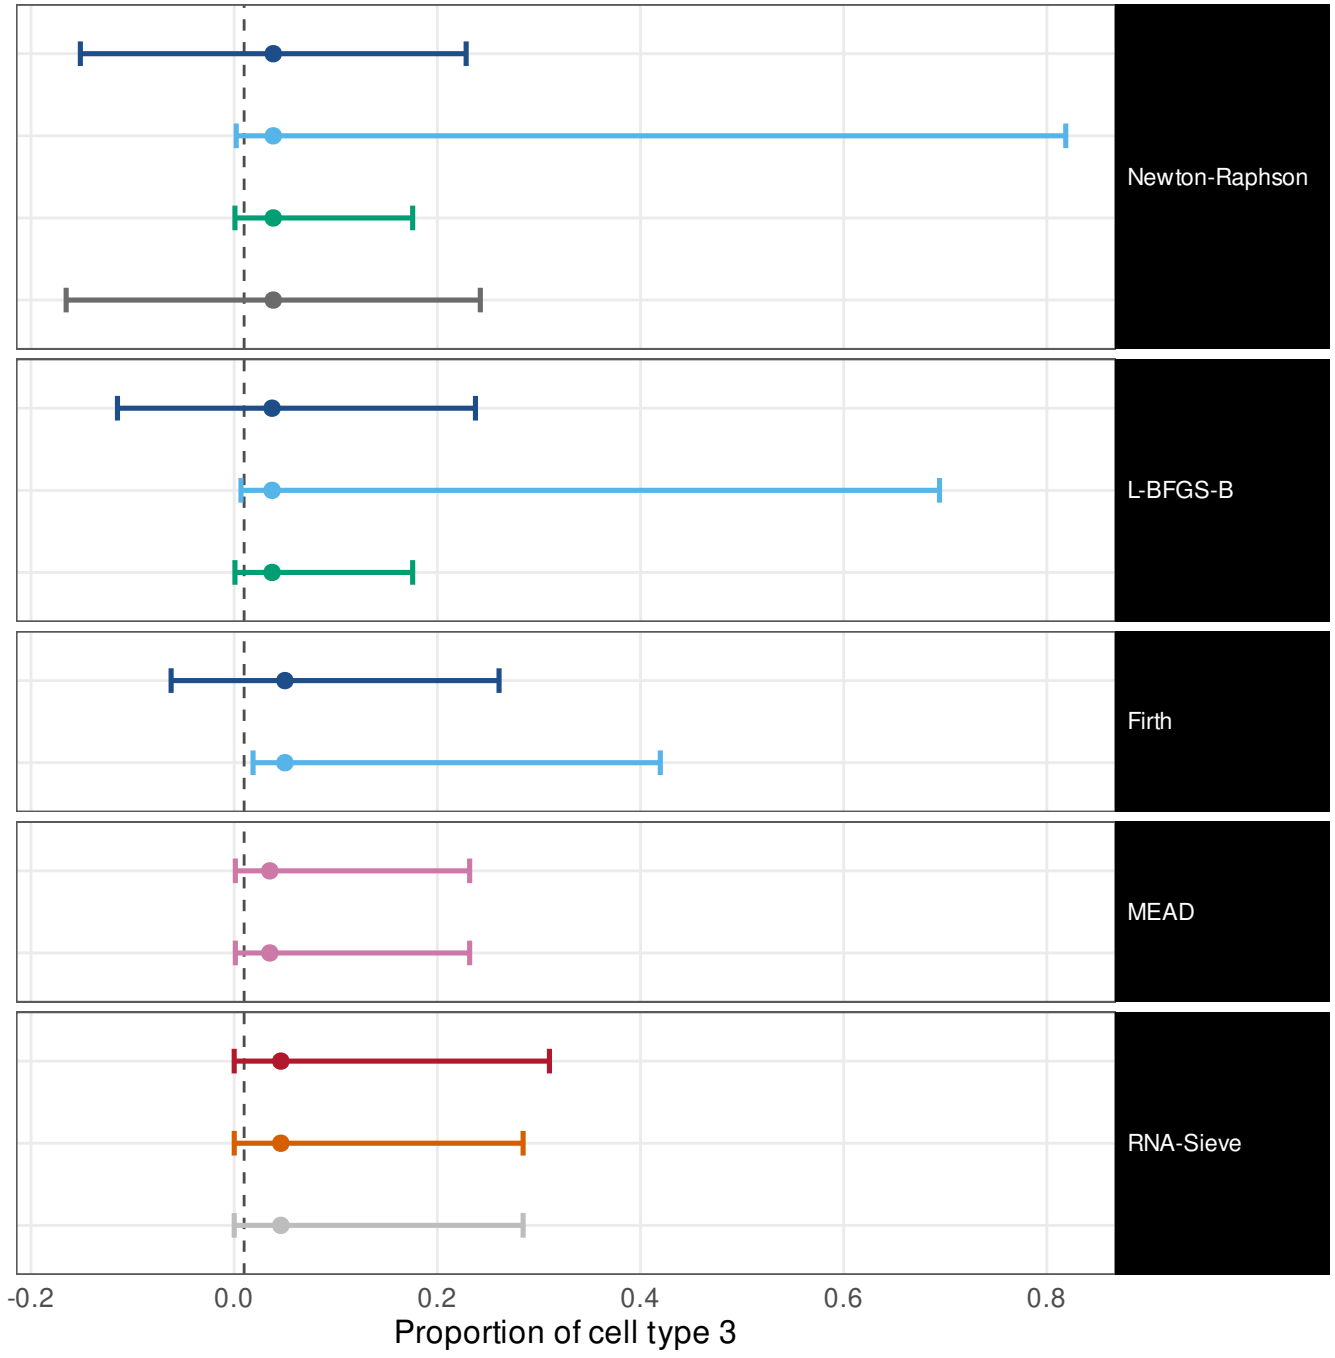


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.93 [0.89, 0.96]	w = 0.554
ILR, mapped back	0.64 [0.57, 0.7]	w = 0.937
Profile likelihood	0.92 [0.88, 0.95]	w = 0.353
Oracle (Fisher at p*)	0.94 [0.9, 0.97]	w = 0.561
Wald (delta)	0.72 [0.58, 0.83]	w = 0.539
ILR, mapped back	0.19 [0.1, 0.33]	w = 0.778
Profile likelihood	0.92 [0.88, 0.95]	w = 0.353
Wald (delta)	0.48 [0.34, 0.62]	w = 0.527
ILR, mapped back	0 [0, 0.077]	w = 0.567
Method's own interval	0.84 [0.78, 0.88]	w = 0.785
Own interval, transcript fractions	0.84 [0.78, 0.88]	w = 0.785
Fisher information (Wald)	0.96 [0.93, 0.98]	w = 0.853
Godambe sandwich	0.98 [0.96, 0.99]	w = 0.842
Released code, as published	0.98 [0.96, 0.99]	w = 0.842

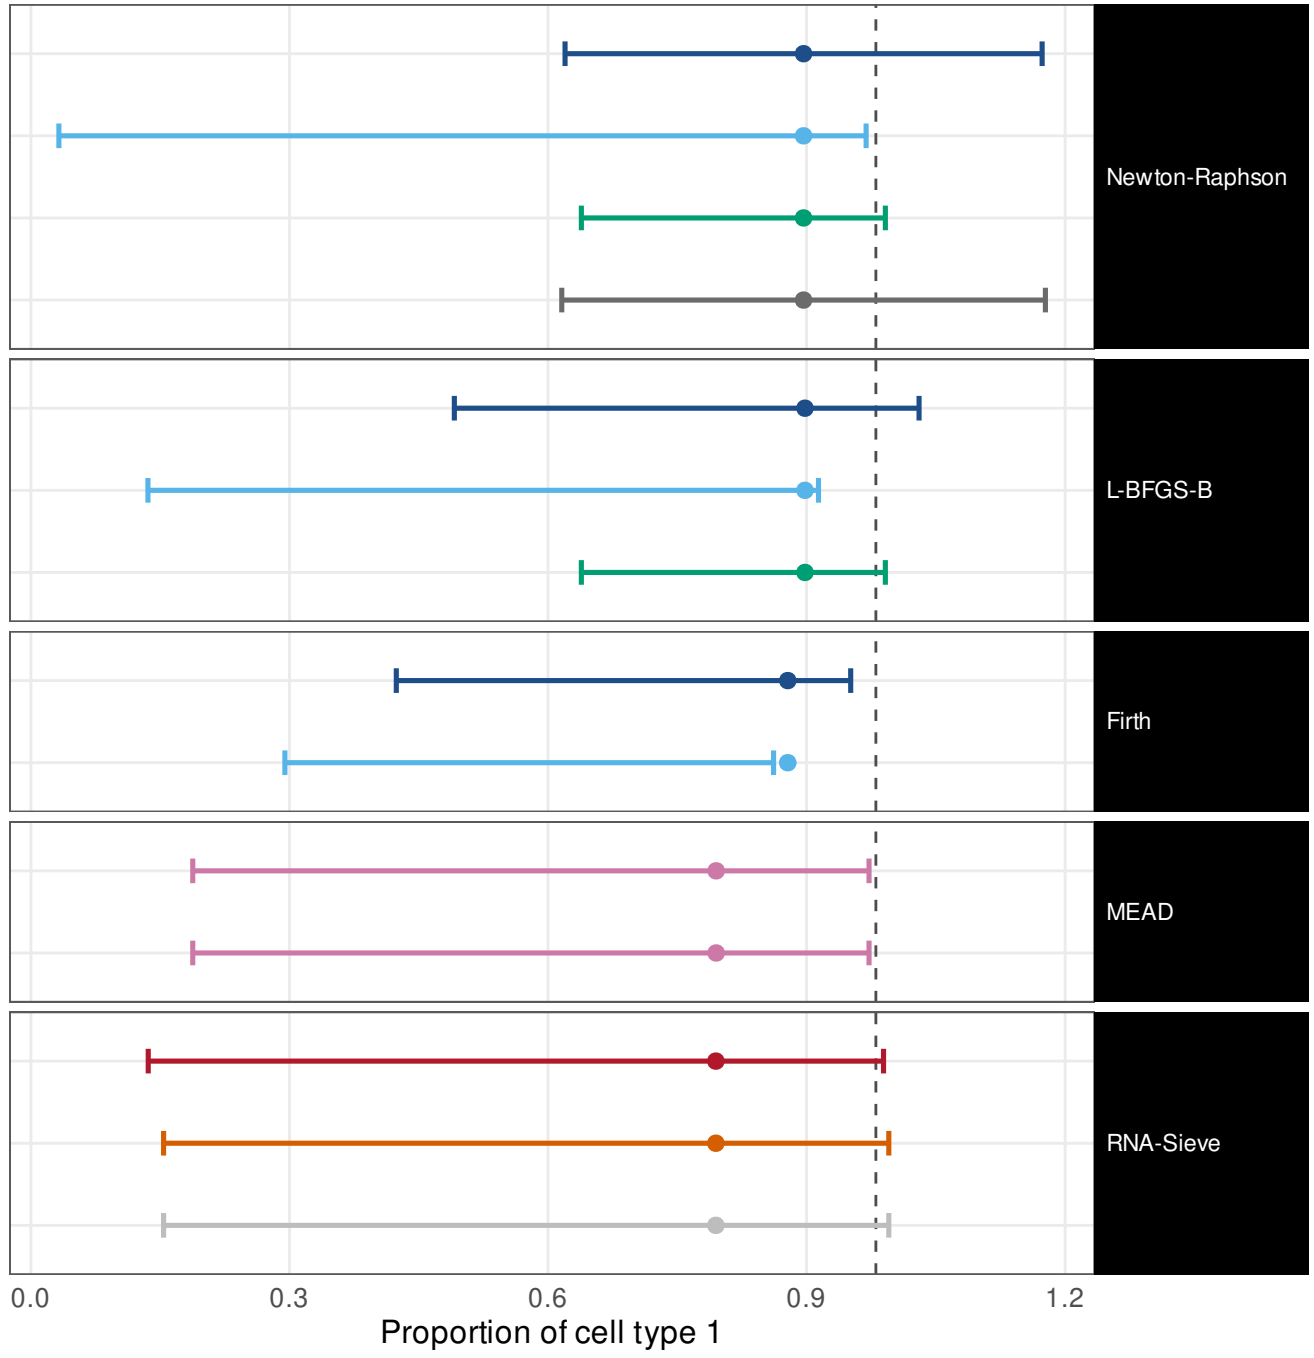


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.98 [0.96, 0.99]	w = 0.64
ILR, mapped back	0.93 [0.89, 0.96]	w = 0.891
Profile likelihood	0.98 [0.96, 0.99]	w = 0.332
Oracle (Fisher at p*)	0.99 [0.96, 1]	w = 0.662
Wald (delta)	0.94 [0.83, 0.98]	w = 0.602
ILR, mapped back	0.66 [0.52, 0.78]	w = 0.742
Profile likelihood	0.98 [0.96, 0.99]	w = 0.332
Wald (delta)	0.93 [0.82, 0.98]	w = 0.577
ILR, mapped back	0.28 [0.17, 0.43]	w = 0.592
Method's own interval	0.88 [0.83, 0.92]	w = 0.759
Own interval, transcript fractions	0.88 [0.83, 0.92]	w = 0.759
Fisher information (Wald)	0.96 [0.93, 0.98]	w = 0.829
Godambe sandwich	0.98 [0.95, 0.99]	w = 0.823
Released code, as published	0.98 [0.95, 0.99]	w = 0.823

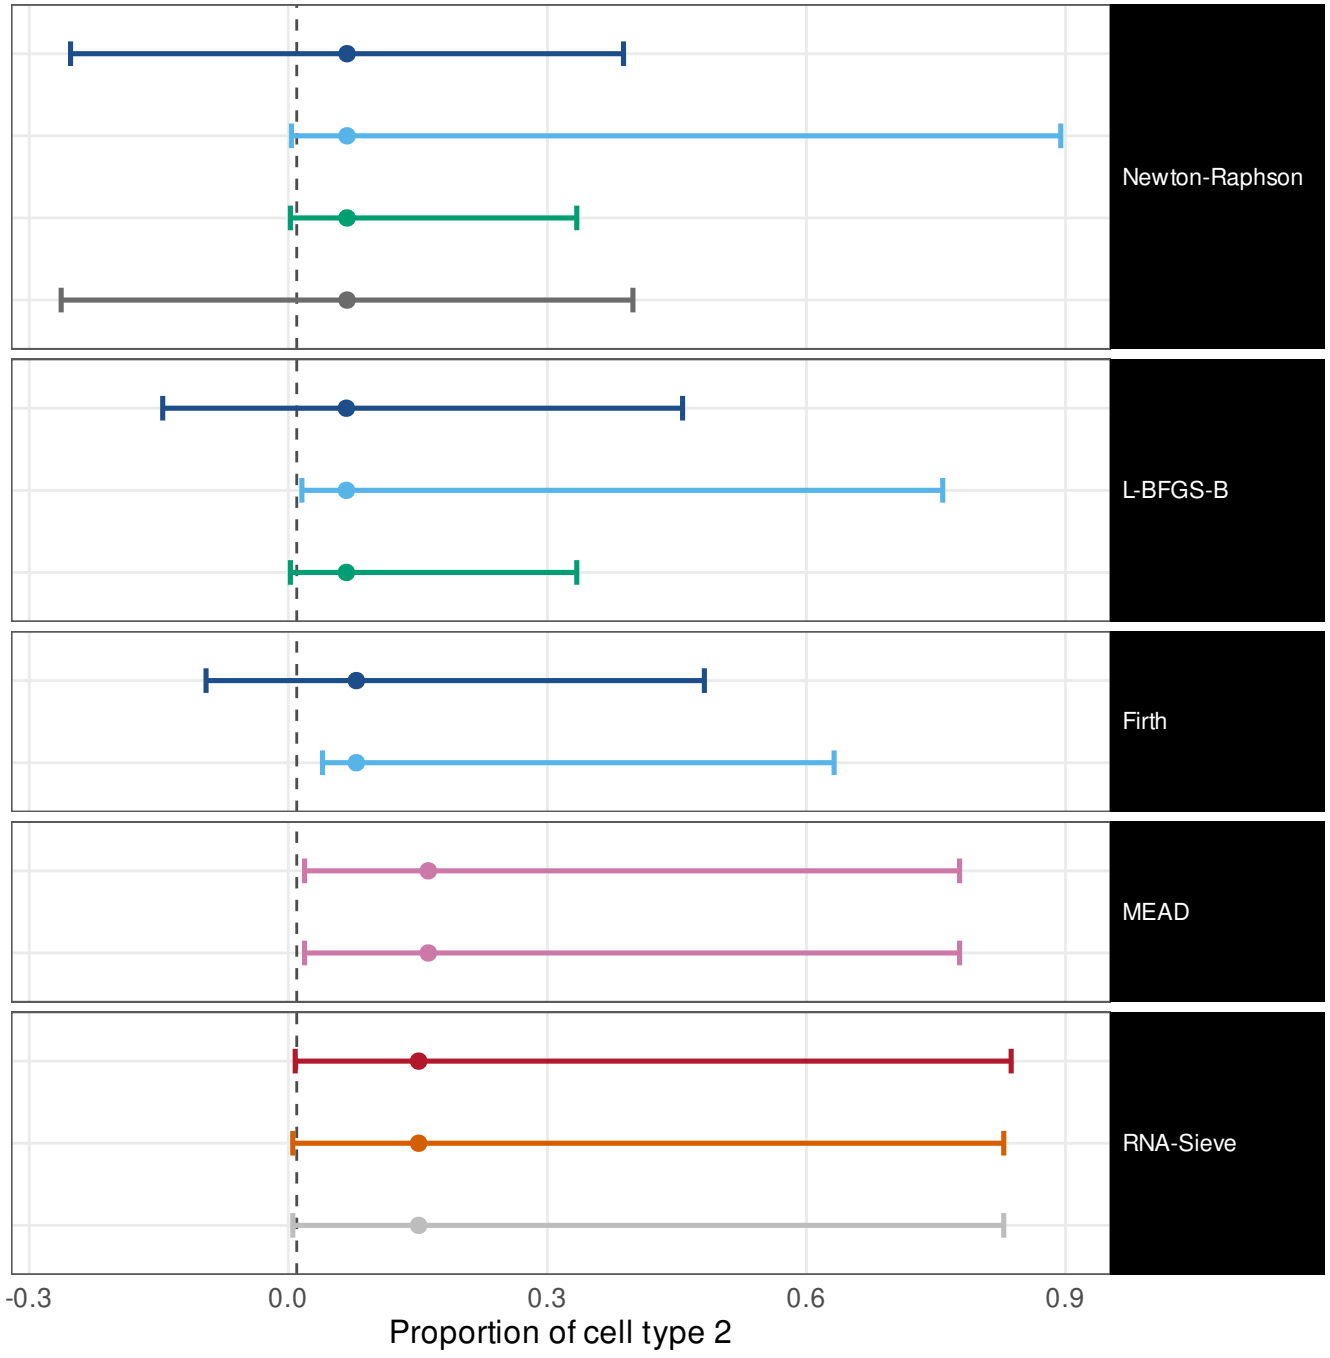


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96 [0.92, 0.98]	w = 0.39
ILR, mapped back	0.94 [0.89, 0.96]	w = 0.842
Profile likelihood	0.96 [0.92, 0.98]	w = 0.17
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 0.421
Wald (delta)	0.85 [0.72, 0.93]	w = 0.341
ILR, mapped back	0.72 [0.58, 0.83]	w = 0.605
Profile likelihood	0.96 [0.92, 0.98]	w = 0.17
Wald (delta)	0.76 [0.62, 0.86]	w = 0.311
ILR, mapped back	0.26 [0.16, 0.4]	w = 0.36
Method's own interval	0.88 [0.83, 0.92]	w = 0.345
Own interval, transcript fractions	0.87 [0.82, 0.91]	w = 0.345
Fisher information (Wald)	1 [0.98, 1]	w = 0.348
Godambe sandwich	1 [0.97, 1]	w = 0.322
Released code, as published	1 [0.97, 1]	w = 0.322

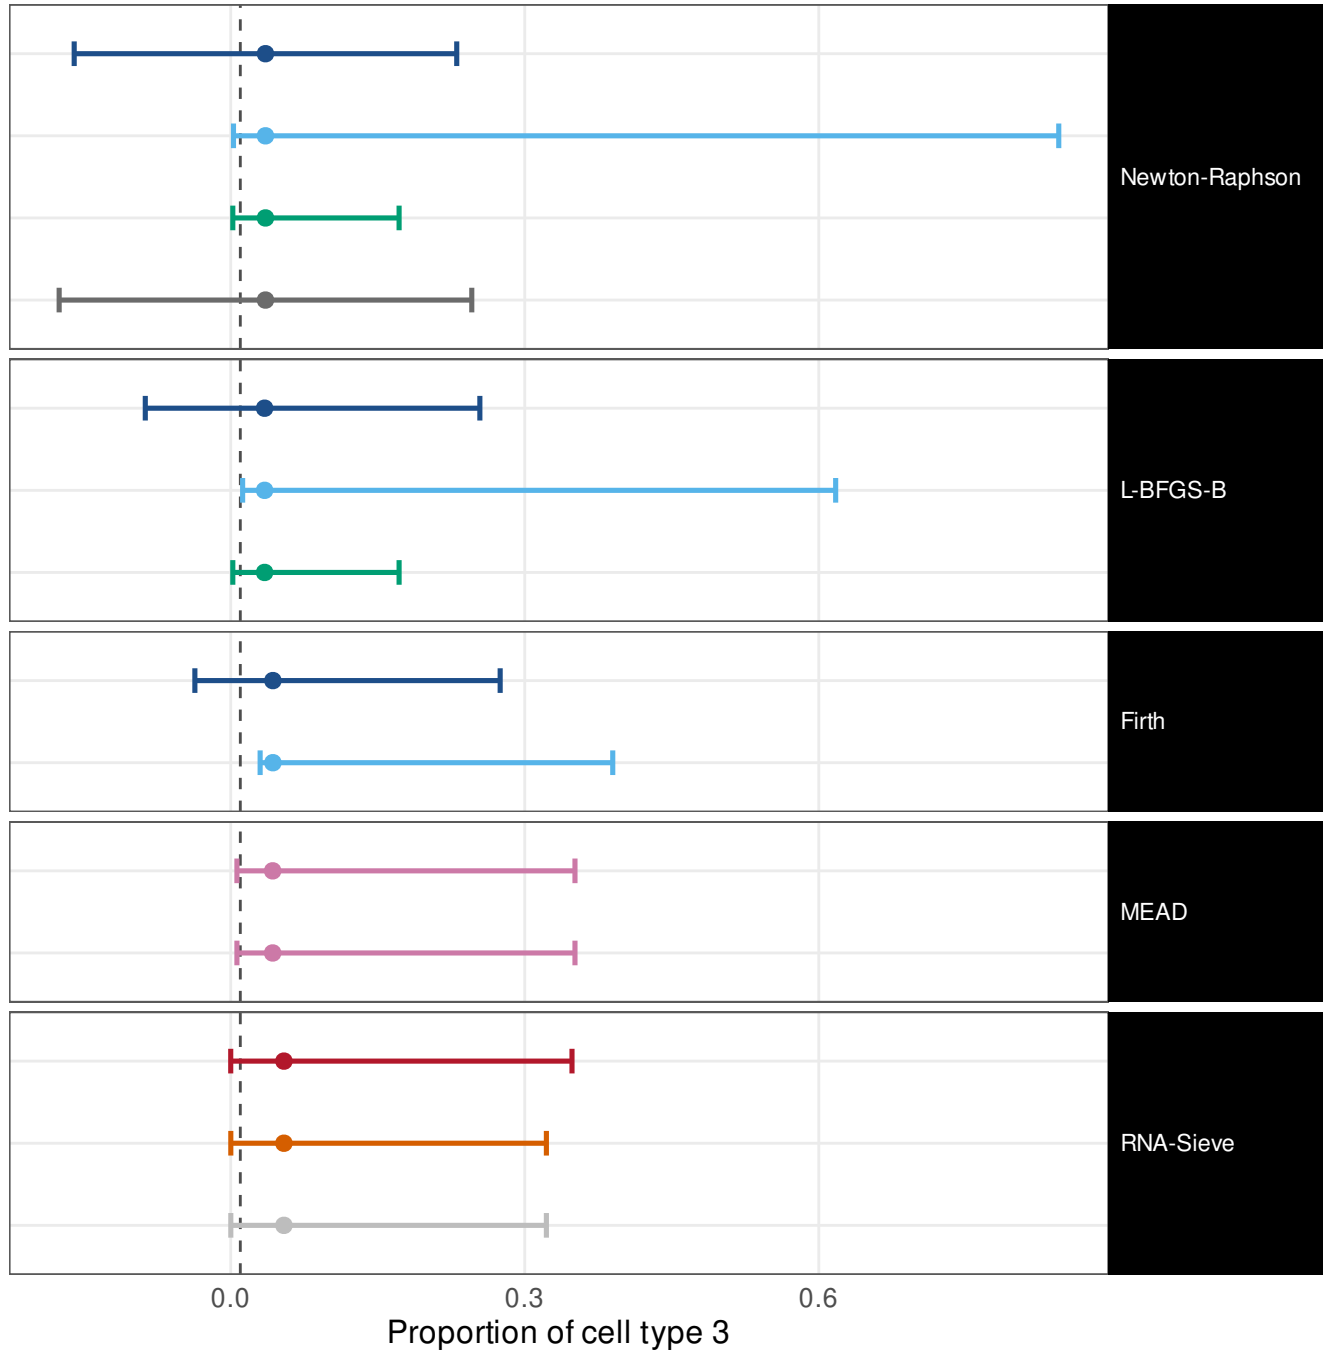


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.91 [0.87, 0.95]	w = 0.563
ILR, mapped back	0.57 [0.5, 0.64]	w = 0.925
Profile likelihood	0.93 [0.89, 0.96]	w = 0.386
Oracle (Fisher at p*)	0.9 [0.85, 0.93]	w = 0.558
Wald (delta)	0.78 [0.66, 0.87]	w = 0.569
ILR, mapped back	0.15 [0.076, 0.26]	w = 0.779
Profile likelihood	0.93 [0.89, 0.96]	w = 0.386
Wald (delta)	0.55 [0.42, 0.67]	w = 0.563
ILR, mapped back	0.052 [0.018, 0.14]	w = 0.612
Method's own interval	0.95 [0.91, 0.97]	w = 0.755
Own interval, transcript fractions	0.94 [0.9, 0.97]	w = 0.755
Fisher information (Wald)	0.96 [0.92, 0.98]	w = 0.821
Godambe sandwich	0.96 [0.92, 0.98]	w = 0.762
Released code, as published	0.96 [0.92, 0.98]	w = 0.762

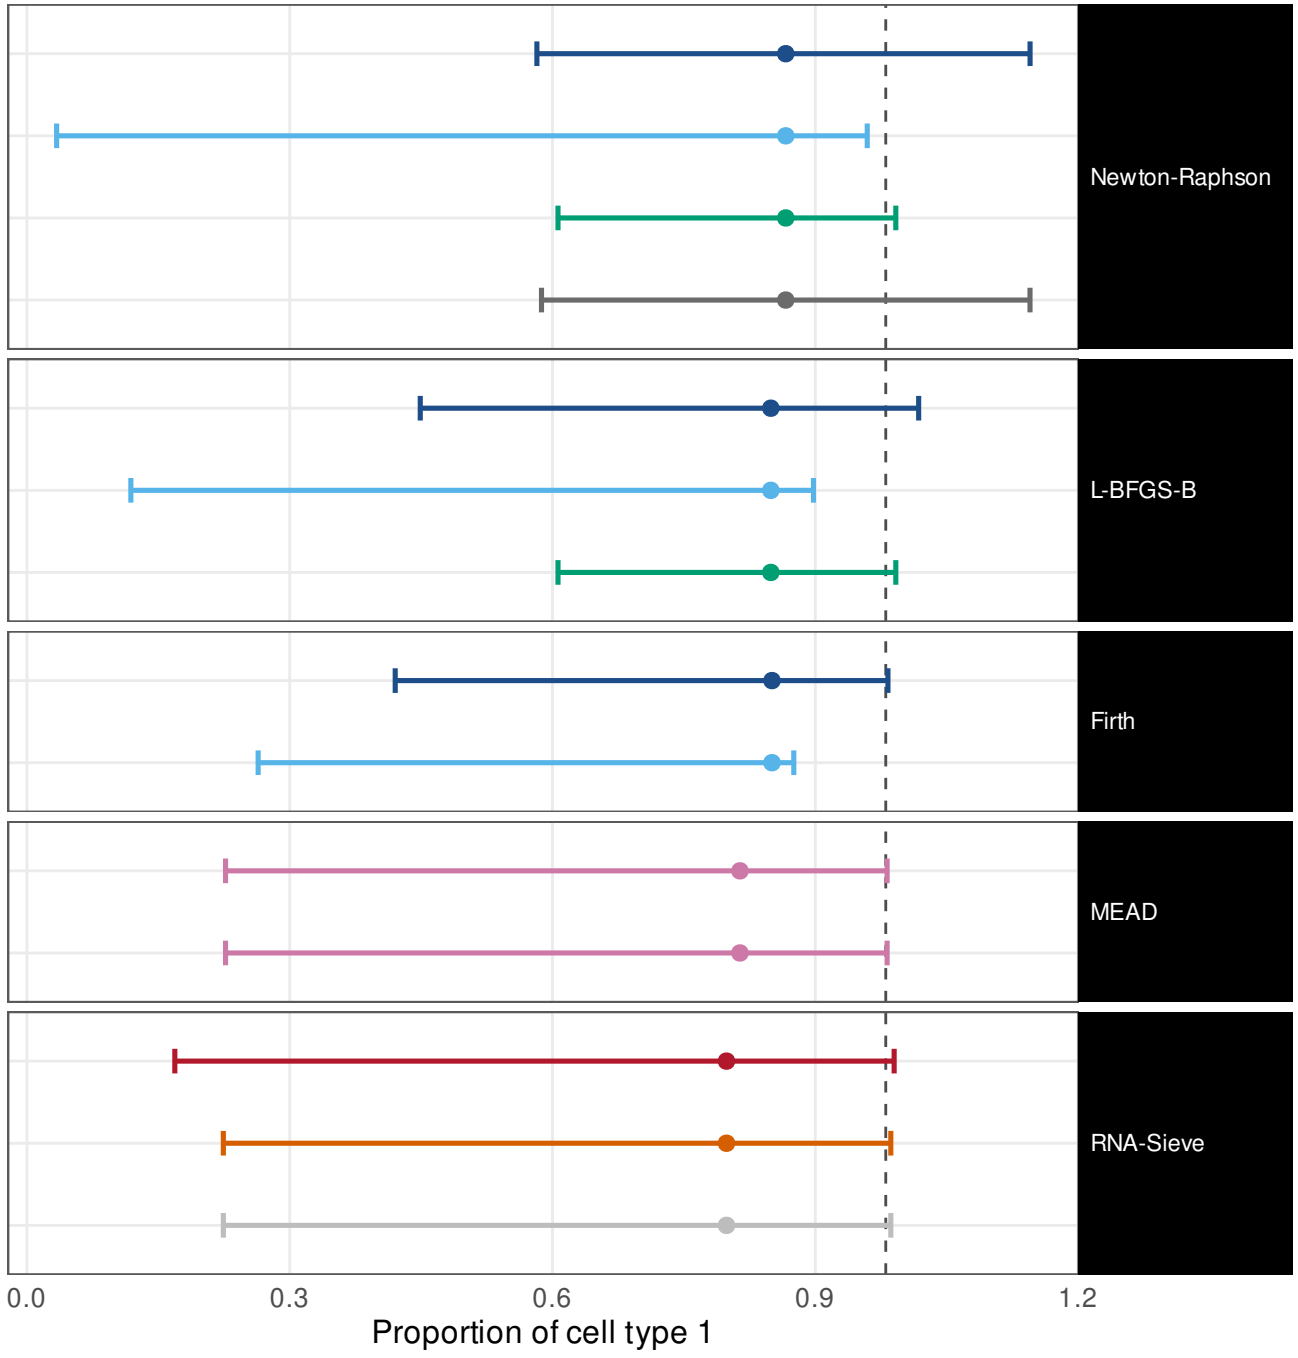


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.94 [0.9, 0.96]	w = 0.629
ILR, mapped back	0.92 [0.87, 0.95]	w = 0.894
Profile likelihood	0.98 [0.95, 0.99]	w = 0.358
Oracle (Fisher at p*)	0.94 [0.9, 0.97]	w = 0.646
Wald (delta)	0.87 [0.76, 0.94]	w = 0.616
ILR, mapped back	0.64 [0.5, 0.75]	w = 0.739
Profile likelihood	0.98 [0.95, 0.99]	w = 0.358
Wald (delta)	0.93 [0.84, 0.97]	w = 0.606
ILR, mapped back	0.24 [0.15, 0.37]	w = 0.631
Method's own interval	0.96 [0.92, 0.98]	w = 0.727
Own interval, transcript fractions	0.96 [0.92, 0.98]	w = 0.727
Fisher information (Wald)	0.98 [0.94, 0.99]	w = 0.796
Godambe sandwich	0.97 [0.94, 0.99]	w = 0.761
Released code, as published	0.97 [0.94, 0.99]	w = 0.761

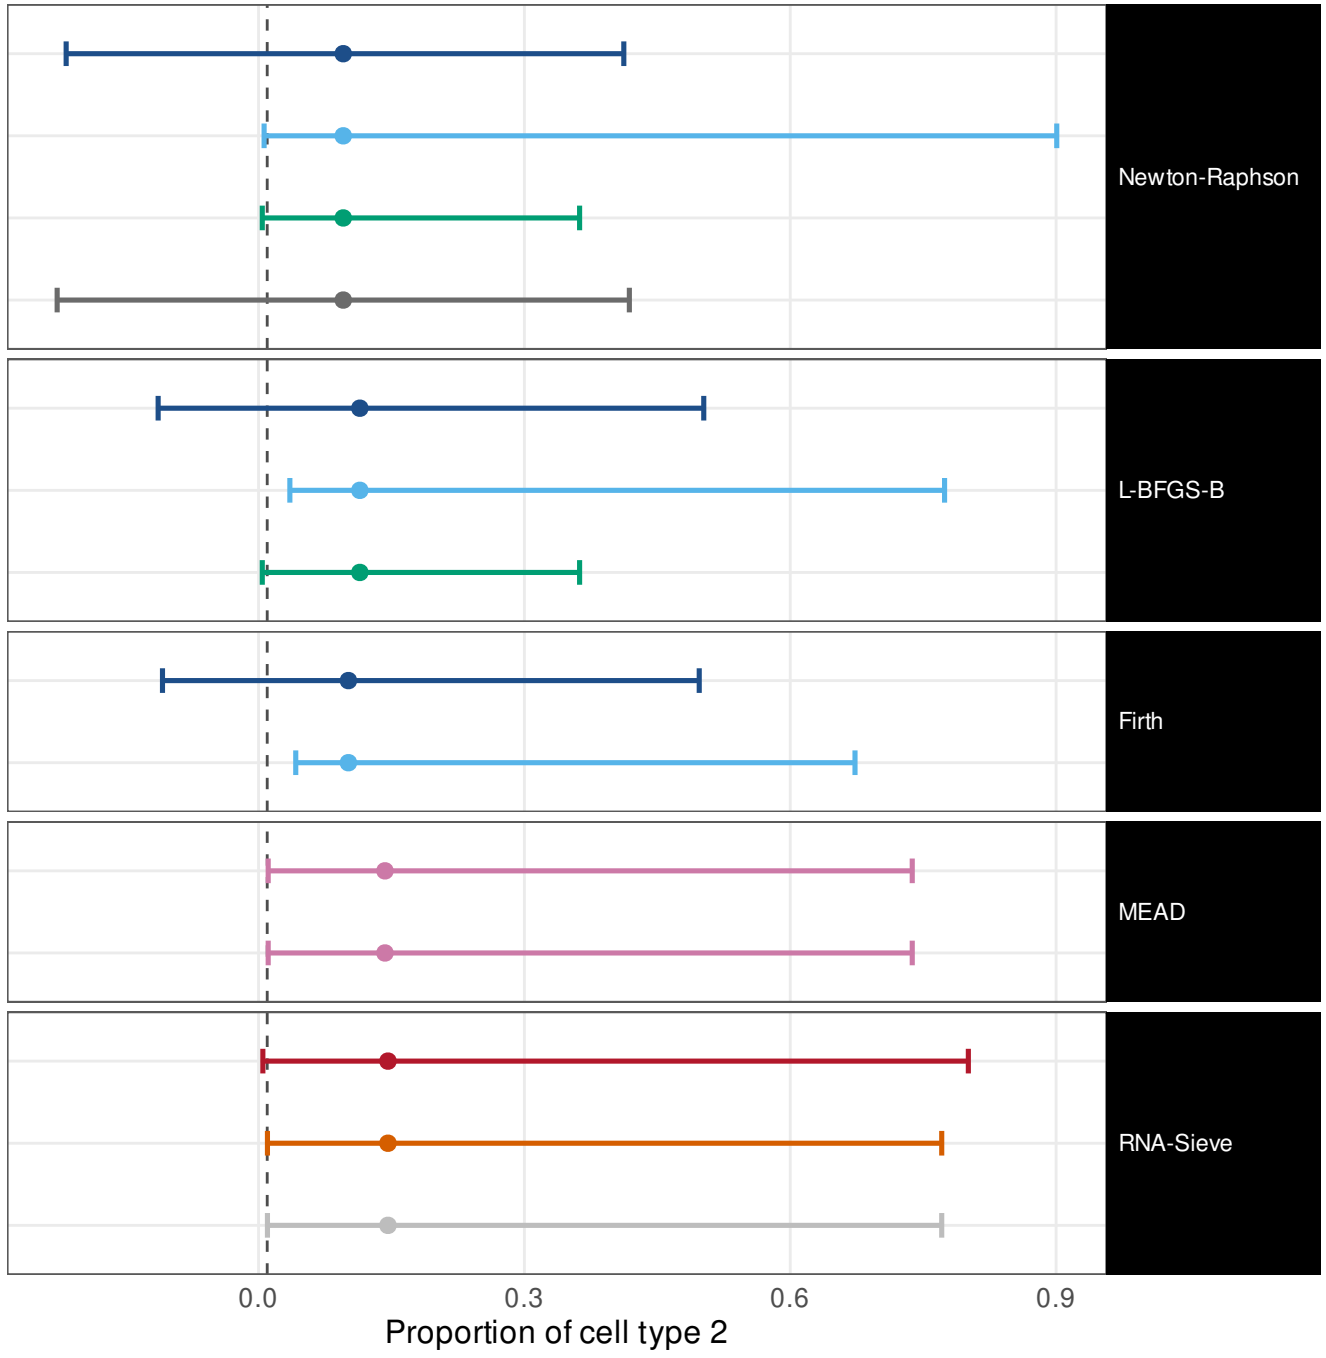


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.97 [0.93, 0.99]	w = 0.357
ILR, mapped back	0.94 [0.9, 0.96]	w = 0.794
Profile likelihood	0.98 [0.96, 0.99]	w = 0.167
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 0.38
Wald (delta)	0.93 [0.83, 0.97]	w = 0.322
ILR, mapped back	0.78 [0.66, 0.87]	w = 0.607
Profile likelihood	0.98 [0.96, 0.99]	w = 0.167
Wald (delta)	0.84 [0.73, 0.92]	w = 0.303
ILR, mapped back	0.34 [0.24, 0.47]	w = 0.384
Method's own interval	0.92 [0.88, 0.95]	w = 0.212
Own interval, transcript fractions	0.92 [0.87, 0.95]	w = 0.212
Fisher information (Wald)	1 [0.98, 1]	w = 0.347
Godambe sandwich	1 [0.98, 1]	w = 0.321
Released code, as published	1 [0.98, 1]	w = 0.321

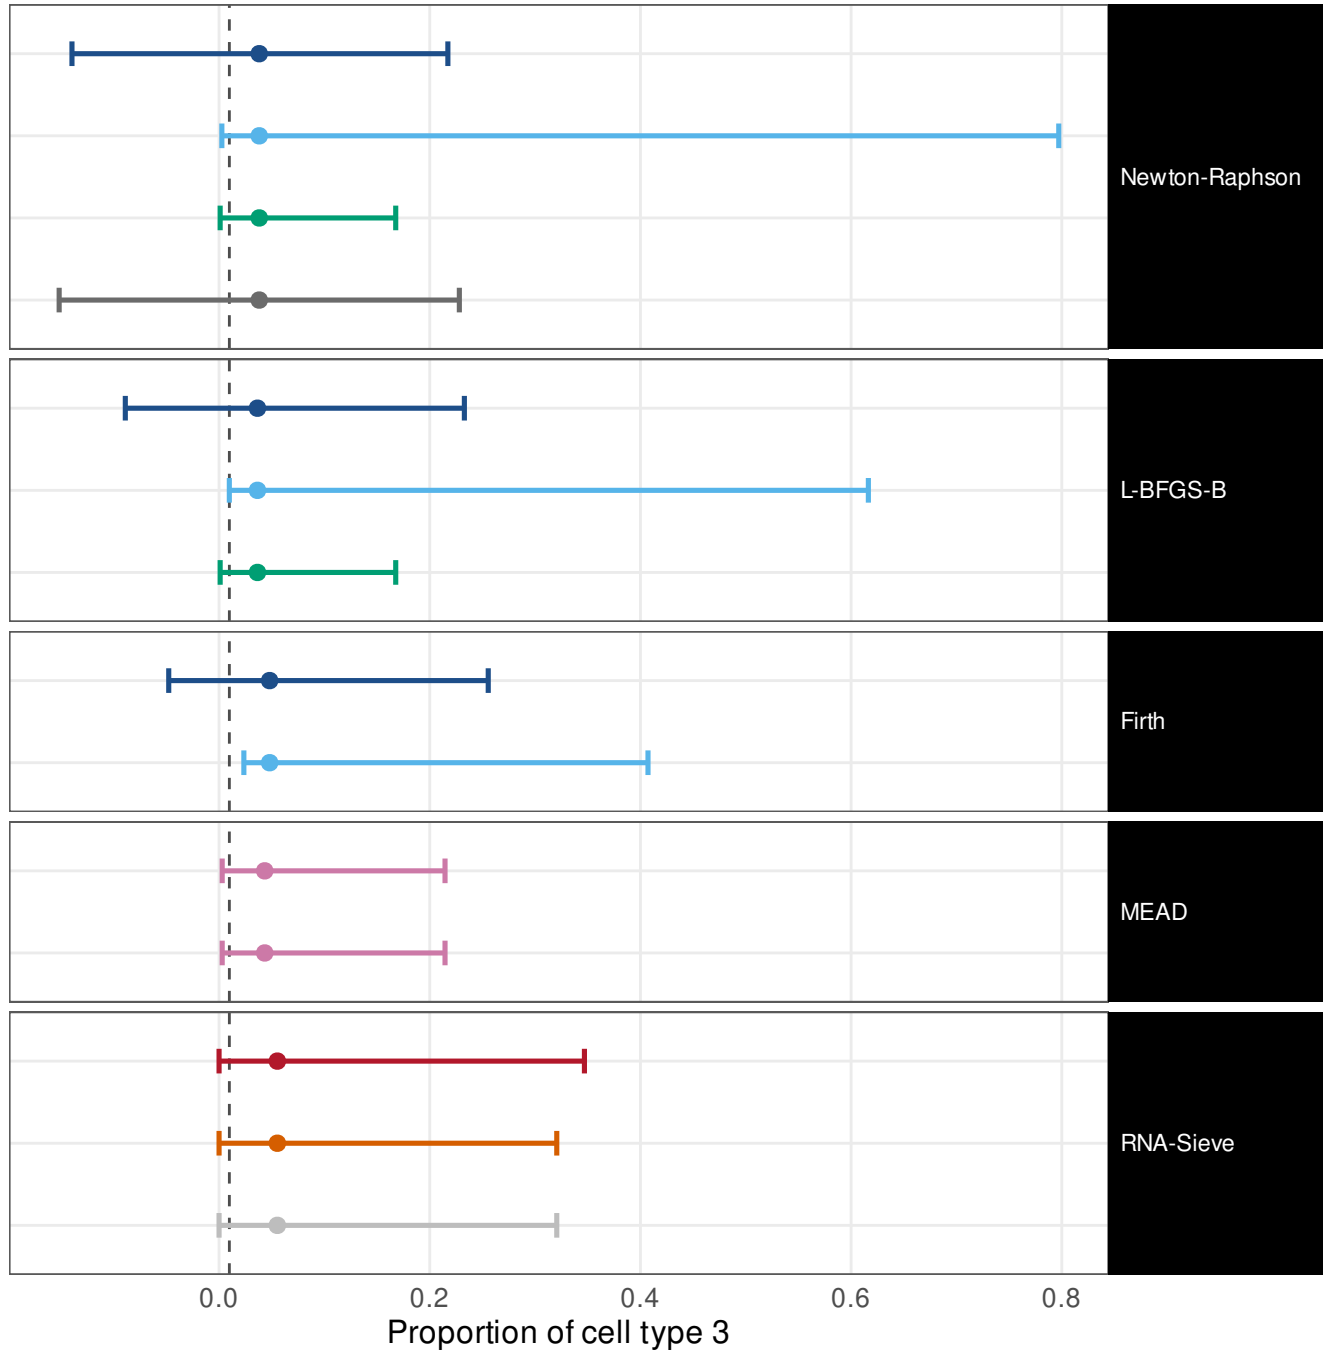


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.95 [0.91, 0.97]	w = 0.548
ILR, mapped back	0.54 [0.47, 0.61]	w = 0.933
Profile likelihood	0.95 [0.91, 0.97]	w = 0.37
Oracle (Fisher at p*)	0.96 [0.92, 0.98]	w = 0.554
Wald (delta)	0.87 [0.76, 0.94]	w = 0.537
ILR, mapped back	0.24 [0.15, 0.37]	w = 0.826
Profile likelihood	0.95 [0.91, 0.97]	w = 0.37
Wald (delta)	0.59 [0.46, 0.71]	w = 0.525
ILR, mapped back	0.018 [0.0032, 0.094]	w = 0.603
Method's own interval	0.96 [0.92, 0.98]	w = 0.793
Own interval, transcript fractions	0.95 [0.91, 0.97]	w = 0.793
Fisher information (Wald)	0.98 [0.95, 0.99]	w = 0.843
Godambe sandwich	1 [0.97, 1]	w = 0.873
Released code, as published	1 [0.97, 1]	w = 0.873

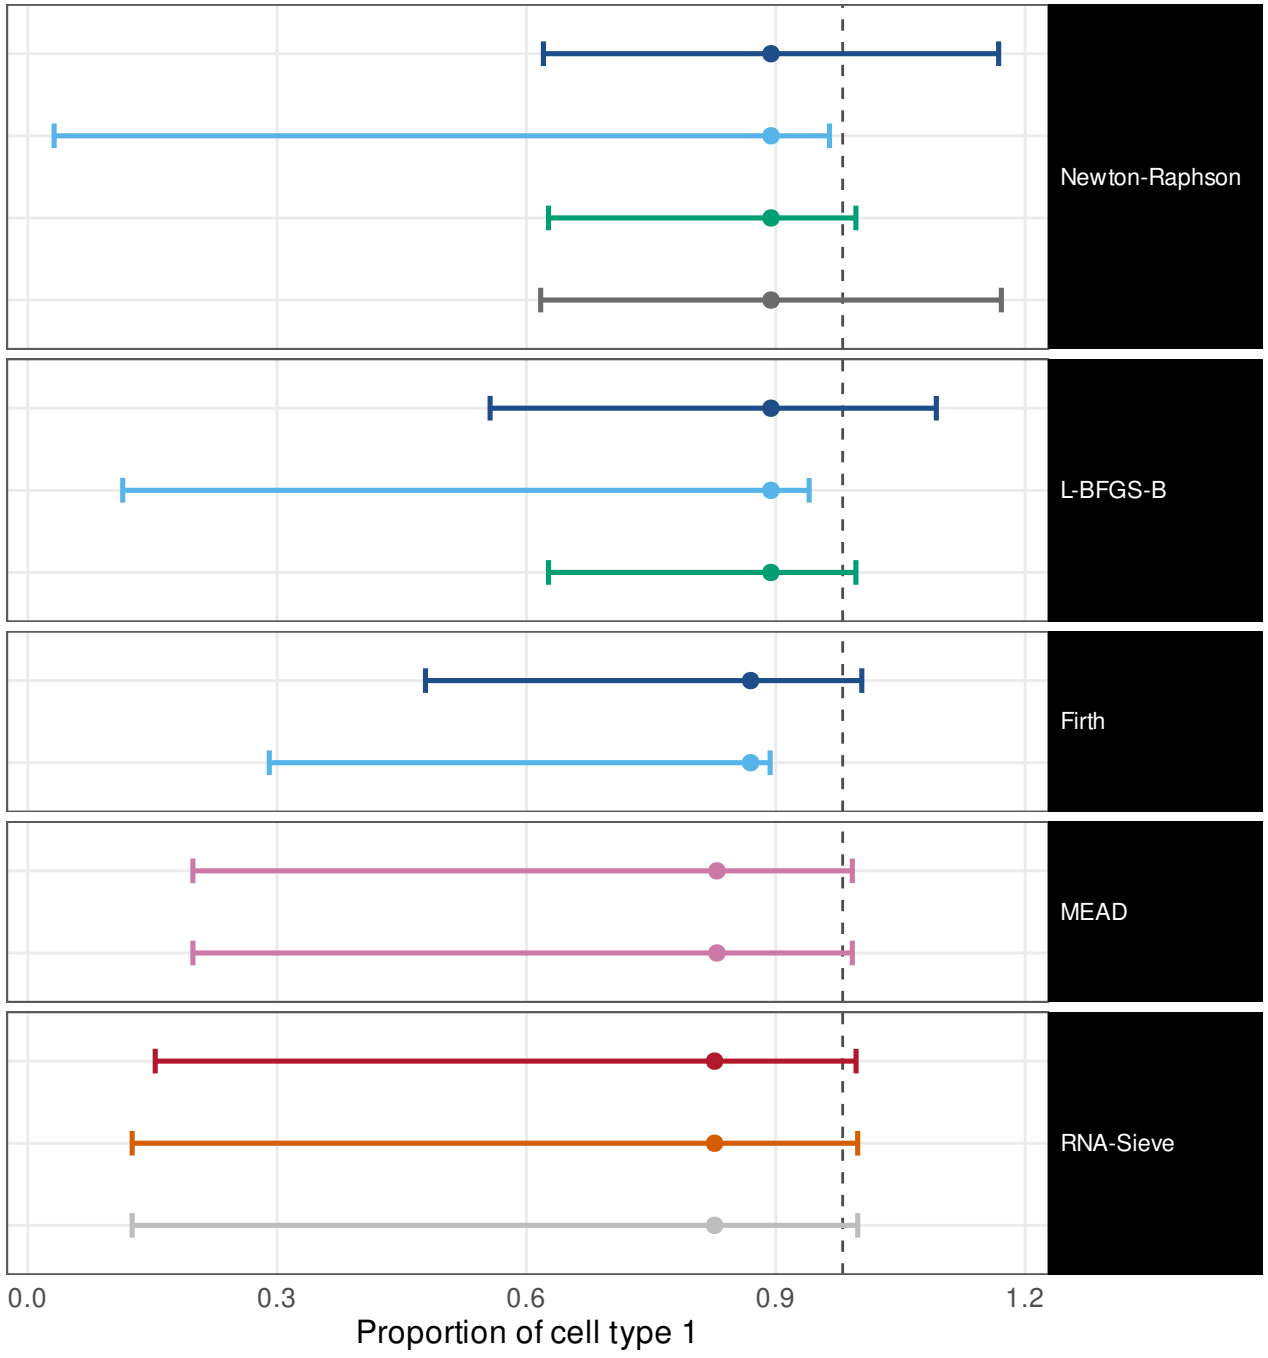


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.98 [0.96, 0.99]	w = 0.652
ILR, mapped back	0.93 [0.89, 0.96]	w = 0.886
Profile likelihood	0.98 [0.96, 0.99]	w = 0.347
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 0.672
Wald (delta)	0.98 [0.9, 1]	w = 0.63
ILR, mapped back	0.72 [0.59, 0.82]	w = 0.803
Profile likelihood	0.98 [0.96, 0.99]	w = 0.347
Wald (delta)	0.98 [0.91, 1]	w = 0.605
ILR, mapped back	0.32 [0.21, 0.45]	w = 0.639
Method's own interval	0.94 [0.9, 0.97]	w = 0.766
Own interval, transcript fractions	0.94 [0.9, 0.97]	w = 0.766
Fisher information (Wald)	0.98 [0.96, 0.99]	w = 0.849
Godambe sandwich	0.99 [0.96, 1]	w = 0.865
Released code, as published	0.99 [0.96, 1]	w = 0.865

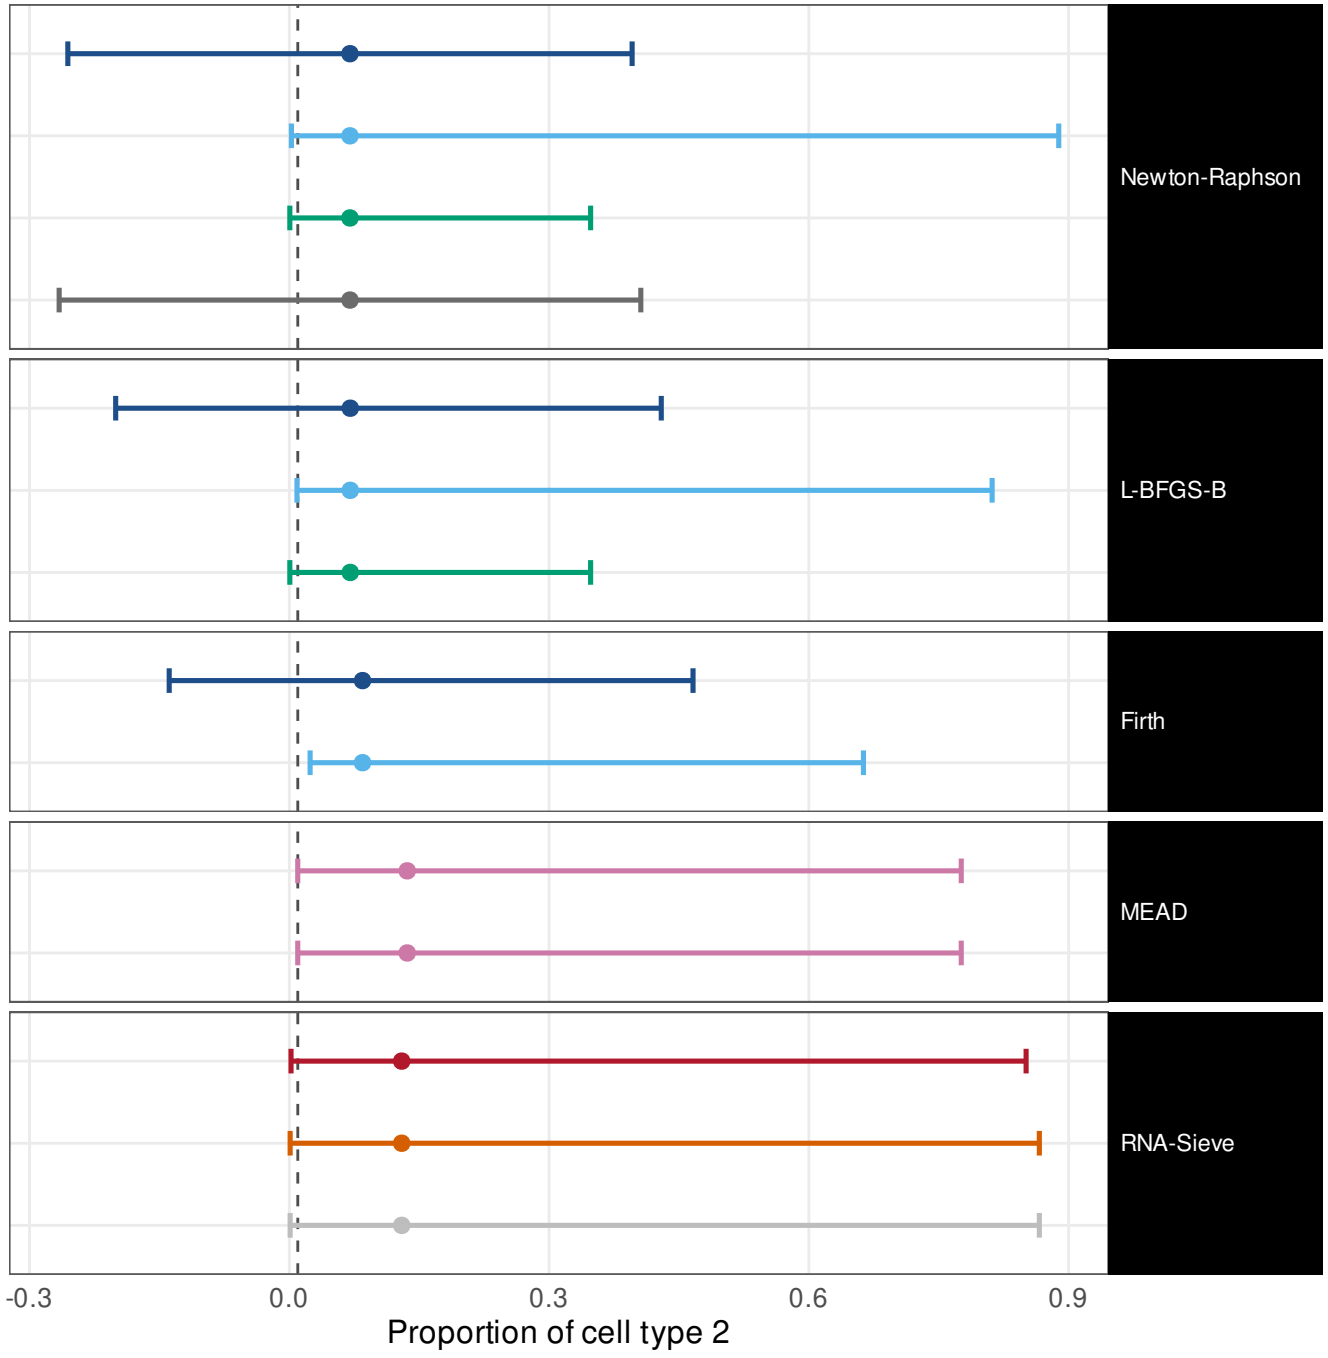


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.98 [0.94, 0.99]	w = 0.378
ILR, mapped back	0.98 [0.95, 0.99]	w = 0.824
Profile likelihood	0.98 [0.95, 0.99]	w = 0.171
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.41
Wald (delta)	0.98 [0.9, 1]	w = 0.351
ILR, mapped back	0.94 [0.85, 0.98]	w = 0.659
Profile likelihood	0.98 [0.95, 0.99]	w = 0.171
Wald (delta)	0.95 [0.85, 0.98]	w = 0.322
ILR, mapped back	0.41 [0.29, 0.54]	w = 0.398
Method's own interval	0.93 [0.89, 0.96]	w = 0.277
Own interval, transcript fractions	0.92 [0.87, 0.95]	w = 0.277
Fisher information (Wald)	1 [0.98, 1]	w = 0.334
Godambe sandwich	1 [0.98, 1]	w = 0.315
Released code, as published	1 [0.98, 1]	w = 0.315

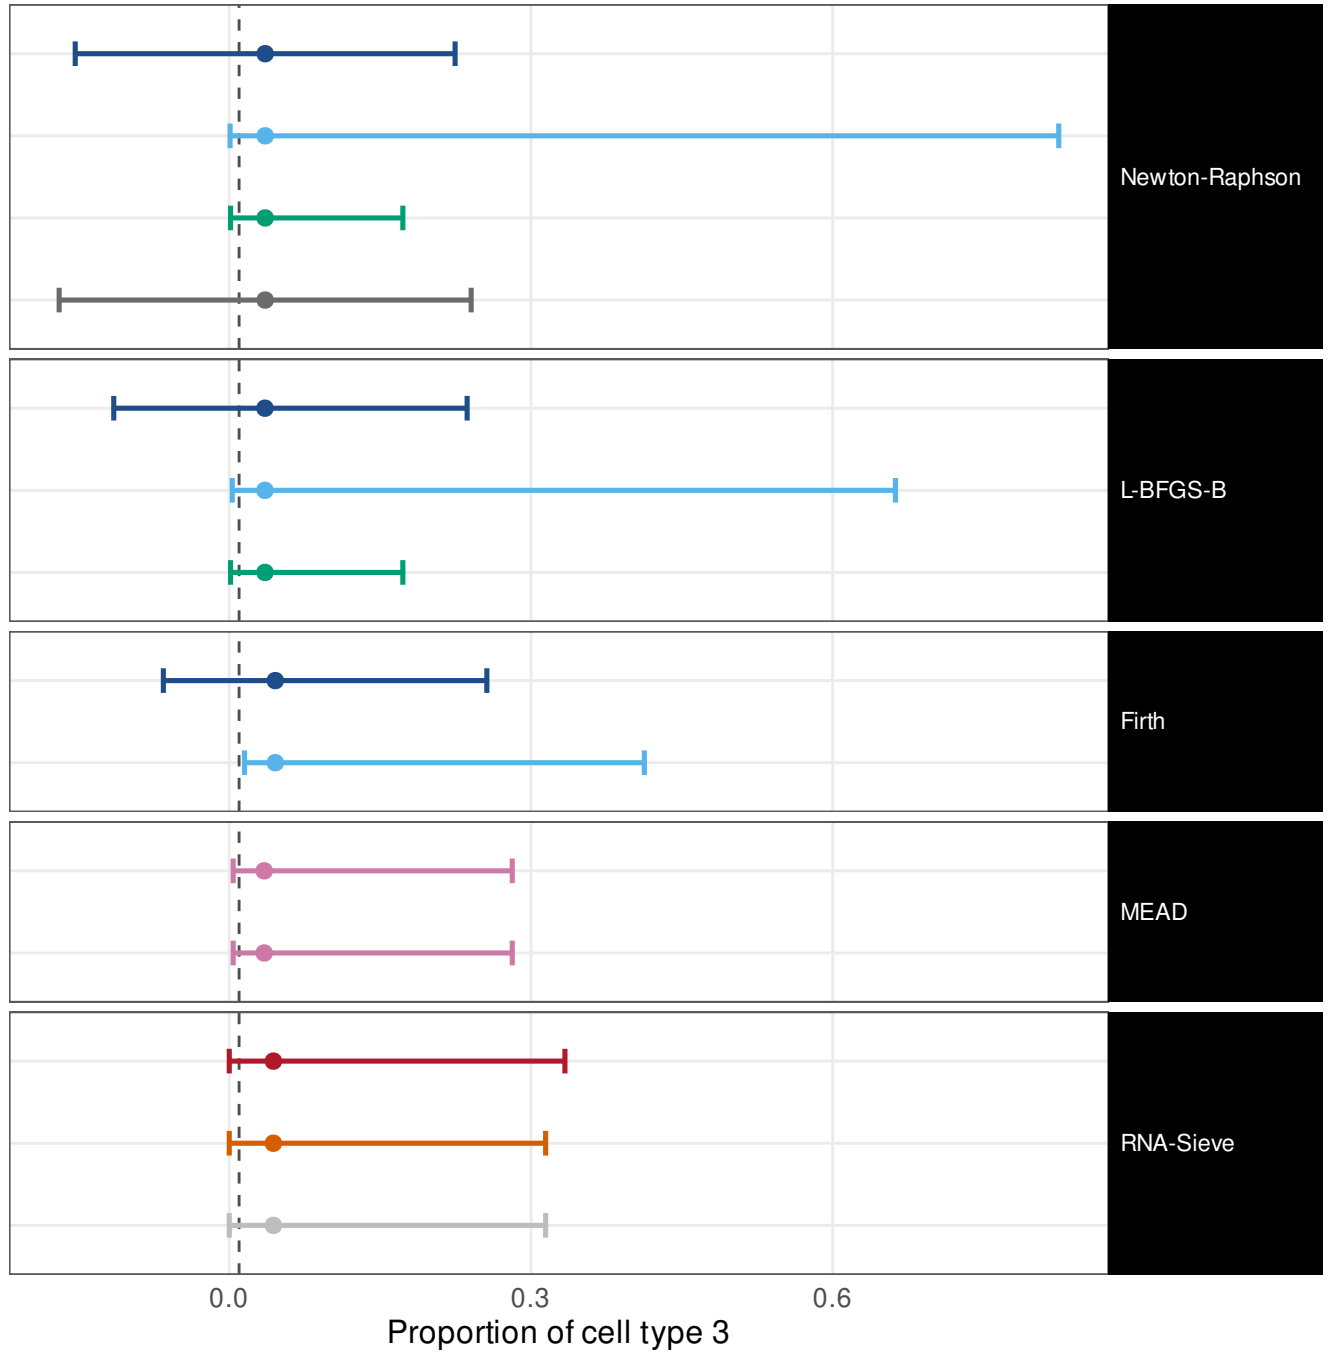

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free


```
Wald (delta)                          0.75 [0.69,   0.8]    w = 0.673
ILR, mapped back                      0.57 [ 0.5, 0.64]     w = 0.933
Profile likelihood                   0.86 [0.81,   0.9]     w = 0.592
Oracle (Fisher at p*)                 0.72 [0.66, 0.78]     w = 0.593

Wald (delta)                          0.64 [0.51, 0.76]     w = 0.656
ILR, mapped back                      0.11 [0.053, 0.23]     w = 0.84
Profile likelihood                   0.86 [0.81,   0.9]     w = 0.592

Wald (delta)                          0.34 [0.23, 0.47]     w = 0.643
ILR, mapped back                      0.019 [0.0033, 0.099]    w =  0.7

Method's own interval                    1 [0.98,     1]    w = 0.998
Own interval, transcript fractions       1 [0.98,     1]    w = 0.998

Fisher information (Wald)             0.98 [0.96, 0.99]     w = 0.986
Godambe sandwich                      0.94 [0.89, 0.96]     w = 0.909
Released code, as published           0.94 [0.89, 0.96]     w = 0.909
```

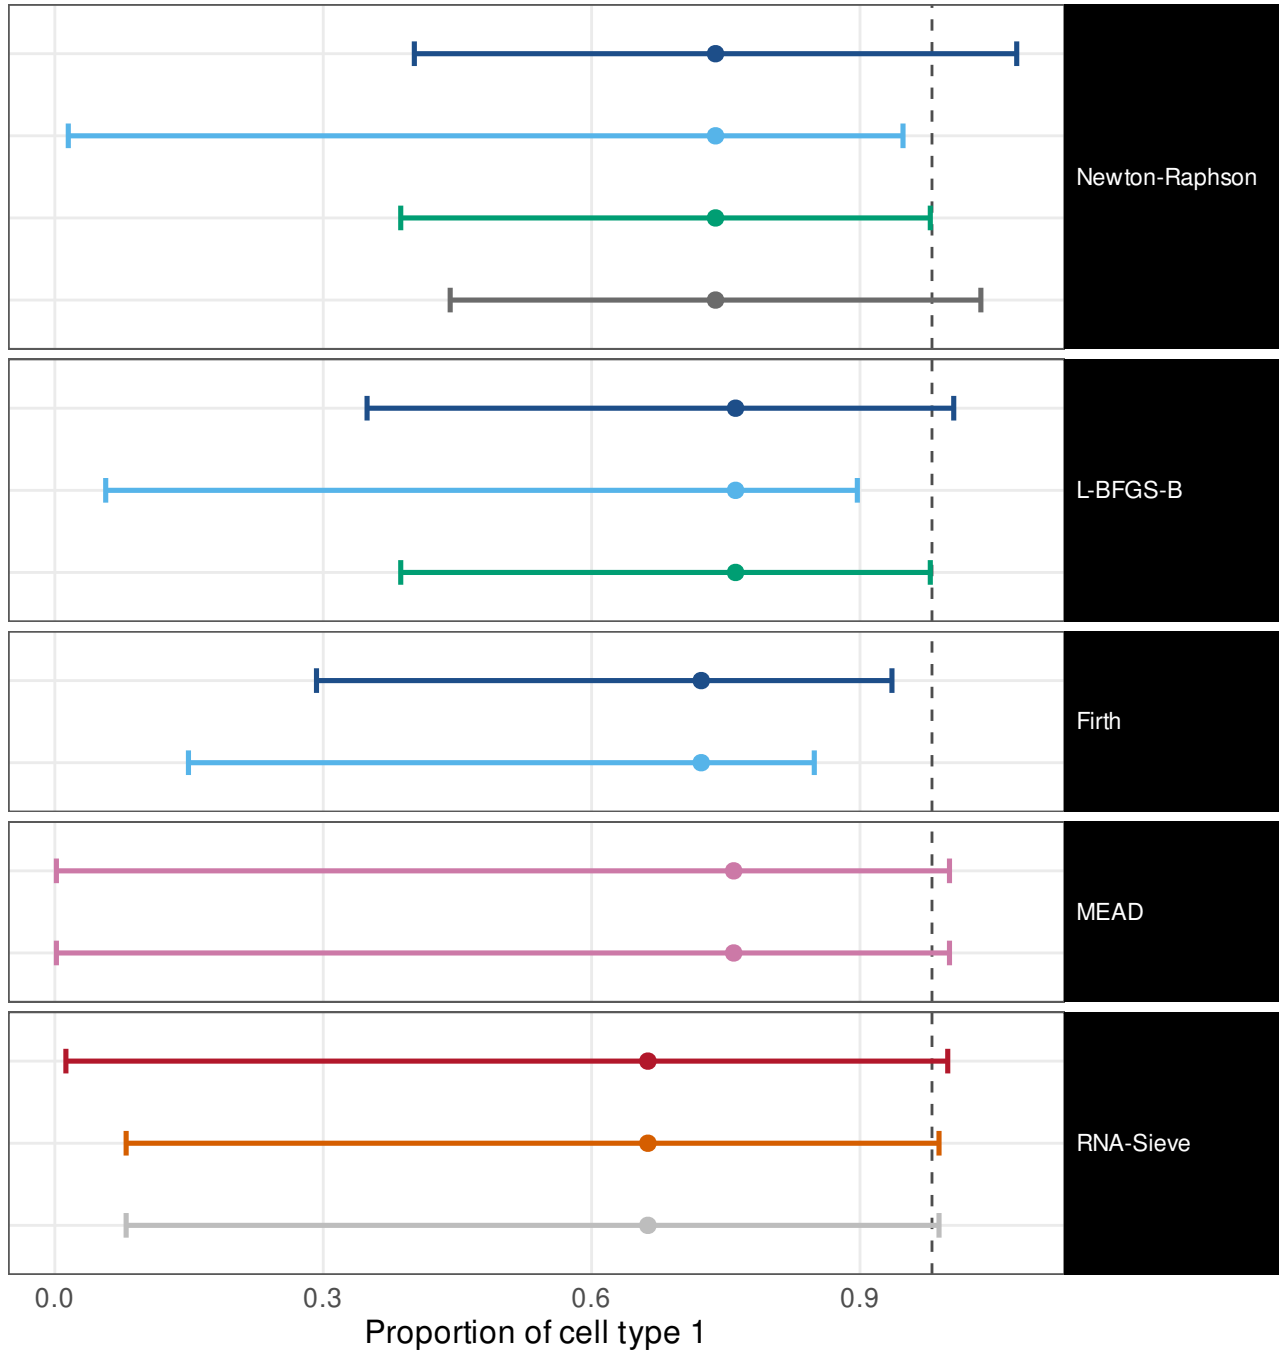


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.82 [0.77, 0.87]	w = 0.875
ILR, mapped back	0.94 [0.89, 0.96]	w = 0.942
Profile likelihood	0.96 [0.92, 0.98]	w = 0.558
Oracle (Fisher at p*)	0.84 [0.78, 0.88]	w = 0.985
Wald (delta)	0.87 [0.75, 0.93]	w = 0.822
ILR, mapped back	0.75 [0.62, 0.85]	w = 0.863
Profile likelihood	0.96 [0.92, 0.98]	w = 0.558
Wald (delta)	0.89 [0.77, 0.95]	w = 0.781
ILR, mapped back	0.45 [0.33, 0.59]	w = 0.749
Method's own interval	1 [0.98, 1]	w = 0.997
Own interval, transcript fractions	1 [0.98, 1]	w = 0.997
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.981
Godambe sandwich	0.96 [0.92, 0.98]	w = 0.887
Released code, as published	0.96 [0.92, 0.98]	w = 0.887

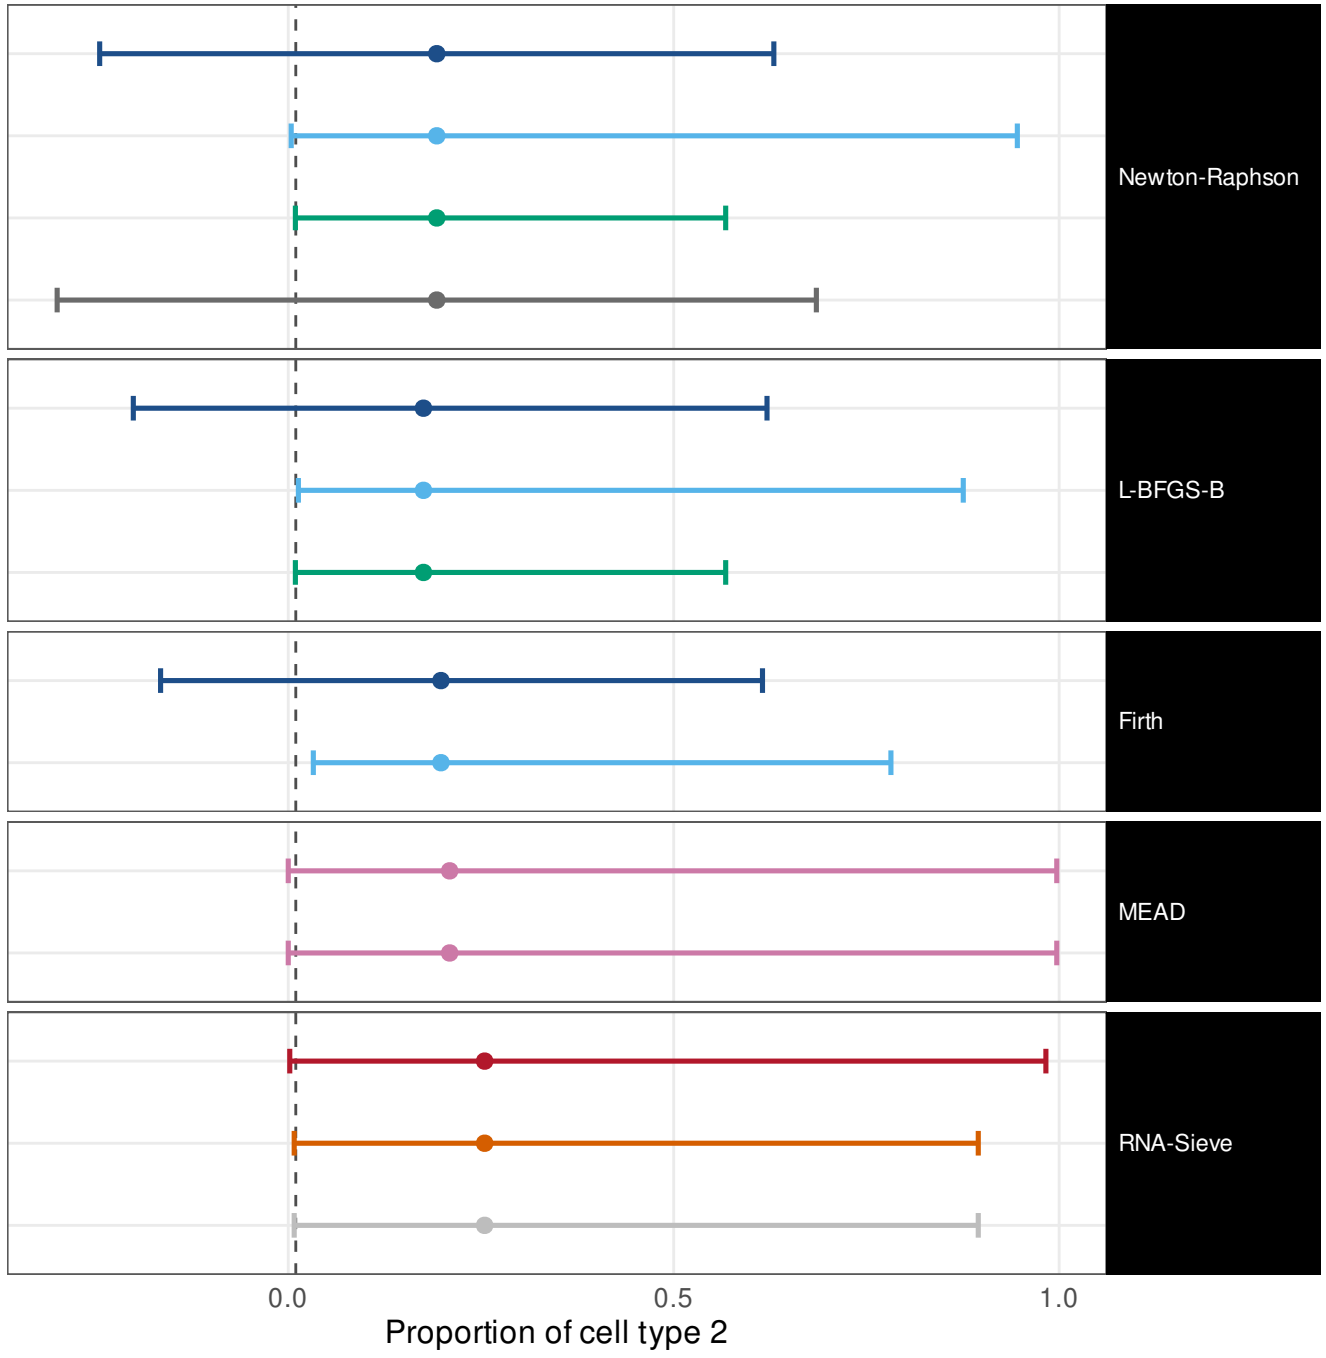


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.94 [0.9, 0.97]	w = 0.723
ILR, mapped back	0.96 [0.92, 0.98]	w = 0.904
Profile likelihood	0.96 [0.92, 0.98]	w = 0.288
Oracle (Fisher at p*)	0.98 [0.95, 0.99]	w = 0.816
Wald (delta)	0.91 [0.8, 0.96]	w = 0.624
ILR, mapped back	0.83 [0.71, 0.91]	w = 0.79
Profile likelihood	0.96 [0.92, 0.98]	w = 0.288
Wald (delta)	0.89 [0.77, 0.95]	w = 0.577
ILR, mapped back	0.45 [0.33, 0.59]	w = 0.609
Method's own interval	1 [0.97, 1]	w = 0.414
Own interval, transcript fractions	1 [0.97, 1]	w = 0.414
Fisher information (Wald)	1 [0.97, 1]	w = 0.595
Godambe sandwich	1 [0.97, 1]	w = 0.45
Released code, as published	1 [0.97, 1]	w = 0.45

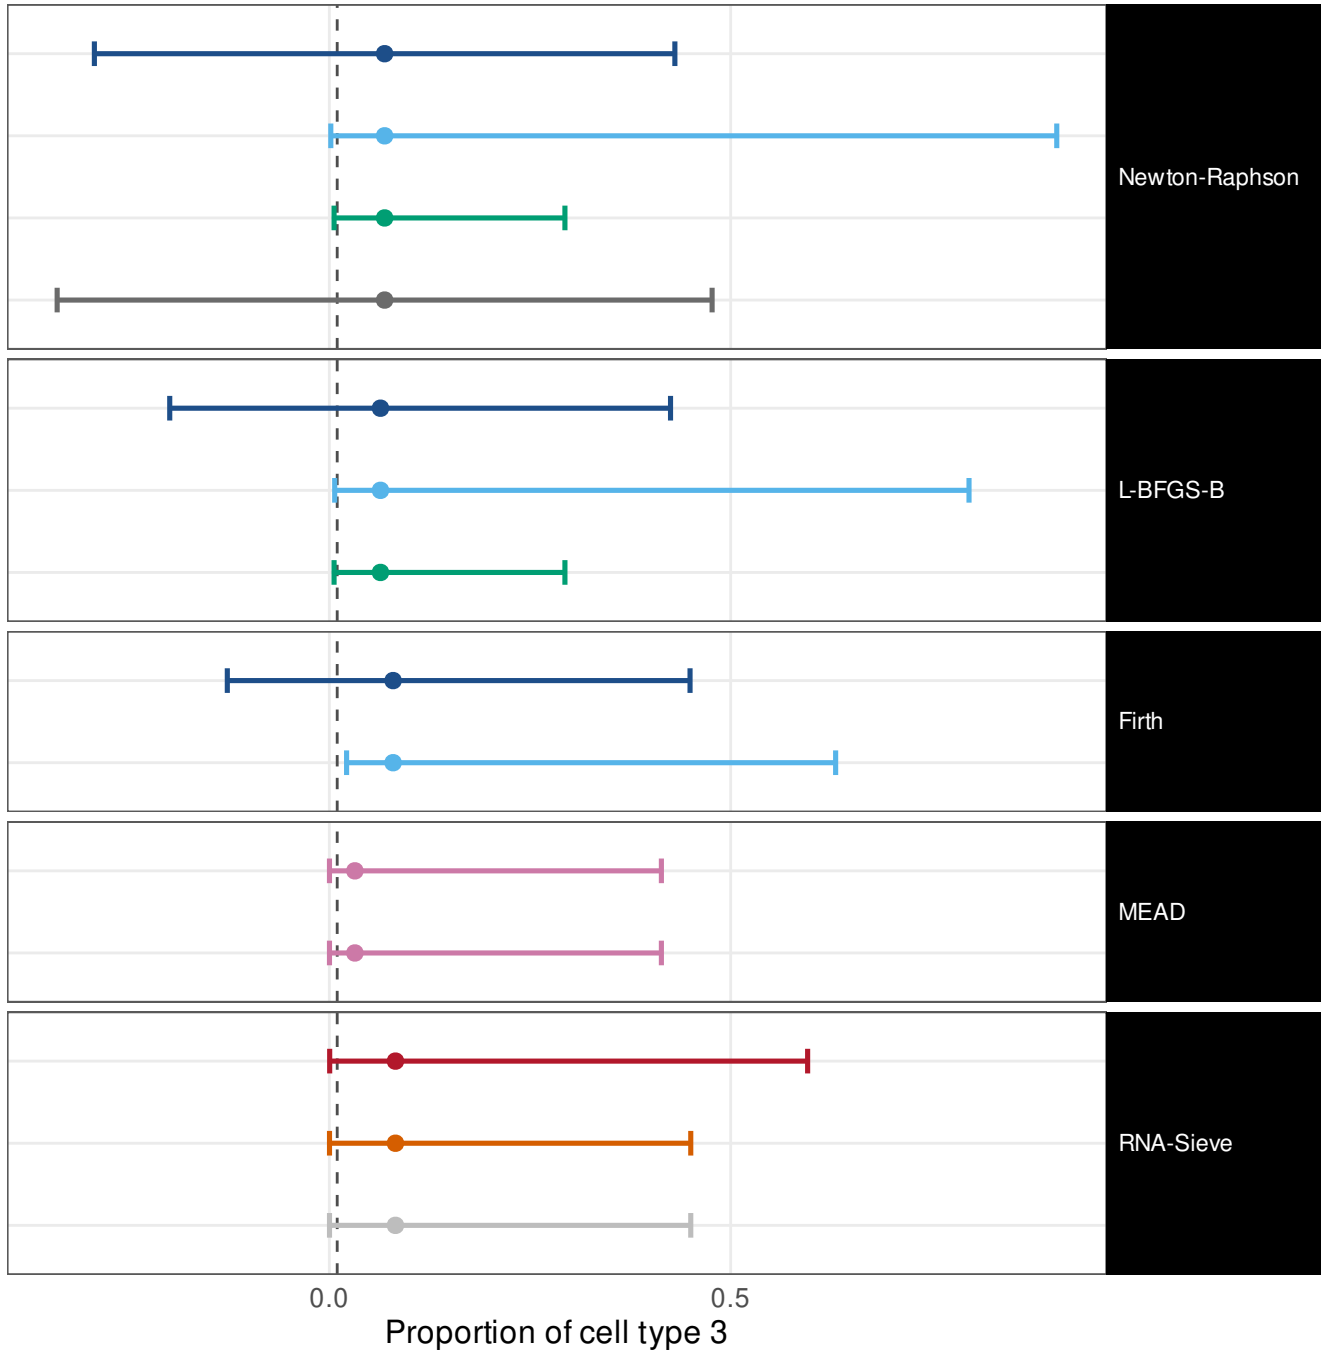


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.91 [0.86, 0.94]	w = 0.642
ILR, mapped back	0.61 [0.54, 0.67]	w = 0.961
Profile likelihood	0.94 [0.9, 0.97]	w = 0.494
Oracle (Fisher at p*)	0.88 [0.83, 0.92]	w = 0.604
Wald (delta)	0.79 [0.6, 0.9]	w = 0.602
ILR, mapped back	0.25 [0.13, 0.43]	w = 0.9
Profile likelihood	0.94 [0.9, 0.97]	w = 0.494
Wald (delta)	0.56 [0.37, 0.72]	w = 0.586
ILR, mapped back	0.11 [0.039, 0.28]	w = 0.749
Method's own interval	0.99 [0.96, 1]	w = 1
Own interval, transcript fractions	0.99 [0.96, 1]	w = 1
Fisher information (Wald)	0.94 [0.9, 0.97]	w = 0.976
Godambe sandwich	0.79 [0.73, 0.84]	w = 0.879
Released code, as published	0.79 [0.73, 0.84]	w = 0.879

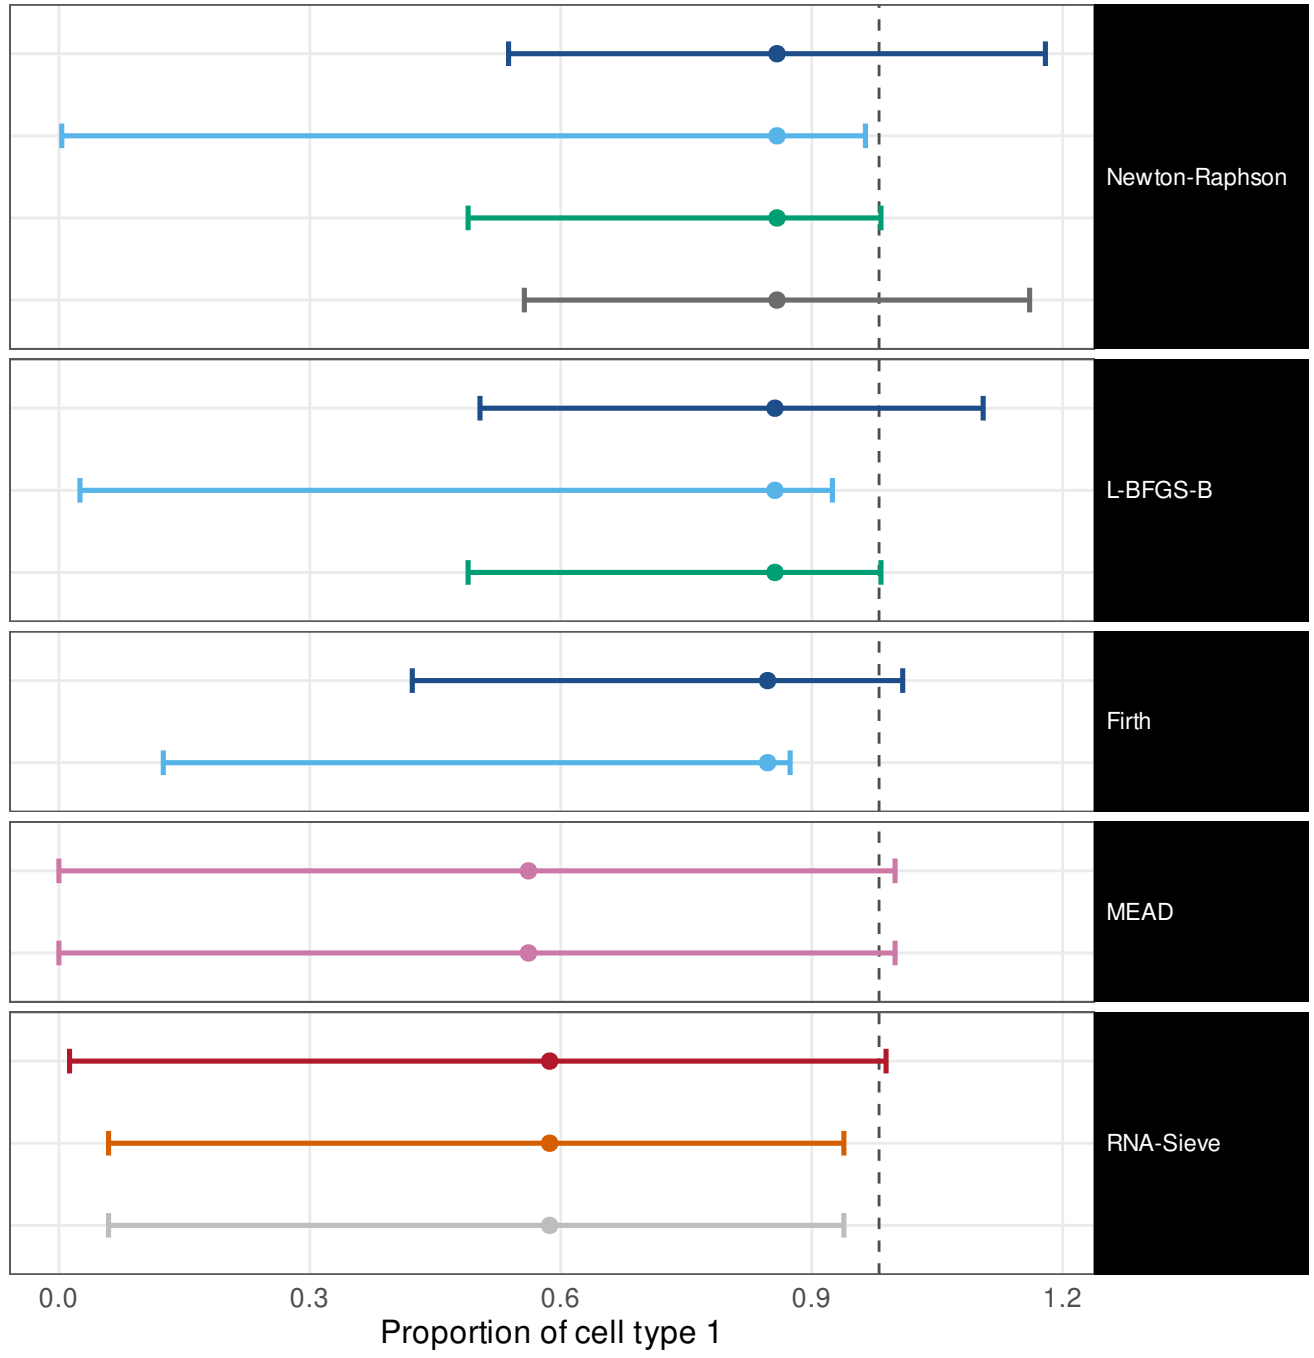


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.97 [0.94, 0.99]	w = 1.07
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.966
Profile likelihood	0.98 [0.95, 0.99]	w = 0.463
Oracle (Fisher at p*)	0.97 [0.94, 0.99]	w = 1.15
Wald (delta)	1 [0.88, 1]	w = 0.976
ILR, mapped back	0.89 [0.73, 0.96]	w = 0.924
Profile likelihood	0.98 [0.95, 0.99]	w = 0.463
Wald (delta)	1 [0.88, 1]	w = 0.89
ILR, mapped back	0.7 [0.52, 0.84]	w = 0.821
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.95 [0.91, 0.97]	w = 0.985
Godambe sandwich	0.78 [0.72, 0.84]	w = 0.872
Released code, as published	0.78 [0.72, 0.84]	w = 0.872

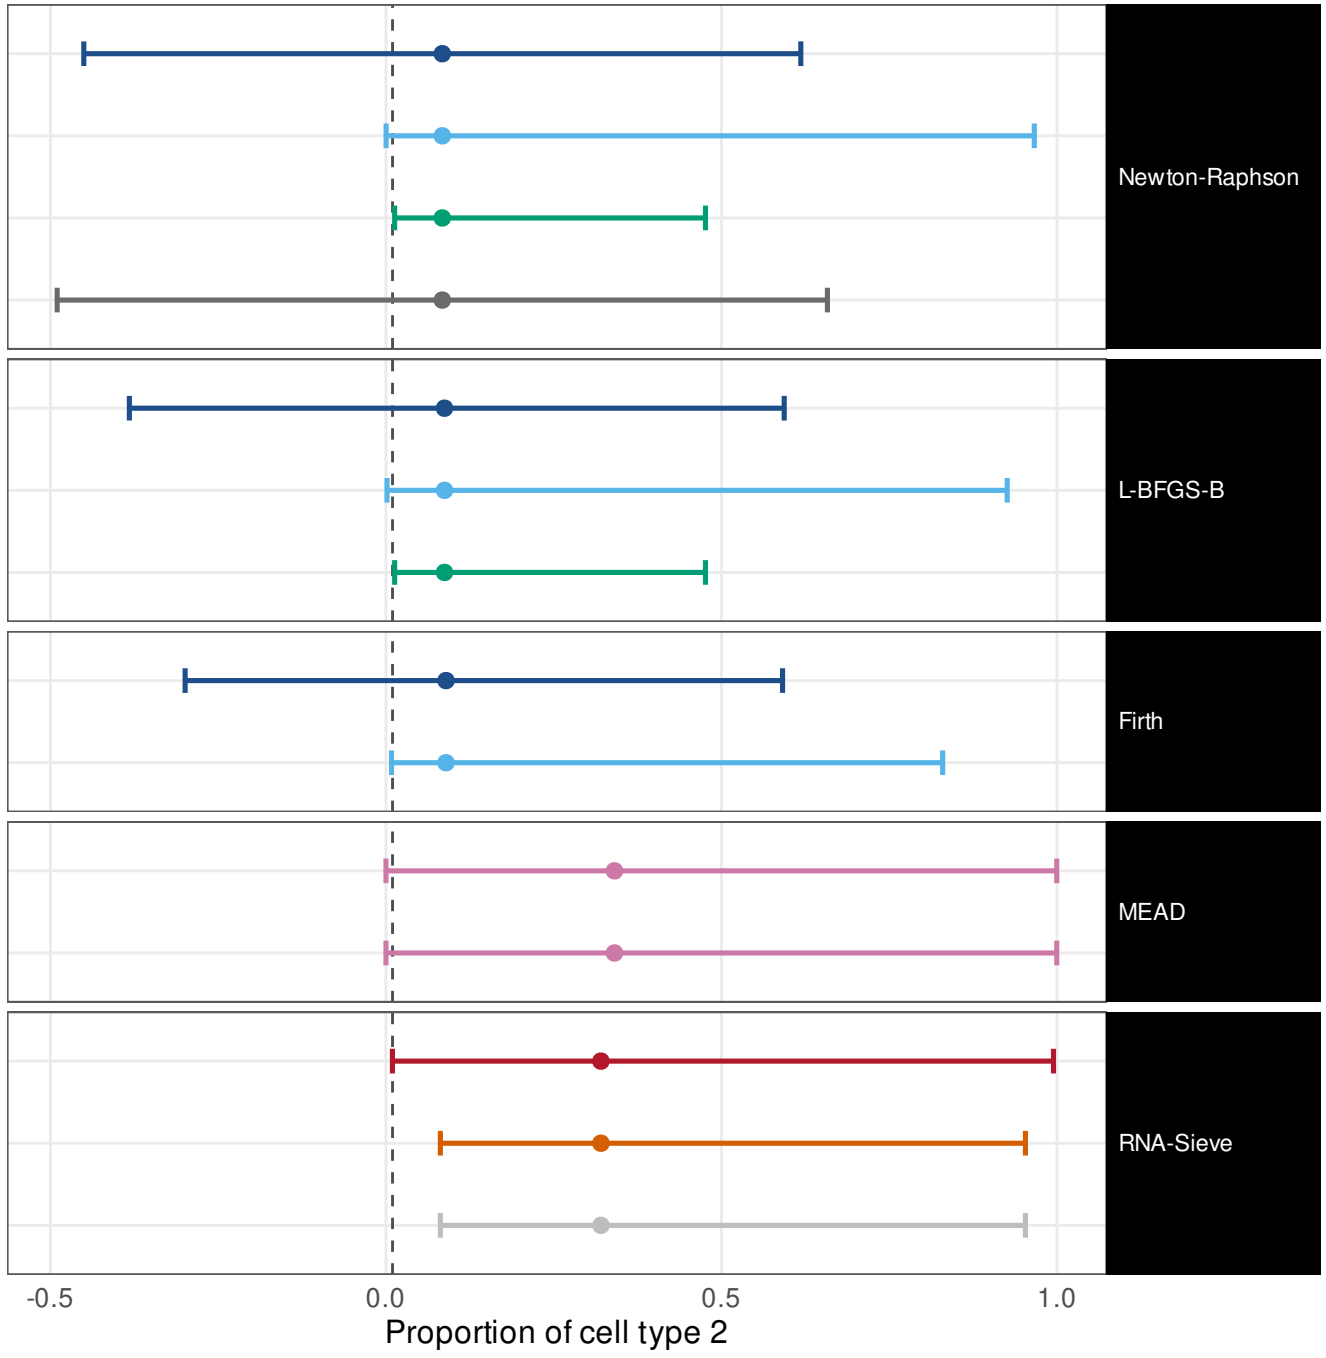


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.98 [0.94, 0.99]	w = 0.907
ILR, mapped back	1 [0.97, 1]	w = 0.95
Profile likelihood	1 [0.97, 1]	w = 0.297
Oracle (Fisher at p*)	0.98 [0.96, 0.99]	w = 1.01
Wald (delta)	1 [0.88, 1]	w = 0.813
ILR, mapped back	0.96 [0.82, 0.99]	w = 0.883
Profile likelihood	1 [0.97, 1]	w = 0.297
Wald (delta)	0.96 [0.82, 0.99]	w = 0.732
ILR, mapped back	0.7 [0.52, 0.84]	w = 0.741
Method's own interval	0.95 [0.91, 0.97]	w = 0.588
Own interval, transcript fractions	0.94 [0.9, 0.97]	w = 0.588
Fisher information (Wald)	1 [0.98, 1]	w = 0.744
Godambe sandwich	1 [0.97, 1]	w = 0.646
Released code, as published	1 [0.97, 1]	w = 0.646

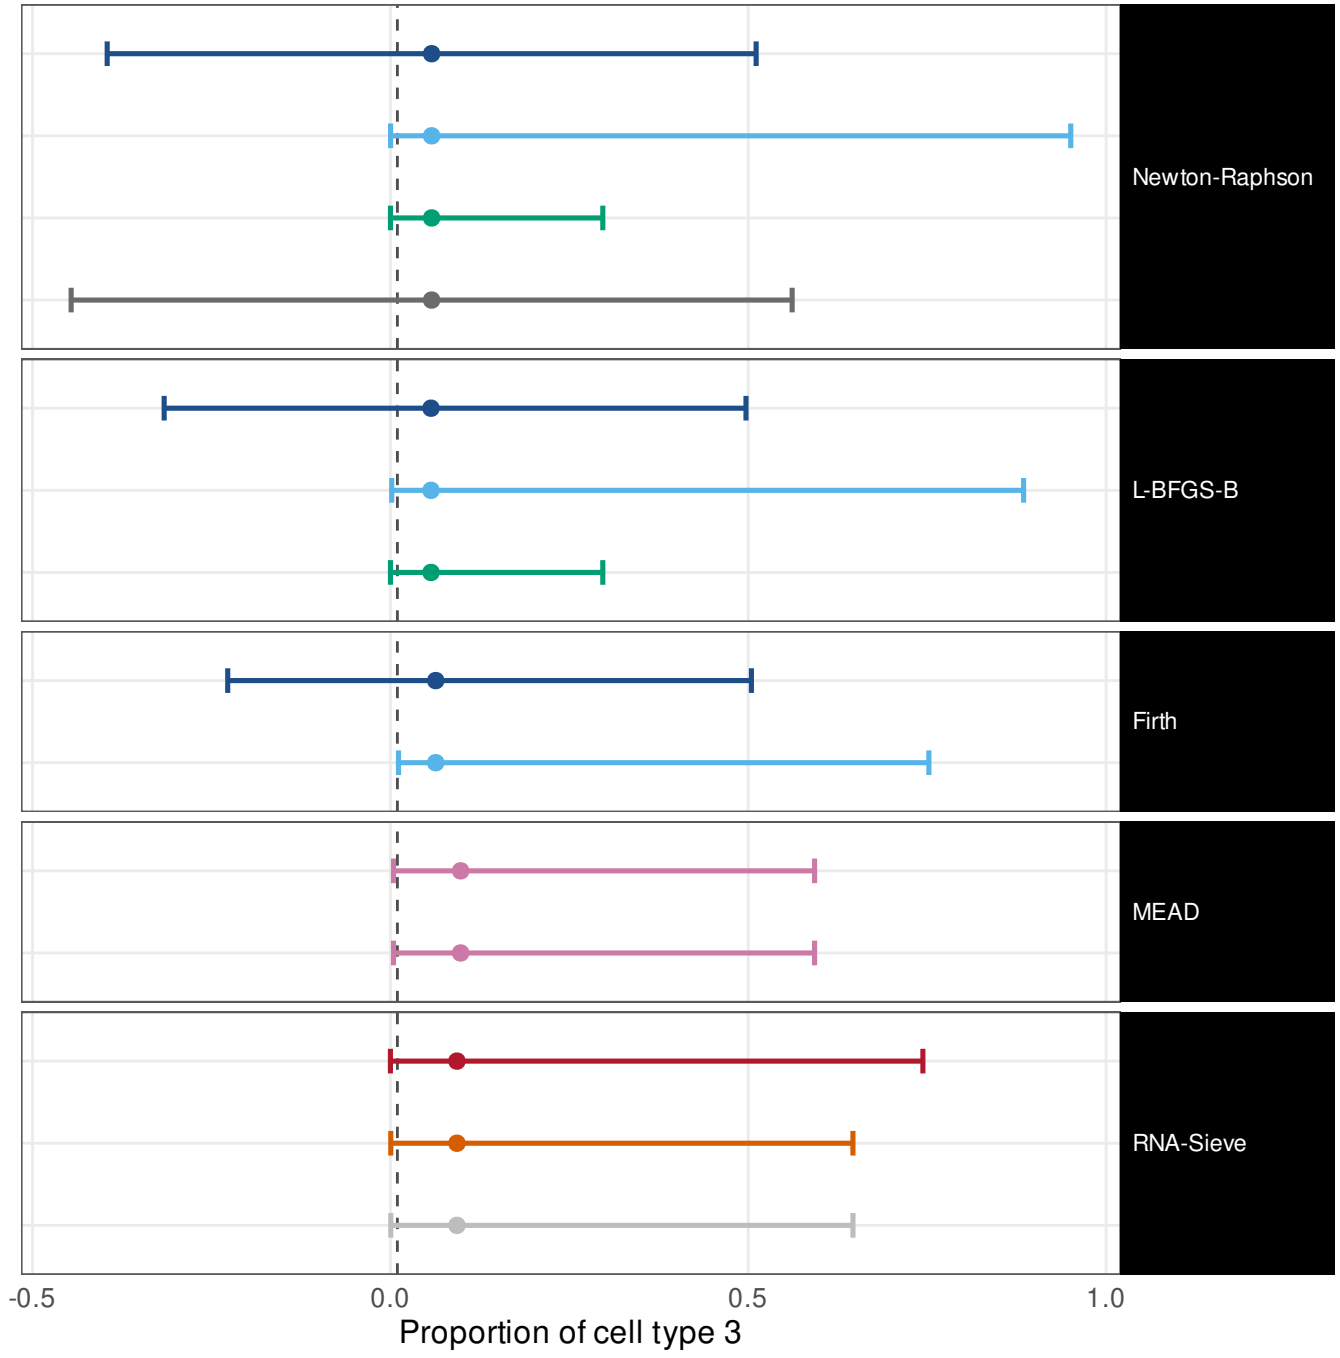

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM


```
Wald (delta)                          0.75 [0.69,   0.8]    w = 0.705
ILR, mapped back                      0.57 [ 0.5, 0.64]     w = 0.947
Profile likelihood                     0.9 [0.84, 0.93]     w = 0.573
Oracle (Fisher at p*)                 0.74 [0.68,   0.8]    w = 0.605

Wald (delta)                          0.67 [0.53, 0.78]     w = 0.683
ILR, mapped back                      0.23 [0.13, 0.37]     w = 0.861
Profile likelihood                     0.9 [0.84, 0.93]     w = 0.573

Wald (delta)                          0.49 [0.36, 0.63]     w = 0.677
ILR, mapped back                      0.02 [0.0036, 0.11]   w = 0.725

Method's own interval                    1 [0.98,    1]     w =     1
Own interval, transcript fractions       1 [0.98,    1]     w =     1

Fisher information (Wald)             0.92 [0.87, 0.95]     w = 0.967
Godambe sandwich                      0.77 [0.71, 0.82]     w = 0.792
Released code, as published           0.77 [0.71, 0.82]     w = 0.792
```

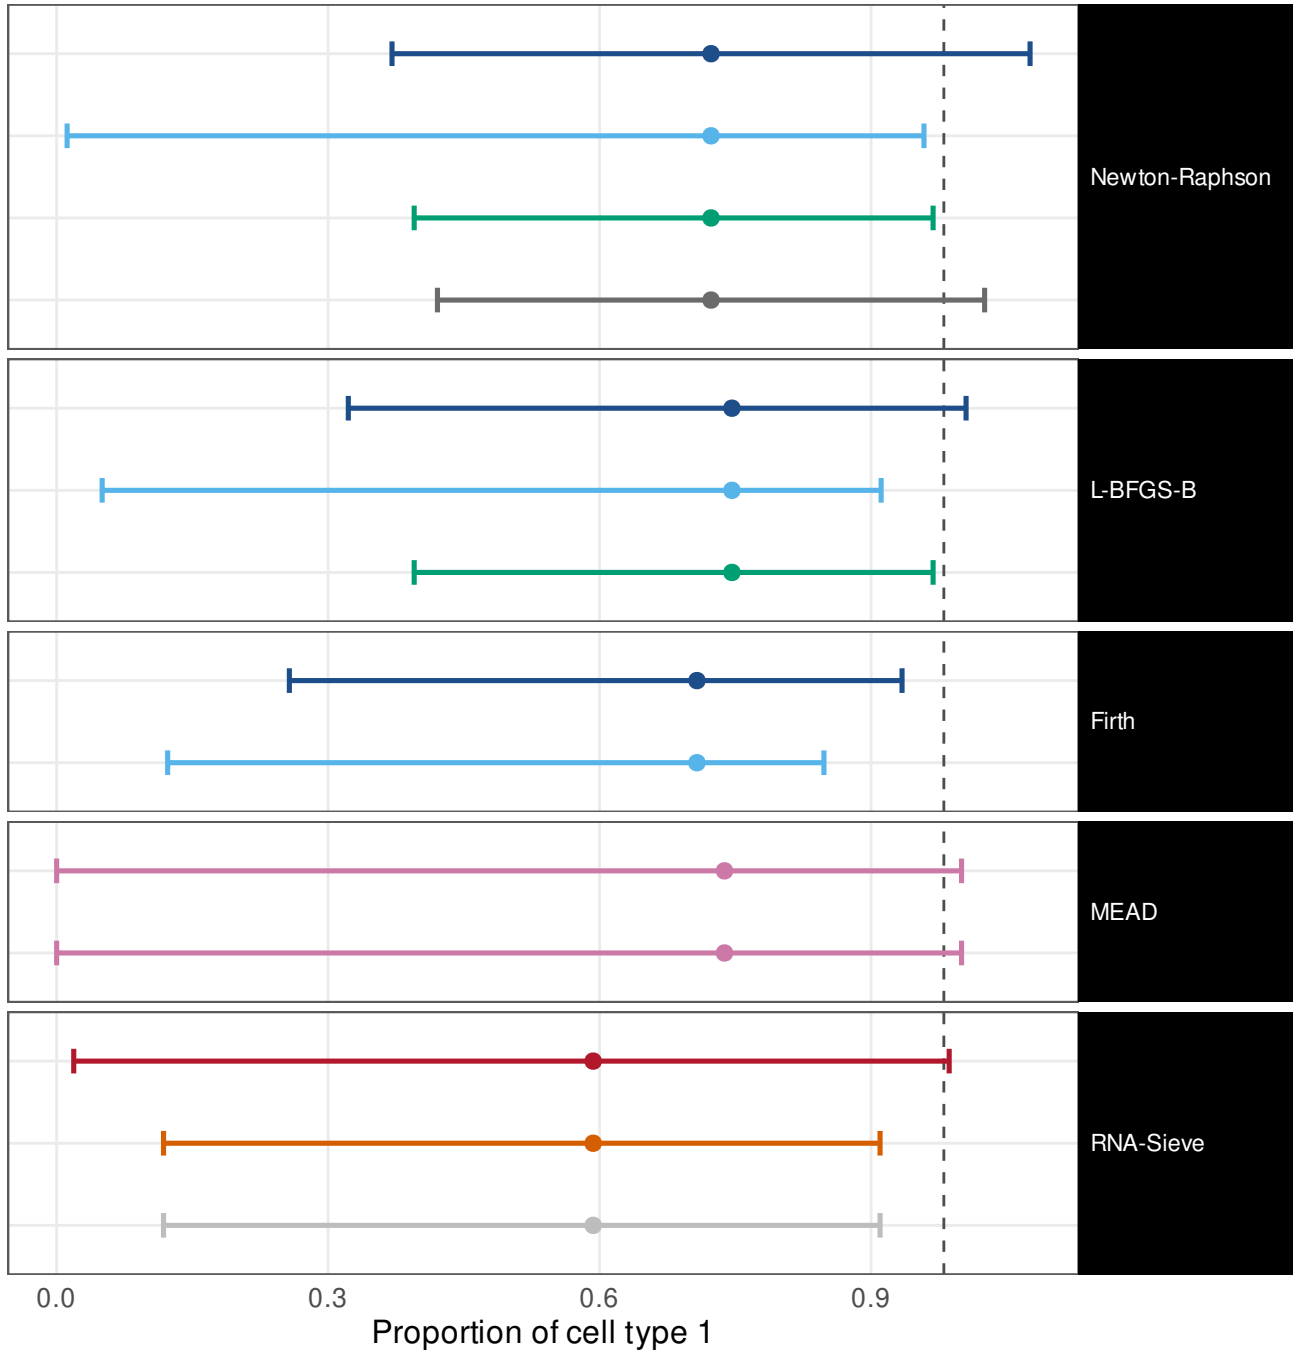


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM


Wald (delta)	0.8 [0.74, 0.85]	w = 0.913
ILR, mapped back	0.94 [0.9, 0.97]	w = 0.944
Profile likelihood	0.94 [0.89, 0.96]	w = 0.547
Oracle (Fisher at p*)	0.82 [0.77, 0.87]	w = 1.05
Wald (delta)	0.85 [0.73, 0.93]	w = 0.873
ILR, mapped back	0.73 [0.59, 0.83]	w = 0.861
Profile likelihood	0.94 [0.89, 0.96]	w = 0.547
Wald (delta)	0.88 [0.76, 0.94]	w = 0.818
ILR, mapped back	0.45 [0.32, 0.59]	w = 0.772
Method's own interval	1 [0.98, 1]	w = 0.992
Own interval, transcript fractions	1 [0.98, 1]	w = 0.992
Fisher information (Wald)	0.96 [0.92, 0.98]	w = 0.975
Godambe sandwich	0.84 [0.78, 0.88]	w = 0.825
Released code, as published	0.84 [0.78, 0.88]	w = 0.825

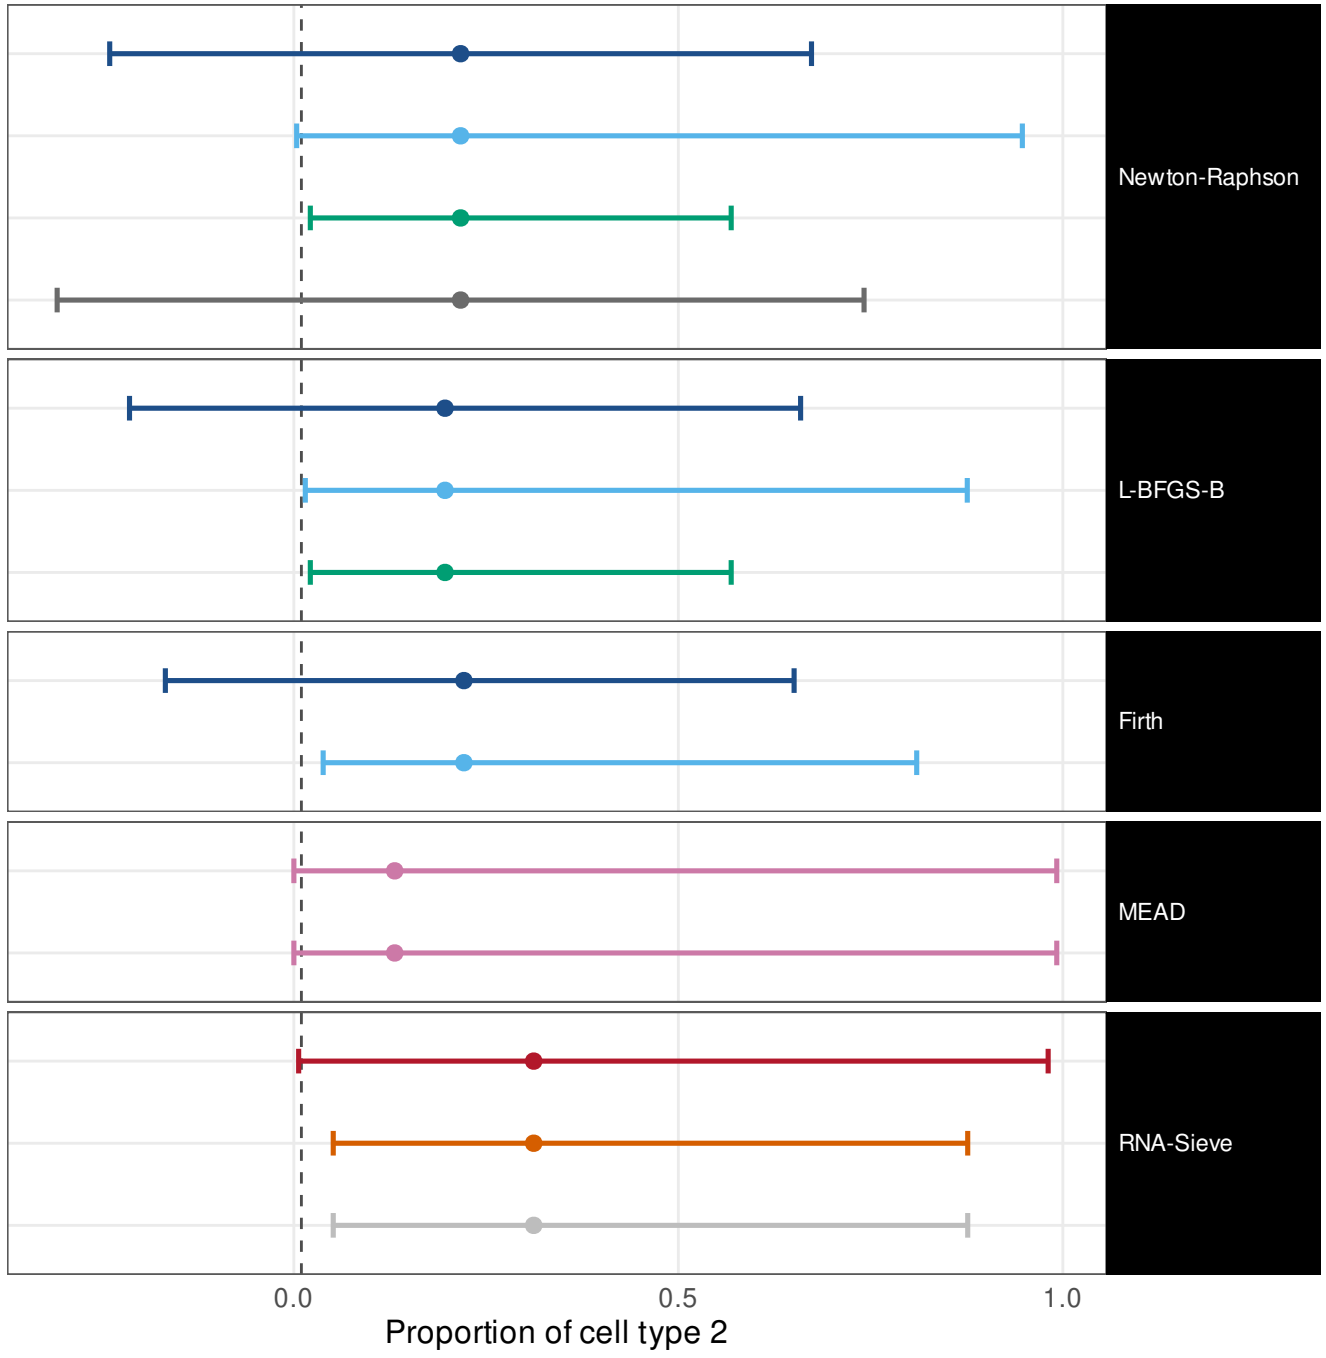

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

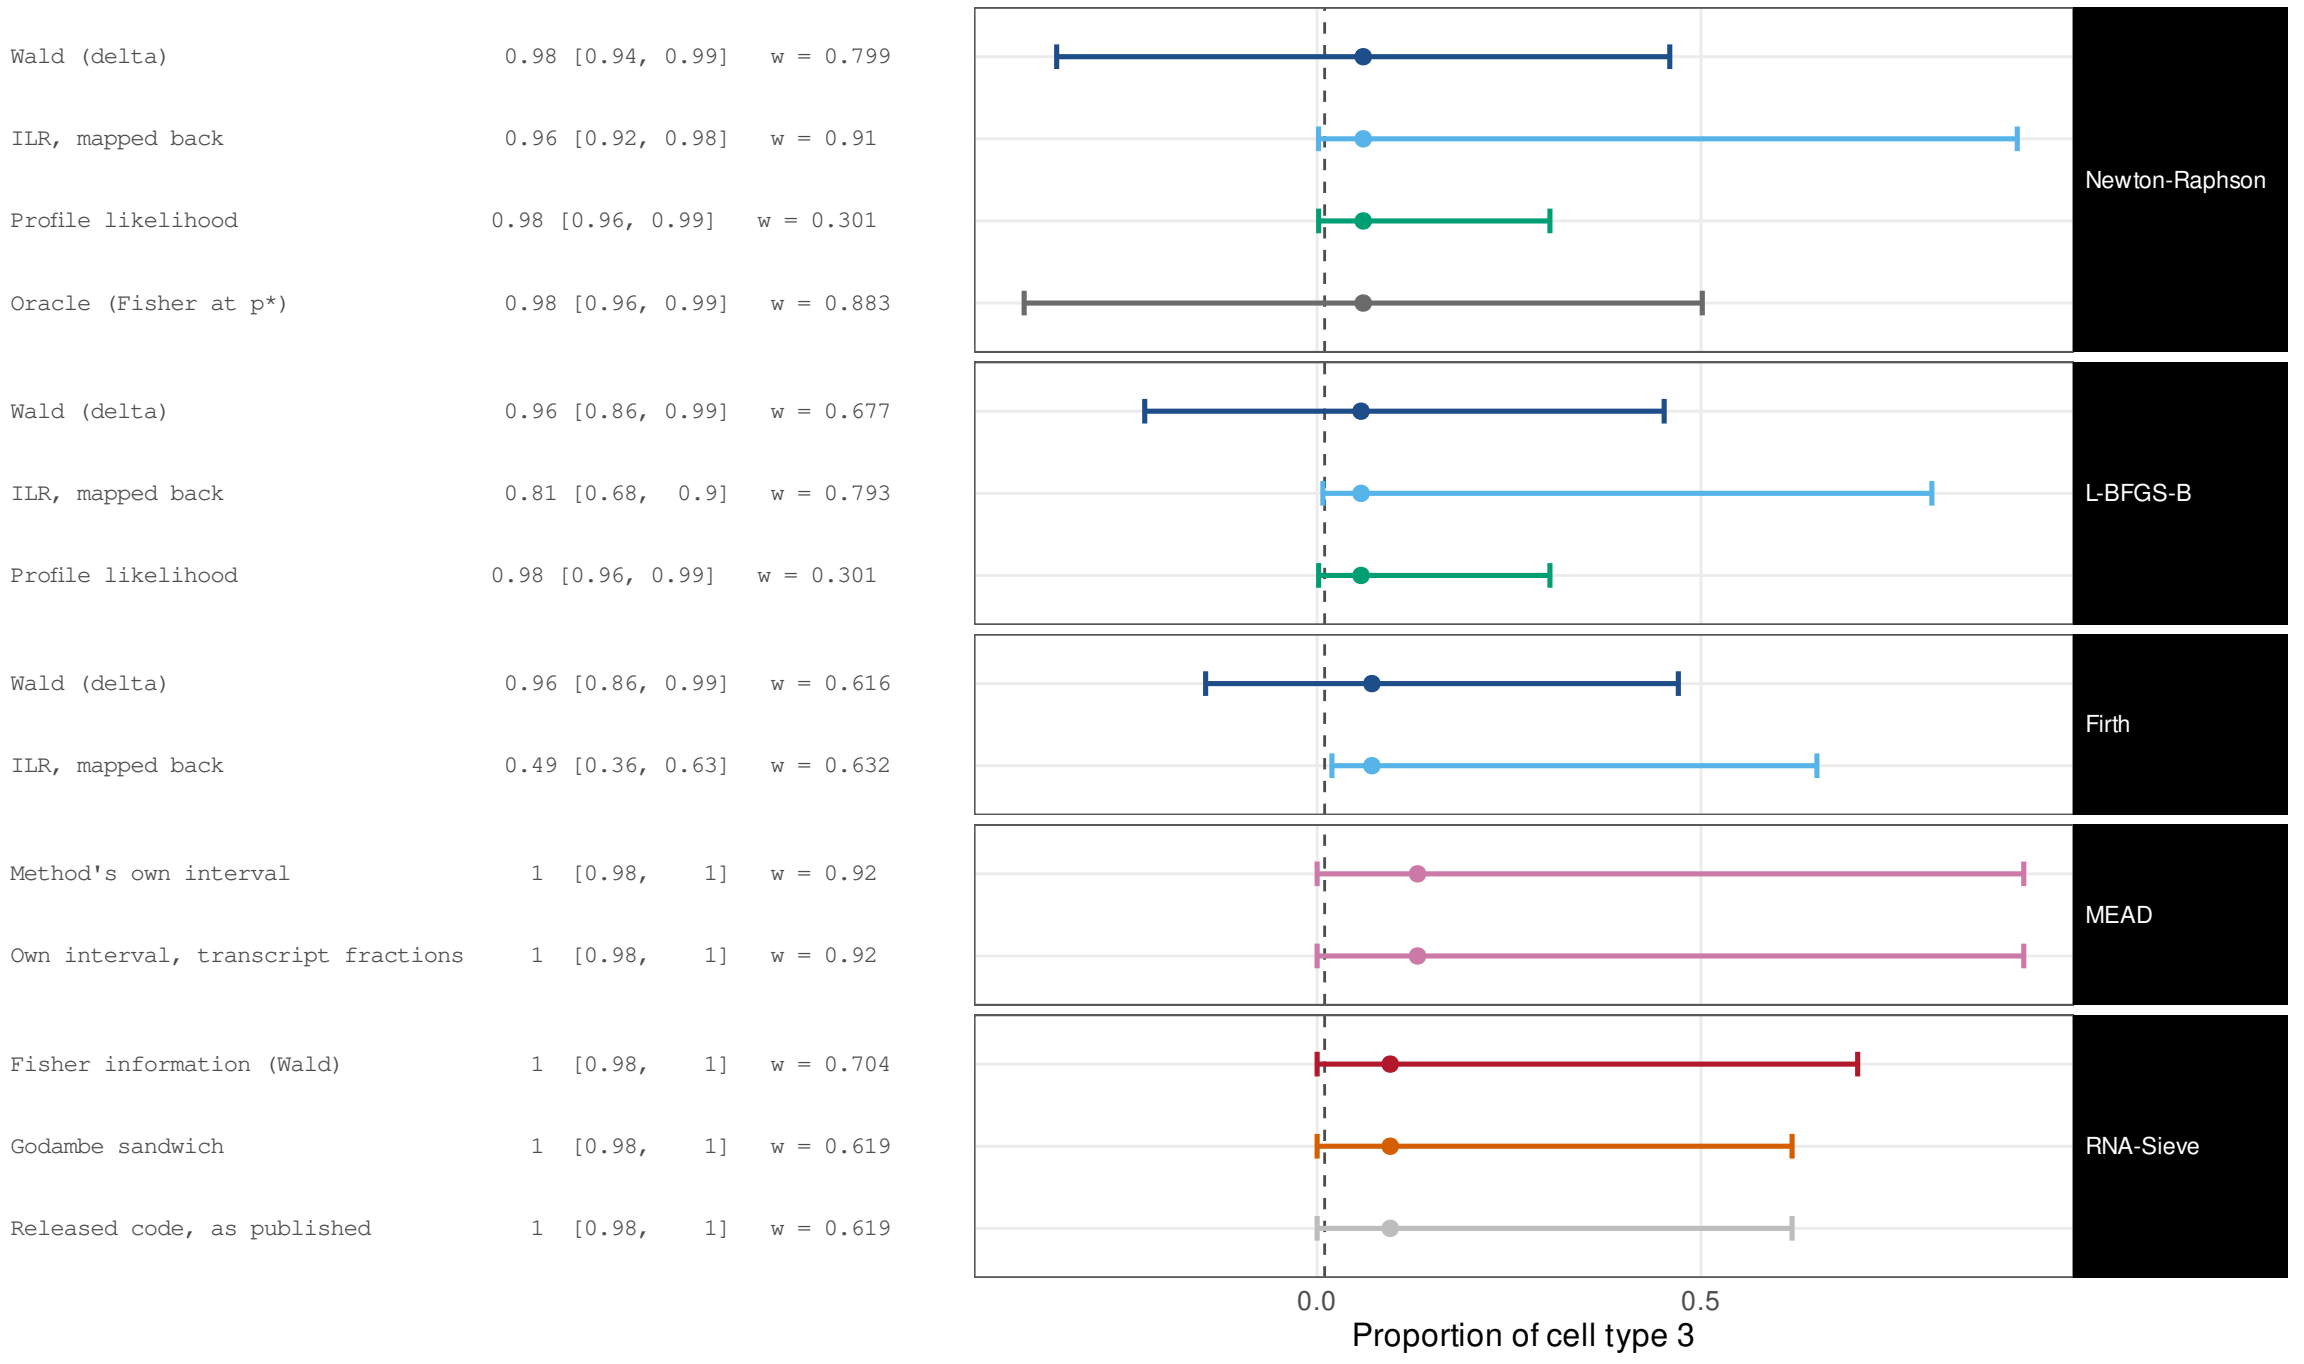


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.88 [0.83, 0.92]	w = 0.635
ILR, mapped back	0.61 [0.54, 0.67]	w = 0.953
Profile likelihood	0.91 [0.86, 0.94]	w = 0.482
Oracle (Fisher at p*)	0.88 [0.82, 0.91]	w = 0.599
Wald (delta)	0.79 [0.64, 0.88]	w = 0.617
ILR, mapped back	0.31 [0.19, 0.46]	w = 0.901
Profile likelihood	0.91 [0.86, 0.94]	w = 0.482
Wald (delta)	0.56 [0.41, 0.7]	w = 0.599
ILR, mapped back	0.024 [0.0043, 0.13]	w = 0.745
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.96 [0.92, 0.98]	w = 0.98
Godambe sandwich	0.9 [0.84, 0.93]	w = 0.932
Released code, as published	0.9 [0.84, 0.93]	w = 0.932

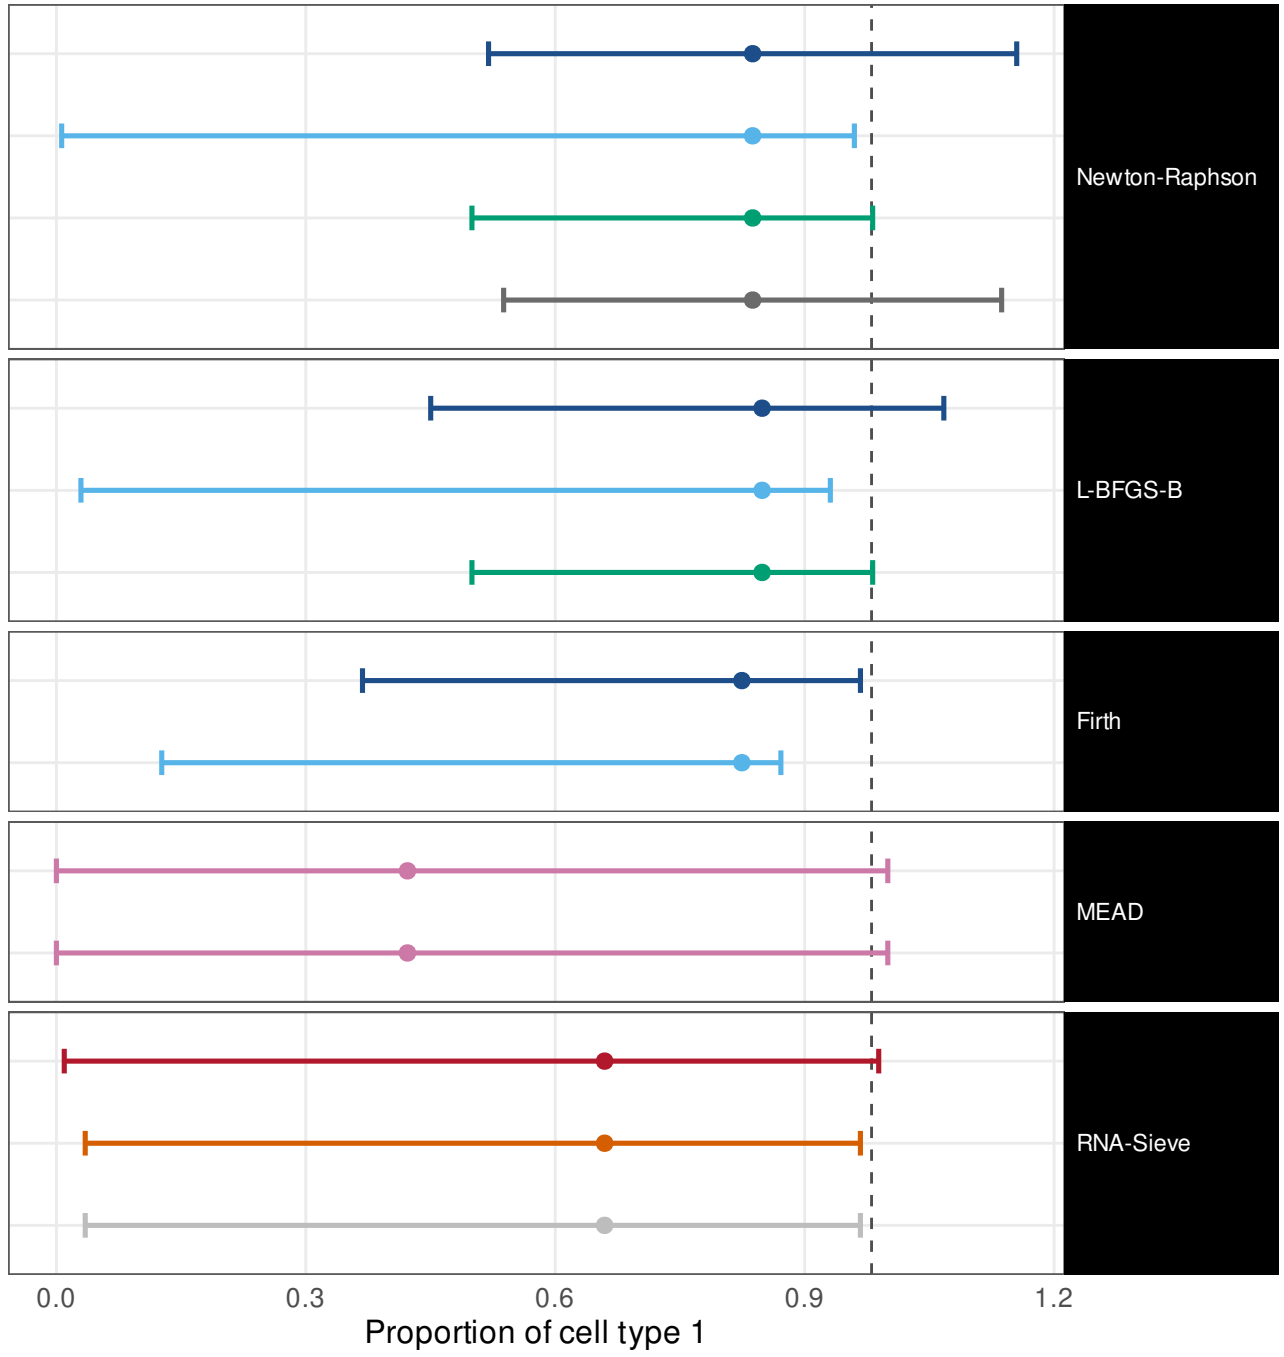


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.93 [0.89, 0.96]	w = 0.96
ILR, mapped back	0.96 [0.93, 0.98]	w = 0.961
Profile likelihood	0.97 [0.94, 0.99]	w = 0.459
Oracle (Fisher at p*)	0.93 [0.89, 0.96]	w = 1.03
Wald (delta)	0.93 [0.81, 0.98]	w = 0.902
ILR, mapped back	0.83 [0.69, 0.92]	w = 0.922
Profile likelihood	0.97 [0.94, 0.99]	w = 0.459
Wald (delta)	0.93 [0.81, 0.97]	w = 0.829
ILR, mapped back	0.68 [0.53, 0.8]	w = 0.806
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.96 [0.93, 0.98]	w = 0.988
Godambe sandwich	0.88 [0.83, 0.92]	w = 0.937
Released code, as published	0.88 [0.83, 0.92]	w = 0.937

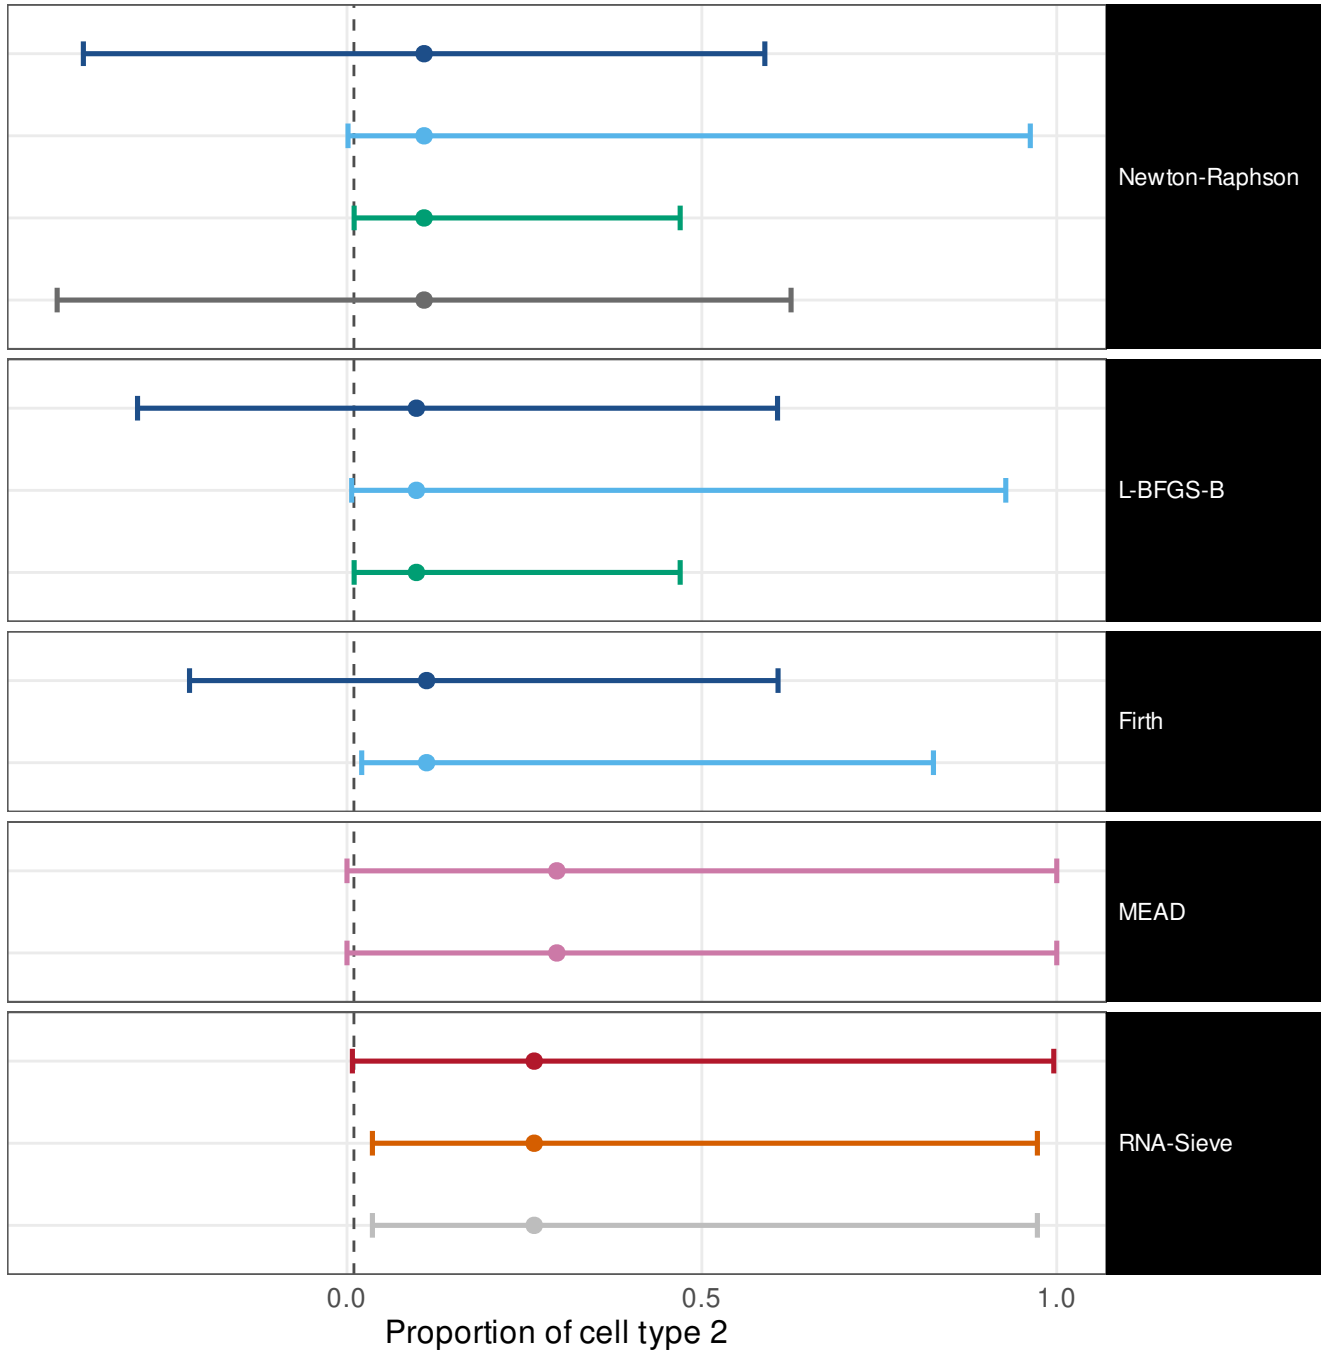


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.97 [0.94, 0.99]	w = 0.777
ILR, mapped back	0.98 [0.96, 0.99]	w = 0.931
Profile likelihood	0.98 [0.95, 0.99]	w = 0.272
Oracle (Fisher at p*)	0.99 [0.96, 1]	w = 0.859
Wald (delta)	0.95 [0.84, 0.99]	w = 0.707
ILR, mapped back	0.93 [0.81, 0.98]	w = 0.853
Profile likelihood	0.98 [0.95, 0.99]	w = 0.272
Wald (delta)	0.95 [0.84, 0.99]	w = 0.631
ILR, mapped back	0.68 [0.53, 0.8]	w = 0.672
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.98, 1]	w = 0.663
Godambe sandwich	1 [0.97, 1]	w = 0.53
Released code, as published	1 [0.97, 1]	w = 0.53

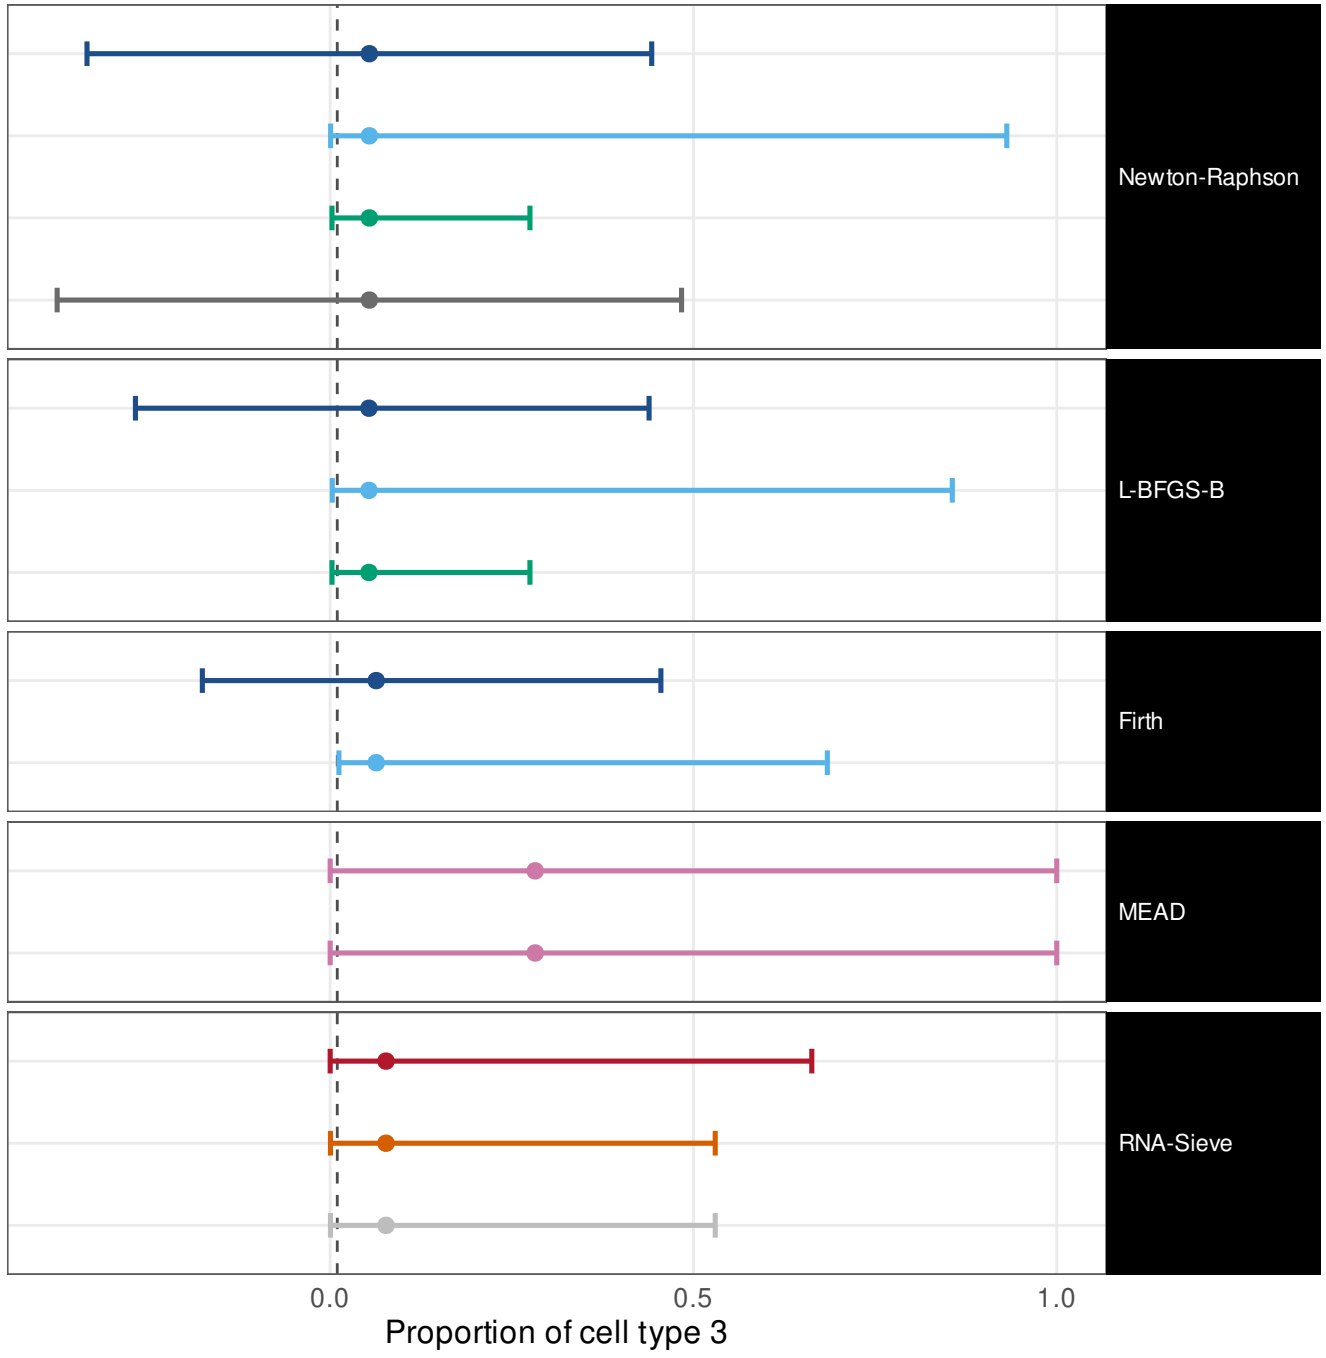


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.9 [0.85, 0.93]	w = 0.98
ILR, mapped back	0.57 [0.5, 0.64]	w = 0.961
Profile likelihood	0.92 [0.87, 0.95]	w = 0.624
Oracle (Fisher at p*)	0.76 [0.7, 0.81]	w = 0.611
Wald (delta)	0.77 [0.63, 0.87]	w = 1.06
ILR, mapped back	0.27 [0.16, 0.42]	w = 0.921
Profile likelihood	0.92 [0.87, 0.95]	w = 0.624
Wald (delta)	0.47 [0.31, 0.63]	w = 0.735
ILR, mapped back	0 [6.9e-18, 0.1]	w = 0.81
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.97, 1]	w = 0.999
Godambe sandwich	0.86 [0.81, 0.9]	w = 0.945
Released code, as published	0.86 [0.81, 0.9]	w = 0.945

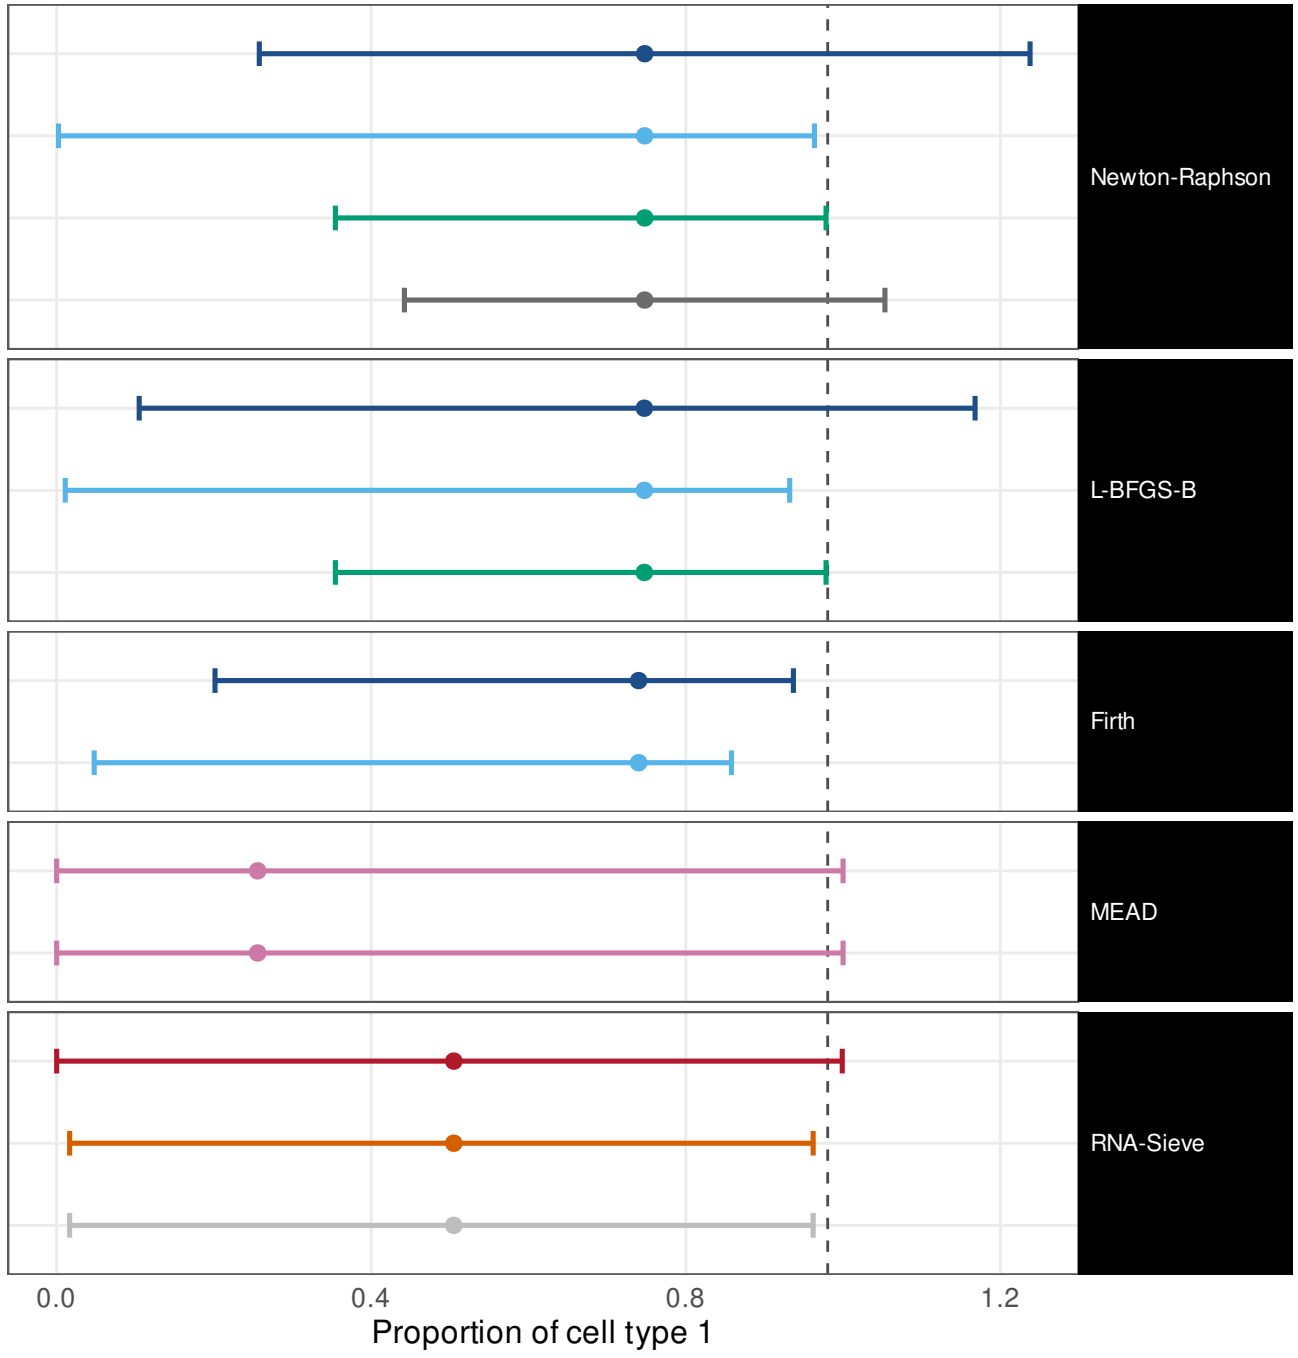


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.9 [0.84, 0.93]	w = 1.71
ILR, mapped back	0.99 [0.96, 1]	w = 0.983
Profile likelihood	0.98 [0.95, 0.99]	w = 0.558
Oracle (Fisher at p*)	0.98 [0.94, 0.99]	w = 1.9
Wald (delta)	0.91 [0.79, 0.96]	w = 1.56
ILR, mapped back	0.95 [0.85, 0.99]	w = 0.966
Profile likelihood	0.98 [0.95, 0.99]	w = 0.558
Wald (delta)	0.88 [0.73, 0.95]	w = 1.08
ILR, mapped back	0.76 [0.6, 0.88]	w = 0.88
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	1 [0.98, 1]	w = 1
Godambe sandwich	0.95 [0.91, 0.97]	w = 0.973
Released code, as published	0.95 [0.91, 0.97]	w = 0.973

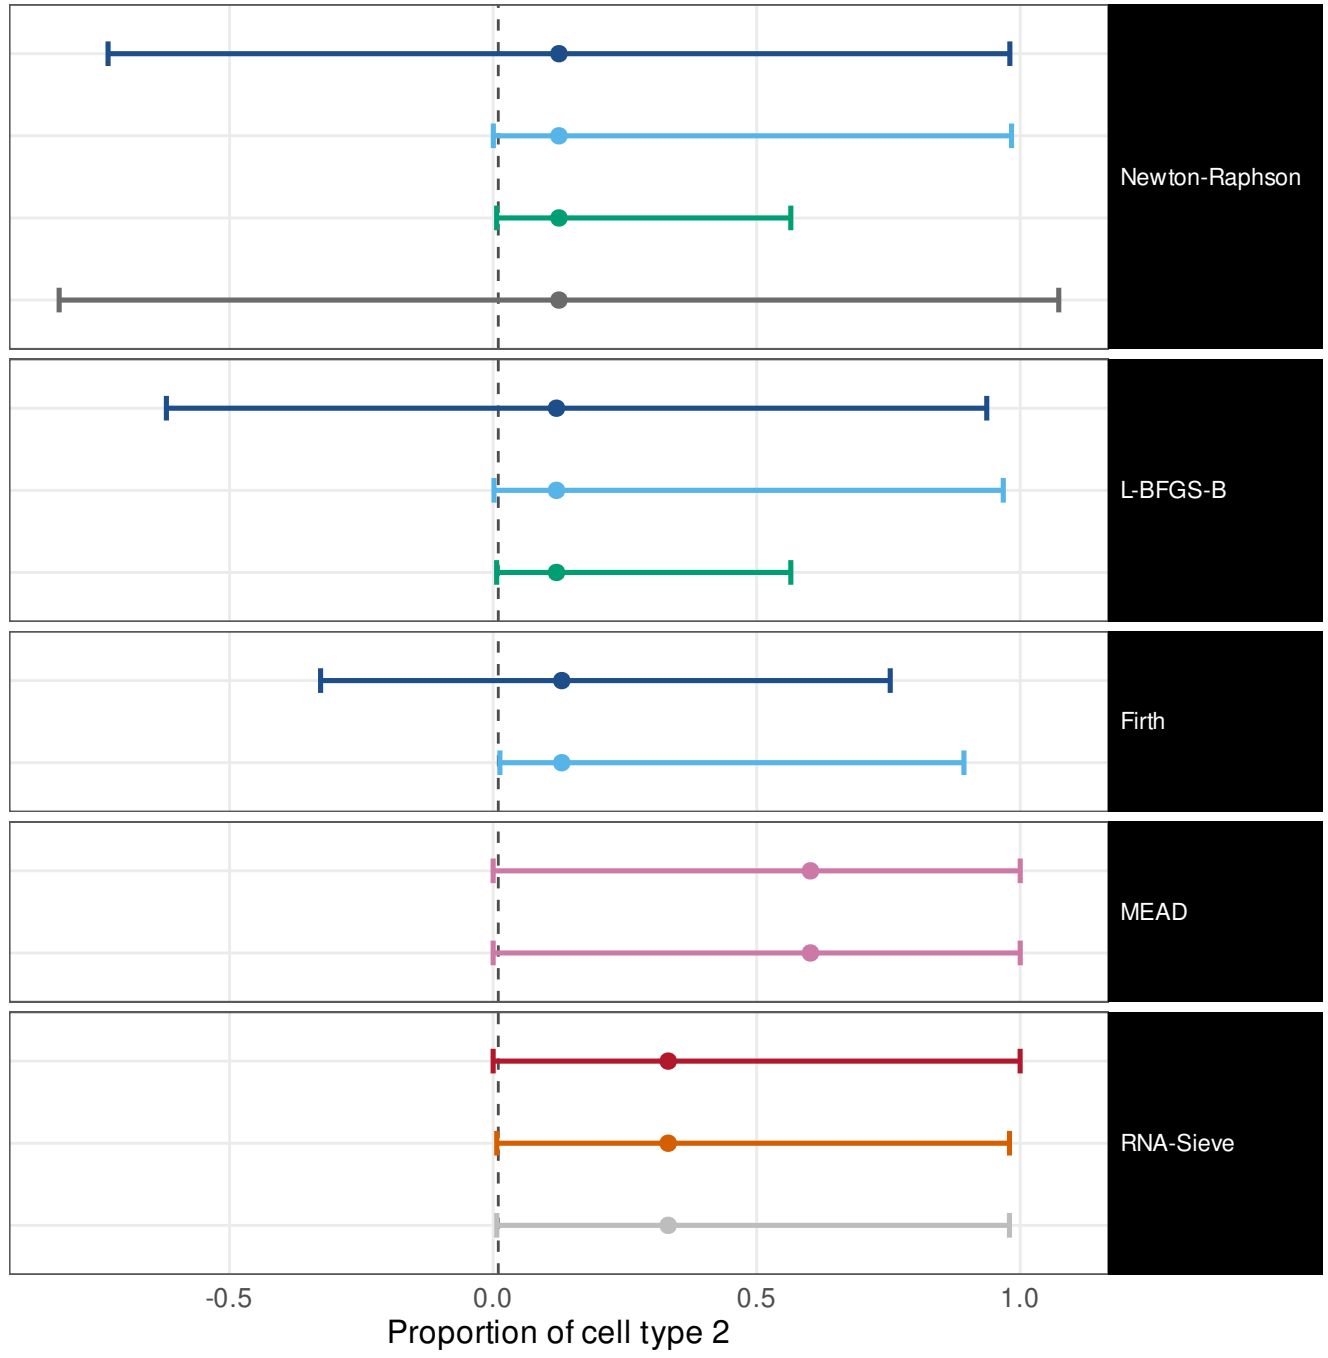


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.9 [0.85, 0.93]	w = 1.49
ILR, mapped back	0.95 [0.91, 0.97]	w = 0.939
Profile likelihood	0.98 [0.94, 0.99]	w = 0.441
Oracle (Fisher at p*)	0.96 [0.92, 0.98]	w = 1.81
Wald (delta)	0.84 [0.71, 0.92]	w = 1.25
ILR, mapped back	0.93 [0.82, 0.98]	w = 0.932
Profile likelihood	0.98 [0.94, 0.99]	w = 0.441
Wald (delta)	0.91 [0.77, 0.97]	w = 1.04
ILR, mapped back	0.74 [0.57, 0.85]	w = 0.841
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.962
Godambe sandwich	0.98 [0.96, 0.99]	w = 0.91
Released code, as published	0.98 [0.96, 0.99]	w = 0.91

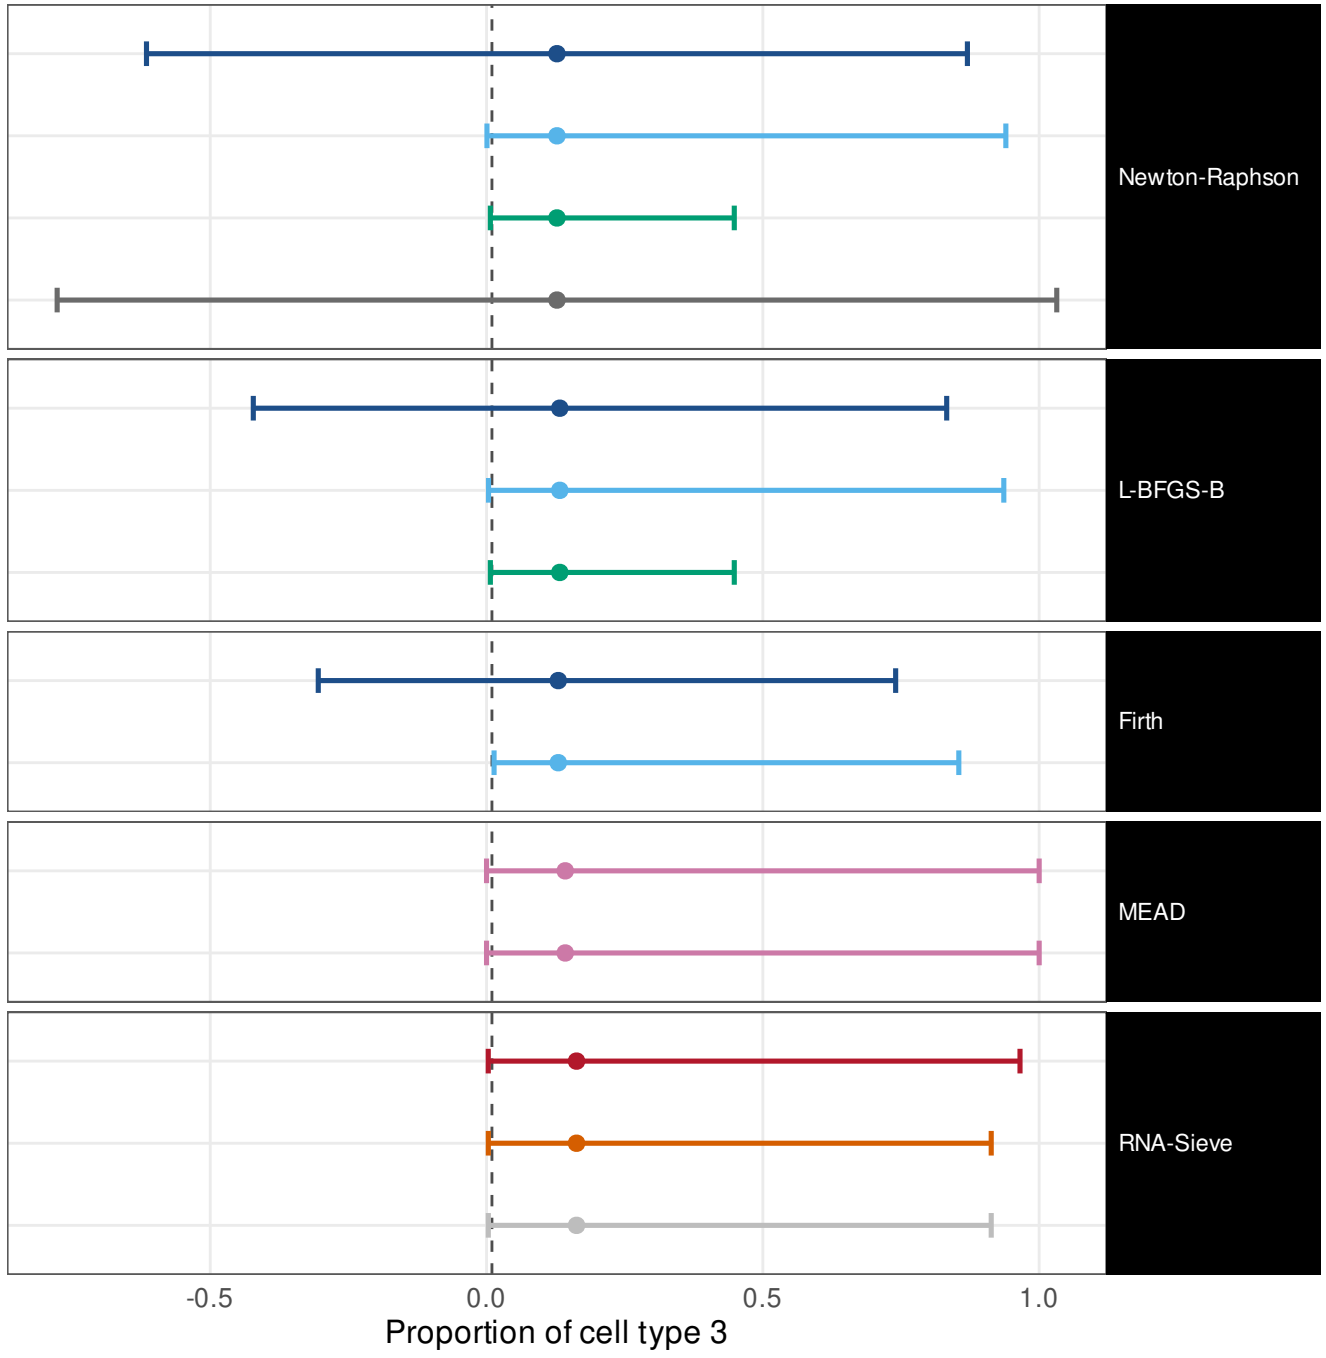

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w


highly unbalanced / high overlap / CT1 SBM / CT2 Scale-free

```
Wald (delta)                        0.93 [0.89, 0.96]   w = 0.802
ILR, mapped back                    0.59 [0.52, 0.66]   w = 0.958
Profile likelihood                  0.92 [0.87, 0.95]   w = 0.585
Oracle (Fisher at p*)               0.86 [0.81, 0.91]   w = 0.613

Wald (delta)                         0.8  [0.66,  0.9]   w =  0.8
ILR, mapped back                    0.32 [ 0.2, 0.47]   w = 0.916
Profile likelihood                  0.92 [0.87, 0.95]   w = 0.585

Wald (delta)                        0.41 [0.26, 0.59]   w = 0.698
ILR, mapped back                   0.069 [0.019, 0.22]  w = 0.795

Method's own interval                 1  [0.98,    1]   w =    1
Own interval, transcript fractions    1  [0.98,    1]   w =    1
```

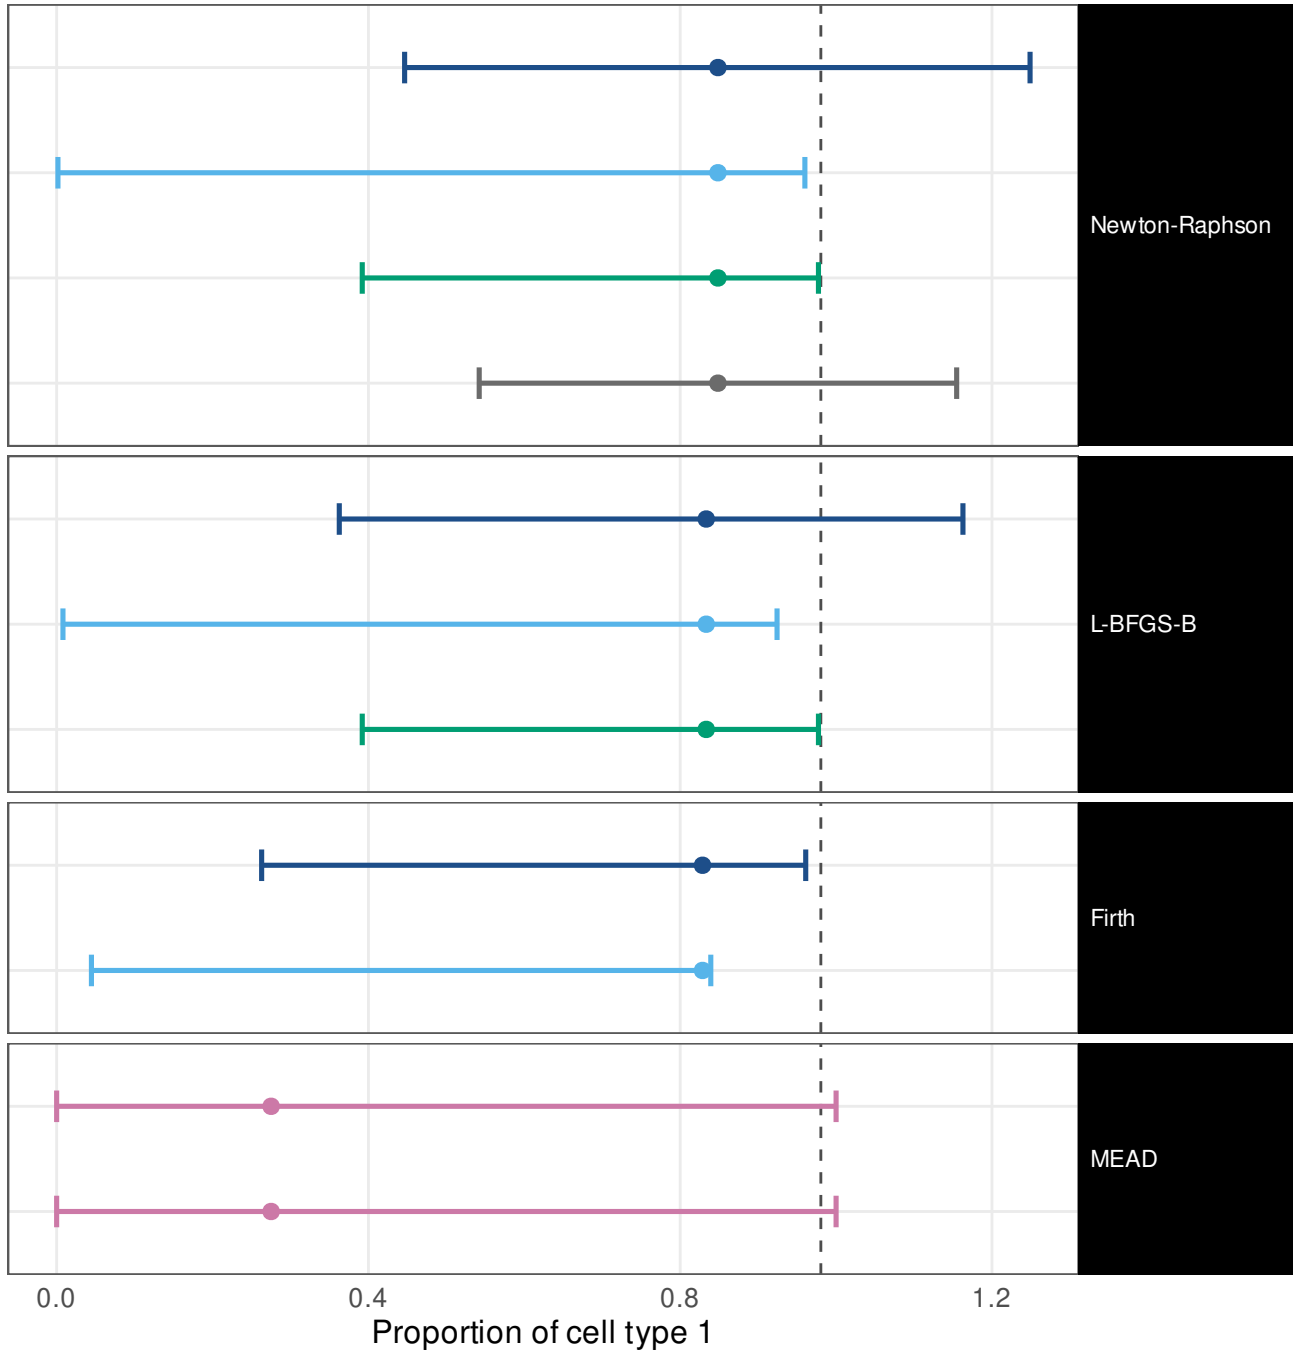


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96	[0.93, 0.98]	w = 2.22
ILR, mapped back	0.99	[0.97, 1]	w = 0.988
Profile likelihood	0.99	[0.96, 1]	w = 0.533
Oracle (Fisher at p*)	1	[0.98, 1]	w = 2.55
Wald (delta)	1	[0.91, 1]	w = 1.96
ILR, mapped back	0.98	[0.87, 1]	w = 0.977
Profile likelihood	0.99	[0.96, 1]	w = 0.533
Wald (delta)	1	[0.88, 1]	w = 1.34
ILR, mapped back	0.9	[0.74, 0.96]	w = 0.915
Method's own interval	1	[0.98, 1]	w = 0.983
Own interval, transcript fractions	1	[0.98, 1]	w = 0.983

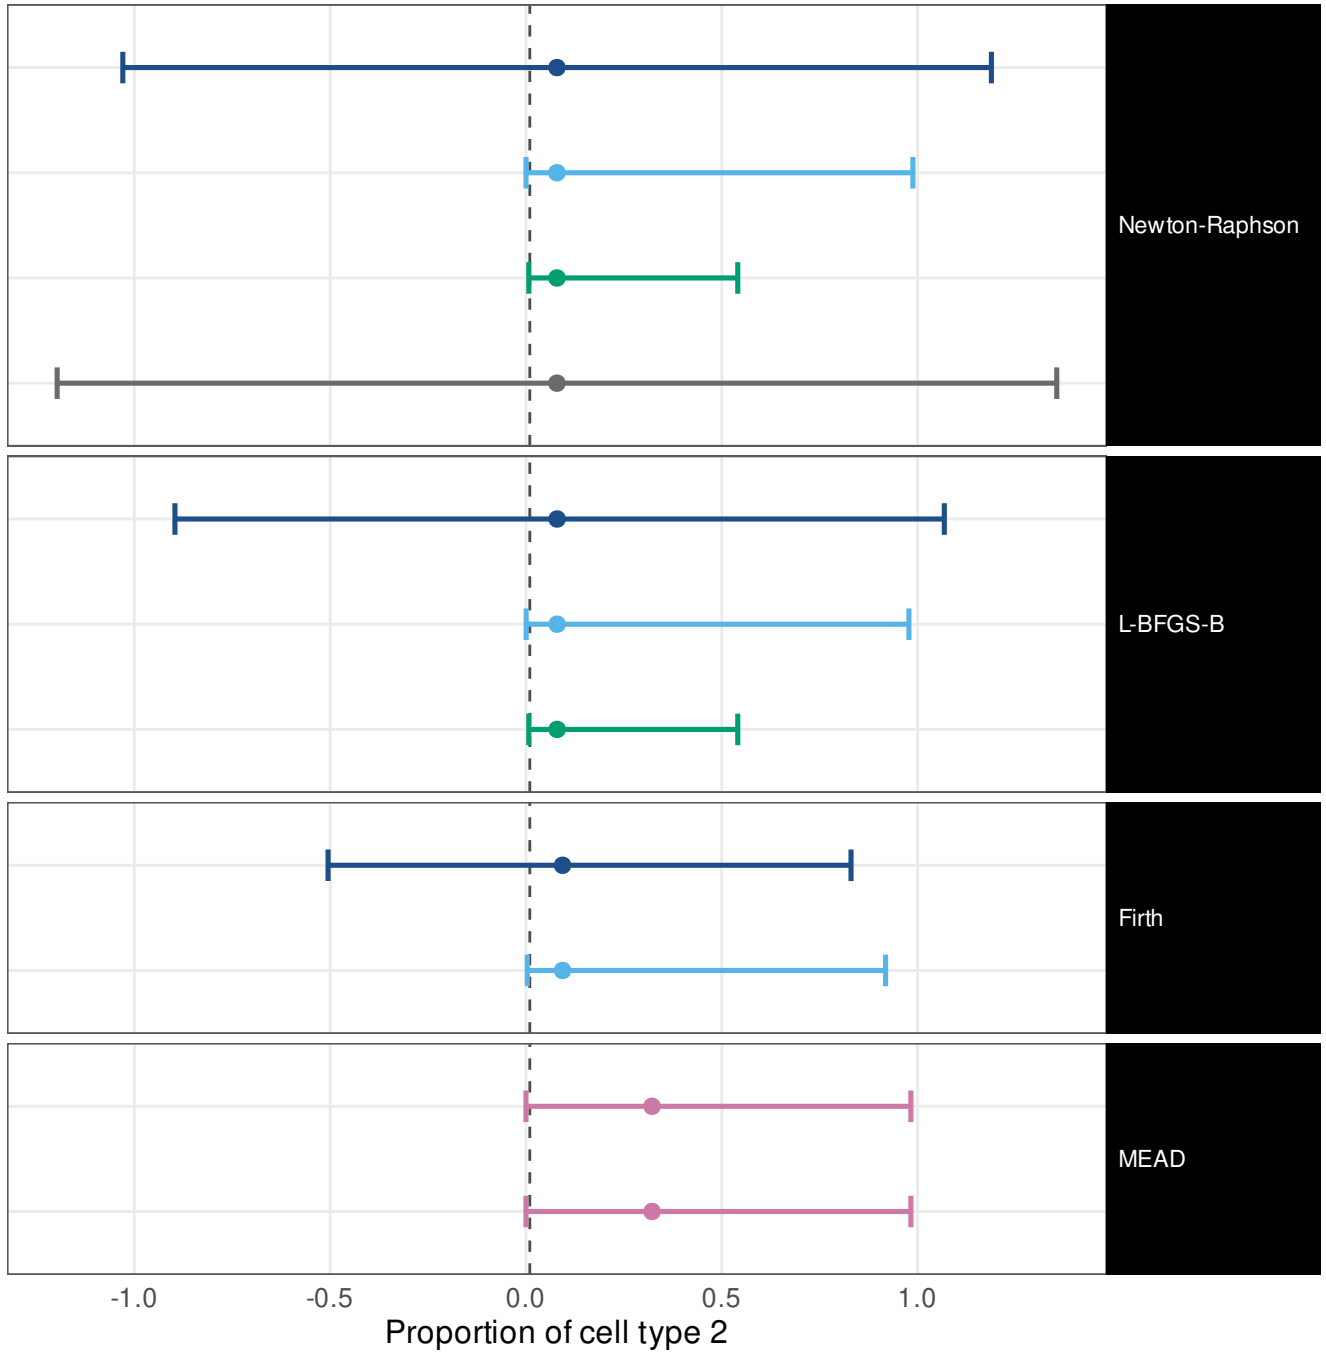


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.96 [0.93, 0.98]	w = 2.09
ILR, mapped back	0.97 [0.94, 0.99]	w = 0.975
Profile likelihood	0.98 [0.94, 0.99]	w = 0.443
Oracle (Fisher at p*)	1 [0.98, 1]	w = 2.49
Wald (delta)	0.93 [0.81, 0.97]	w = 1.76
ILR, mapped back	0.95 [0.84, 0.99]	w = 0.961
Profile likelihood	0.98 [0.94, 0.99]	w = 0.443
Wald (delta)	0.9 [0.74, 0.96]	w = 1.25
ILR, mapped back	0.79 [0.62, 0.9]	w = 0.886
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1

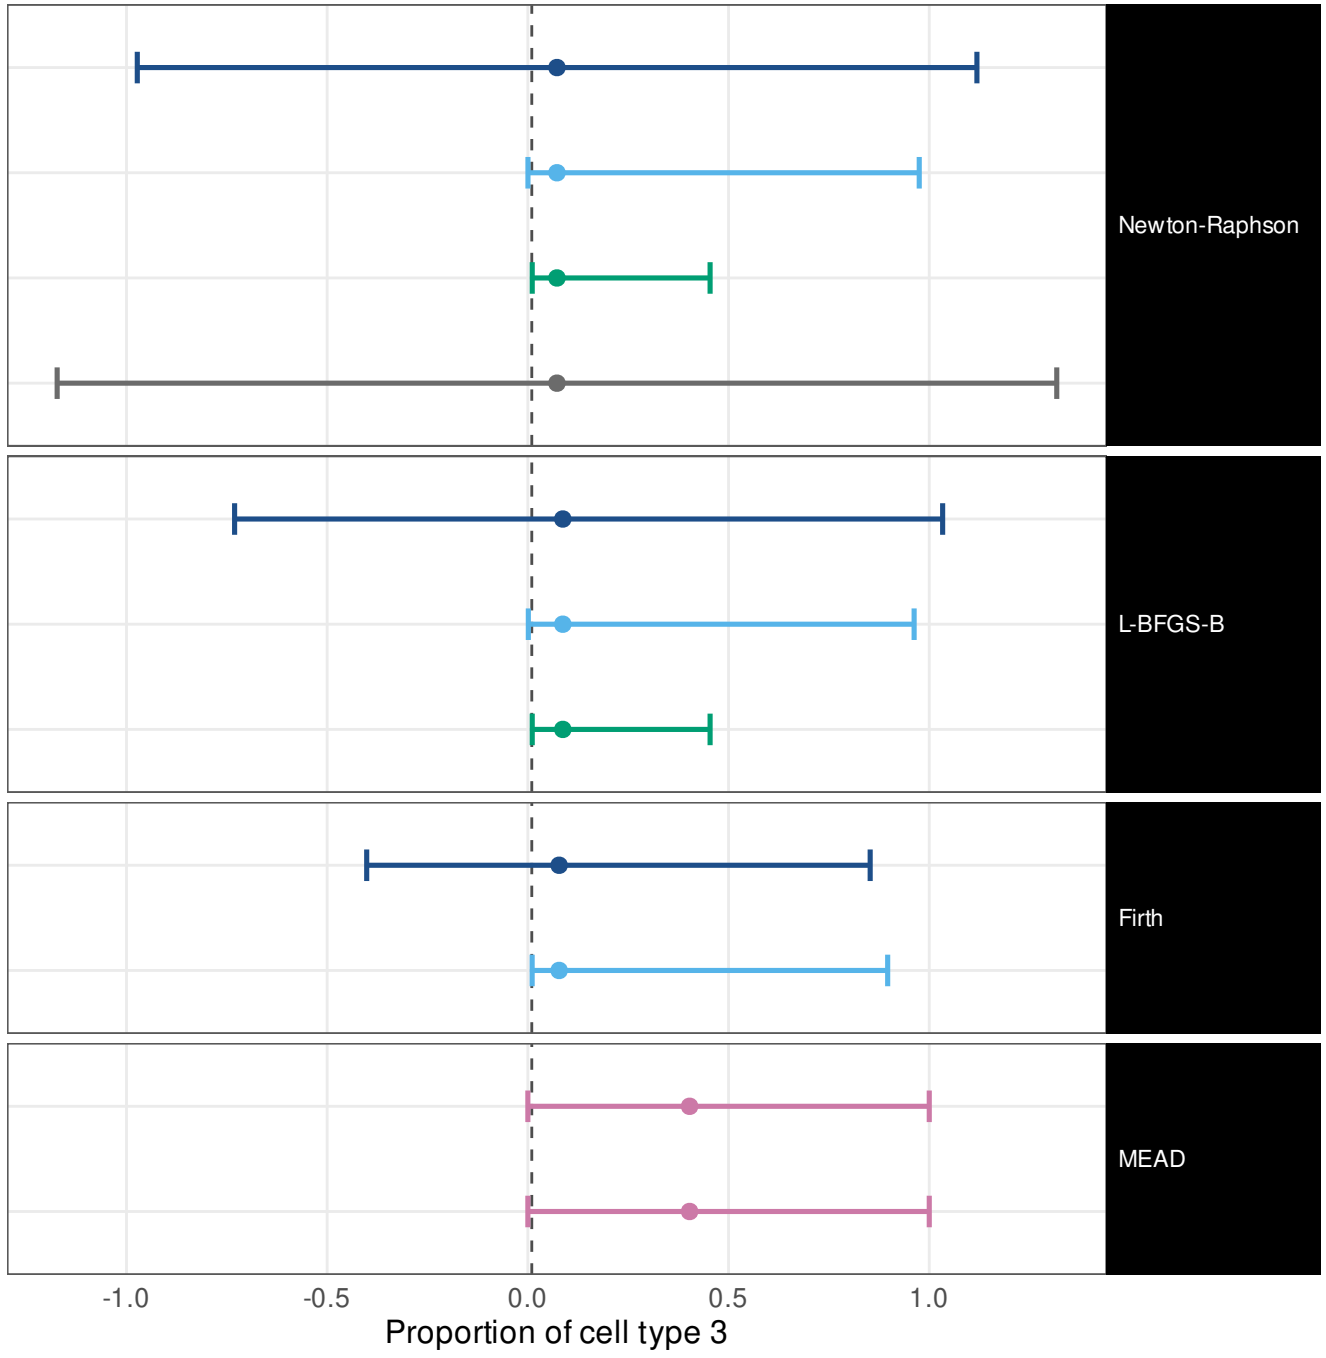


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.86 [0.81, 0.9]	w = 1.05
ILR, mapped back	0.64 [0.57, 0.7]	w = 0.957
Profile likelihood	0.88 [0.83, 0.92]	w = 0.623
Oracle (Fisher at p*)	0.68 [0.61, 0.74]	w = 0.615
Wald (delta)	0.59 [0.44, 0.72]	w = 0.9
ILR, mapped back	0.28 [0.17, 0.43]	w = 0.889
Profile likelihood	0.88 [0.83, 0.92]	w = 0.623
Wald (delta)	0.29 [0.17, 0.45]	w = 0.806
ILR, mapped back	0.026 [0.0047, 0.13]	w = 0.779
Method's own interval	1 [0.98, 1]	w = 0.968
Own interval, transcript fractions	1 [0.98, 1]	w = 0.968

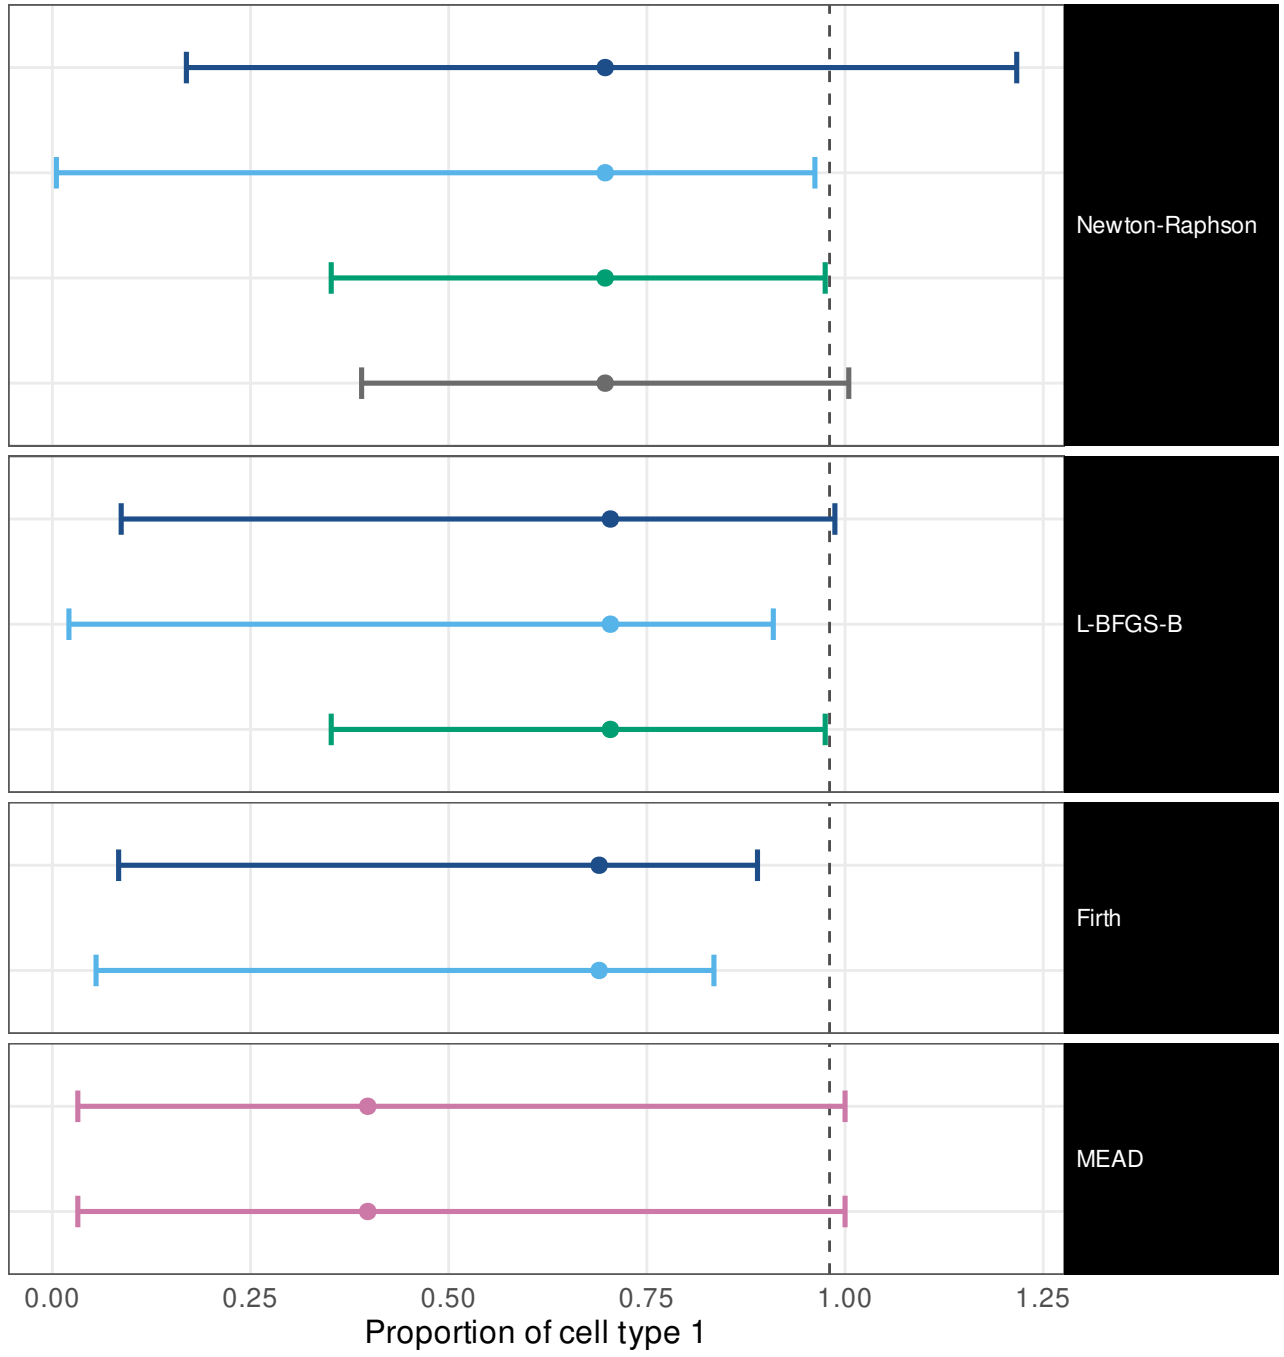


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.82 [0.76, 0.86]	w = 1.68
ILR, mapped back	0.94 [0.9, 0.96]	w = 0.965
Profile likelihood	0.96 [0.92, 0.98]	w = 0.559
Oracle (Fisher at p*)	1 [0.98, 1]	w = 2.09
Wald (delta)	0.72 [0.57, 0.83]	w = 1.2
ILR, mapped back	0.74 [0.6, 0.84]	w = 0.899
Profile likelihood	0.96 [0.92, 0.98]	w = 0.559
Wald (delta)	0.74 [0.58, 0.85]	w = 1.01
ILR, mapped back	0.5 [0.35, 0.65]	w = 0.816
Method's own interval	0.99 [0.96, 1]	w = 0.963
Own interval, transcript fractions	0.99 [0.96, 1]	w = 0.963

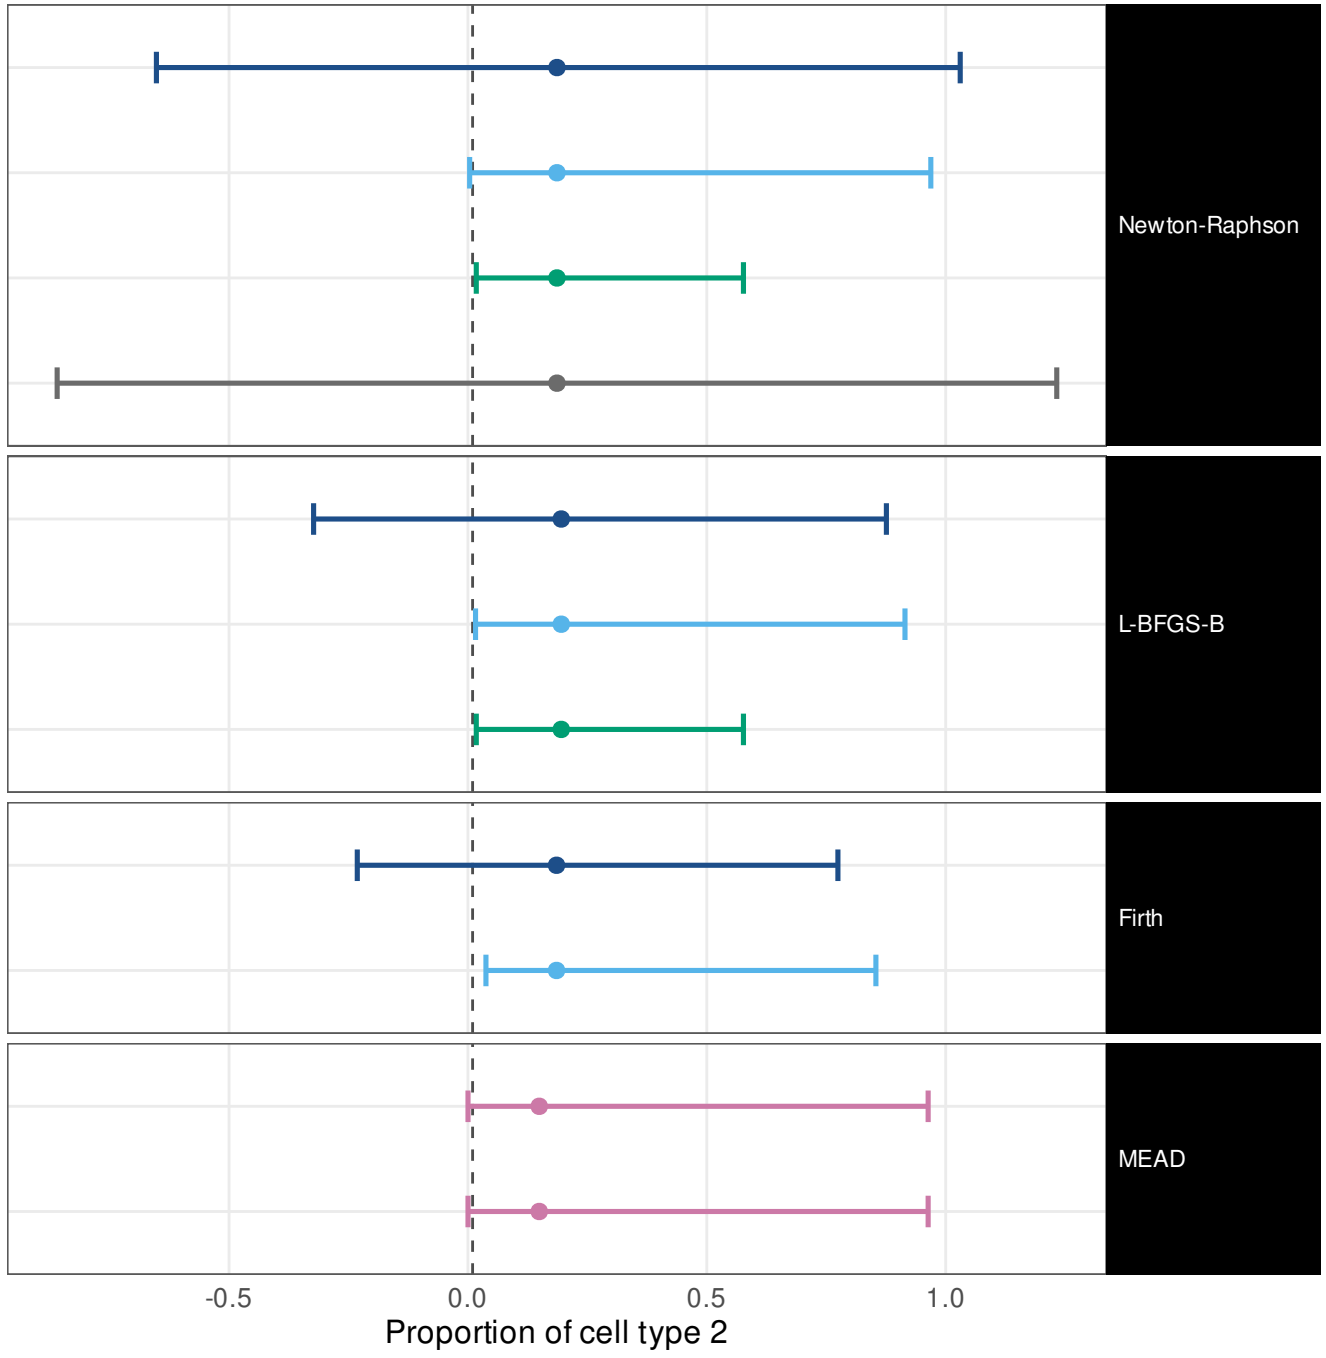


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.92 [0.87, 0.95]	w = 1.62
ILR, mapped back	0.94 [0.9, 0.96]	w = 0.937
Profile likelihood	0.99 [0.96, 1]	w = 0.456
Oracle (Fisher at p*)	1 [0.98, 1]	w = 2.01
Wald (delta)	0.91 [0.8, 0.97]	w = 1.24
ILR, mapped back	0.85 [0.72, 0.92]	w = 0.884
Profile likelihood	0.99 [0.96, 1]	w = 0.456
Wald (delta)	0.89 [0.76, 0.96]	w = 0.944
ILR, mapped back	0.47 [0.32, 0.63]	w = 0.775
Method's own interval	1 [0.98, 1]	w = 0.925
Own interval, transcript fractions	1 [0.98, 1]	w = 0.925

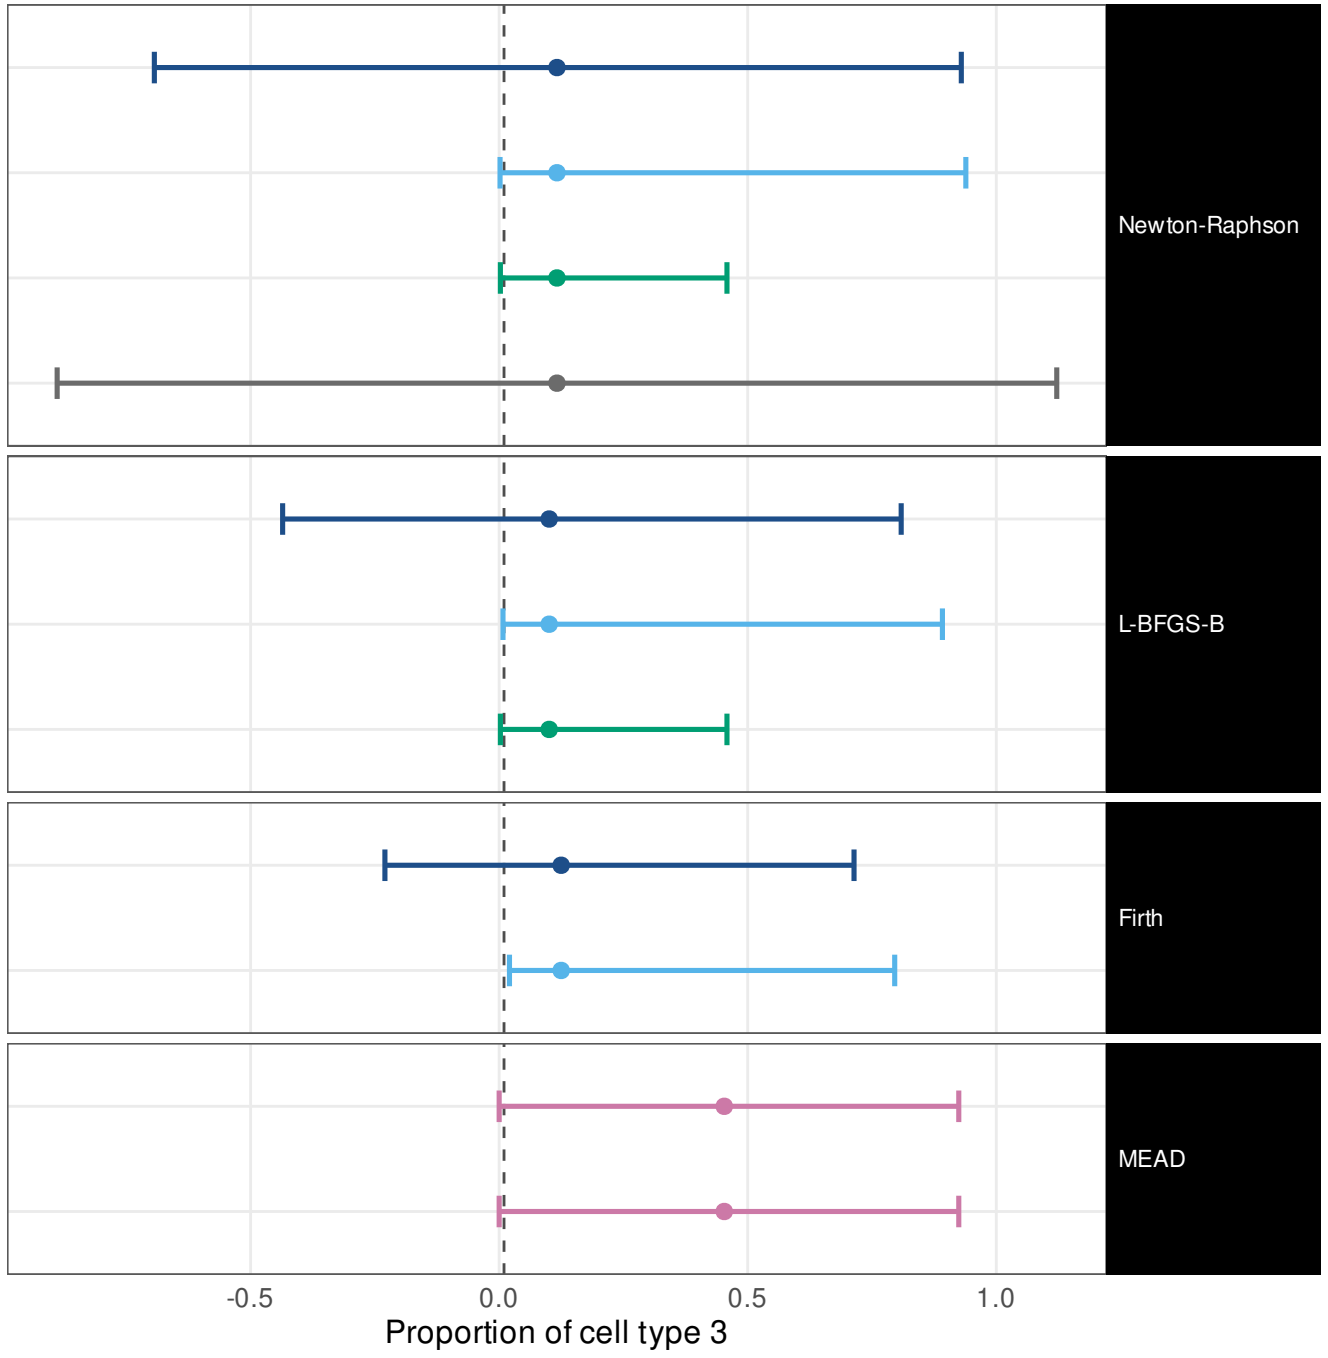


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.89 [0.84, 0.93]	w = 0.763
ILR, mapped back	0.58 [0.51, 0.65]	w = 0.957
Profile likelihood	0.9 [0.85, 0.93]	w = 0.548
Oracle (Fisher at p*)	0.83 [0.77, 0.88]	w = 0.611
Wald (delta)	0.71 [0.56, 0.83]	w = 0.721
ILR, mapped back	0.19 [0.1, 0.33]	w = 0.896
Profile likelihood	0.9 [0.85, 0.93]	w = 0.548
Wald (delta)	0.5 [0.35, 0.65]	w = 0.848
ILR, mapped back	0.079 [0.027, 0.21]	w = 0.808
Method's own interval	0.96 [0.93, 0.98]	w = 0.997
Own interval, transcript fractions	0.96 [0.93, 0.98]	w = 0.997
Fisher information (Wald)	0.98 [0.95, 0.99]	w = 0.973
Godambe sandwich	0.96 [0.92, 0.98]	w = 0.992
Released code, as published	0.96 [0.92, 0.98]	w = 0.992

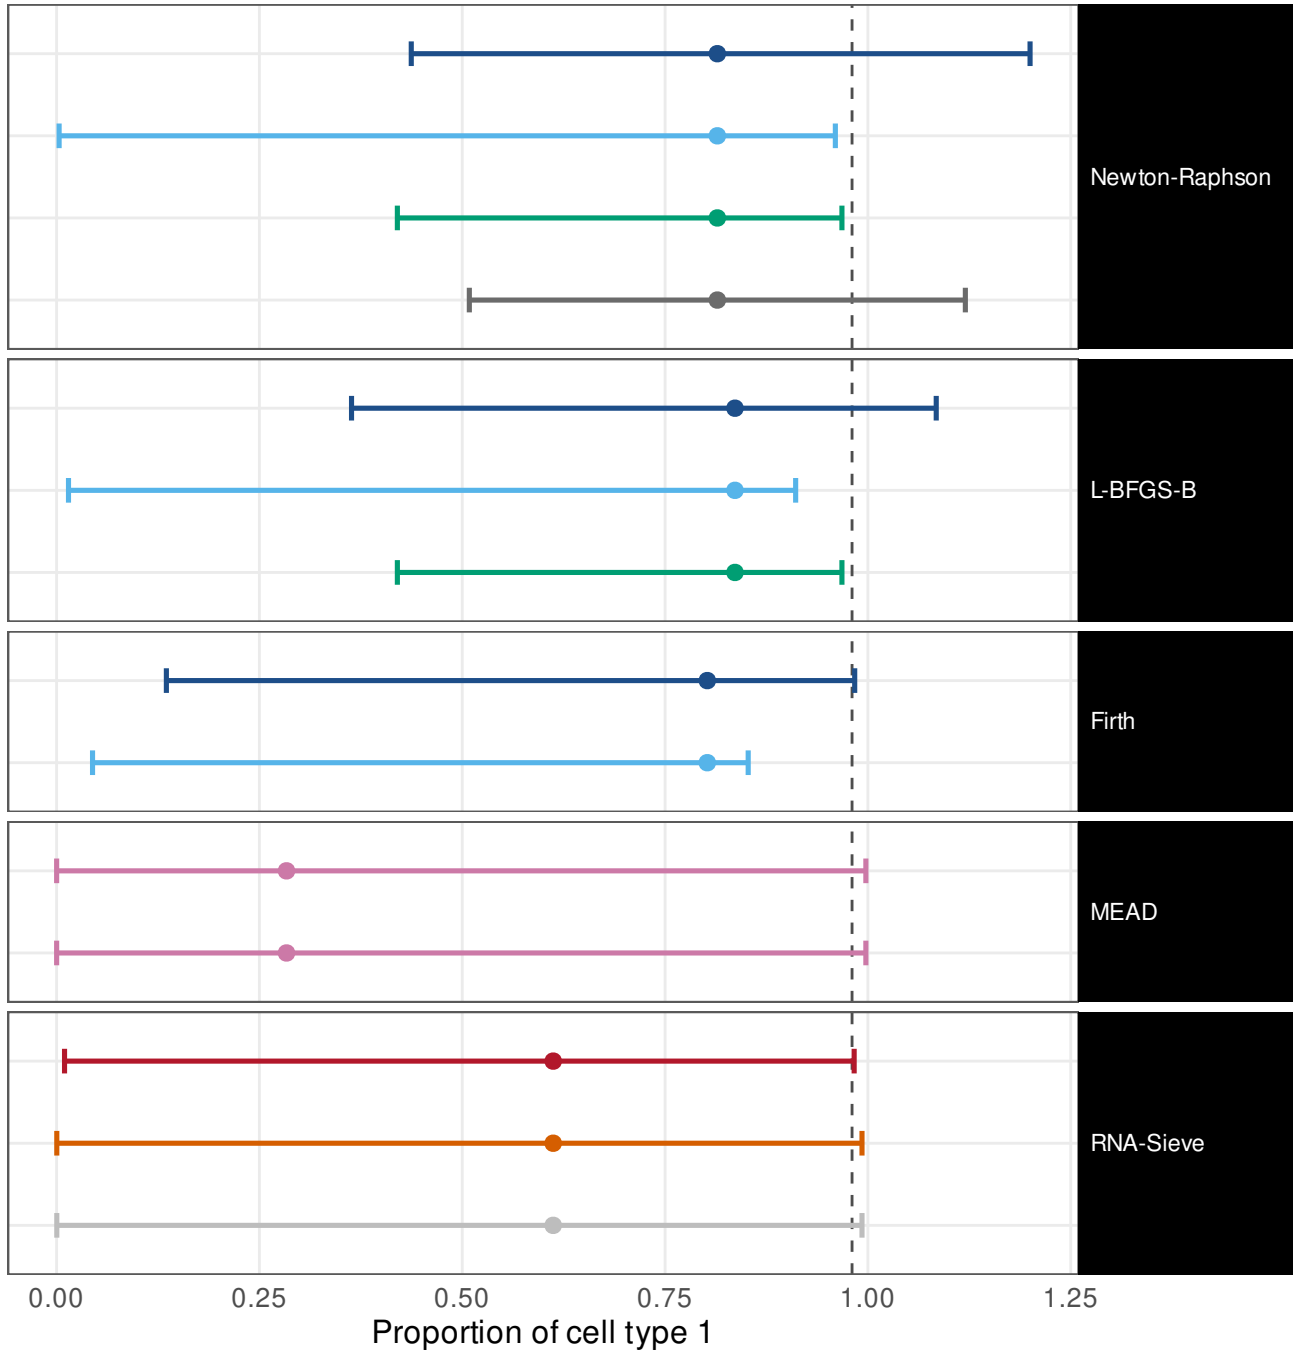


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.92 [0.87, 0.95]	w = 1.8
ILR, mapped back	0.97 [0.94, 0.99]	w = 0.981
Profile likelihood	0.98 [0.95, 0.99]	w = 0.481
Oracle (Fisher at p*)	1 [0.98, 1]	w = 2.08
Wald (delta)	0.93 [0.81, 0.98]	w = 1.55
ILR, mapped back	0.86 [0.72, 0.93]	w = 0.951
Profile likelihood	0.98 [0.95, 0.99]	w = 0.481
Wald (delta)	0.89 [0.76, 0.96]	w = 1.27
ILR, mapped back	0.79 [0.64, 0.89]	w = 0.901
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.99 [0.96, 1]	w = 0.972
Godambe sandwich	0.98 [0.96, 0.99]	w = 0.992
Released code, as published	0.98 [0.96, 0.99]	w = 0.992

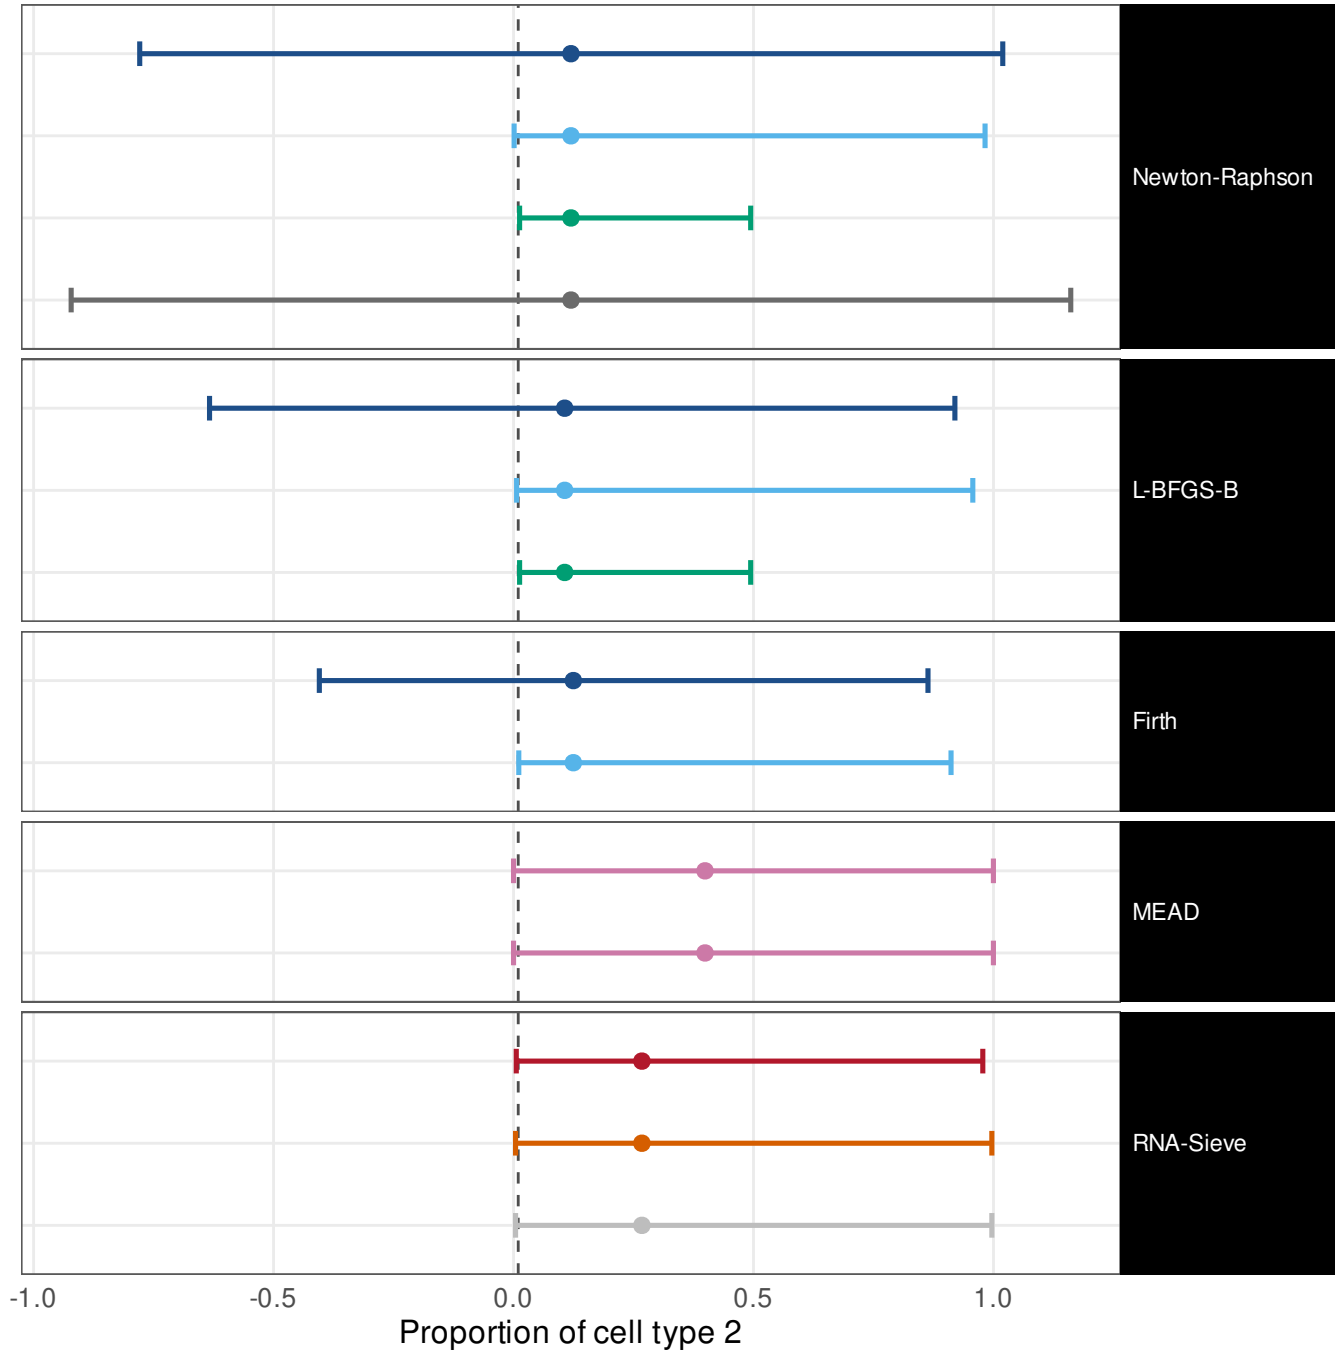


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.97 [0.94, 0.99]	w = 1.71
ILR, mapped back	0.97 [0.94, 0.99]	w = 0.973
Profile likelihood	1 [0.97, 1]	w = 0.428
Oracle (Fisher at p*)	1 [0.98, 1]	w = 2
Wald (delta)	0.95 [0.84, 0.99]	w = 1.44
ILR, mapped back	0.9 [0.78, 0.96]	w = 0.938
Profile likelihood	1 [0.97, 1]	w = 0.428
Wald (delta)	0.95 [0.83, 0.99]	w = 1.11
ILR, mapped back	0.76 [0.61, 0.87]	w = 0.867
Method's own interval	1 [0.98, 1]	w = 1
Own interval, transcript fractions	1 [0.98, 1]	w = 1
Fisher information (Wald)	0.98 [0.95, 0.99]	w = 0.958
Godambe sandwich	0.98 [0.94, 0.99]	w = 0.939
Released code, as published	0.98 [0.94, 0.99]	w = 0.939

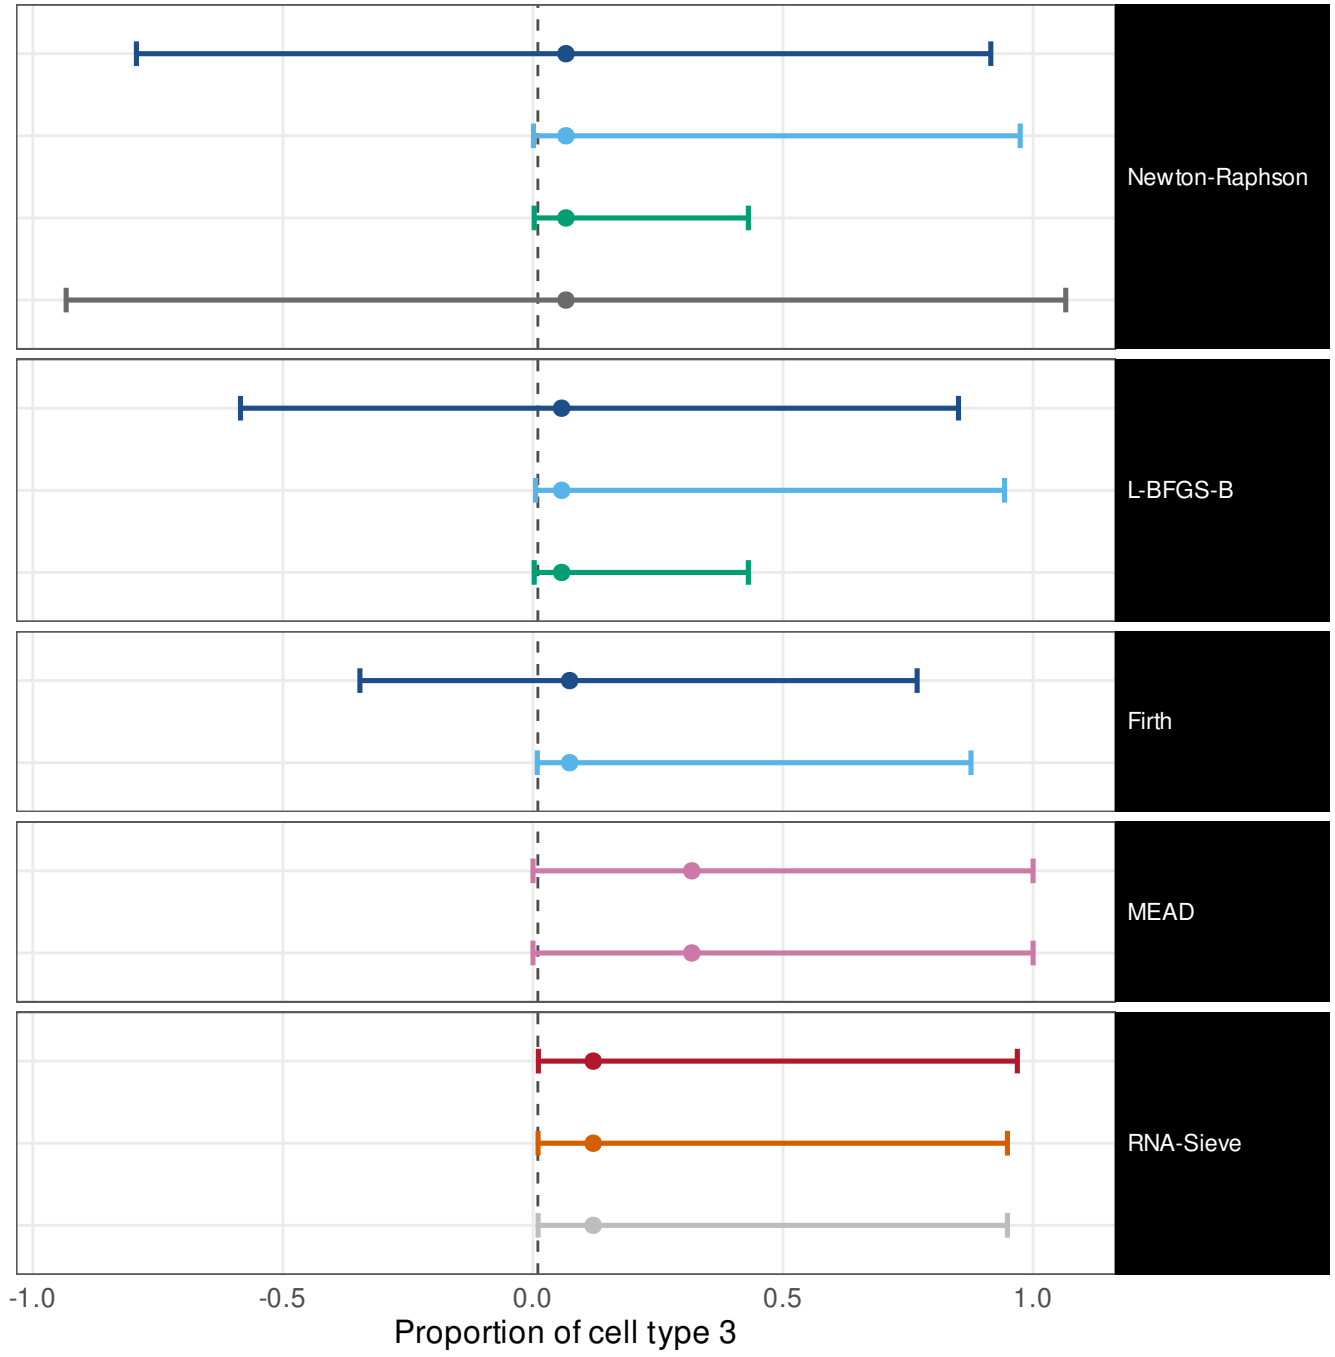

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.