
Wald approximation: whitened ILR estimates against N(0, 1)

balanced / low overlap

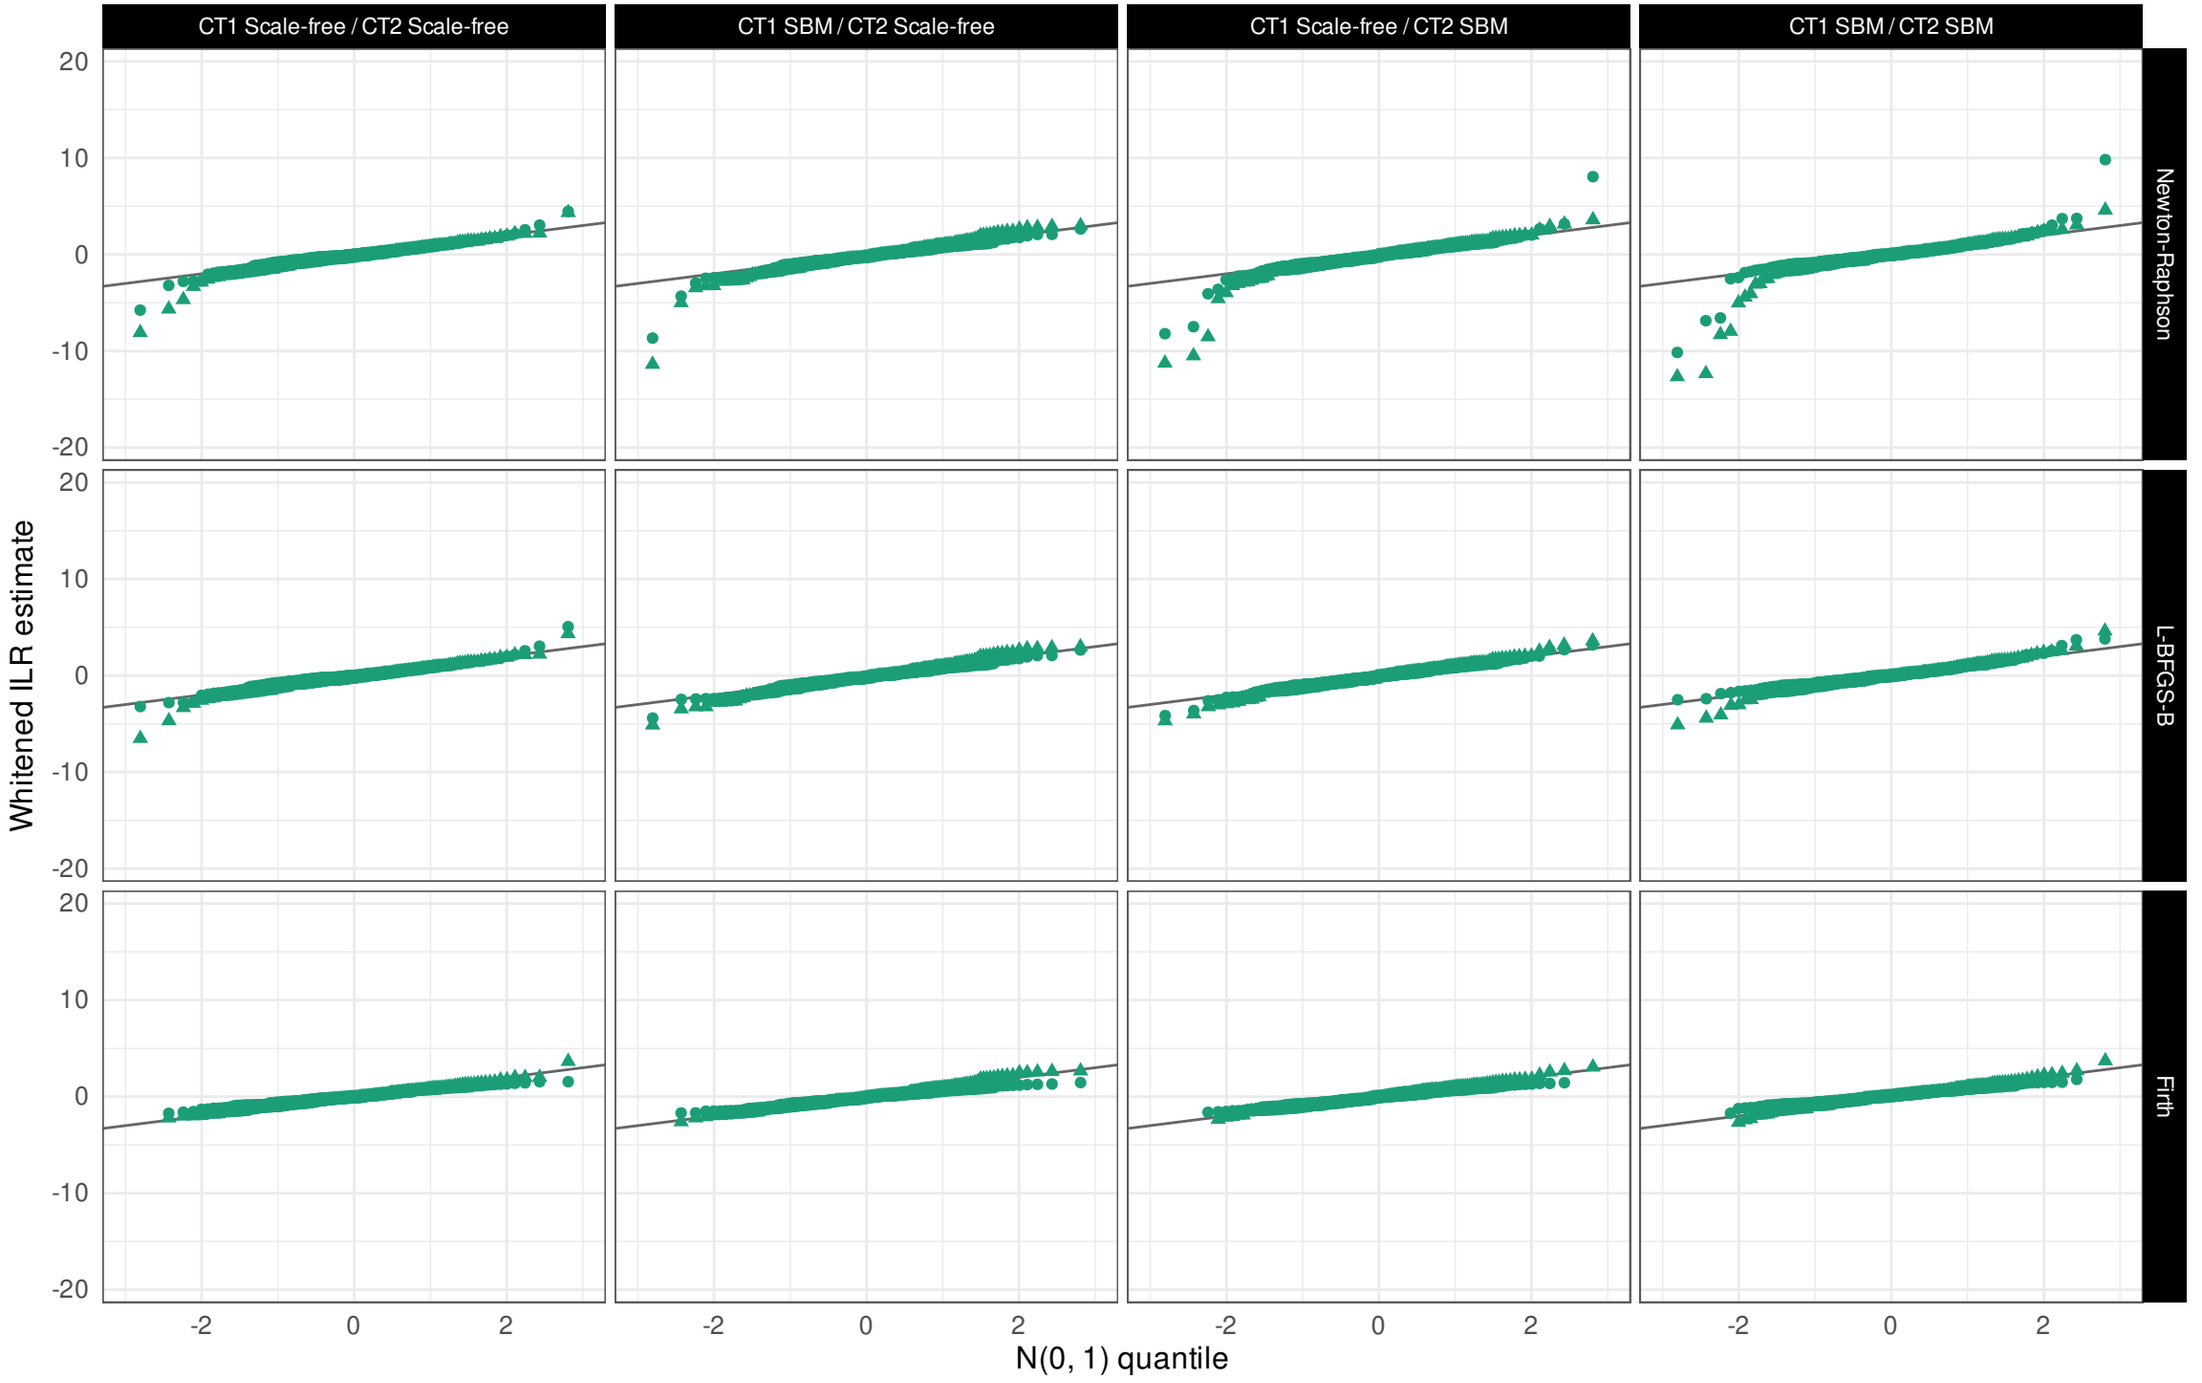


Converged, local maximum Converged, not a local maximum Numerical failure ILR coordinate z1 z2

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

balanced / moderate overlap

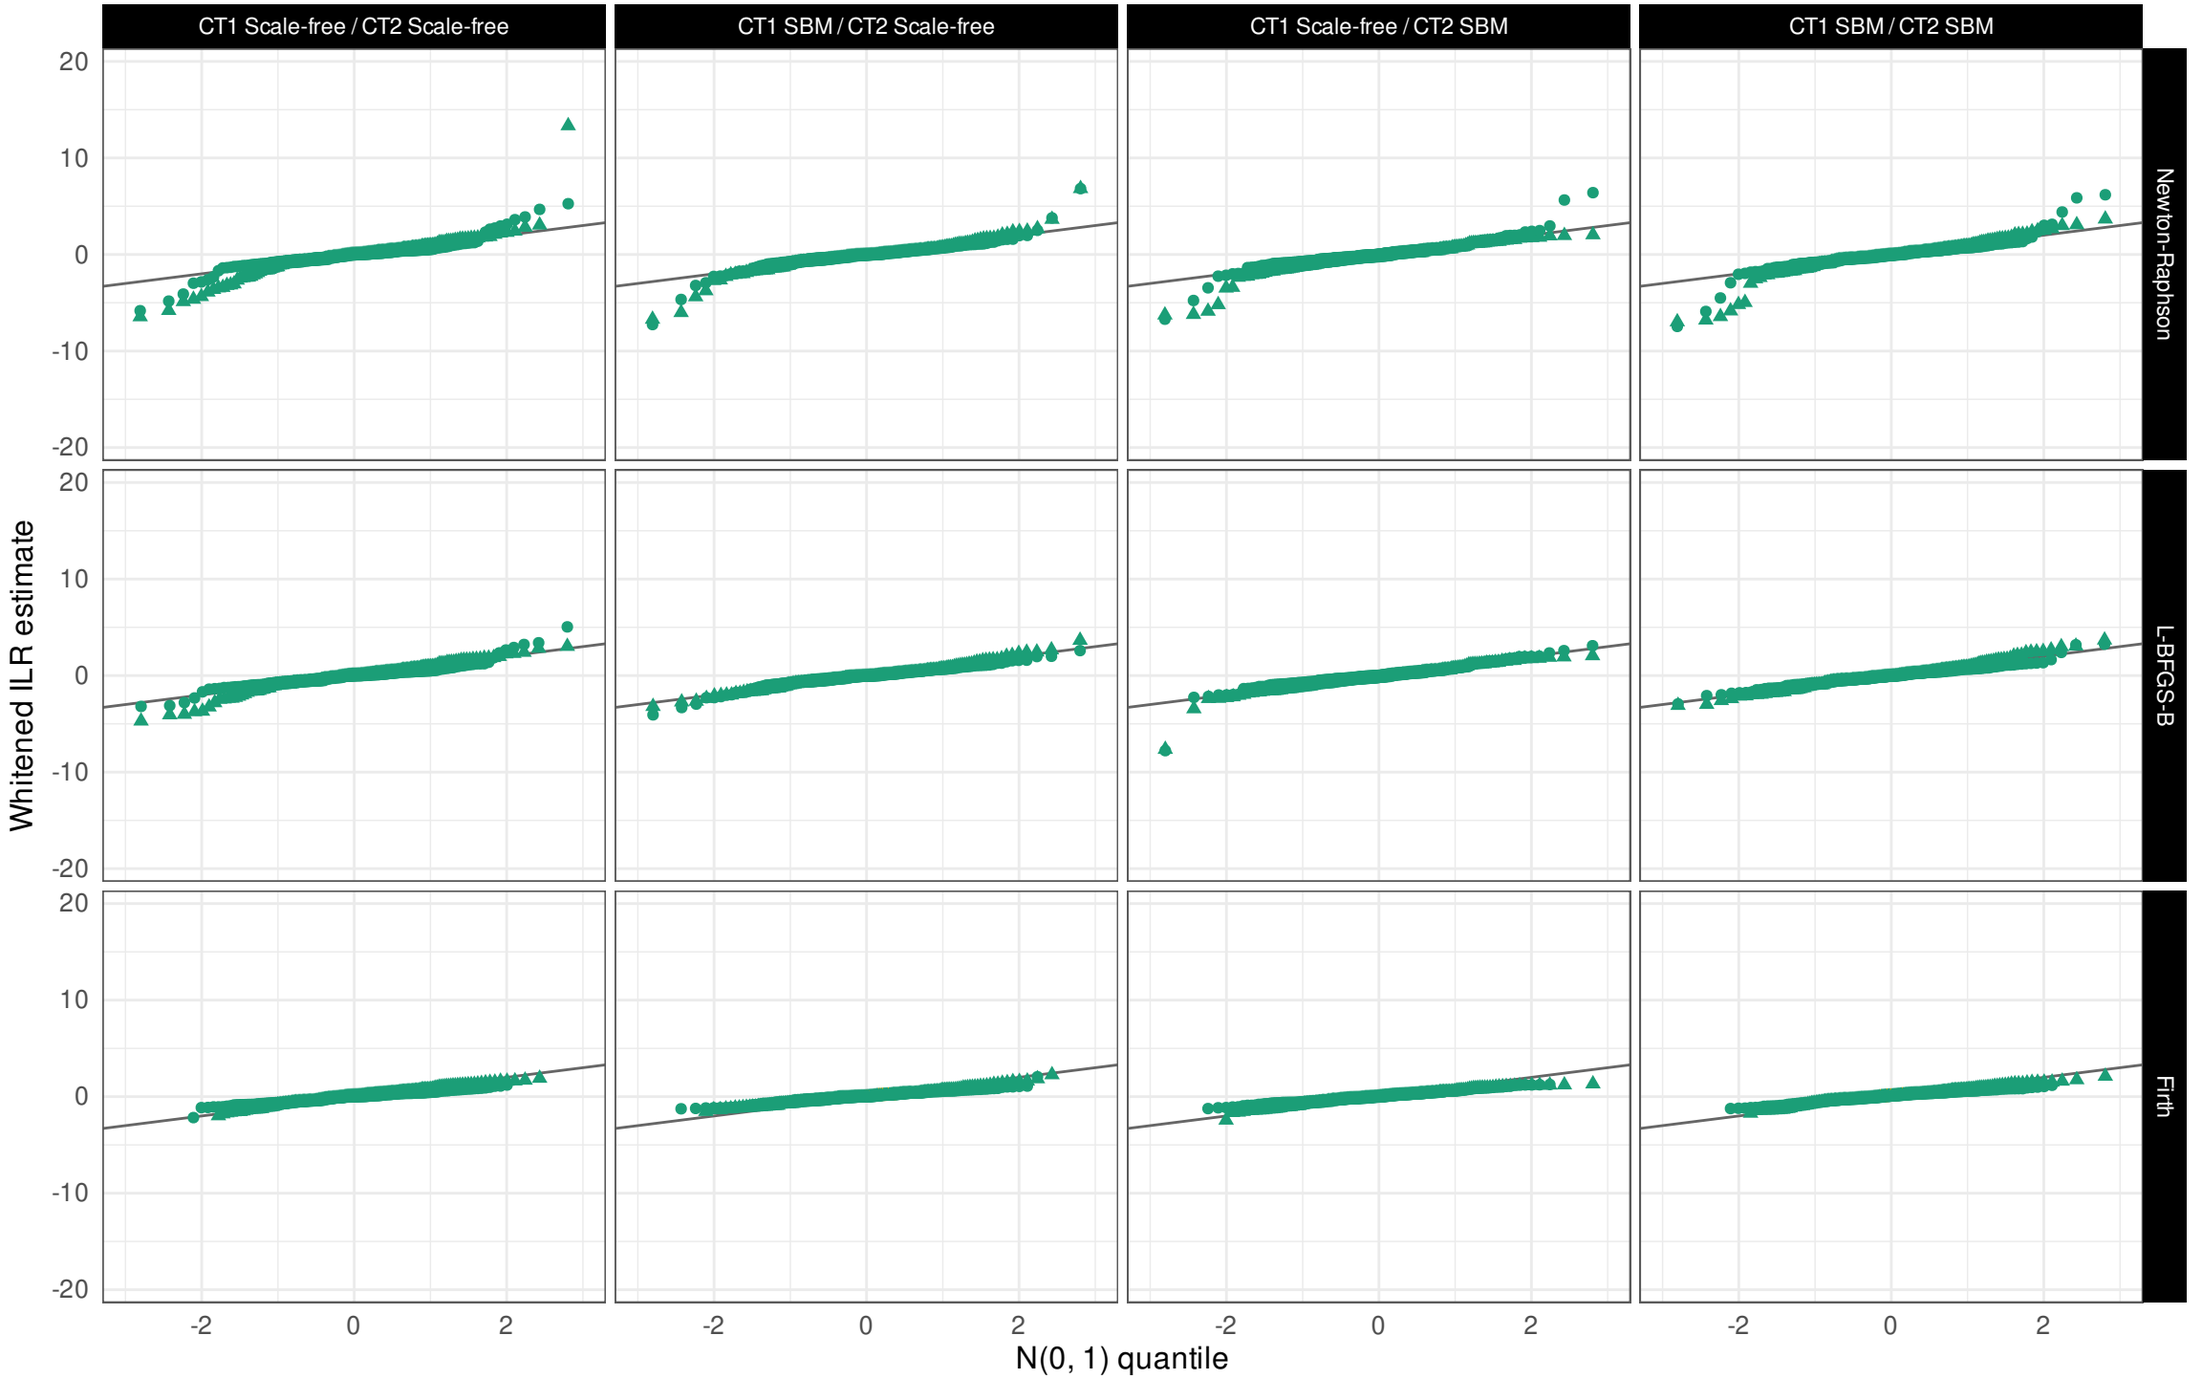


Converged, local maximum Converged, not a local maximum Numerical failure ILR coordinate z1 z2

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

balanced / high overlap

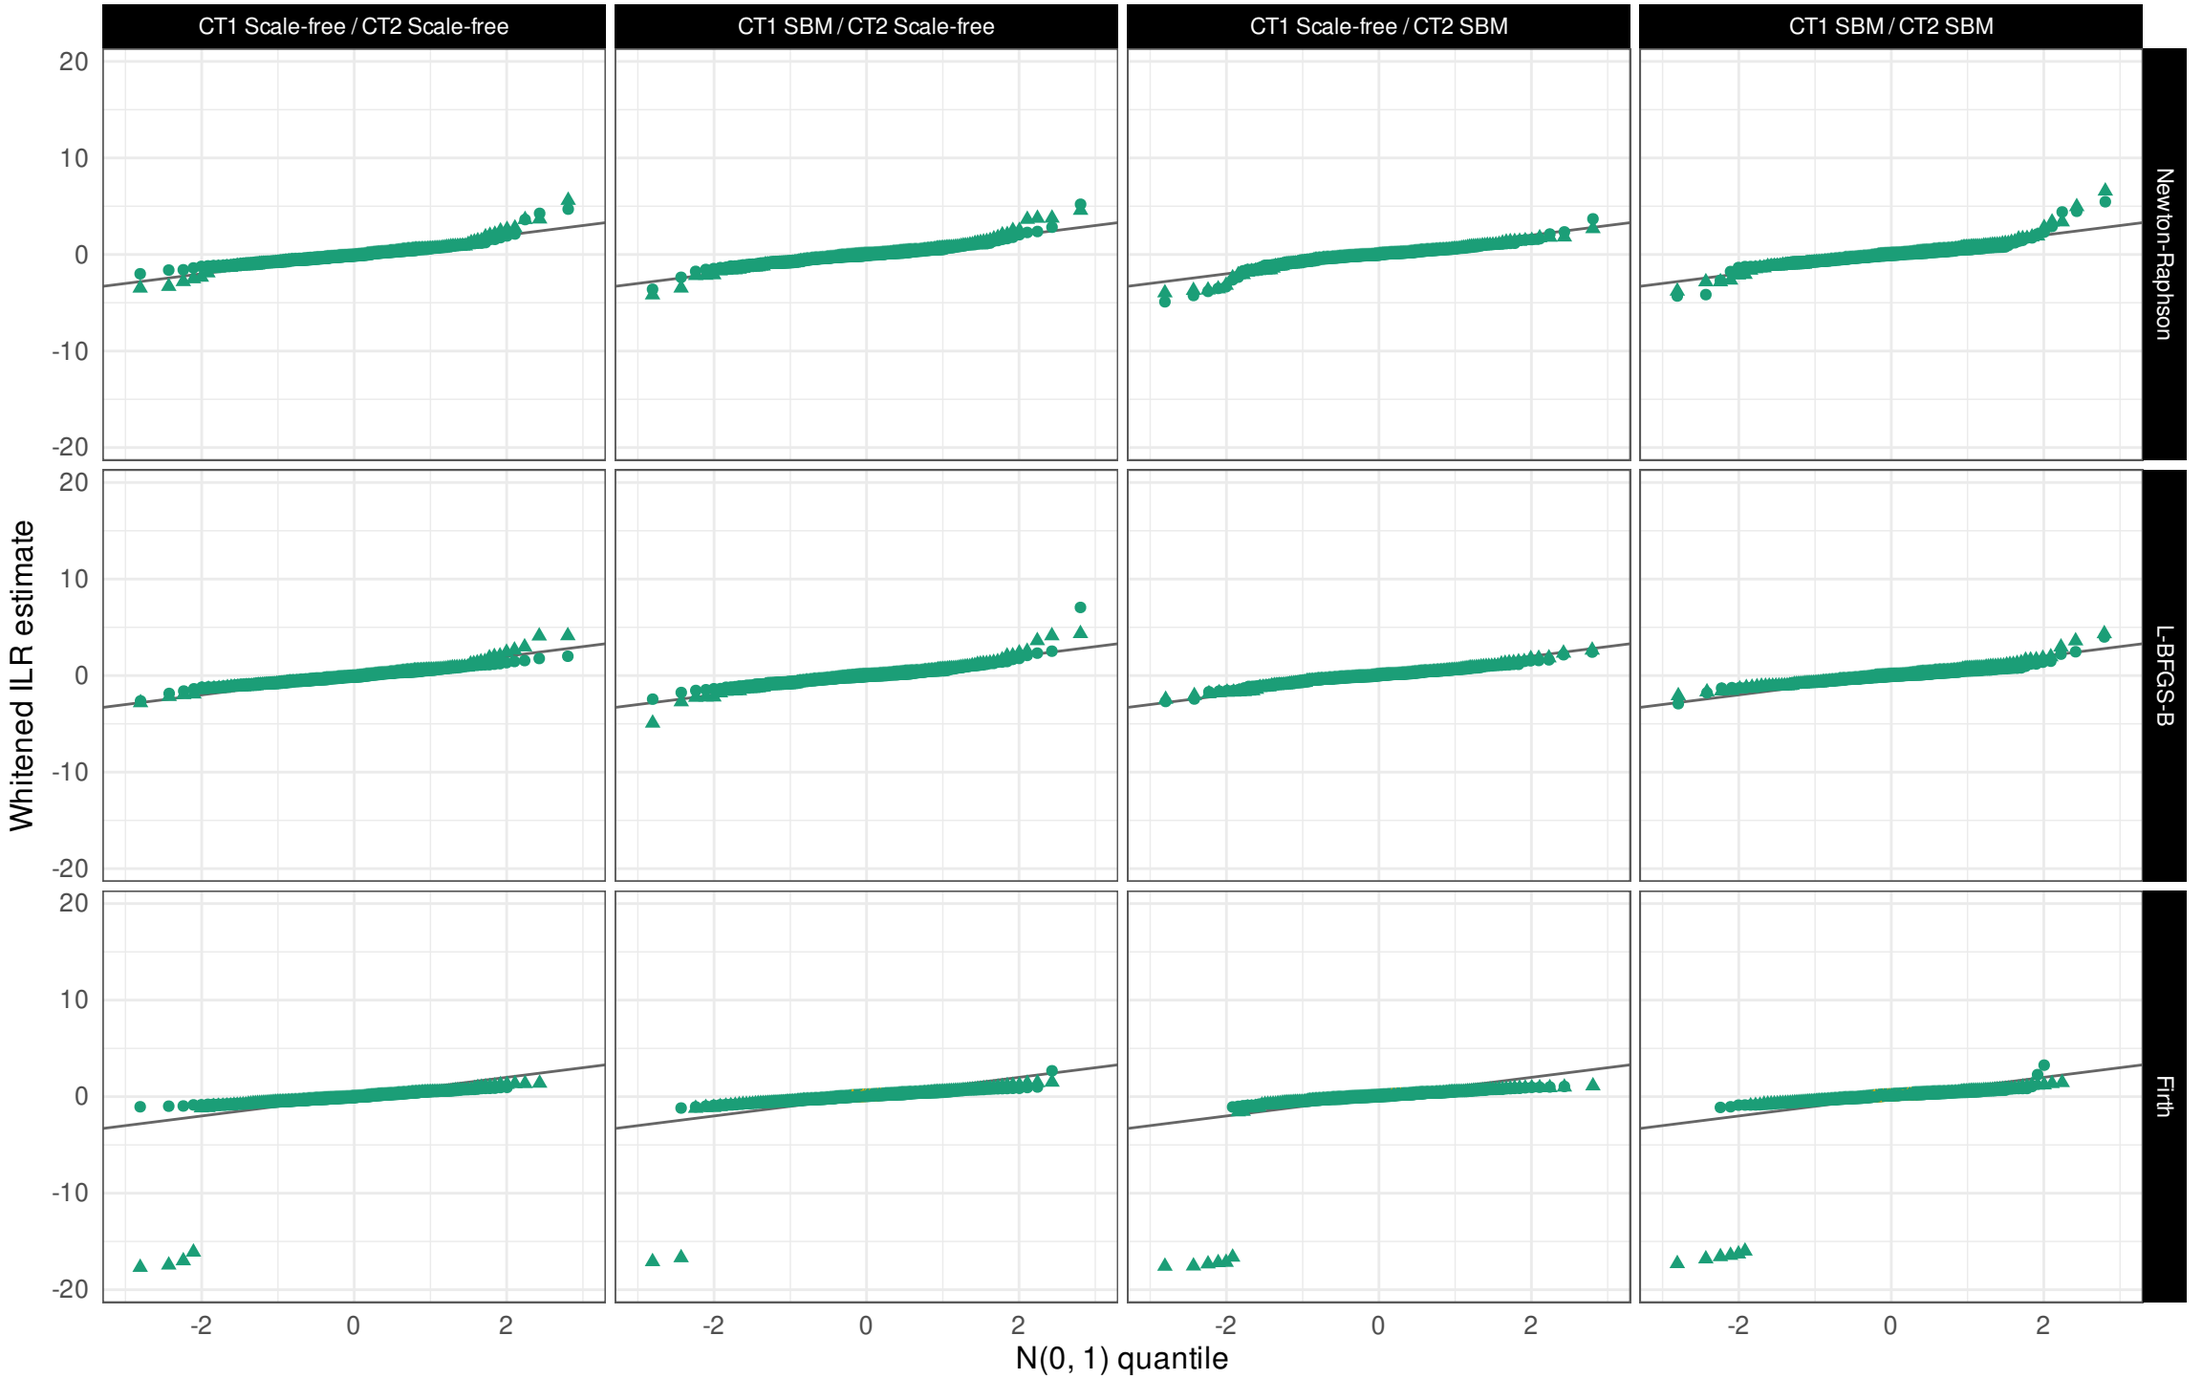


Converged, local maximum Converged, not a local maximum Numerical failure ILR coordinate z1 z2

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)


moderately unbalanced / low overlap

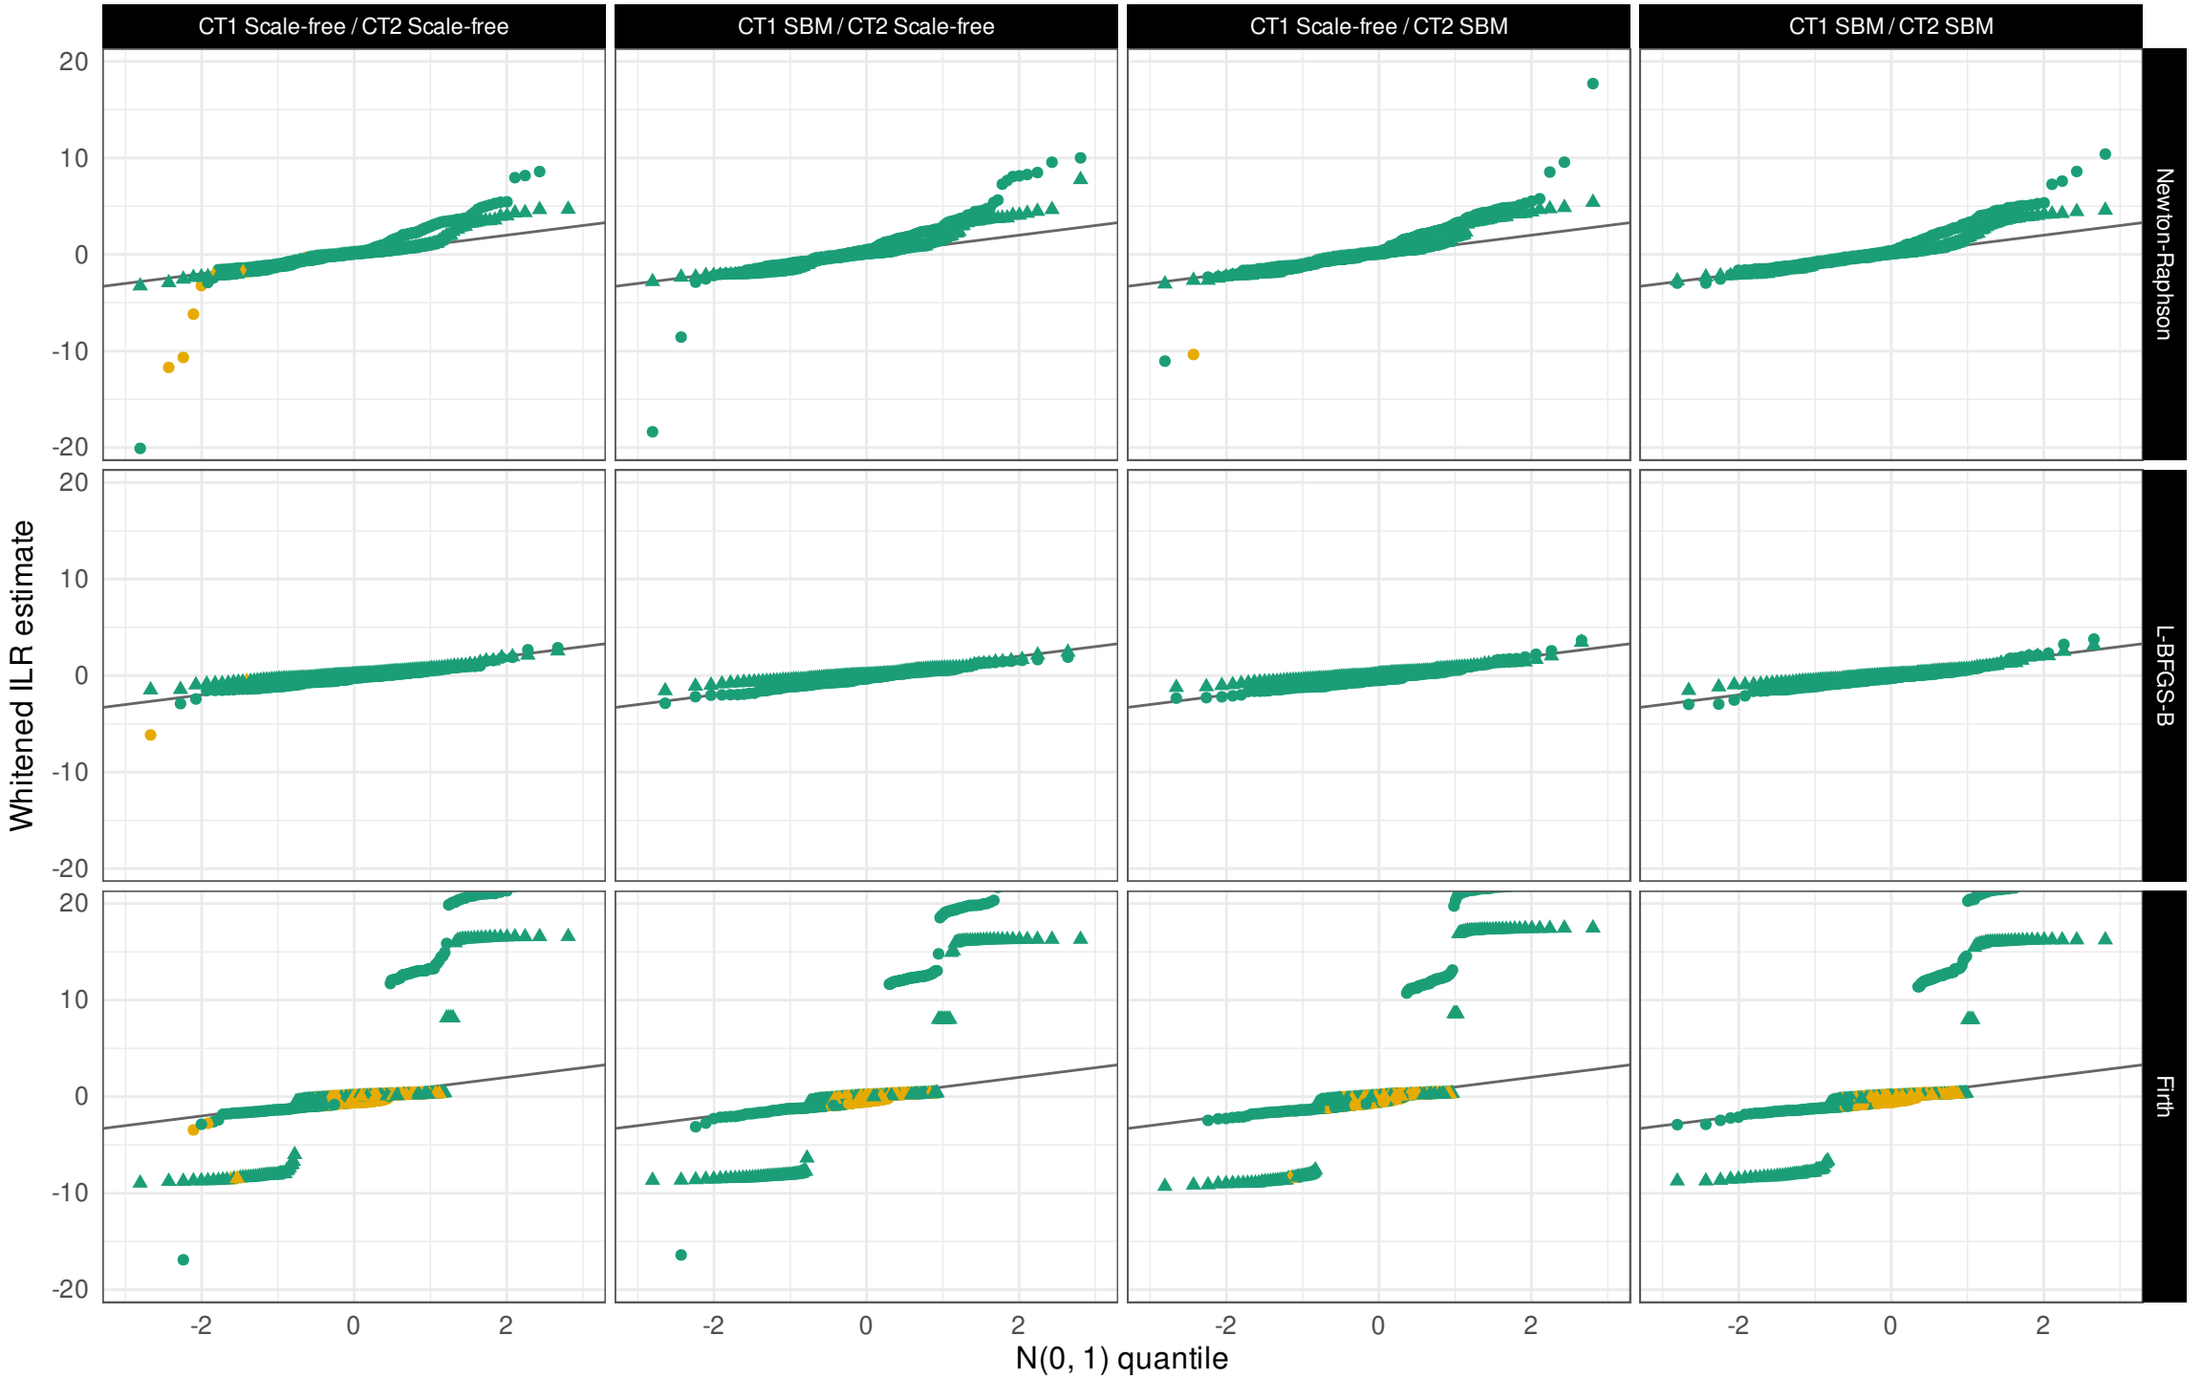

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)


moderately unbalanced / moderate overlap

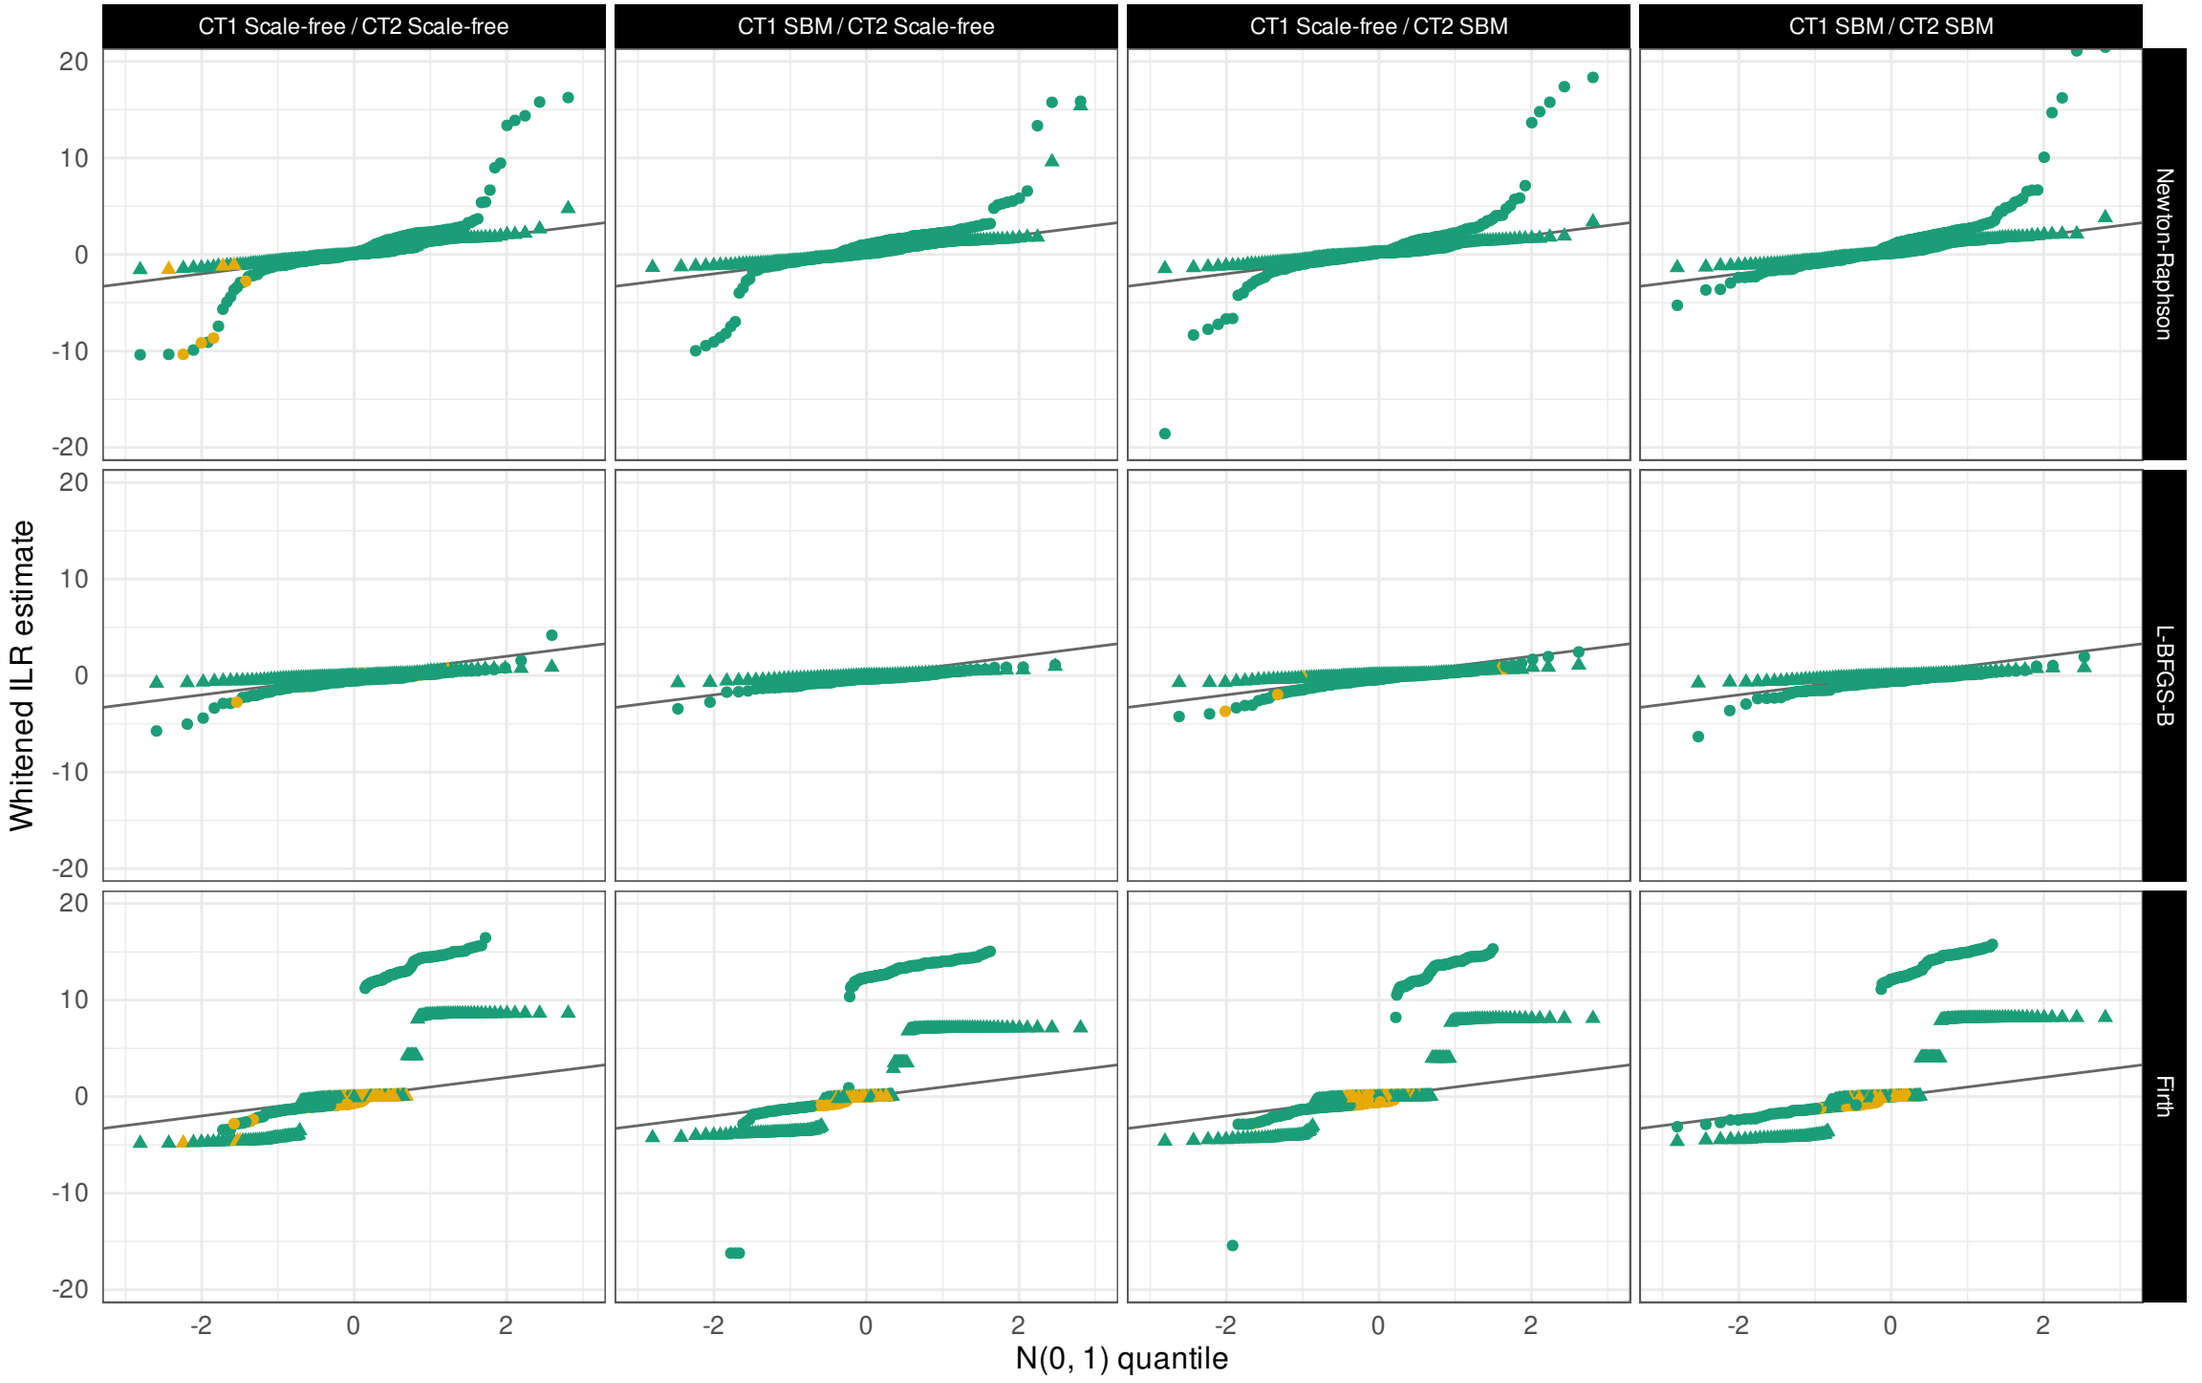

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)


moderately unbalanced / high overlap

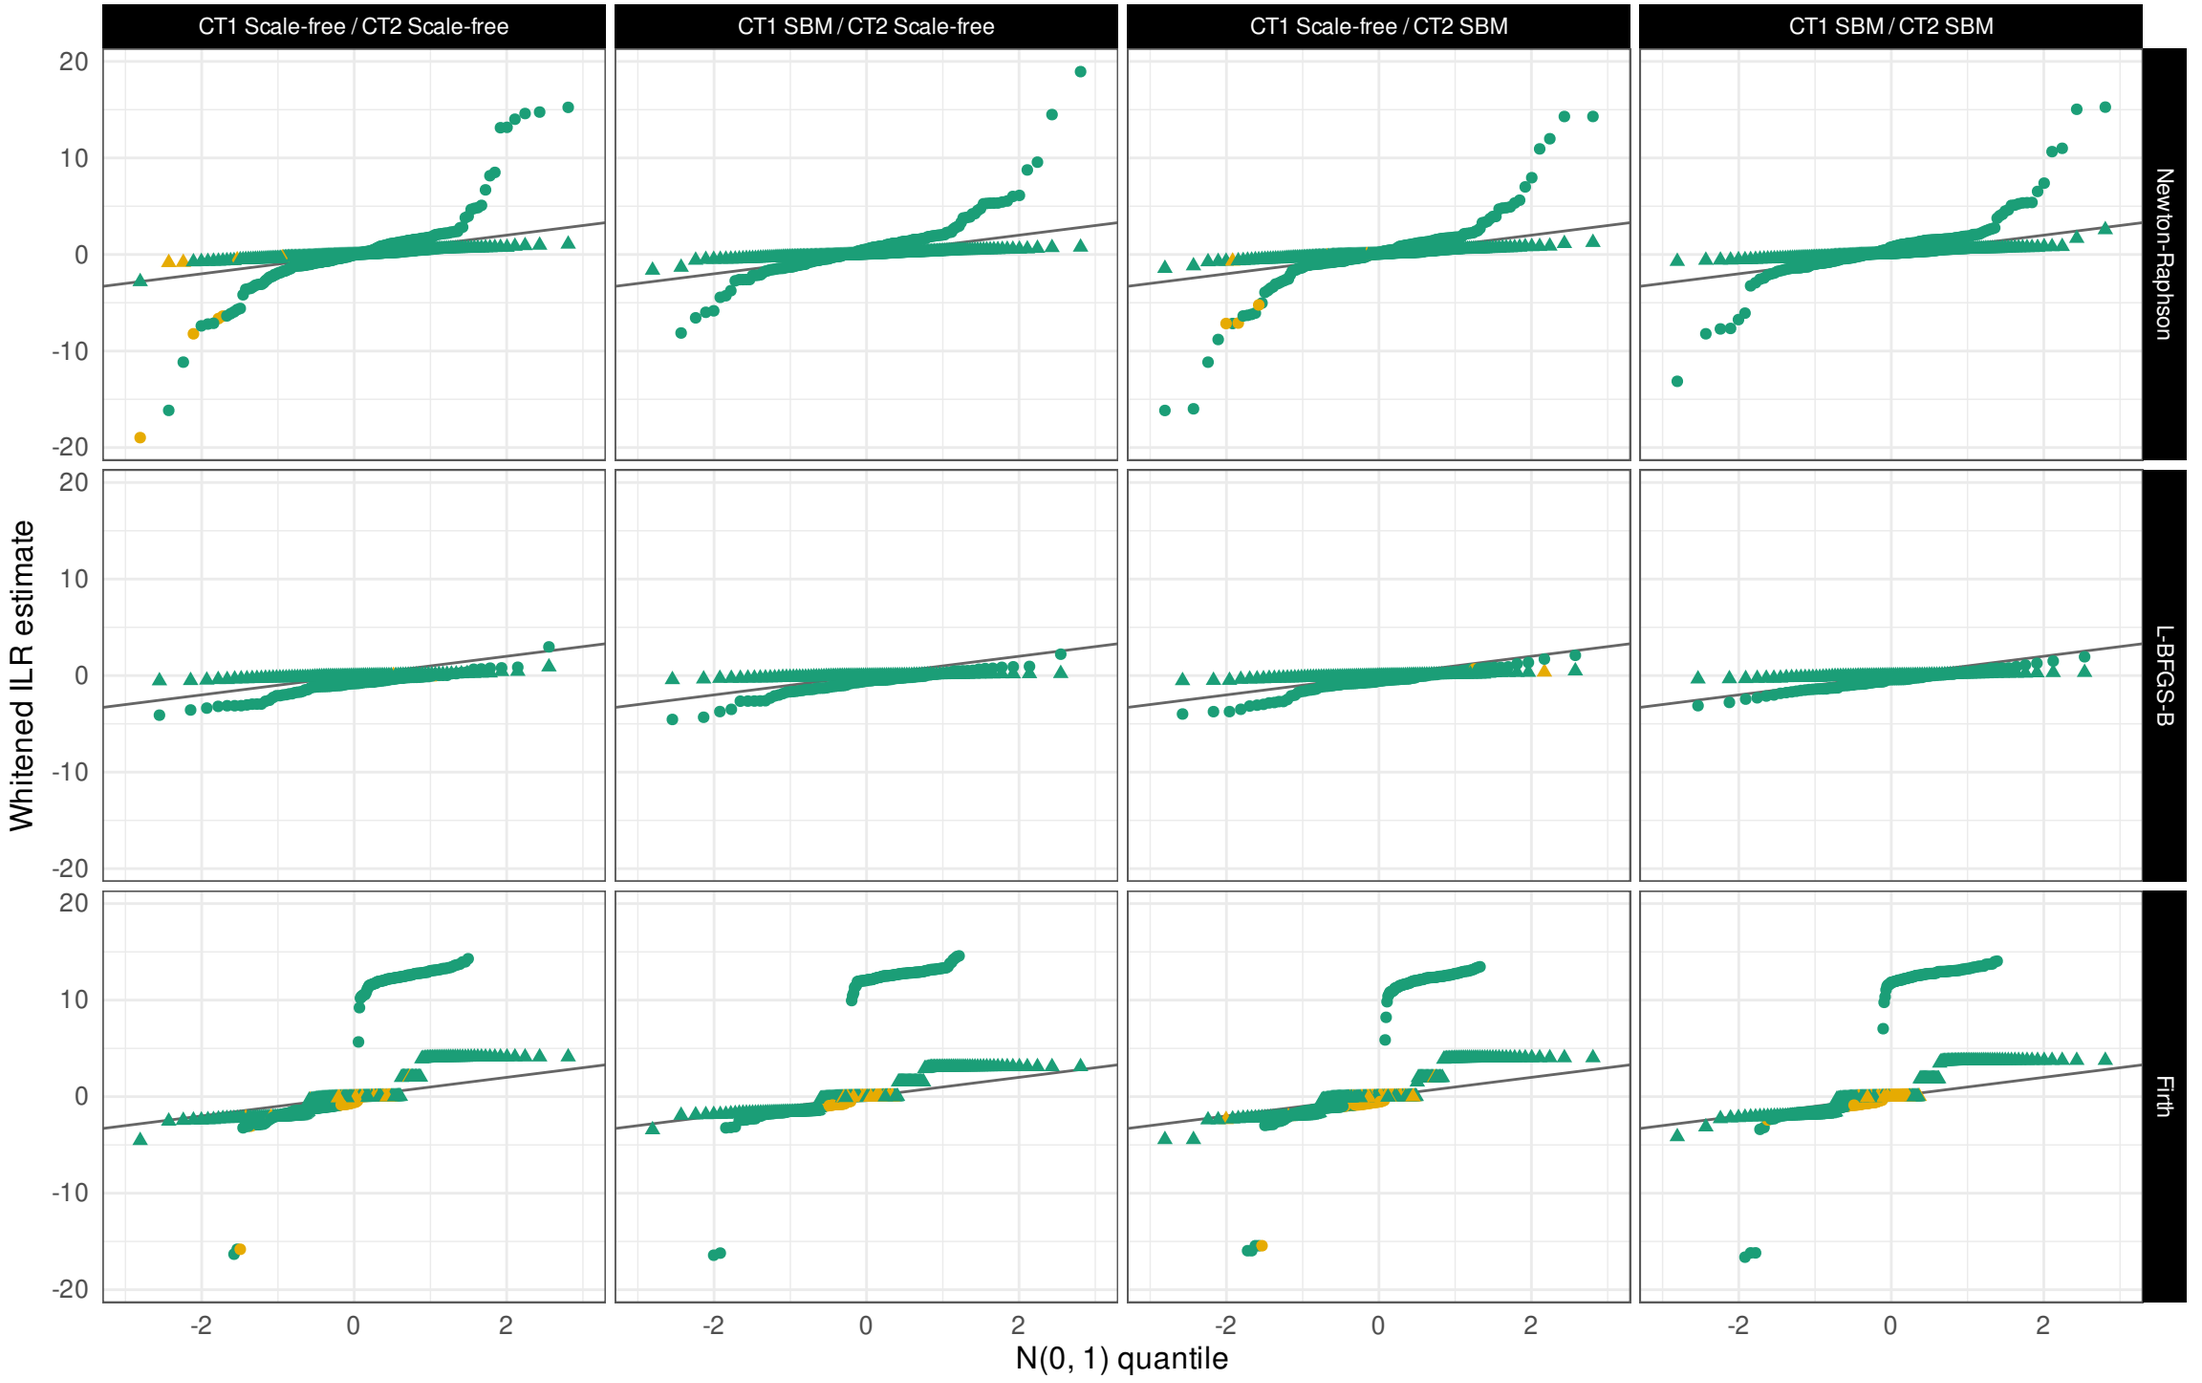

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)


highly unbalanced / low overlap

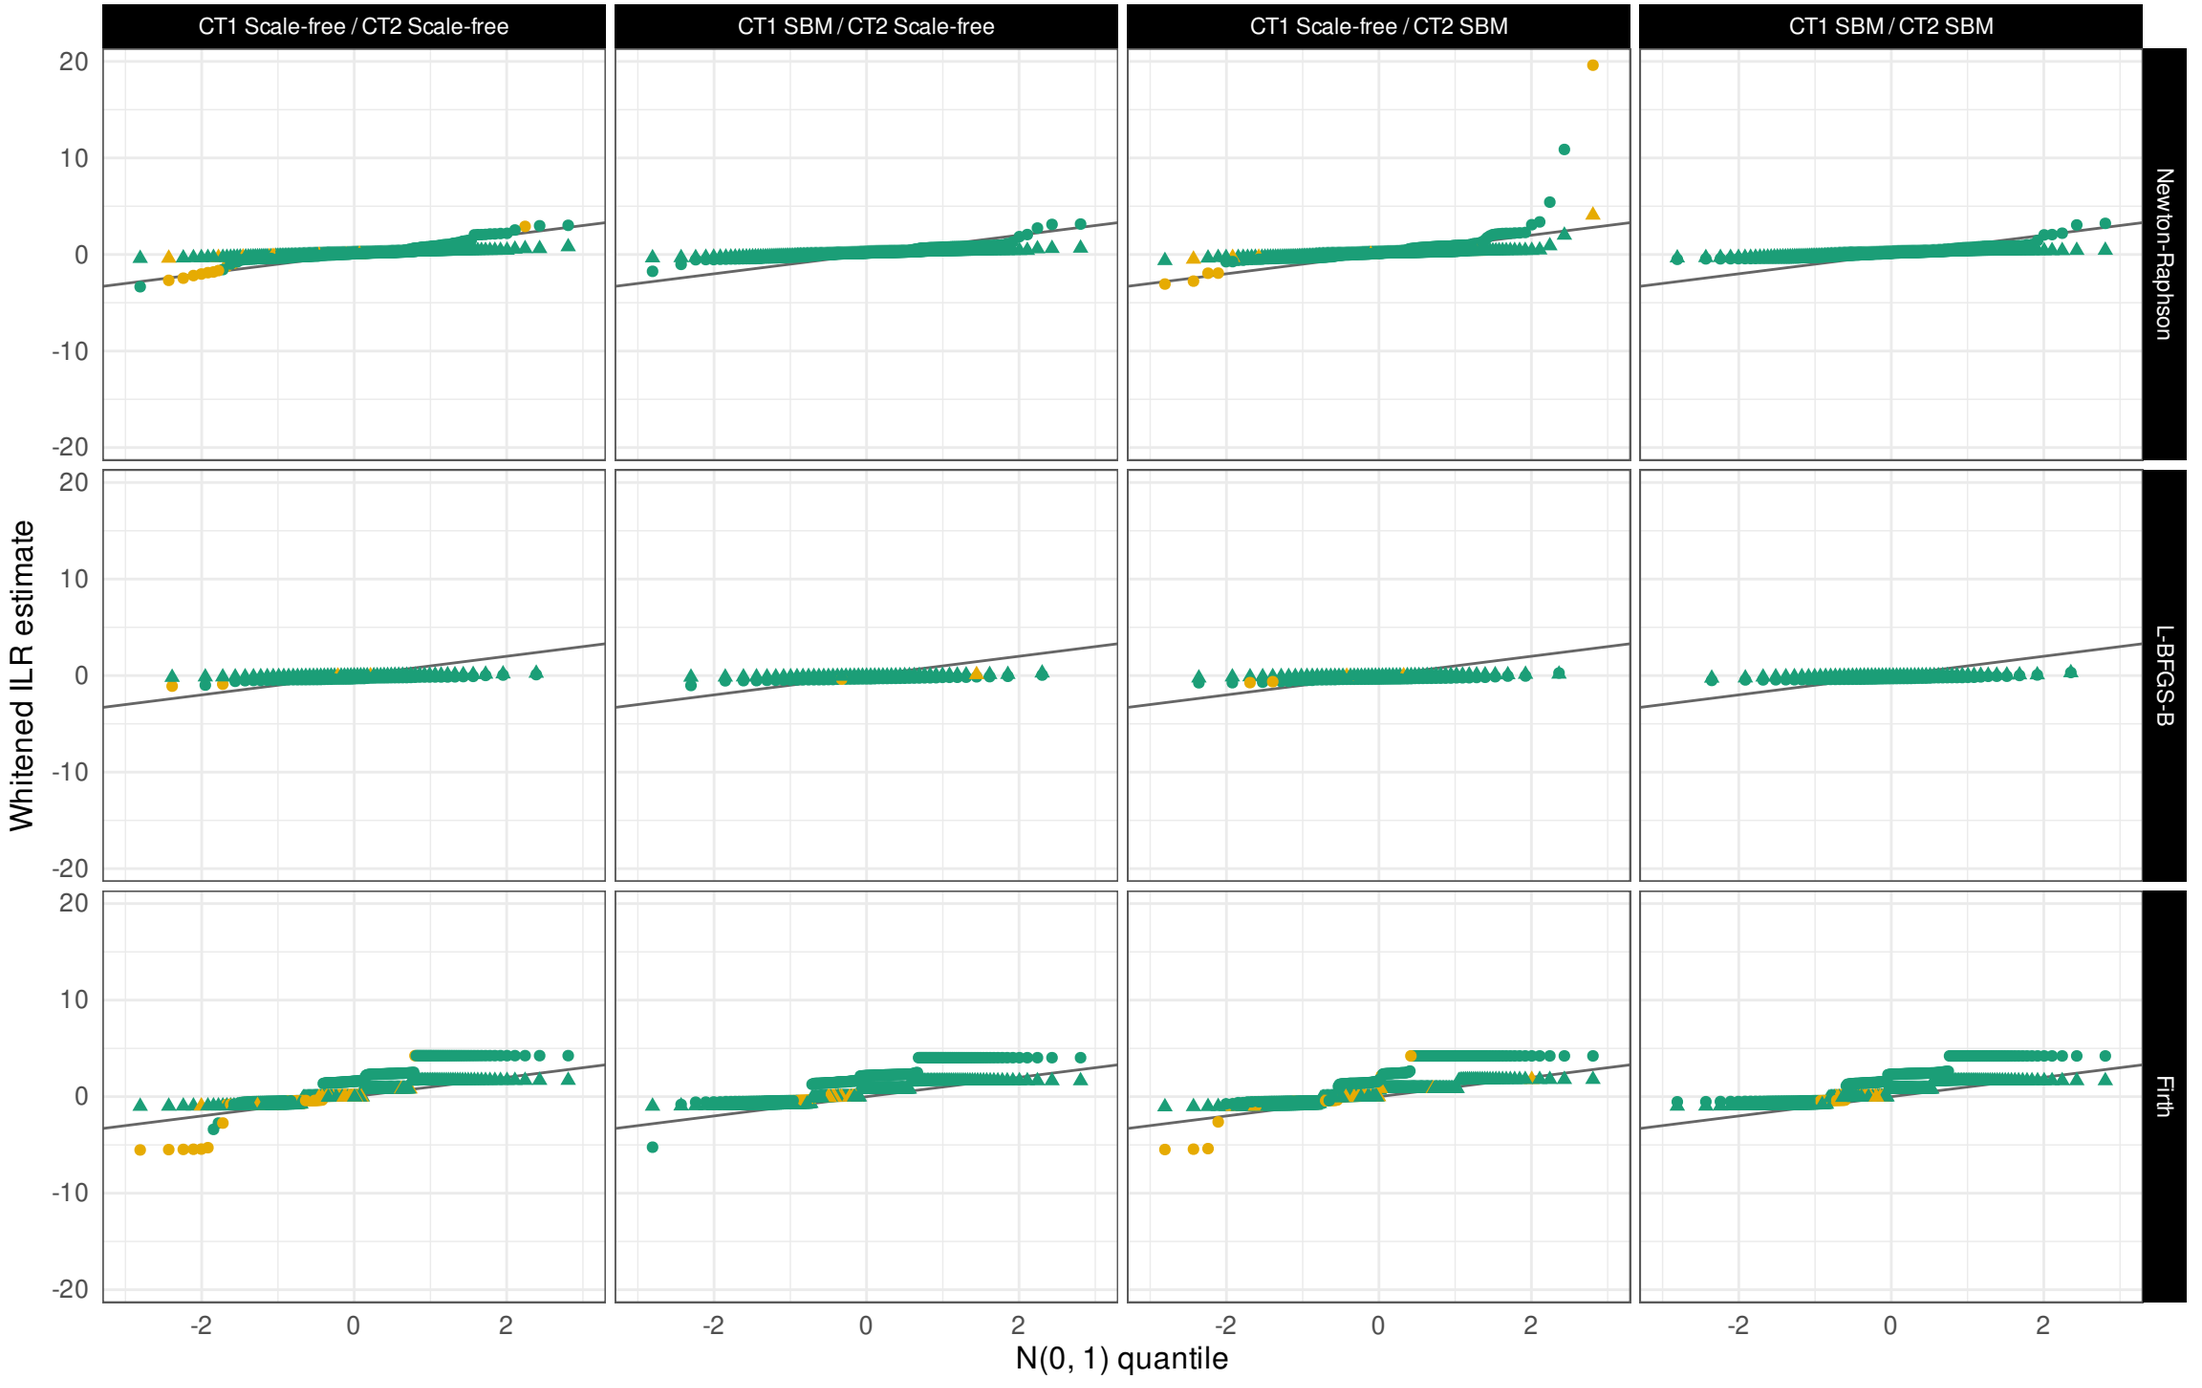

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)


highly unbalanced / moderate overlap

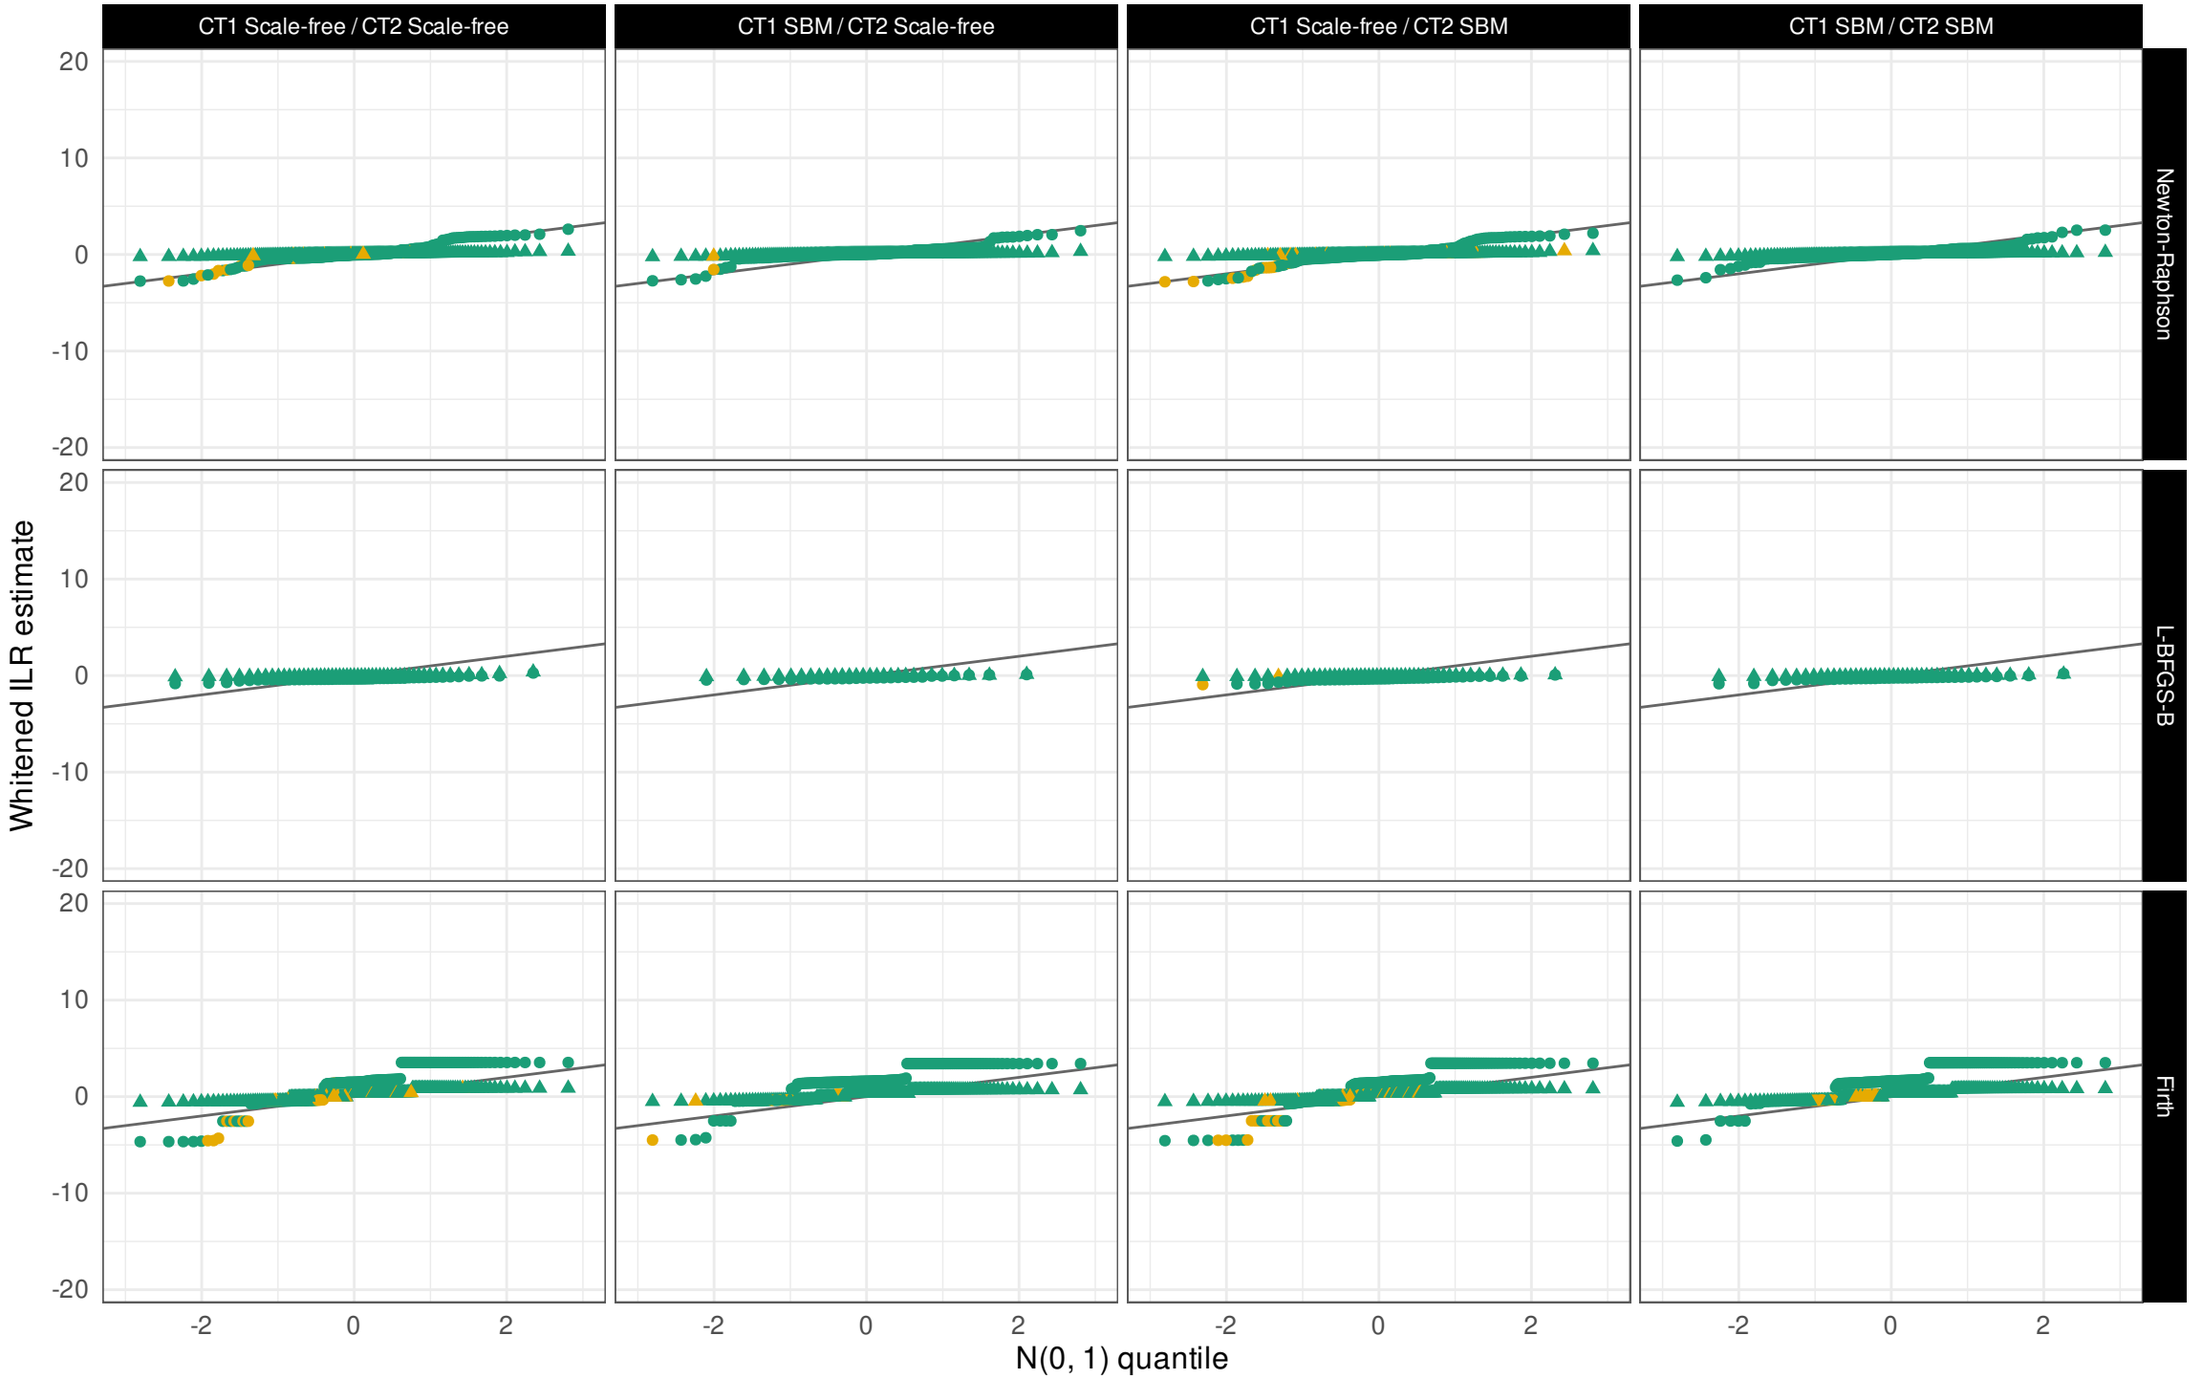

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

highly unbalanced / high overlap

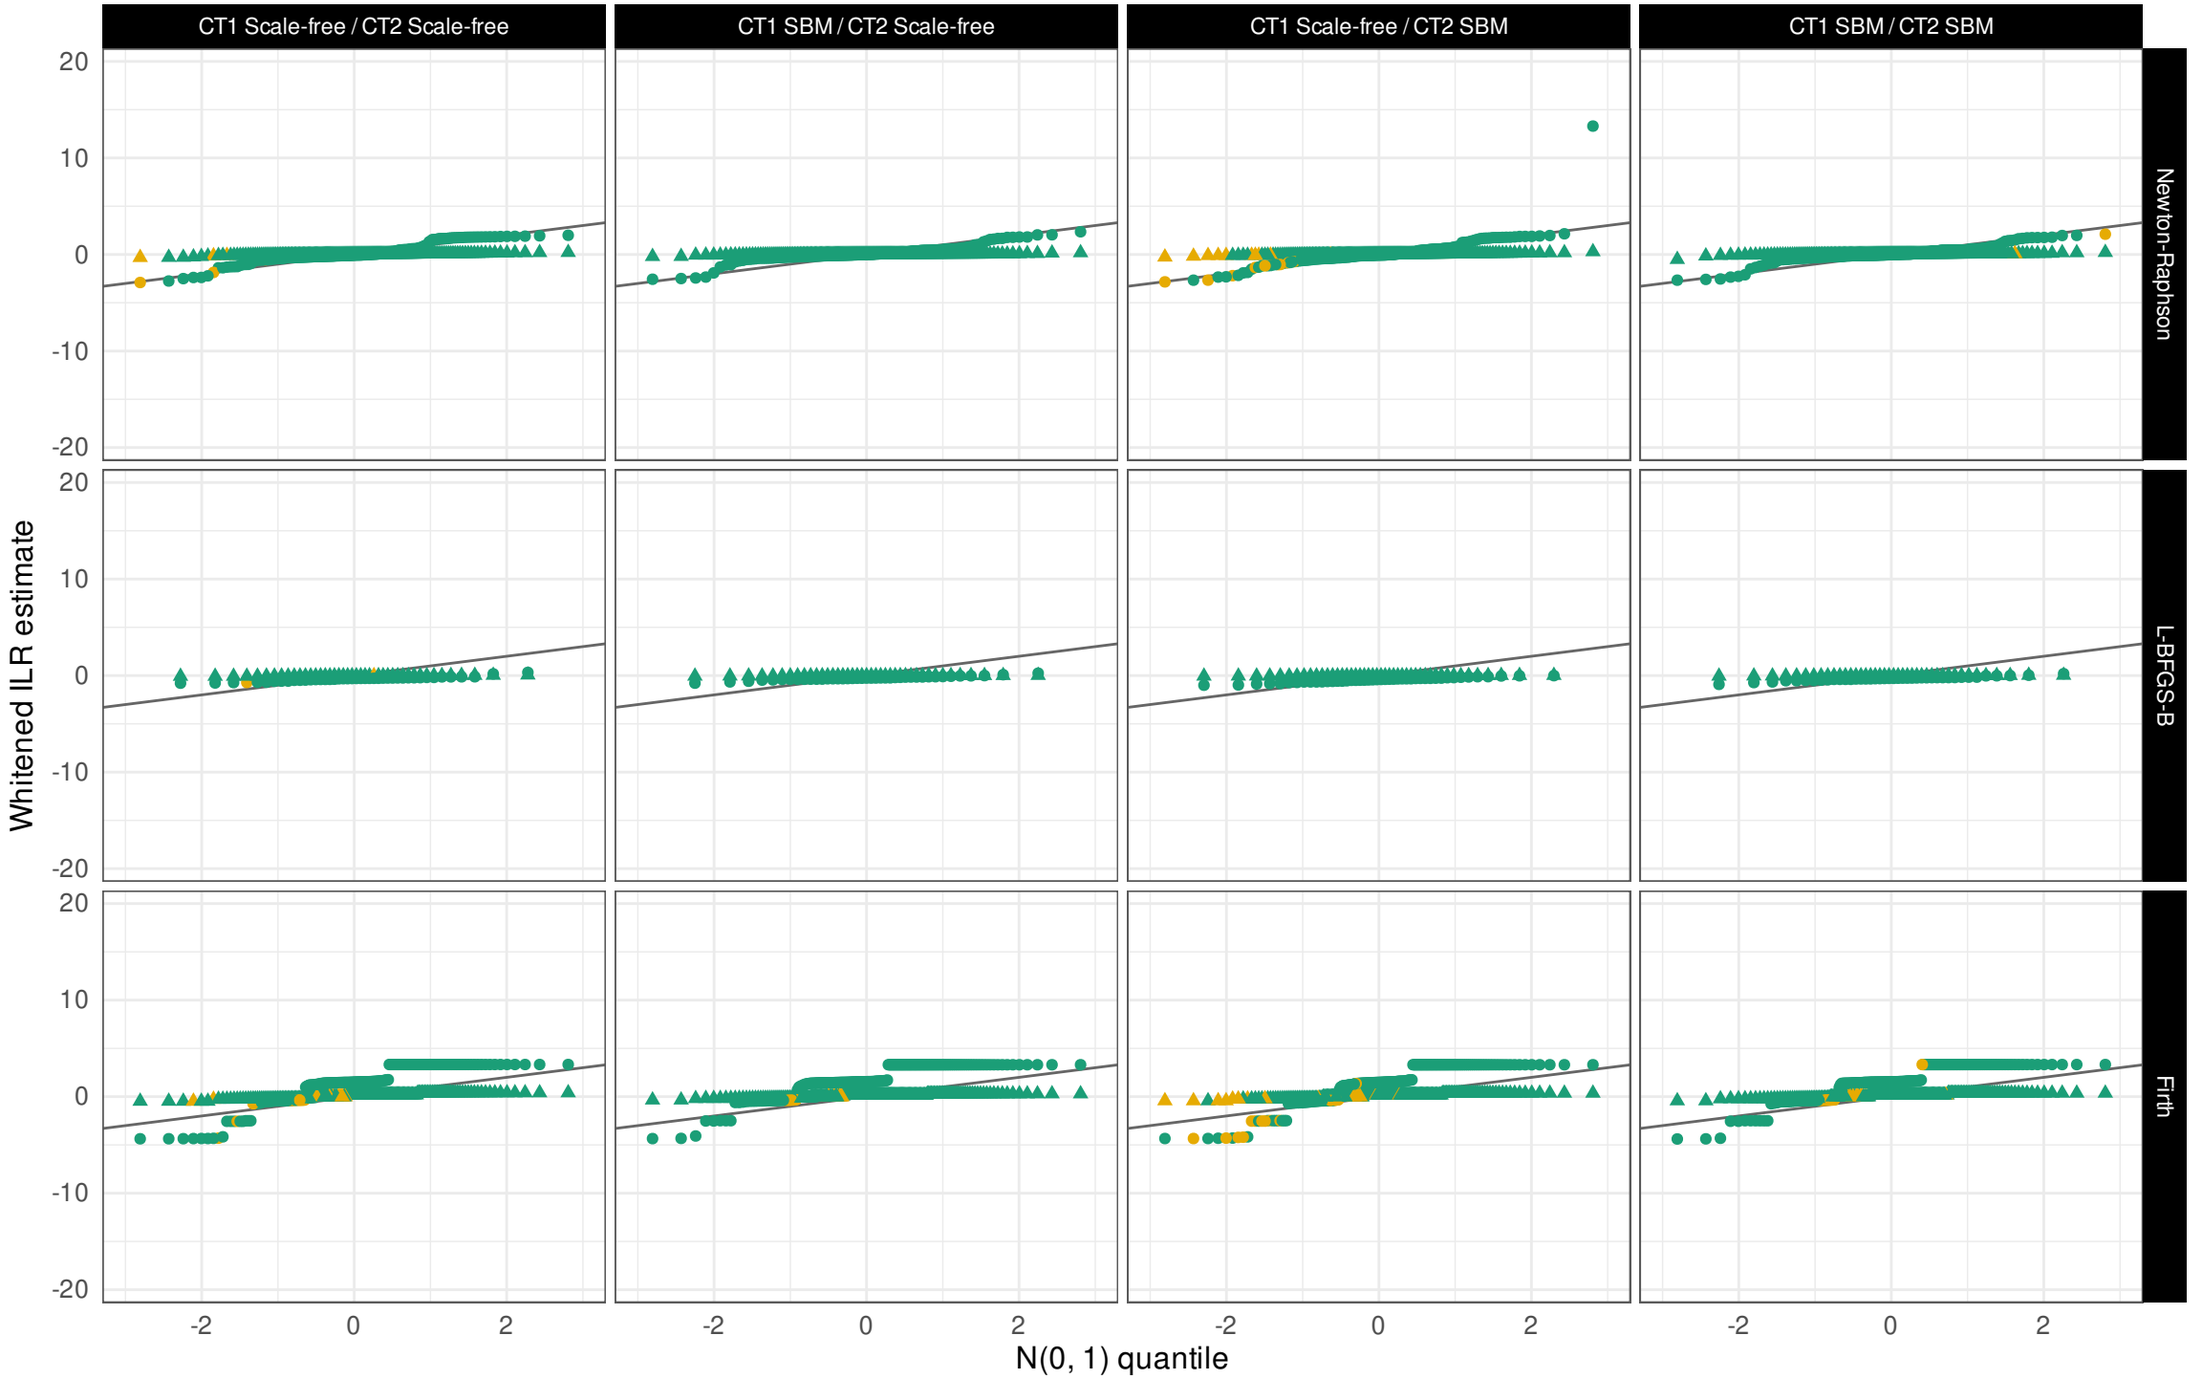

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.