

```
import pandas as pd

url = "https://raw.githubusercontent.com/datasciencedojo/datasets/master/titanic.csv"

df = pd.read_csv(url)

df.head()
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	2117062934
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...)	female	38.0	1	0	PC 17596
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O 3101282
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373451

Next steps: [Generate code with df](#) [New interactive sheet](#)

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     891 non-null   int64
1   Survived        891 non-null   int64
2   Pclass          891 non-null   int64
3   Name            891 non-null   object
4   Sex             891 non-null   object
5   Age             714 non-null   float64
```

```
6  SibSp      891 non-null   int64
7  Parch      891 non-null   int64
8  Ticket     891 non-null   object
9  Fare       891 non-null   float64
10 Cabin      204 non-null   object
11 Embarked   889 non-null   object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

```
df.isnull().sum()
```

	0
PassengerId	0
Survived	0
Pclass	0
Name	0
Sex	0
Age	177
SibSp	0
Parch	0
Ticket	0
Fare	0
Cabin	687
Embarked	2

```
dtype: int64
```

```
df['Age'].fillna(df['Age'].mean(), inplace=True)
```

/tmp/ipykernel_1535/1698716155.py:1: FutureWarning: A value is trying to
The behavior will change in pandas 3.0. This inplace method will never wo

For example, when doing 'df[col].method(value, inplace=True)', try using

```
df['Age'].fillna(df['Age'].mean(), inplace=True)
```

```
df['Embarked'].fillna(df['Embarked'].mode()[0], inplace=True)
```

/tmp/ipykernel_1535/3744086084.py:1: FutureWarning: A value is trying to
The behavior will change in pandas 3.0. This inplace method will never wo

For example, when doing 'df[col].method(value, inplace=True)', try using

```
df['Embarked'].fillna(df['Embarked'].mode()[0], inplace=True)
```

```
df.drop('Cabin', axis=1, inplace=True)
```

```
df.isnull().sum()
```

	0
PassengerId	0
Survived	0
Pclass	0
Name	0
Sex	0
Age	0
SibSp	0
Parch	0
Ticket	0
Fare	0
Embarked	0

dtype: int64

```
df.duplicated().sum()
```

```
np.int64(0)
```

```
df.drop_duplicates(inplace=True)
```

```
df.columns = df.columns.str.lower()
```


```
df.columns
```

```
Index(['passengerid', 'survived', 'pclass', 'name', 'sex', 'age',  
      'sibsp',  
      'parch', 'ticket', 'fare', 'embarked'],  
      dtype='object')
```

```
df.columns = df.columns.str.lower()
```

```
import matplotlib.pyplot as plt

plt.boxplot(df['fare'])
plt.show()
```

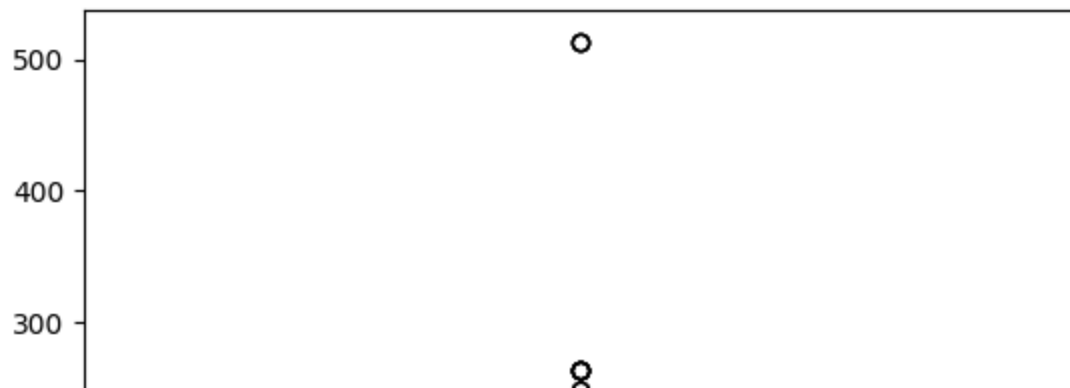

```
df.to_csv('cleaned_dataset1.csv', index=False)
```

```
import pandas as pd

url2 = "https://raw.githubusercontent.com/datasciencedojo/datasets/master/titanic.csv"
df2 = pd.read_csv(url2)
df2.head()
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	211
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 175
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	1138
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	3734

Next steps:

[Generate code with df2](#)

[New interactive sheet](#)

df2.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     891 non-null    int64
1   Survived        891 non-null    int64
2   Pclass          891 non-null    int64
3   Name            891 non-null    object
4   Sex             891 non-null    object
5   Age            714 non-null    float64
6   SibSp           891 non-null    int64
7   Parch           891 non-null    int64
8   Ticket          891 non-null    object
9   Fare            891 non-null    float64
10  Cabin           204 non-null    object
11  Embarked        889 non-null    object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

```
df2.isnull().sum()
```

	0
PassengerId	0
Survived	0
Pclass	0
Name	0
Sex	0
Age	177
SibSp	0
Parch	0
Ticket	0
Fare	0
Cabin	687
Embarked	2

dtype: int64

```
df2['Age'].fillna(df2['Age'].mean(), inplace=True)
```

/tmp/ipykernel_1535/2049159914.py:1: FutureWarning: A value is trying to
The behavior will change in pandas 3.0. This inplace method will never wo

For example, when doing 'df[col].method(value, inplace=True)', try using

```
df2['Age'].fillna(df2['Age'].mean(), inplace=True)
```

```
df2['Embarked'].fillna(df2['Embarked'].mode()[0], inplace=True)
```

/tmp/ipykernel_1535/1512377307.py:1: FutureWarning: A value is trying to
The behavior will change in pandas 3.0. This inplace method will never wo

For example, when doing 'df[col].method(value, inplace=True)', try using

```
df2['Embarked'].fillna(df2['Embarked'].mode()[0], inplace=True)
```

```
df2.drop('Cabin', axis=1, inplace=True)
```

```
df2.drop_duplicates(inplace=True)
```

```
df2.columns = df2.columns.str.lower()
```

```
import matplotlib.pyplot as plt  
plt.boxplot(df2['fare'])  
plt.show()
```

