


Directions:

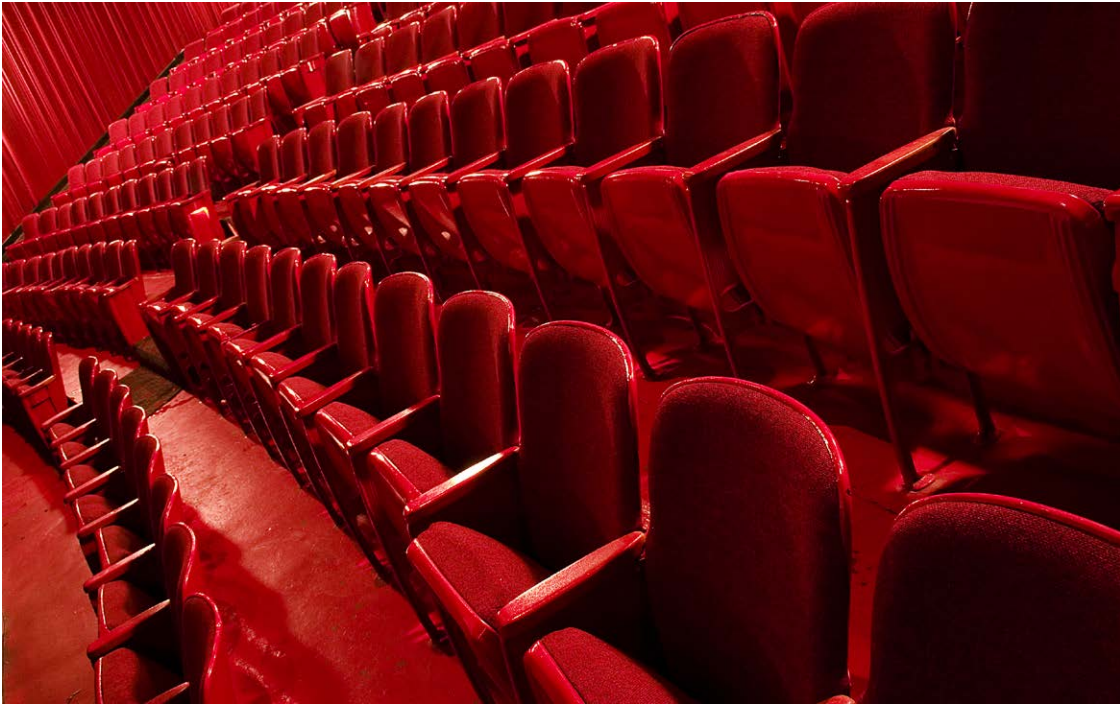

Creative Commons - Jeffrey Smith - "State Theater"

Theater seats often display a row and seat number to help theatergoers find their seats. If there are 26 rows (0 to 25) and 100 seats (0 to 99) in each row, write a nested **for** loop to print out all of the different seat combinations in the theater.

Example output for row-seat information: *output each row and seat number on a separate line*

```
0-0
0-1
0-2
...
25-97
25-98
25-99
```