

ER SKILLS II-5

Trace the following program and choose

```
int x[5]={2,0,3,4,1};
```

```
int y[5];
```

```
for(int i=0; i<=4; i++)
```

```
    y[x[i]]=i+x[i];
```

```
for(int i=0; i<=4; i++)
```

```
    cout<<y[i]<<" ";
```

```
cout<<endl;
```

Select one:

☐ 0 2 6 5 7

☐ 1 1 4 7 7

☐ 3 3 2 7 5

☐ 1 5 2 5 7

What is the output of the following code?

```
int x [ ][ 3 ] = { { 3 , 2 } , { 0 } , { 1 , 1 , 1 } } ;  
for ( int i = 0 ; i < 3 ; i++ ) {  
    for ( int j = 0 ; j < 3 ; j++ )  
        cout << x [ j ][ i ] ;  
        cout << " , " ;  
    }  
}
```

Select one:

- ☐ 301 , 21 , 1 ,
- ☐ 32 , 0 , 111 ,
- ☐ 301 , 201 , 001 ,
- ☐ 320 , 000 , 111 ,

ER SKILLS II-5

What is the output of the following code?

```
int x = 2;  
for ( int i = 1 ; i <= 2 ; i++ )  
static int c = 10;  
int x = 6;  
c += x;  
x--;  
cout << c;  
}  
cout << x;
```

Select one:

- ☐ 16154
- ☐ 16162
- ☐ 16222
- ☐ 16214

ER SKILLS II-5

How many times "BAU" is get printed?

```
for(int i=1; i<=7; i++) {  
    if(i < 3)  
        continue;  
    break;  
    cout<<"BAU";  
}
```

Select one:

- ☐ Three times
- ☐ Four times
- ☐ 0
- ☐ Twice

```
int fun(){
    char i;
    for(i='b'; i++<'e';)
        ++i;
    return i++;
}

int main()
{
    cout << fun();
    return 0;
}
```


What would be printed by the following statements?

```
int y[3][3] = {10, 2, 83, 46, 95, 6, 17};
```

```
cout << y[1][1];
```

Select one:

- ☐ a. 0
- ☐ b. 10
- ☐ c. 2
- ☐ d. 95

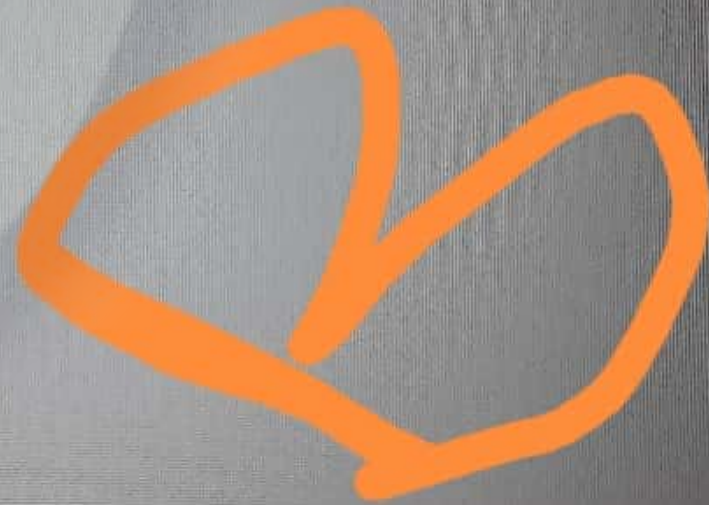

ER SKILLS II-5

For the following code , the output will be :

```
int change();  
void main(){  
    cout<<change();  
    cout<<change();  
}  
  
int change(){  
    static int k=2;  
    k*=2;  
    return k;  
}
```

Select one:

- ☐ a. 24
- ☐ b. 44
- ☐ c. 46
- ☐ d. 48

n 10

answered

out of 2.00

question

what is the output

```
int x=12,y=4;
```

```
if (x / y != 0 && ++y)
```

```
    cout << x / y << "k";
```

```
else
```

```
    cout << x * y << "z";
```

Select one:

- ☐ 2k
- ☐ 1k
- ☐ 32z
- ☐ 45z

what is the output

```
int a=5;
```

```
if (a-- && (a-=2))
```

```
cout<< a/2.0;
```

```
cout<<a-1;
```

Select one:

☐ 24

☐ 11

☐ 23

☐ 22

COMPUTER SKILLS II-5

3

what is the output

answered

```
bool x=1;
```

of 2.00

```
int w=2,y=0,m=2;
```

question

```
switch((w+=y!=x>m++))
```

```
{
```

```
case 0: w=6; break;
```

```
case 1: w=-7; break;
```

```
default: w=3; break;
```

```
}
```

```
cout<<w;
```

Select one:

☐ 0

☐ -7

☐ -3

☐ 1



PUTER SKILLS II-5

ion 14

t answered

ed out of 2.00

ag question

what is the output

```
bool b = 3 ;
```

```
cout << 9 + 1.0 / 2 ;
```

```
cout << b * 2 ;
```

Select one:

- ☐ 56
- ☐ 9.52
- ☐ 51
- ☐ 9.56

COMPUTER SKILLS II-5

5

what is the output

marked

of 2.00

question

```
int a = 4;

int fun(int x, int &a) {
    int y;
    y = x - a;
    return x - y; }

int main() {
    cout << a;
    int a = 7, b = 9;
    b = fun(a, b);
    cout << a << b; }
```

Select one:

- ☐ 478
- ☐ 475
- ☐ 479
- ☐ 477

ER SKILLS II-5

What is the output of the following code?

```
char str1[10] = "FET";  
char str2[10] = "BAU";  
char str3[10] = "C++";  
int len;  
strcpy(str3, str1);  
cout << str3;  
strcat(str3, strcat(str1, str2));  
len = strlen(str3);  
cout << len << endl;
```

Select one:

- ☐ a. FET9
- ☐ b. FET3
- ☐ c. BAU9
- ☐ d. C++9

TER SKILLS II-5

Consider the following statements:

```
int num1=6, num2=7, num3=4;
```

```
double length=6.2, width=2.3, height=3.4, volume;
```

and the following prototype:

```
double box(double, &double, double);
```

Which of the following statements are valid?

Select one:

- ☐ cout<<box(9.7,,height);
- ☐ volume=box(7.4, height, num1);
- ☐ volume=box(width, 7.3, height);

```
int s;  
  
void fun(){  
    s +=4;  
}  
  
int main()  
{  
    int res = -1;  
    int i;  
    for(i=0; i<2; ++i){  
        fun();  
        cout << s << " ";  
        res +=s;  
    }  
    cout << res << " ";  
    int s = 2;  
    res +=s;  
    cout << res << " ";  
    return 0;  
}
```

ER SKILLS II-5

what is the output

```
int main()
{
    char y = 'c';
    if ( y == 'c' ) {
        if ( y++ <= 'd' )
            cout << y; }
        else
            cout << ++y;
        if ( y == 'd' )
            cout << 'd'+1; }
```

Select one:

- ☐ 100
- ☐ 101
- ☐ 99
- ☐ e

COMPUTER SKILLS II-5

Which of the codes are equivalent to the following code?

```
switch(Q)
{
    case 'a': cout<<"Hi";break;
    case 'b':
    case 'c': cout<<"C++";cout<<"It Midterm";break;
    default: cout<<"Ok";
}
```

Select one:

- ☐ If (Q == 'a')
cout<<"Hi";
else if(Q=='b' && Q=='c')
cout<<"C++"<<"It Midterm";
else
cout<<"Ok";
- ☐ None
- ☐ If (Q == 'a')
cout<<"Hi";
else if(Q=='b' || Q=='c')
cout<<"C++"<<"It Midterm";
else
cout<<"Ok";
- ☐ If (Q == 'a')
cout<<"Hi";

The output of this program is:

```
int s;  
  
int f(int x){  
    static int val = 1;  
    do{  
        val *=2;  
        ++val;  
        continue;  
        val--;  
    }while(x-->0);  
    return val;  
}  
  
void main(){  
    int i = 0;  
    while(i<2)  
        s += f(i++);  
    cout << s;  
}
```

Select one:

- ☐ 18
☐ rubbish

INTER SKILLS II-5

What is the output of the following code?

```
float x = 5.7;  
if ( ( x - floor ( x ) ) * 10 >= 5 )  
    cout << pow ( floor ( x ) , 1 / 2 ) + 6;  
else  
    cout << pow ( ceil ( x ) , 1 / 2 ) + 7;
```

Select one:

- ☐ 8.23
- ☐ 8
- ☐ 5
- ☐ 7



Marked out of 2.00

Flag question

What is the output of the following code?

```
int call (int m[],int b) {  
    for(int i=3;i<b;i++)  
        m[i]=m[i]%3;  
    return m[b];}  
  
int main(){ int x[10]={5,4,7,9,8,10,2,3,6,1};  
    cout<<call (x,6);  
    for(int i=5;i<7;i++) cout<<x[i];  
    return 0;  
}
```

Select one:

- ☐ 211
- ☐ 210
- ☐ 220
- ☐ 212

[Next page](#)

QUIZ NAVIGATION



COMPUTER SKILLS

II-3

Question 1

Not yet answered

Marked out of 2.00

Flag question

How many times " ok " is get printed?

```
for(int i=4; i<=7; i++) {  
    if(i < 5)  
        continue;  
    break;  
    cout<<"ok";  
}
```

Select one:

- ☐ 0
- ☐ Five times
- ☐ Three times
- ☐ Four times

Next page

QUIZ NAVIGATION

1 2 3 4 5 6 7 8

COMPUTER SKILLS

II-3

Question 20

Not yet answered

Marked out of 2.00

Flag question

What would be printed by the following statements?

```
int y[3][3] = {10, 2, 83, 46, 95, 6, 17};
```

```
cout << y[1][2];
```

Select one:

- ☐ a. 86
- ☐ b. 0
- ☐ c. 17
- ☐ d. 6

Next page

QUIZ NAVIGATION

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

PUTER SKILLS II-8

What is the output of the following code?

```
char st1 [ ] = "Computer";
```

```
char st2 [ 30 ] = "ABCDEF";
```

```
st2 [ 2 ] = '\0';
```

```
strcpy ( st1 , st2 );
```

```
cout << st1 << "##" << st2 << st1 [ 4 ];
```

Select one:

- ☐ ABC##ABct
- ☐ AB##ABu
- ☐ Error
- ☐ A##Ap

COMPUTER SKILLS

II-3

Question 19

Not yet answered

Marked out of 2.00

Flag question

what is the output

```
int x=12,y=2;
```

```
if (x / y != 0 && y++)
```

```
    cout << x / y << "k";
```

```
else
```

```
    cout << x * y << "z";
```

Select one:

☐ 4k

☐ 48z

☐ 24z

☐ 6k

Next page

QUIZ NAVIGATION

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

ER SKILLS II-2

What would be printed by the following statements?

```
int y[3][3] = {10, 2, 83, 46, 95, 6, 17};
```

```
cout << y[2][0];
```

Select one:

- ☐ a. 0
- ☐ b. 44
- ☐ c. 17
- ☐ d. 24

```
}while(x-->0);  
return val;  
}
```

```
void main(){  
    int i = 0;  
    while(i<2)  
        s += f(i++);  
    cout << s;  
}
```

Select one:

- ☐ 5
- ☐ 22
- ☐ rubbish
- ☐ 17



غير مجاب عليه بعد

الدرجة من 2.00

علم هذا السؤال

The output of the following code is

```
int fun(){
    char i;
    for(i='e'; i++<'h';)
        ++i;
    return i++;
}

int main()
{
    cout << fun();
    return 0;
}
```

اختر أحد الخيارات

- a. j ☐
- b. 106 ☐
- c. 107 ☐
- d. k ☐

الصفحة التالية

تنقل الاختبار

COMPUTER SKILLS II-5-2021

?What is the output of the following code

```
int x[ ][3] = {{2, 2, 2}, {0}, {1, 2}}
for ( int i = 0 ; i < 3 ; i++ )
    for ( int j = 0 ; j < 3 ; j++ )
        cout << x[j][i]
        ;", ">> cout
    {
```

اختر أحد الخيارات

, 2 , 22 , 201 ☐

, 120 , 000 , 222 ☐

, 12 , 0 , 222 ☐

, 200 , 202 , 201 ☐

Question 18

Not yet answered

Marked out of 2.00

Flag question

what is the output

```
bool x=1;  
int w=5,y=3,m=2;  
switch((w+= y != x > m++))  
{  
case 0: w= 10;break;  
case 1: w= 50;break;  
default:w= -80;break;  
}  
cout<<w;
```

Select one:

- ☐ -10
- ☐ 10
- ☐ -80
- ☐ 50

Next page

QUIZ NAVIGATION

1 2 3 4 5 6 7 8

سؤال 16

غير مجاب عليه بعد

الدرجة من 2.00

علم هذا السؤال

what is the output

```
int x=3,y=5.7
```

do

```
while(x-2<y)
```

```
;++cout<< ++x + y
```

```
;while(x==y)
```

اختر أحد الخيارات

Infinite loop ☐

8 10 ☐

7 10 ☐

10 ☐

الصفحة التالية

تنقل الاختبار

9	8	7	6	5	4	3	2	1
18	17	16	15	14	13	12	11	10
	25	24	23	22	21	20	19	

```
float add(float a, float &b){  
    return (a++ + b++);  
}
```

```
void main(){  
    float a = -1.2, b = 3.4;  
    int res = add(b, a);  
    cout << a << " " << b << " " << res; }
```

اختر أحد الخيارات

- a. -1.2 3.4 2 ☐
- b. -1.2 4.4 2 ☐
- c. -0.2 4.4 2.2 ☐
- d. -0.2 3.4 2 ☐

الصفحة التالية

تنقل الاختبار

what is the output

```
int main()
{
    char y = 'c';
    if ( y == 'c' ) {
        if ( y++ <= 'd' )
            cout << y;
        else
            cout << ++y;
        if ( y == 'd' )
            cout << 'd'+1;
    }
```

Select one:

- ☐ e
- ☐ 99
- ☐ 100
- ☐ 101

Next page

COMPUTER SKILLS

II-3

Question 16

Not yet answered

Marked out of 2.00

Flag question

what is the output

```
int main() {  
    char y = 'd';  
    if ( y == 'd' ) {  
        if ( y++ <= 'E' )  
            cout << y; }  
    else  
        cout << ++y;  
    if ( y == 'e' )  
        cout << 'e'+1; }
```

Select one:

- ☐ f
- ☐ 102
- ☐ 101
- ☐ 99

Next page

Consider the following statements:

```
int num1=6, num2=7, num3=4;
```

```
double length=6.2, width=2.3, height=3.4,  
volume;
```

and the following prototype:

```
double box(double, &double, double);
```

Which of the following statements are valid?

Select one:

- ☐ box(length, width, height);
- ☐ volume=box(num1, length, num2);
- ☐ cout<<box(9.7,,height);

Next page

QUIZ NAVIGATION

Question 15

Not yet answered

Marked out of 2.00

Flag question

For the following code , the output will be :

```
int change();  
void main(){  
    cout<<change();  
    cout<<change();  
}  
int change(){  
    static int k=6;  
    k-=2;  
    return k ;  
}
```

Select one:

- ☐ a. 20
- ☐ b. 42
- ☐ c. 64
- ☐ d. 44

II-3

Question 14

Not yet answered

Marked out of 2.00

Flag question

what is the output

```
int d=5.6;
int m(int a, int b,int d ) {
    d++;
    return ( a < b || d ? a : b ); }
int main() {
    int i = 2;
    int j = 5;
    cout << m(i,j,d);
    cout<<++d;
    return 0; }
```

Select one:

- ☐ 36
- ☐ 25
- ☐ 27
- ☐ 26

Marked out of 2.00

Flag question

What is the output of the following code?

```
float x = 3.7;
```

```
if ( ( x - floor ( x ) ) * 10 >= 5 )
```

```
cout << pow ( floor ( x ) , 1 / 2 ) + 1;
```

```
else
```

```
cout << pow ( ceil ( x ) , 1 / 2 ) + 2;
```

Select one:

- ☐ 3
- ☐ 2.73
- ☐ 4
- ☐ 2

[Next page](#)

QUIZ NAVIGATION

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

what is the output

```
;int a=6
```

```
((if (a++ && (a+=3
```

```
;cout<< a/2.0
```

```
;cout<<a-2
```

اختر أحد الخيارات

68 ☐

58 ☐

44 ☐

5 ☐

الصفحة التالية

تنقل الاختبار

8	7	6	5	4	3	2	1
16	15	14	13	12	11	10	9
24	23	22	21	20	19	18	17

II-3

Question 11

Not yet answered

Marked out of 2.00

Flag question

The output of the following program is:

```
float add(float a, float &b){  
    return (a++ + b++);  
}  
  
void main(){  
    float a = 3.4, b = -1.2;  
    int res = add(b, a);  
    cout << a << " " << b << " " << res; }
```

Select one:

- ☐ a. 3.4 -0.2 2
- ☐ b. 3.4 -1.2 2
- ☐ c. 4.4 -1.2 2
- ☐ d. 4.4 -0.2 2.2



: For the following code , the output will be

```
int change();
void main(){
cout<<change();
cout<<change();
}
int change(){
static int k=2;
k*=2;
return k ;
}
```

اختر أحد الخيارات

- a. 46 ☐
- b. 44 ☐
- c. 48 ☐
- d. 24 ☐

الصفحة التالية

تنقل الاختبار

9	8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---	---



30801101-

COMPUTER SKILLS

II-3

Question 10

Not yet answered

Marked out of 2.00

Flag question

What is the output of the following code?

```
int x = 5;
for ( int i = 1 ; i <= 2 ; i++ ){
    static int c = 6;
    int x = 6;
    c += x;
    x--;
    cout << c;
}
cout << x;
```

Select one:

- ☐ 12185
- ☐ 12114
- ☐ 12174
- ☐ 12125

Question 14

Not yet answered

Marked out of 2.00

Flag question

What is the output of the following code?

```
float x = 8.7;
```

```
if ((x - floor(x)) * 10 >= 5)
```

```
cout << pow(floor(x), 1 / 2) + 2;
```

```
else
```

```
cout << pow(ceil(x), 1 / 2) + 3;
```

Select one:

☐ 4.82☐ 4☐ 8☐ 3

Next page

QUIZ NAVIGATION

1	2	3	4	5	6	7	8	9
10	11	12	13	14	15	16	17	18
19	20	21	22	23	24	25		

[Finish attempt ...](#)Time left **0:13:42**



١٩٠ من ٢٠٠

م ٣:١٨ اليوم عند mohammed q



SMURFS POLYTECHNIC UNION

سؤال 4

غير مجاب عليه بعد

الدرجة من 2.00

علم هذا السؤال

Trace the following program and choose the correct output

```
int matrix[4][4] = {{1, 2, 3, 4}, {4, 5, 6, 7}, {8, 9, 10, 11}, {12, 13, 14, 15}};  
for (int i = 0; i < 4; i++)  
cout << matrix[2][i] << " ";
```

اختر أحد الخيارات

- a. 2 5 9 13 ☐
- b. 8 9 10 11 ☐
- c. 3 6 10 2 ☐
- d. 1 2 3 4 ☐

الجامعة

البوليتكنيك
SPU



what is the output

```
bool x=1;
int w=5,y=3,m=2;
switch((w+= y != x > m++))
{
case 0: w=2;break;
case 1: w=3;break;
default: w=4;break;
}
cout<<w;
```

اختر أحد الخيارات

0 ☐

3 ☐

4 ☐

2 ☐

الصفحة التالية

What would be printed by the following
statements

```
{int y[3][3] = {10, 2, 83,46, 95, 6,17  
;[cout <<y[1][1
```

اختر أحد الخيارات

a. 95 ☐

b. 10 ☐

c. 2 ☒

d. 0 ☐

الصفحة التالية

تنقل الاختبار

8	7	6	5	4	3	2	1
16	15	14	13	12	11	10	9
24	23	22	21	20	19	18	17
							25

II-3

Question 5

Not yet answered

Marked out of 2.00

Flag question

what is the output

```
int x=2.7,y=4.9;  
do  
while(x+2<y)  
cout<<++x + y--;  
while(x==y);
```

Select one:

- ☐ Infinite loop
- ☐ 12 9
- ☐ 10
- ☐ No output

Next page

QUIZ NAVIGATION

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16



الدرجة من 2.00

علم هذا السؤال

what is the output

; bool b = 6

; cout << 5 + 1.0 / 2

; cout << b * 2

اختر أحد الخيارات

312 ☐

31 ☐

5.512 ☐

5.52 ☐

الصفحة التالية

تنقل الاختبار

9	8	7	6	5	4	3	2	1
18	17	16	15	14	13	12	11	10
		25	24	23	22	21	20	19

.. إنهاء المحاولة

الوقت المتبقي 0:28:02



?What is the output of the following code

```

;int x = 3
}for ( int i = 1 ; i <= 2 ; i++ )
;static int c = 8
;int x = 6
;c += x
;--x
;cout << c
{
;cout << x

```

اختر أحد الخيارات

14134 ☐

14194 ☐

14143 ☐

14203 ☐

الصفحة التالية

تنقل الاختبار

9	8	7	6	5	4	3	2	1
18	17	16	15	14	13	12	11	10
		25	24	23	22	21	20	19

... انهاء المحاولة