


Q1-Write a program in C++ to find the sum of the digits of a given number.

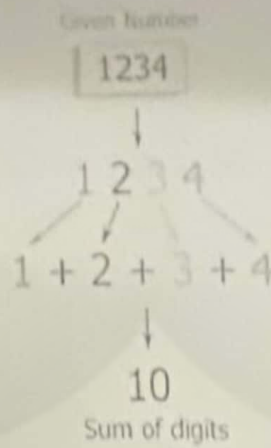

```
int main()
{
    int num1, num2, r, sum=0;
    cout << "\n\n Find the sum of digits of a given number:\n";
    cout << " Input a number: ";
    cin >> num1;
    num2 = num1;
    [[ 4 ]]
    {
        [[ 2 ]]
        [[ 1 ]]
        [[ 3 ]]
    }
    cout << " The sum of digits of " << num2 << " is: " << sum << endl;}
```

[[1]] r = num1 % 10;	3	[[2]] num1 = num1 / 10;	2
[[3]] sum = sum + r;	4	[[4]] while (num1 > 0)	1

Q2-Write a program in C++ to find the factorial of a number.

Specified number

5

Factorial of 5

$$5 \times 4 \times 3 \times 2 \times 1 = 120$$

```
int main()
{
    int num1, factorial=1;
    cout << "\n\n Find the factorial of a number:\n";
    cout << " Input a number to find the factorial: ";
```

```

    cin >> num1;
    for(int a=1; a<=num1 ;a++)
    {
        [[ 2 ]]
    }
    cout<<" The factorial of the given number is: "<<factorial<<endl;
    return 0;
}

```

[[1]] factorial+=factorial+a;	[[2]] factorial=factorial*a;
[[3]] factorial*=factorial*a;	[[4]] factorial=factorial+a;

Q3- Write a C++ program to check two given integers, and check =true if one of them is 30 or if their sum is 30.

```

int main()
{
    [[ 1 ]] x;
    [[ 1 ]] y;
    [[ 2 ]] check;

```

[[1]] int	[[2]] bool ✓	[[3]] float 2	[[4]] char
-----------	--------------	---------------	------------

```

    [[ 1 ]]

```

[[1]] check= x == 30 y == 30 (x + y == 30);	✓
[[2]] check=x == 30 y == 30 (x && y == 30);	
[[3]] check=x == 30 && y == 30 && (x + y == 30);	X
[[4]] check=x = 30 y = 30 (x + y = 30);	

Q4- Write a C++ program to check if a given positive number is a multiple of 3 or a multiple of 7.

```

int main()
{
    [[ 1 ]] n;

```

[[1]] int	[[2]] float	[[3]] bool \	[[4]] double
-----------	-------------	--------------	--------------

```

    [[ 1 ]]

```

[[1]] cin>>n;	[[2]] cin<<n;	[[3]] cout>>n;	[[4]] cout<<n;
---------------	---------------	----------------	----------------

```

    [[ 1 ]]
    cout<<"is multiple";}

```

[[1]] if(n % 3 == 0 n % 7 == 0) ✓	[[2]] if(n % 3 != 0 n % 7 != 0)
[[3]] if(n % 3 != 0 && n % 7 != 0) X	[[4]] if(n / 3 == 0 n / 7 == 0)

Q5- Write a C++ statment to compute the sum of two given integer values. If the two values are the same, then return triple their sum.

- a. sum=x == y , (x + y)*3 ? x + y; X
- b. sum=x == y : (x + y)*3 ? x + y;
- c. sum=x == y ? (x + y)*3 : x + y; ✓
- d. sum=x == y : (x + y)*3 : x + y; ✓