


http://www.belleonaturelle.fr/



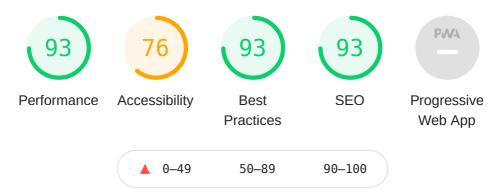

Performance

Metrics			=
First Contentful Paint	0.8 s	Time to Interactive	0.9 s
Speed Index	0.8 s	Total Blocking Time	0 ms
Largest Contentful Paint	3.2 s	Cumulative Layout Shift	0.055

Values are estimated and may vary. The <u>performance score is calculated</u> directly from these metrics. <u>See calculator</u>.

View Original Trace





















Opportunities — These suggestions can help your page load faster. They don't <u>directly affect</u> the Performance score.

Opportunity Estimated Savings

Serve images in next-gen formats

1.05 s ^

Image formats like JPEG 2000, JPEG XR, and WebP often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <u>Learn more</u>.

Show 3rd-party resources (0)

URL

Resource Size Potential Savings

/logo_pap.png (www.belleonaturelle.fr)

147.6 KiB 128.9 KiB

URL	Resource Size	Potentia Savings
/photo1.jpg (www.belleonaturelle.fr)	146 KiB	99.9 KiB
BIO /logo_cosmebio.png (www.belleonaturelle.fr)	17.4 KiB	11.7 KiB
Properly size images		0.3 s ^
Serve images that are appropriately-sized to save cellular data and imp	rove load time. <u>Learn more</u> .	
	Show 3rd party re	esources (0)
URL	Resource Size	Potentia Savings
/logo_pap.png (www.belleonaturelle.fr)	147.6 KiB	86.3 KiB
Efficiently encode images		0.3 s /
Optimized images load faster and consume less cellular data. Learn mo	ore.	
	Show 3rd party re	esources (0)
URL	Resource Size	Potentia Saving
/photo1.jpg (www.belleonaturelle.fr)	146 KiB	56.8 KiB
		0.2 s
Preload key requests		
Consider using ` <link rel="preload"/> ` to prioritize fetching resources that	are currently requested later in page load.	<u>Learn</u>
	are currently requested later in page load. Show 3rd party re	
Consider using ` <link rel="preload"/> ` to prioritize fetching resources that	Show 3rd party re	esources (0)
Consider using ` <link rel="preload"/> ` to prioritize fetching resources that more.	Show 3rd party re	esources (0
Consider using ` <link rel="preload"/> ` to prioritize fetching resources that more. URL	Show 3rd party re	
Consider using ` k rel=preload>` to prioritize fetching resources that more. URL /fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr)	Show 3rd party re	esources (0) ential Saving 200 ms
Consider using ` <link rel="preload"/> ` to prioritize fetching resources that more. URL /fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr) Eliminate render-blocking resources Resources are blocking the first paint of your page. Consider delivering	Show 3rd party re	esources (0) ential Saving 200 ms 0.14 s
Consider using ` <link rel="preload"/> ` to prioritize fetching resources that more. URL /fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr) Eliminate render-blocking resources Resources are blocking the first paint of your page. Consider delivering	Show 3rd party reports Pote critical JS/CSS inline and deferring all not	ential Saving 200 ms 0.14 s

Diagnostics — More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

	Leverage the font-display CSS feature to ensure text is user-visible while webfonts are lo	oading. <u>Learn more</u> .	
		Show 3rd party	resources (0)
	URL		Potential Savings
	/fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr)		180 ms
<u> </u>	Image elements do not have explicit width and height		^
	Set an explicit width and height on image elements to reduce layout shifts and improve 0	CLS. <u>Learn more</u>	
		Show 3rd-party	resources (0)
	URL	Failing Elements	;
	/logo_pap.png (www.belleonaturelle.fr)	img#l ogo	
	/photo1.jpg (www.belleonaturelle.fr)	img	
	BIO /logo_cosmebio.png (www.belleonaturelle.fr)	img	
<u> </u>	Serve static assets with an efficient cache policy — 5 resources found		^
	A long cache lifetime can speed up repeat visits to your page. <u>Learn more</u> .		
		Show 3rd party	resources (0)
	URL	Cache TTL	Transfer Size
	/logo_pap.png (www.belleonaturelle.fr)	None	148 KiB
	/photo1.jpg (www.belleonaturelle.fr)	None	146 KiB
	/fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr)	None	114 KiB
	/logo_cosmebio.png (www.belleonaturelle.fr)	None	17 KiB
	/monstyle.css (www.belleonaturelle.fr)	None	1 KiB
	Avoid chaining critical requests — 1 chain found		^
	The Critical Request Chains below show you what resources are loaded with a high prior chains, reducing the download size of resources, or deferring the download of unnecess <u>Learn more</u> .	_	_
	Maximum critical path latency: 340 ms		
	Initial Navigation		
	http://www.belleonaturelle.fr		
	/monstyle.css (www.belleonaturelle.fr)		
	/fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr) - 180 ms, 2	114.04 KiB	
	Keep request counts low and transfer sizes small — 6 requests • 429 KiB		^

To set budgets for the quantity and size of page resources, add a budget.json file. <u>Learn more</u>.

Resource Type	Requests		Transfer Size
Total	6		428.8 KiB
Image	3		311 KiB
Font	1		114 KiB
Document	1		2.5 KiB
Stylesheet	1		1.3 KiB
Media	0		0 KiB
Script	0		0 KiB
Other	0		0 KiB
Third-party	0		0 KiB
Largest Contentful Paint element — 1 element found			^
This is the largest contentful element painted within the viewp	ort. <u>Learn More</u>		
Element			
h1			
Avoid large layout shifts — 5 elements found			
These DOM elements contribute most to the CLS of the page			
Element		CL	.S Contribution
aside.horaires			0.019
div.presentationtexte			0.012
h1			0.008
nav.nav			0.006
h1			0.005
Avoid long main-thread tasks — 2 long tasks found			^
Lists the longest tasks on the main thread, useful for identifyin	ng worst contributors to input delay	y. <u>Learn more</u>	
		Show 3rd-party	resources (0)
URL		Start Time	Duratio
http://www.belleonaturelle.fr		797 ms	86 ms
http://www.belleonaturelle.fr		728 ms	69 ms
sed audits (22)			^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to interactive. <u>Learn more</u> .	lower time to
Minify CSS	^
Minifying CSS files can reduce network payload sizes. <u>Learn more</u> .	
Minify JavaScript	^
Minifying JavaScript files can reduce payload sizes and script parse time. <u>Learn more</u> .	
Remove unused CSS	^
Remove dead rules from stylesheets and defer the loading of CSS not used for above-the-fold conterunnecessary bytes consumed by network activity. <u>Learn more</u> .	nt to reduce
Remove unused JavaScript	^
Remove unused JavaScript to reduce bytes consumed by network activity. <u>Learn more</u> .	
Enable text compression	^
Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total net more.	work bytes. <u>Learn</u>
Preconnect to required origins	^
Consider adding `preconnect` or `dns-prefetch` resource hints to establish early connections to import Learn more.	tant third-party origins.
Initial server response time was short — Root document took 50 ms	^
Keep the server response time for the main document short because all other requests depend on it.	<u>Learn more</u> .
Show	3rd party resources (0)
URL	Time Spent
http://www.belleonaturelle.fr	50 ms
Avoid multiple page redirects	^
Redirects introduce additional delays before the page can be loaded. <u>Learn more</u> .	
Use HTTP/2 — 6 requests not served via HTTP/2	^
HTTP/2 offers many benefits over HTTP/1.1, including binary headers, multiplexing, and server push.	<u>Learn more</u> .
Show	- 3rd-party resources (0)
URL	Protocol
http://www.belleonaturelle.fr	http/1.1
/monstyle.css (www.belleonaturelle.fr)	http/1.1
/logo_pap.png (www.belleonaturelle.fr)	http/1.1
/photo1.jpg (www.belleonaturelle.fr)	http/1.1
/logo_cosmebio.png (www.belleonaturelle.fr)	http/1.1

with this. Learn more.

URL Protocol /fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr) http/1.1 Use video formats for animated content Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. Learn more Remove duplicate modules in JavaScript bundles Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. Avoid serving legacy JavaScript to modern browsers Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn More Avoids enormous network payloads — Total size was 429 KiB Large network payloads cost users real money and are highly correlated with long load times. Learn more. Show 3rd party resources (0) **URL** Transfer Size /logo_pap.png (www.belleonaturelle.fr) 147.6 KiB /photo1.jpg (www.belleonaturelle.fr) 146 KiB /fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr) 114 KiB 17.4 KiB /logo_cosmebio.png (www.belleonaturelle.fr) http://www.belleonaturelle.fr 2.5 KiB 1.3 KiB /monstyle.css (www.belleonaturelle.fr) Avoids an excessive DOM size — 79 elements A large DOM will increase memory usage, cause longer style calculations, and produce costly layout reflows. Learn more. Statistic Element Value Total DOM Elements 79 Maximum DOM Depth 6 Maximum Child Elements <section class="phyts"> 14 User Timing marks and measures Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. Learn more. JavaScript execution time - 0.0 s Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps

Show 3rd party resources (0)

URL	Total CPU Time	Script Evaluation	Script Parse
http://www.belleonaturelle.fr	388 ms	5 ms	2 ms
Unattributable	150 ms	8 ms	1 ms
Minimizes main-thread work — 0.5 s			^
Consider reducing the time spent parsing, compiling and exe with this. <u>Learn more</u>	ecuting JS. You may find	delivering smaller JS pay	loads helps
Category			Time Spent
Rendering			220 ms
Other			210 ms
Style & Layout			79 ms
Parse HTML & CSS			22 ms
Script Evaluation			13 ms
Script Parsing & Compilation			3 ms
Minimize third-party usage			^
Third-party code can significantly impact load performance. load third-party code after your page has primarily finished lo		ndant third-party providers	s and try to
Uses passive listeners to improve scrolling performance			^
Consider marking your touch and wheel event listeners as `p	passive` to improve your	page's scroll performance	e. <u>Learn more</u> .
Avoids document.write()			^
For users on slow connections, external scripts dynamically seconds. <u>Learn more</u> .	injected via `document.w	rite()` can delay page loa	d by tens of
Avoid non-composited animations			^
Animations which are not composited can be janky and incre	ease CLS. <u>Learn more</u>		




Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

Contrast — These are opportunities to improve the legibility of your content.

▲ Background and foreground colors do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. Learn more.

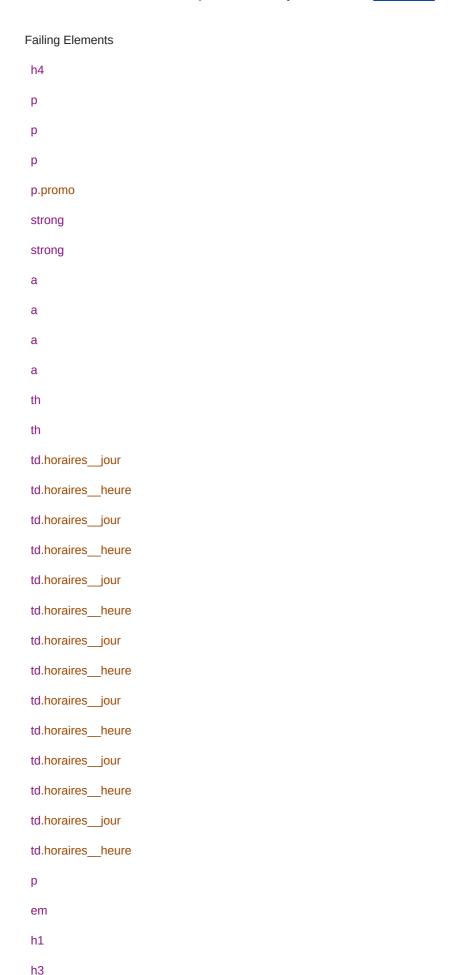

Failing Elements

	The page has a logical tab order	^
	ditional items to manually check (10) — These items address areas which an automated testing tool cannot cover. Learning in our guide on conducting an accessibility review.	۸ ۱
	img	
	Failing Elements	
	Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alternate. Learn more.	
A	Image elements do not have [alt] attributes	^
	mes and labels — These are opportunities to improve the semantics of the controls in your application. This may enhance experience for users of assistive technology, like a screen reader.	
	h3	
	h4	
	Failing Elements	
	Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <u>Learn more</u> .	
A	Heading elements are not in a sequentially-descending order	^
Na	vigation — These are opportunities to improve keyboard navigation in your application.	
	p#pied	
	p	
	h3	
	p	
	p h3	
	h3	
	p LC	
	h3	
	р	
	h3	
	P	

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more</u>.

	Interactive controls are keyboard focusable	^
	Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn more</u> .	
	Interactive elements indicate their purpose and state	^
	Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. <u>Learn more</u> .	
	The user's focus is directed to new content added to the page	^
	If new content, such as a dialog, is added to the page, the user's focus is directed to it. <u>Learn more</u> .	
	User focus is not accidentally trapped in a region	^
	A user can tab into and out of any control or region without accidentally trapping their focus. <u>Learn more</u> .	
	Custom controls have associated labels	^
	Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. <u>Learn more</u> .	
	Custom controls have ARIA roles	^
	Custom interactive controls have appropriate ARIA roles. <u>Learn more</u> .	
	Visual order on the page follows DOM order	^
	DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more</u> .	
	Offscreen content is hidden from assistive technology	^
	Offscreen content is hidden with display: none or aria-hidden=true. <u>Learn more</u> .	
	HTML5 landmark elements are used to improve navigation	^
	Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology Learn more.</nav></main>	<i>1</i> .
Pas	ssed audits (11)	^
	[aria-hidden="true"] is not present on the document <body></body>	^
	Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document ` <body>`. Learn more.</body>	
	The page contains a heading, skip link, or landmark region	^
	Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. <u>Learn more</u> .	
	Document has a <title> element</td><td>^</td></tr><tr><td></td><td>The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more</u>.</td><td></td></tr><tr><td></td><td><html> element has a [lang] attribute</td><td>^</td></tr><tr><td></td><td>If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. <u>Learn more</u>.</td><td>[</td></tr></tbody></table></title>	

<html> element has a valid value for its [lang] attribute Specifying a valid BCP 47 language helps screen readers announce text properly. Learn more. Links have a discernible name Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn more. Lists contain only elements and script supporting elements (<script> and <template>). Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more. List items () are contained within or parent elements Screen readers require list items (`') to be contained within a parent '' or '' to be announced properly. Learn more. [user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5. Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more. Cells in a element that use the [headers] attribute refer to table cells within the same table. Screen readers have features to make navigating tables easier. Ensuring `` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more. elements and elements with [role="columnheader"/"rowheader"] have data cells they describe. Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more. Not applicable (27) [accesskey] values are unique Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more. [aria-*] attributes match their roles Each ARIA `role` supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. Learn more. [aria-hidden="true"] elements do not contain focusable descendents Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn more. ARIA input fields have accessible names When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more. [role]s have all required [aria-*] attributes

Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more.

Elements with an ARIA [role] that require children to contain a specific [role] have all required children. Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more. [role]s are contained by their required parent element Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more. [role] values are valid ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more. ARIA toggle fields have accessible names When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more. [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more. [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more. Buttons have an accessible name When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn more. <dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements. When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn more. Definition list items are wrapped in <dl> elements Definition list items ('<dt>' and '<dd>') must be wrapped in a parent '<dl>' element to ensure that screen readers can properly announce them. Learn more. [id] attributes on active, focusable elements are unique All focusable elements must have a unique `id` to ensure that they're visible to assistive technologies. Learn more. ARIA IDs are unique The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn No form fields have multiple labels Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn more. <frame> or <iframe> elements have a title Screen reader users rely on frame titles to describe the contents of frames. Learn more. <input type="image"> elements have [alt] text

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. <u>Learn more</u>.

Form elements have associated labels

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more.

Presentational elements avoid using , <caption> or the [summary] attribute.

A table being used for layout purposes should not include data elements, such as the thor caption elements or the summary attribute, because this can create a confusing experience for screen reader users. <u>Learn more</u>.

The document does not use <meta http-equiv="refresh">

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. <u>Learn more</u>.

<object> elements have [alt] text

Screen readers cannot translate non-text content. Adding all text to `<object>` elements helps screen readers convey meaning to users. <u>Learn more</u>.

No element has a [tabindex] value greater than 0

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more</u>.

[lang] attributes have a valid value

Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reader. <u>Learn more</u>.

<video> elements contain a <track> element with [kind="captions"]

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more.

<video> elements contain a <track> element with [kind="description"]

Audio descriptions provide relevant information for videos that dialogue cannot, such as facial expressions and scenes. <u>Learn more</u>.



Best Practices

Trust and Safety

▲ Does not use HTTPS — 6 insecure requests found

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. <u>Learn more</u>.

	Show 3rd party resources (0)
Insecure URL	Request Resolution
http://www.belleonaturelle.fr	Allowed
/monstyle.css (www.belleonaturelle.fr)	Allowed
/logo_pap.png (www.belleonaturelle.fr)	Allowed
/photo1.jpg (www.belleonaturelle.fr)	Allowed
/logo_cosmebio.png (www.belleonaturelle.fr)	Allowed
/fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr)	Allowed
Passed audits (15)	^
Links to cross-origin destinations are safe	^
Add `rel="noopener"` or `rel="noreferrer"` to any external links to improve performance Learn more.	and prevent security vulnerabilities.
Avoids requesting the geolocation permission on page load	^
Users are mistrustful of or confused by sites that request their location without context. action instead. <u>Learn more</u> .	Consider tying the request to a user
Avoids requesting the notification permission on page load	^
Users are mistrustful of or confused by sites that request to send notifications without cuser gestures instead. <u>Learn more</u> .	context. Consider tying the request to
Avoids front-end JavaScript libraries with known security vulnerabilities	^
Some third-party scripts may contain known security vulnerabilities that are easily identification. Learn more.	tified and exploited by attackers.
Allows users to paste into password fields	^
Preventing password pasting undermines good security policy. <u>Learn more</u> .	
Displays images with correct aspect ratio	^
Image display dimensions should match natural aspect ratio. <u>Learn more</u> .	
Serves images with appropriate resolution	^
Image natural dimensions should be proportional to the display size and the pixel ratio more.	to maximize image clarity. <u>Learn</u>
Page has the HTML doctype	^
Specifying a doctype prevents the browser from switching to quirks-mode. <u>Learn more</u>	
Properly defines charset	^
A character encoding declaration is required. It can be done with a ` <meta/> ` tag in the Content-Type HTTP response header. <u>Learn more</u> .	first 1024 bytes of the HTML or in the

Avoids unload event listeners The 'unload' event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Consider using the 'pagehide' or 'visibilitychange' events instead. Learn More Avoids Application Cache Application Cache is deprecated. Learn more. Detected JavaScript libraries All front-end JavaScript libraries detected on the page. Learn more. Avoids deprecated APIs Deprecated APIs will eventually be removed from the browser. Learn more. No browser errors logged to the console Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more Page has valid source maps Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more. Not applicable (1)

Fonts with font-display: optional are preloaded

Preload 'optional' fonts so first-time visitors may use them. Learn More



SEO

These checks ensure that your page is optimized for search engine results ranking. There are additional factors Lighthouse does not check that may affect your search ranking. Learn more.

Content Best Practices — Format your HTML in a way that enables crawlers to better understand your app's content.

Image elements do not have [alt] attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more.

Failing Elements

img

Passed audits but with warnings (1)	,
Has a <meta name="viewport"/> tag with width or initial-scale	
Warnings: Invalid properties found: {"device":"device-width"}	
Add a ` <meta name="viewport"/> ` tag to optimize your app for mobile screens. <u>Learn more</u> .	
Additional items to manually check (1) — Run these additional validators on your site to check additional SEO best practices.	,
Structured data is valid	
Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn more</u> .	
Passed audits (12)	
Document has a <title> element</td><td></td></tr><tr><td>The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if page is relevant to their search. <u>Learn more</u>.</td><td>а</td></tr><tr><td>Document has a meta description</td><td>•</td></tr><tr><td>Meta descriptions may be included in search results to concisely summarize page content. <u>Learn more</u>.</td><td></td></tr><tr><td>Page has successful HTTP status code</td><td>,</td></tr><tr><td>Pages with unsuccessful HTTP status codes may not be indexed properly. <u>Learn more</u>.</td><td></td></tr><tr><td>Links have descriptive text</td><td></td></tr><tr><td>Descriptive link text helps search engines understand your content. <u>Learn more</u>.</td><td></td></tr><tr><td>Links are crawlable</td><td>,</td></tr><tr><td>Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor element to an appropriate destination, so more pages of the site can be discovered. Learn More</td><td>s links</td></tr><tr><td>Page isn't blocked from indexing</td><td></td></tr><tr><td>Search engines are unable to include your pages in search results if they don't have permission to crawl them. <u>Learn</u></td><td>more.</td></tr><tr><td>robots.txt is valid</td><td></td></tr><tr><td>If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled of indexed. <u>Learn more</u>.</td><td>or</td></tr><tr><td>Document has a valid hreflang</td><td></td></tr><tr><td>hreflang links tell search engines what version of a page they should list in search results for a given language or regingle.</td><td>on.</td></tr><tr><td>Document has a valid rel=canonical</td><td></td></tr><tr><td>Canonical links suggest which URL to show in search results. <u>Learn more</u>.</td><td></td></tr><tr><td>Document uses legible font sizes — 99.59% legible text</td><td></td></tr></tbody></table></title>	

Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text \ge 12px. Learn more.

		_ s	how 3rd-party resources ((0)
Source	Selector	% of Page Text	Font Size	
monstyle.css:69	.promo	0.41%	11.2px	
Legible text		99.59%	≥ 12px	
Document avoids plugins				^
Search engines can't index plugin	n content, and many devices restri	ict plugins or don't support ther	n. <u>Learn more</u> .	
Tap targets are sized appropriatel	ly — 100% appropriately sized to	ap targets		^
Interactive elements like buttons a			pace around them, to be	



Progressive Web App

These checks validate the aspects of a Progressive Web App. Learn more.

Fast and reliable

Insecure URL

Page load is fast enough on mobile networks

A fast page load over a cellular network ensures a good mobile user experience. Learn more.

Current page does not respond with a 200 when offline

If you're building a Progressive Web App, consider using a service worker so that your app can work offline. Learn more.

start_url does not respond with a 200 when offline No usable web app manifest found on page.

A service worker enables your web app to be reliable in unpredictable network conditions. Learn more.

Installable

Does not use HTTPS — 6 insecure requests found

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more.

Show-3rd-party-resources (0)

Request Resolution

	Insecure URL	Request Resolution	
	http://www.belleonaturelle.fr	Allowed	
	/monstyle.css (www.belleonaturelle.fr)	Allowed	
	/logo_pap.png (www.belleonaturelle.fr)	Allowed	
	/photo1.jpg (www.belleonaturelle.fr)	Allowed	
	/logo_cosmebio.png (www.belleonaturelle.fr)	Allowed	
	/fonts/Delicious%20Curls%20bold.ttf (www.belleonaturelle.fr)	Allowed	
A	Does not register a service worker that controls page and start_url		^
	The service worker is the technology that enables your app to use many Progressive Web App to homescreen, and push notifications. <u>Learn more</u> .	p features, such as offline, ad	d
A	Web app manifest does not meet the installability requirements Failures: No manifest was feto	ched.	^
	Browsers can proactively prompt users to add your app to their homescreen, which can lead to more.	o higher engagement. <u>Learn</u>	
	PWA Optimized		
A	Does not redirect HTTP traffic to HTTPS		^
	If you've already set up HTTPS, make sure that you redirect all HTTP traffic to HTTPS in order features for all your users. <u>Learn more</u> .	r to enable secure web	
	Is not configured for a custom splash screen Failures: No manifest was fetched.		^
	A themed splash screen ensures a high-quality experience when users launch your app from more.	their homescreens. <u>Learn</u>	
_	Does not set a theme color for the address bar.		^
	Failures: No manifest was fetched, No ` <meta name="theme-color"/> ` tag found.		
	The browser address bar can be themed to match your site. <u>Learn more</u> .		
	Content is sized correctly for the viewport		^
	If the width of your app's content doesn't match the width of the viewport, your app might not be screens. <u>Learn more</u> .	e optimized for mobile	
	Has a <meta name="viewport"/> tag with width or initial-scale		^
	Warnings: Invalid properties found: {"device":"device-width"}		
	Add a ` <meta name="viewport"/> ` tag to optimize your app for mobile screens. <u>Learn more</u> .		
	Contains some content when JavaScript is not available		^
	Your app should display some content when JavaScript is disabled, even if it's just a warning to required to use the app. <u>Learn more</u> .	to the user that JavaScript is	
A	Does not provide a valid apple-touch-icon		^

For ideal appearance on iOS when users add a progressive web app to the home screen, define an `apple-touch-icon`. It must point to a non-transparent 192px (or 180px) square PNG. <u>Learn More</u>.

▲ Manifest doesn't have a maskable icon No manifest was fetched

A maskable icon ensures that the image fills the entire shape without being letterboxed when installing the app on a device. <u>Learn more</u>.

Additional items to manually check (3) — These checks are required by the baseline <u>PWA Checklist</u> but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.

Site works cross-browser

To reach the most number of users, sites should work across every major browser. Learn more.

Page transitions don't feel like they block on the network

Transitions should feel snappy as you tap around, even on a slow network. This experience is key to a user's perception of performance. <u>Learn more</u>.

Each page has a URL

Ensure individual pages are deep linkable via URL and that URLs are unique for the purpose of shareability on social media. Learn more.

Runtime Settings

URL http://www.belleonaturelle.fr/

Fetch Time Feb 5, 2021, 3:19 PM GMT+1

Device Emulated Moto G4

Network throttling 150 ms TCP RTT, 1,638.4 Kbps throughput (Simulated)

CPU throttling 4x slowdown (Simulated)

Channel devtools

User agent (host) Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko)

Chrome/88.0.4324.146 Safari/537.36

User agent (network) Mozilla/5.0 (Linux; Android 7.0; Moto G (4)) AppleWebKit/537.36 (KHTML, like

Gecko) Chrome/84.0.4143.7 Mobile Safari/537.36 Chrome-Lighthouse

CPU/Memory Power 1611

Axe version 3.5.5

Generated by **Lighthouse** 6.4.0 | File an issue