OpenAlex2Pajek

Institutions, the saturation approach, and co-authorship between countries

Vladimir Batagelj
IMFM, UP IAM

1351. sredin seminar
Ljubljana, May 22, 2024

Outline

Vladimir Batagelj: vladimir.batagelj@fmf.uni-lj.si
Current version of slides (May 22, 2024 at 05 : 29): slides PDF
https://github.com/bavla/OpenAlex

OpenAlex2Pajek

We continue the development of support for the conversion of OpenAlex data into Pajek's networks.

The saturation approach was split into two phases:

- the saturation phase dealing only with the citation network for the selection of the set of relevant works W

- creation of bibliographic networks for the selected set of relevant works W

The set W is determined iteratively using the function `OpenAlex2PajekCite`.

1. Create the basic query Q and determine using `OpenAlex2PajekCite` the initial version of W; list of old candidates C is empty

2. Analyze using Pajek macro `expNodes` the obtained citation network and identify new candidates N for relevant works. If N is empty **STOP**.

3. Save the list N in a CSV file. Using in R the command `joinLists("Cold.csv","N.csv","Cnew.csv")` join the old candidates and new candidates into the current list of candidates (removing duplicates).

4. Using `OpenAlex2PajekCite` determine the new version of W; go to **2**.

Creating a collection

OpenAlex2Pajek

saturation approach

To create the collection we first change the parameter `select` in the query Q to `selAll`. Afterward, we run the function `OpenAlex2PajekAll`.

Currently, we get a collection of bibliometric networks:

```
>>> n Citation Cite
>>> c publication year
>>> c type of publication
>>> c language of publication
>>> c cited by count
>>> c countries distinct count
>>> c referenced works
>>> n Authorship WA
>>> n Sources WJ
>>> n Keywords WK
>>> n Countries WC
```

I don't like the keywords provided by OpenAlex. In a future
version of OpenAlex2Pajek I will provide an alternative based
on words from the work's title (and abstract).

In phase one we could consider also other available properties
of nodes (works).

On the **to do** list is to remove the use of Pajek from phase one
and program the iterations in R.

OpenAlex2Pajek

converting dictionary into data frame

Internal: dict2DF

```
dict2DF <- function(dict,ind) {
  DF <- as.data.frame(do.call(rbind, as.list(dict)))
  return(DF[order(unlist(unname(DF[[ind]]))),])
}
```

In some cases, such as all works of researchers from a selected institution, the saturation phase is not needed.

Internal: Young universities
GitHub: HKUST, IMFM
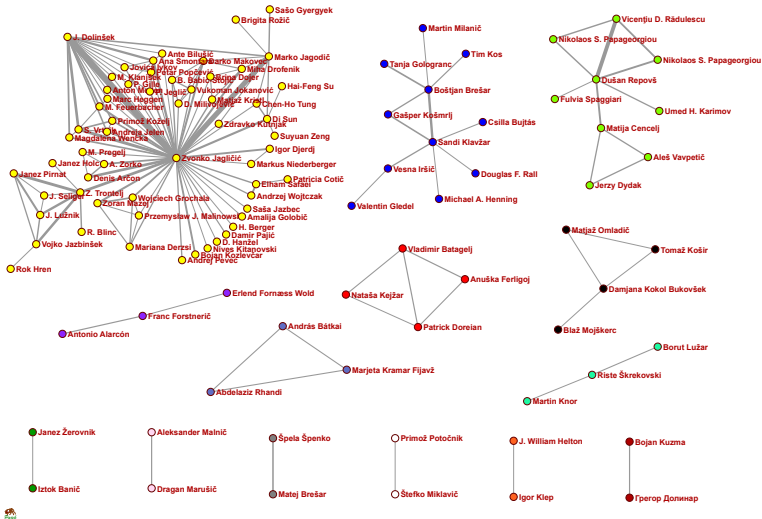
OpenAlex2Pajek
IMFM co-authorship link cut at level 7

We developed a function `coAuthorship` that creates a sequence of
temporal networks describing the co-authorship between world
countries.

Internal: meaning; total; years

GitHub: pics; 1-neighbors

Problem: OpenAlex is using ISO 2-character country codes. Only
currently existing countries are considered.

OpenAlex2Pajek

Total co-authorship between countries/1-neighbors