

# NetsJSON


Vladimir Batagelj

IMFM Ljubljana, IAM UP Koper, and NRU HSE Moscow

**UP FAMNIT & IAM Computer science seminar  
and Mathematical research seminar**

Koper, April 6, 2020

- 1 Networks
- 2 Pajek and R
- 3 JSON
- 4 Nets and NetsJSON
- 5 D3.js
- 6 References

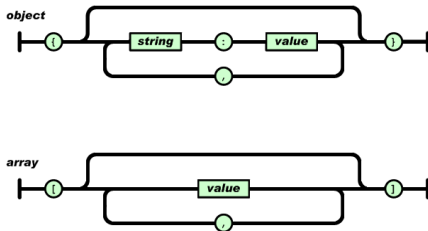

Vladimir Batagelj: [vladimir.batagelj@fmf.uni-lj.si](mailto:vladimir.batagelj@fmf.uni-lj.si)

Version (April 6, 2020, 14:59): [NetsJSON-UP.pdf](#)



Additional data about nodes or links can be known – their *properties* (attributes). For example: name/label, type, value, ...

The data can be measured or computed.

A *network*  $\mathcal{N} = (\mathcal{V}, \mathcal{L}, \mathcal{P}, \mathcal{W})$  consists of:

- a *graph*  $\mathcal{G} = (\mathcal{V}, \mathcal{L})$ , where  $\mathcal{V}$  is the set of nodes,  $\mathcal{A}$  is the set of arcs,  $\mathcal{E}$  is the set of edges, and  $\mathcal{L} = \mathcal{E} \cup \mathcal{A}$  is the set of links.

$$n = |\mathcal{V}|, m = |\mathcal{L}|$$

- $\mathcal{P}$  *node value functions* / properties:  $p: \mathcal{V} \rightarrow A$
- $\mathcal{W}$  *link value functions* / weights:  $w: \mathcal{L} \rightarrow B$

Visual complexity, Icon index, Network Repository

# Two-mode networks

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON


D3.js

References

In a *two-mode* network  $\mathcal{N} = ((\mathcal{U}, \mathcal{V}), \mathcal{L}, \mathcal{P}, \mathcal{W})$  the set of nodes consists of two disjoint sets of nodes  $\mathcal{U}$  and  $\mathcal{V}$ , and all the links from  $\mathcal{L}$  have one endnode in  $\mathcal{U}$  and the other node in  $\mathcal{V}$ .

A classical example of two-mode network are the Southern women (Davis 1941).

NAMES OF PARTICIPANTS OF GROUP I	CODE NUMBERS AND DATES OF SOCIAL EVENTS REPORTED IN <i>Om City Herald</i>													
	(1) 6/27	(2) 3/2	(3) 4/12	(4) 9/16	(5) 2/25	(6) 5/19	(7) 3/15	(8) 9/16	(9) 4/6	(10) 6/10	(11) 3/23	(12) 4/7	(13) 11/21	(14) 8/3
1. Mrs. Evelyn Jefferson.....	X	X	X	X	X	X		X	X					
2. Miss Laura Mandeville.....	X	X	X		X	X	X	X						
3. Miss Theresa Anderson.....		X	X	X	X	X	X	X	X					
4. Miss Brenda Rogers.....	X		X	X	X	X	X	X						
5. Miss Charlotte McDowd.....			X	X	X		X							
6. Miss Frances Anderson.....			X		X	X		X						
7. Miss Eleanor Nye.....					X	X	X							
8. Miss Pearl Ogletorpe.....					X	X		X	X					
9. Miss Ruth DeSand.....					X		X	X	X					
10. Miss Verne Sanderson.....						X	X	X	X				X	
11. Miss Myra Liddell.....							X	X	X	X			X	
12. Miss Katherine Rogers.....							X	X	X	X	X		X	X
13. Mrs. Sylvia Avondale.....							X	X	X	X	X	X	X	
14. Mrs. Nora Fayette.....						X	X	X	X	X	X	X	X	X
15. Mrs. Helen Lloyd.....							X			X	X	X		
16. Mrs. Dorothy Murchison.....							X	X	X					
17. Mrs. Olivia Carleton.....								X		X	X			
18. Mrs. Flora Price.....								X		X				

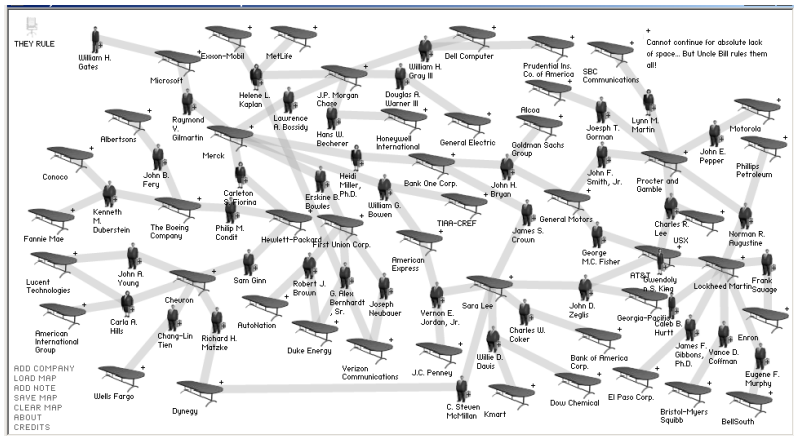

## A *temporal network*

$$\mathcal{N}_T = (\mathcal{V}, \mathcal{L}, \mathcal{P}, \mathcal{W}, T)$$

is obtained if the *time*  $T$  is attached to an ordinary network.  $T$  is a set of *time points*  $t \in T$ .

In temporal network nodes  $v \in \mathcal{V}$  and links  $l \in \mathcal{L}$  are not necessarily present or active in all time points. If a link  $l(u, v)$  is active in time point  $t$  then also its endnodes  $u$  and  $v$  should be active in time  $t$ .

Also the properties of nodes and links can change through time. To describe the changes we introduce the temporal quantities (TQ) [5, 2].


We denote the network consisting of links and nodes active in time  $t \in T$  by  $\mathcal{N}(t)$  and call it a *time slice* in time point  $t$ .

In a *multirelational* network

$$\mathcal{N} = (\mathcal{V}, (\mathcal{L}_1, \mathcal{L}_2, \dots, \mathcal{L}_k), \mathcal{P}, \mathcal{W})$$

the set of links  $\mathcal{L}$  is partitioned into subsets (*relations*)  $\mathcal{L}_i$ .

Important for encoding textual data according to the S-V-O (*Subject-Verb-Object*) model or its improvements.



Examples: *Roberto Franzosi*; *KEDS*, *Tabari*, *KEDS / Gulf*.

This coding can be directly considered as network with *Subjects*  $\cup$  *Objects* as nodes and links (arcs) labeled with *Verbs*.

See also *RDF* triples in *semantic web*, *SPARQL*.





# Multi-relational temporal network – KEDS/WEIS

NetsJSON

% Recoded by WEISmonths, Sun Nov 28 21:57:00 2004

% from http://www.ku.edu/~keds/data.dir/balk.html

\*vertices 325

```
1 "AFG" [1-*]
2 "AFR" [1-*]
3 "ALB" [1-*]
4 "ALBMED" [1-*]
5 "ALG" [1-*]
```

```
318 "YUGGOV" [1-*]
319 "YUGMAC" [1-*]
320 "YUGMED" [1-*]
321 "YUGMTN" [1-*]
322 "YUGSER" [1-*]
323 "ZAI" [1-*]
324 "ZAM" [1-*]
325 "ZIM" [1-*]
```

\*arcs :0 "\*\*\* ABANDONED"

\*arcs :10 "YIELD"

\*arcs :11 "SURRENDER"

\*arcs :12 "RETREAT"

...

\*arcs :223 "MIL ENGAGEMENT"

\*arcs :224 "RIOT"

\*arcs :225 "ASSASSINATE TORTURE"

\*arcs

224: 314 153 1 [4]

212: 314 83 1 [4]

224: 3 83 1 [4]

123: 83 153 1 [4]

...

42: 105 63 1 [175]

212: 295 35 1 [175]

43: 306 87 1 [175]

13: 295 35 1 [175]

121: 295 22 1 [175]

122: 246 295 1 [175]

121: 35 295 1 [175]

890402	YUG	KSV	224	(RIOT)	RIOT-TORN
890404	YUG	ETHALB	212	(ARREST PERSON)	ALB ETHNIC JAILED
890407	ALB	ETHALB	224	(RIOT)	RIOTS
890408	ETHALB	KSV	123	(INVESTIGATE)	PROBING
030731	GER	CYP	042	(ENDORSE)	GAVE SUPPORT
030731	UNWCT	BOSSER	212	(ARREST PERSON)	SENTENCED TO PRIS
030731	VAT	EUR	043	(RALLY)	RALLIED
030731	UNWCT	BOSSER	013	(RETRACT)	CLEARED
030731	UNWCT	BAL	121	(CRITICIZE)	CHARGES
030731	SER	UNWCT	122	(DENIGRATE)	TESTIFIED
030731	BOSSER	UNWCT	121	(CRITICIZE)	ACCUSED

Kansas Event Data System **KEDS**

In a *linked* or *multimodal* network

$$\mathcal{N} = ((\mathcal{V}_1, \mathcal{V}_2, \dots, \mathcal{V}_j), (\mathcal{L}_1, \mathcal{L}_2, \dots, \mathcal{L}_k), \mathcal{P}, \mathcal{W})$$

the set of nodes  $\mathcal{V}$  is partitioned into subsets (*modes*)  $\mathcal{V}_i$ ,  $\mathcal{L}_s \subseteq \mathcal{V}_p \times \mathcal{V}_q$ , and properties and weights are usually partial functions.

# Description of networks using a spreadsheet

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

How to describe a network  $\mathcal{N}$ ? In principle the answer is simple – we list its components  $\mathcal{V}$ ,  $\mathcal{L}$ ,  $\mathcal{P}$ , and  $\mathcal{W}$ .

The simplest way is to describe a network  $\mathcal{N}$  by providing  $(\mathcal{V}, \mathcal{P})$  and  $(\mathcal{L}, \mathcal{W})$  in a form of two tables.

As an example, let us describe a part of network determined by the following works:

Generalized blockmodeling, Clustering with relational constraint, Partitioning signed social networks, The Strength of Weak Ties

There are nodes of different types (modes): persons, papers, books, series, journals, publishers; and different relations among them: author\_of, editor\_of, contained\_in, cites, published\_by.

Both tables are often maintained in Excel. They can be exported as text in **CSV** (Comma Separated Values) format.



# bibNodes.csv

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
name;mode;country;sex;year;vol;num;fPage;lPage;x;y
"Batagelj, Vladimir";person;SI;m;;;;;809.1;653.7
"Doreian, Patrick";person;US;m;;;;;358.5;679.1
"Ferligoj, Anuška";person;SI;f;;;;;619.5;680.7
"Granovetter, Mark";person;US;m;;;;;145.6;660.5
"Moustaki, Irini";person;UK;f;;;;;783.0;228.0
"Mrvar, Andrej";person;SI;m;;;;;478.0;630.1
"Clustering with relational constraint";paper;;;1982;47;;413;426;684.1;3
"The Strength of Weak Ties";paper;;;1973;78;6;1360;1380;111.3;329.4
"Partitioning signed social networks";paper;;;2009;31;1;1;11;408.0;337.8
"Generalized Blockmodeling";book;;;2005;24;;1;385;533.0;445.9
"Psychometrika";journal;;;;;;741.8;086.1
"Social Networks";journal;;;;;;321.4;236.5
"The American Journal of Sociology";journal;;;;;;111.3;168.9
"Structural Analysis in the Social Sciences";series;;;;;;310.4;082.8
"Cambridge University Press";publisher;UK;;;;;;534.3;238.2
"Springer";publisher;US;;;;;;884.6;174.0
```

## bibNodes.csv

In large networks, to avoid the empty cells, we split a network to some subnetworks – a collection.

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
from;relation;to
"Batagelj, Vladimir";authorOf;"Generalized Blockmodeling"
"Doreian, Patrick";authorOf;"Generalized Blockmodeling"
"Ferligoj, Anuška";authorOf;"Generalized Blockmodeling"
"Batagelj, Vladimir";authorOf;"Clustering with relational constraint"
"Ferligoj, Anuška";authorOf;"Clustering with relational constraint"
"Granovetter, Mark";authorOf;"The Strength of Weak Ties"
"Granovetter, Mark";editorOf;"Structural Analysis in the Social Sciences"
"Doreian, Patrick";authorOf;"Partitioning signed social networks"
"Mrvar, Andrej";authorOf;"Partitioning signed social networks"
"Moustaki, Irini";editorOf;"Psychometrika"
"Doreian, Patrick";editorOf;"Social Networks"
"Generalized Blockmodeling";containedIn;"Structural Analysis in the Social Sciences"
"Clustering with relational constraint";containedIn;"Psychometrika"
"The Strength of Weak Ties";containedIn;"The American Journal of Sociology"
"Partitioning signed social networks";containedIn;"Social Networks"
"Partitioning signed social networks";cites;"Generalized Blockmodeling"
"Generalized Blockmodeling";cites;"Clustering with relational constraint"
"Structural Analysis in the Social Sciences";publishedBy;"Cambridge University Press"
"Psychometrika";publishedBy;"Springer"
```

bibLinks.csv

To save space and improve the computing efficiency we often replace values of categorical variables with integers. In R this encoding is called a *factorization*.

We enumerate all possible values of a given categorical variable (coding table) and afterwards replace each its value by the corresponding index in the coding table.

This approach is used in most programs dealing with large networks. Unfortunately the coding table is often a kind of meta-data.



# CSV2Pajek.R

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
# transforming CSV file to Pajek files
# by Vladimir Batagelj, June 2016
# setwd("C:/Users/batagelj/work/Python/graph/SVG/EUSN")
# colC <- c(rep("character",4),rep("numeric",7)); nas=c("", "NA", "NaN")
colC <- c(rep("character",4),rep("numeric",5)); nas=c("", "NA", "NaN")
nodes <- read.csv2("bibNodes.csv",encoding='UTF-8',colClasses=colC,na.strings=nas)
n <- nrow(nodes); M <- factor(nodes$mode); S <- factor(nodes$sex)
mod <- levels(M); sx <- levels(S); S <- as.numeric(S); S[is.na(S)] <- 0
links <- read.csv2("bibLinks.csv",encoding='UTF-8',colClasses="character")
F <- factor(links$from,levels=nodes$name,ordered=TRUE)
T <- factor(links$to,levels=nodes$name,ordered=TRUE)
R <- factor(links$relation); rel <- levels(R)
net <- file("bib.net","w"); cat('*vertices ',n,'\n',file=net)
clu <- file("bibMode.clu","w"); sex <- file("bibSex.clu","w")
cat('%',file=clu); cat('%',file=sex)
for(i in 1:length(mod)) cat(' ',i,mod[i],file=clu)
cat('\n*vertices ',n,'\n',file=clu)
for(i in 1:length(sx)) cat(' ',i,sx[i],file=sex)
cat('\n*vertices ',n,'\n',file=sex)
for(v in 1:n) {
  cat(v, ' ',nodes$name[v],'\n',sep='',file=net);
  cat(M[v],'\n',file=clu); cat(S[v],'\n',file=sex)
}
for(r in 1:length(rel)) cat('*arcs :',r,' ',rel[r],'\n',sep='',file=net)
cat('*arcs\n',file=net)
for(a in 1:nrow(links))
  cat(R[a],': ',F[a],', ',T[a], ' 1 1 ',rel[R[a]],'\n',sep='',file=net)
close(net); close(clu); close(sex)
```

CSV2Pajek.R

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
*vertices 16
1 "Batagelj, Vladimir"
2 "Doreian, Patrick"
3 "Ferligoj, Anuška"
4 "Granovetter, Mark"
5 "Moustaki, Irini"
6 "Mrvar, Andrej"
7 "Clustering with relational constraint"
8 "The Strength of Weak Ties"
9 "Partitioning signed social networks"
10 "Generalized Blockmodeling"
11 "Psychometrika"
12 "Social Networks"
13 "The American Journal of Sociology"
14 "Structural Analysis in the Social Sciences"
15 "Cambridge University Press"
16 "Springer"
*arcs :1 "authorOf"
*arcs :2 "cites"
*arcs :3 "containedIn"
*arcs :4 "editorOf"
*arcs :5 "publishedBy"

*arcs
1: 1 10 1 1 "authorOf"
1: 2 10 1 1 "authorOf"
1: 3 10 1 1 "authorOf"
1: 1 7 1 1 "authorOf"
1: 3 7 1 1 "authorOf"
1: 4 8 1 1 "authorOf"
4: 4 14 1 1 "editorOf"
1: 2 9 1 1 "authorOf"
1: 6 9 1 1 "authorOf"
4: 5 11 1 1 "editorOf"
4: 2 12 1 1 "editorOf"
3: 10 14 1 1 "containedIn"
3: 7 11 1 1 "containedIn"
3: 8 13 1 1 "containedIn"
3: 9 12 1 1 "containedIn"
2: 9 10 1 1 "cites"
2: 10 7 1 1 "cites"
5: 14 15 1 1 "publishedBy"
5: 11 16 1 1 "publishedBy"
```

[bib.net](#), [bibMode.clu](#), [bibSex.clu](#); [bib.paj](#), [bib.ini](#).



# Bibliographic network – picture / Pajek

NetsJSON

V. Batagelj

Networks


Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

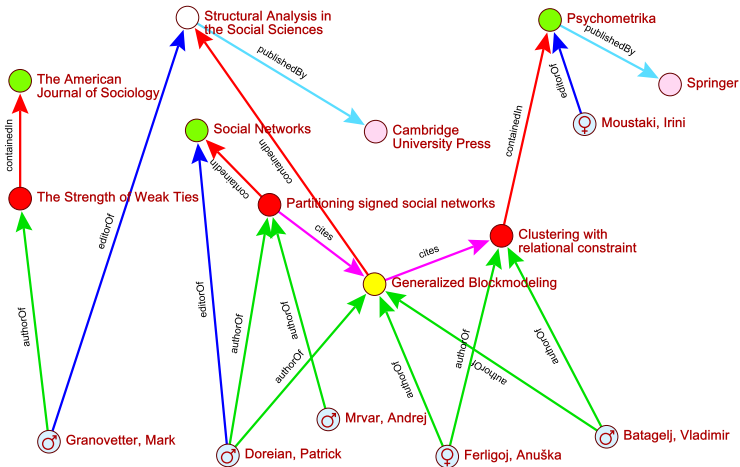

# XML api – JSON api

NetsJSON

V. Batagelj

Networks

Pajek and R


JSON

Nets and  
NetsJSON

D3.js

References

In near past, for description of structured data the **XML** (Extensible Markup Language) was mostly used. In last years a JSON format started to replace it. **Google trends** (March 2020)

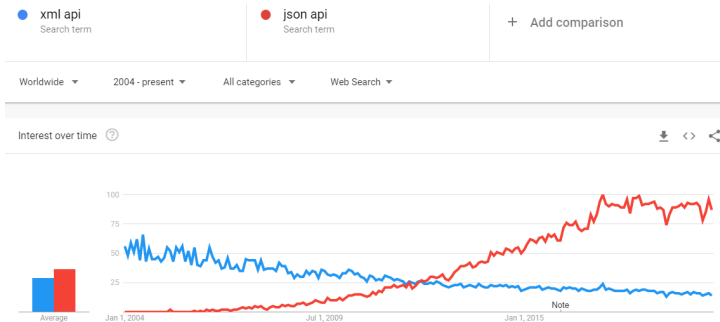

JSON (JavaScript Object Notation) is a text data format that preserves the structure of data objects. It is “compatible” with basic data structures in modern programming languages.

The initial version of JSON was developed by Douglas Crockford (around 2002). He based it on the Javascript notation. The principal idea is: if we apply on a string (sequence of characters) containing a description of a data object, the Javascript function `eval` we get as its result the corresponding data object. JSON is a programming language independent, open code standard for exchange of data among programs.

Two JSON standards exist:

- The JSON Data Interchange Format. [Standard ECMA-404](#), October 2013.
- The JavaScript Object Notation (JSON) Data Interchange Format [Request for Comments: 7159](#), March 2014.

Wikipedia



# JSON

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

XML is appropriate for describing the structure of textual data, JSON is becoming the first choice for describing structured data.

JSON has much simpler grammar, is more readable and compatible with basic data structures in modern programming languages.

All keys (names of fields) are in double quotes.

JSON files are by default based on the encoding Unicode (UTF-8).

The MIME type for JSON files is `application/json`, the recommended file extension is `.json`.

For work with JSON there exists supporting libraries for all important programming languages <http://www.json.org/>.



# JSON grammar

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON


D3.js

References

```
value
  object
  array
  string
  number
  true
  false
  null
object
  { }
  { members }
members
  pair
  pair , members
pair
  string : value
array
  [ ]
  [ elements ]
elements
  value
  value , elements
```

```
string
  ""
  " chars "
chars
  char
  char chars
char
  any-Unicode-character-except-
    "-or-\-or-control-character
  \ "
  \ \
  \ /
  \ b
  \ f
  \ n
  \ r
  \ t
  \ u four-hex-digits
number
  int
  int frac
  int exp
  int frac exp
```

```
int
  digit
  digit1-9 digits
  - digit
  - digit1-9 digits
frac
  . digits
exp
  e digits
  e digits
digits
  digit
  digit digits
e
  e
  e+
  e-
  E
  E+
  E-
```

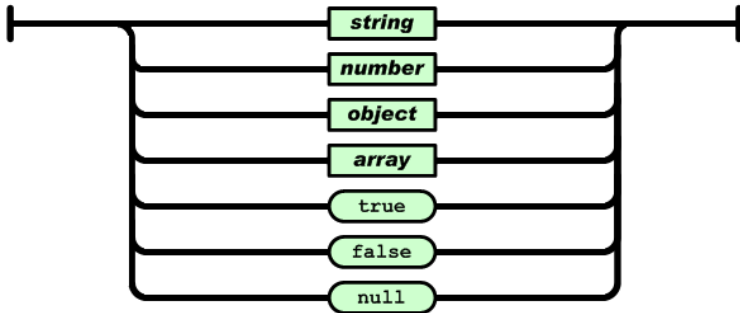**value**

# JSON grammar

NetsJSON

V. Batagelj

Networks


Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

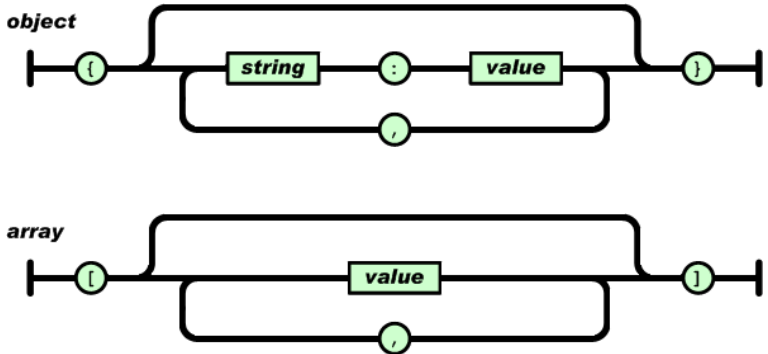



# JSON grammar

NetsJSON

V. Batagelj

Networks


Pajek and R


JSON

Nets and  
NetsJSON

D3.js

References

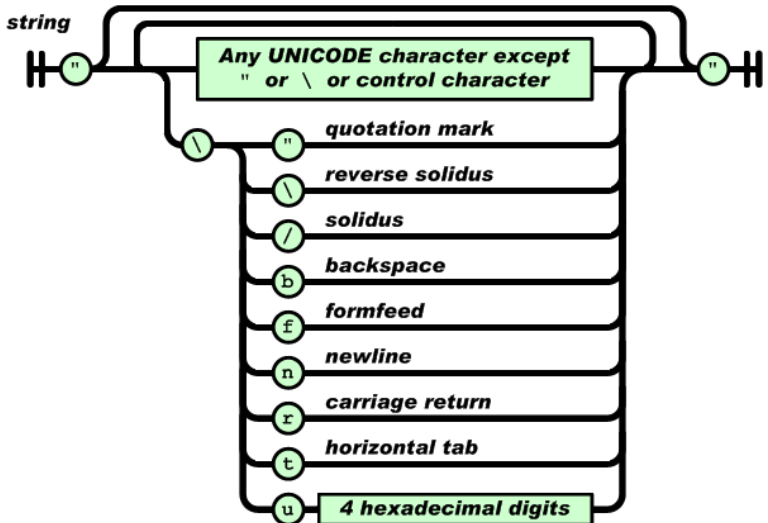

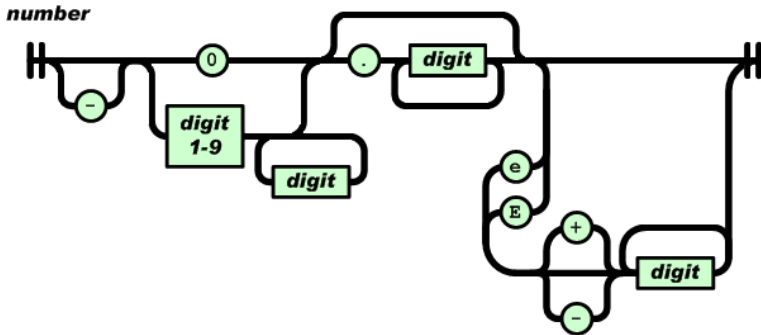

# Well formed and valid JSON files

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

A JSON file is *well formed* iff it respects JSON's grammar.  
*Is my file well formed?* service. *JSONlint* - another checker.  
We can inspect it using a web browser!!!

## JSON editor

Similar to XML's DTD files or schema, we can impose additional restrictions to the structure of JSON files describing special types of data using *JSON schema* – the JSON files respecting these additional restrictions are called *valid*.

*Github*, *validation*, *JSON Schema Lint*, *JSON Schema validator*.

R packages *jsonlite*, *rjson* and *RJSONIO*. *jsonlite Quick start*



# JSON in R - jsonlite

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
> library(jsonlite)
> J <- fromJSON(readLines("john.json"))
> J
$firstName
[1] "John"

$lastName
[1] "Smith"

...
$phoneNumbers
  type      number
1  home 212 555-1234
2 office 646 555-4567

$children
list()

$spouse
NULL

> john <- toJSON(J)
> john
{"firstName":["John"],"lastName":["Smith"],"isAlive":[true],"age":[25],"
"city":["New York"],"state":["NY"],"postalCode":["10021-3100"]},"phoneNu
{"type":"office","number":["646 555-4567"]},"children":[],"spouse":{}}
> js <- file("john2.json",encoding="UTF-8")
> write(john,file=js)
```

For dealing with networks with properties with structured values (for example, temporal quantities) we are developing a Python package Nets [3].

For describing temporal networks we initially, extending Pajek format, defined and used a lanus format.

In 2015 we started to develop a new format based on JSON – we named it netJSON. On February 26, 2019 the format was renamed to NetsJSON because of the collision with <http://netjson.org/rfc.html>.

NetsJSON has two formats: a *basic* and a *general* format. Current implementation of the Nets / TQ library supports only the basic format.

Besides for a *description* of networks with structured values, NetsJSON should *envelope* (most of) existing network description formats [6] (archiving, conversion) and provide input data for D3.js *visualizations*.



# Informal description of the basic netJSON format

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
{
  "netJSON": "basic",
  "info": {
    "org":1, "nNodes":n, "nArcs":mA, "nEdges":mE,
    "simple":TF, "directed":TF, "multirel":TF, "mode":m,
    "network":fName, "title":title,
    "time": { "Tmin":tm, "Tmax":tM, "Tlabs": {labs} },
    "meta": [events], ...
  },
  "nodes": [
    { "id":nodeId, "lab":label, "x":x, "y":y, ... },
    ***
  ]
  "links": [
    { "type":arc/edge, "n1":nodeID1, "n2":nodeID2, "rel":r, ... }
    ***
  ]
}
```

where ... are user defined properties and \*\*\* is a sequence of such elements.

An event description can contain fields:

```
{  "date": date,
   "title": short description,
   "author": name,
   "desc": long description,
   "url": URL,
   "cite": reference,
   "copy": copyright
}
```

for describing temporal networks a node element and a link element has an additional required property `tq`

Example 1, Franzosi's violence network / UTF-8 no sig



# CSV2JSON.R

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
# transforming CSV files to JSON file
# by Vladimir Batagelj, June 2016
setwd("C:/Users/batagelj/work/Python/graph/SVG/EUSN")
library(rjson)
colC <- c(rep("character",4),rep("numeric",5)); nas <- c("", "NA", "NaN")
nodes <- read.csv2("bibNodesXY.csv", encoding='UTF-8', colClasses=colC, na.strings=nas)
M <- factor(nodes$mode); mod <- levels(M); M <- as.numeric(M)
S <- factor(nodes$sex); sx <- levels(S); S <- as.numeric(S); S[is.na(S)] <- 0
links <- read.csv2("bibLinks.csv", encoding='UTF-8', colClasses="character")
F <- as.numeric(factor(links$from, levels=nodes$name, ordered=TRUE))
T <- as.numeric(factor(links$to, levels=nodes$name, ordered=TRUE))
R <- factor(links$relation); rel <- levels(R); R <- as.numeric(R)
n <- nrow(nodes); nods <- vector('list', n)
for(i in 1:n) nods[[i]] <- list(id=i, name=nodes$name[i], mode=M[i],
  sex=S[i], x=as.numeric(nodes$x[i])/1000, y=as.numeric(nodes$y[i])/1000)
m <- nrow(links); lnks <- vector('list', m)
for(i in 1:m) lnks[[i]] <- list(type="arc", source=F[i], target=T[i],
  rel=R[i], weight=1)
meta <- list(date="June 11, 2016", author="Vladimir Batagelj")
leg <- list(mode=mod, sex=sx, rel=rel)
inf <- list(network="bib", org=1, nNodes=n, nArcs=m,
  title="Example for EUSN'16", legend=leg, meta=meta)
data <- list(netJSON="basic", info=inf, nodes=nods, links=lnks)
json <- file("bib.json", "w"); cat(toJSON(data), file=json); close(json)
```





# bib.json

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

```
{
  "netJSON": "basic",
  "info": {
    "network": "bib",
    "org": 1,
    "nNodes": 16,
    "nArcs": 19,
    "title": "Example for EUSN'16",
    "legend": {
      "mode": ["book", "journal", "paper", "person", "publisher", "series"],
      "sex": ["f", "m"],
      "rel": ["authorOf", "cites", "containedIn", "editorOf", "publishedBy"]
    },
    "meta": {
      "date": "June 11, 2016",
      "author": "Vladimir Batagelj"
    },
    "nodes": [
      {
        "id": 1,
        "name": "Batagelj, Vladimir",
        "mode": 4,
        "sex": 2,
        "x": 0.8091,
        "y": 0.6537
      },
      {
        "id": 2,
        "name": "Doreian, Patrick",
        "mode": 4,
        "sex": 2,
        "x": 0.3585,
        "y": 0.6791
      },
      {
        "id": 3,
        "name": "Ferligoj, Anu\u0161ka",
        "mode": 4,
        "sex": 1,
        "x": 0.6195,
        "y": 0.6807
      },
      {
        "id": 4,
        "name": "Granovetter, Mark",
        "mode": 4,
        "sex": 2,
        "x": 0.1456,
        "y": 0.6605
      },
      {
        "id": 5,
        "name": "Moustaki, Irini",
        "mode": 4,
        "sex": 1,
        "x": 0.783,
        "y": 0.228
      },
      {
        "id": 6,
        "name": "Mrvar, Andrej",
        "mode": 4,
        "sex": 2,
        "x": 0.478,
        "y": 0.6301
      },
      {
        "id": 7,
        "name": "Clustering with relational constraint",
        "mode": 3,
        "sex": 0,
        "x": 0.6841,
        "y": 0.3801
      },
      {
        "id": 15,
        "name": "Cambridge University Press",
        "mode": 5,
        "sex": 0,
        "x": 0.5343,
        "y": 0.2382
      },
      {
        "id": 16,
        "name": "Springer",
        "mode": 5,
        "sex": 0,
        "x": 0.8846,
        "y": 0.174
      }
    ],
    "links": [
      {
        "type": "arc",
        "source": 1,
        "target": 10,
        "rel": 1,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 2,
        "target": 10,
        "rel": 1,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 3,
        "target": 10,
        "rel": 1,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 1,
        "target": 7,
        "rel": 1,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 3,
        "target": 7,
        "rel": 1,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 4,
        "target": 8,
        "rel": 1,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 4,
        "target": 14,
        "rel": 4,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 10,
        "target": 7,
        "rel": 2,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 14,
        "target": 15,
        "rel": 5,
        "weight": 1
      },
      {
        "type": "arc",
        "source": 11,
        "target": 16,
        "rel": 5,
        "weight": 1
      }
    ]
  }
}
```

bib.json, picture: bib

There exists an excellent library **D3.js** for interactive data visualization on the web (and locally) in SVG format. Most of the network data for D3.js are prepared in the JSON format. Many nice D3.js based network visualization solutions were developed:

- Force: **Force-Directed Graph, Force Layout & Matrix Market Format, 3D Force Layout; An A to Z of extra features for the d3 force layout**
- Directed: **Directed Graph Editor, Directed Edges (Curves and Arrow Markers), Mobile Patent Suits**
- Other: **Co-occurrence Matrix, Hive Plots, Chord Diagram, Hierarchical Edge Bundling**
- Applications: **Linked JAZZ, Ontology Visualization, Visualizing Package Dependencies, Connectome explorer for the "brain" of C. elegans, Gene functional interaction networks**
- More: **D3 gallery, The Big List of D3.js Examples - Christophe Viau, Over 2000 D3.js Examples and Demos**



# bib.json

NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References

## NetsJSON

V. Batagelj

Networks

Pajek and R

JSON

Nets and  
NetsJSON

D3.js

References



Batagelj, V.: Python Packages for Networks. Encyclopedia of Social Network Analysis and Mining. Reda Alhajj, Jon Rokne (Eds.), 2nd Ed, Springer, 2017



Batagelj, V., Maltseva, D.: Temporal bibliographic networks. Journal of Informetrics, 14(2020)1, 101006. [PDF](#)



Batagelj, V.: Nets. <https://github.com/bavla/Nets>



Batagelj, V.: NetsJSON. <https://github.com/bavla/netsJSON>



Batagelj, V., Praprotnik, S.: An algebraic approach to temporal network analysis based on temporal quantities. Social Network Analysis and Mining, 6(2016)1, 1-22. [PDF](#)



Bodlaj, J., Cerinšek, M.: Network Data File Formats. Encyclopedia of Social Network Analysis and Mining. Reda Alhajj, Jon Rokne (Eds.), 2nd Ed, Springer, 2018