


How Does The Internet Work?

USER

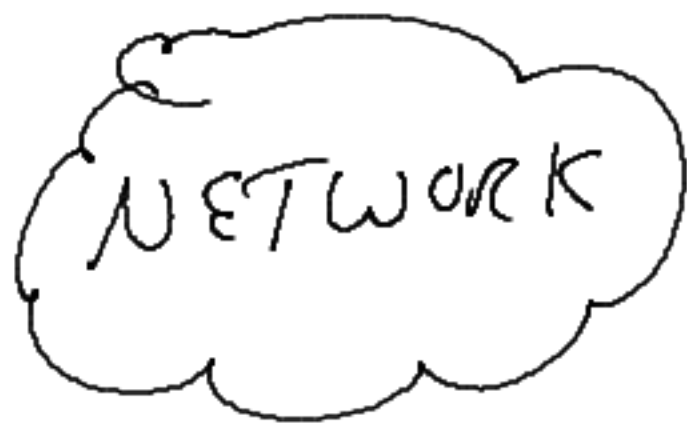

PROTOCOL

ROUTER


IP ADDR

DATABASE

SERVER

CLIENT


"STUFF"

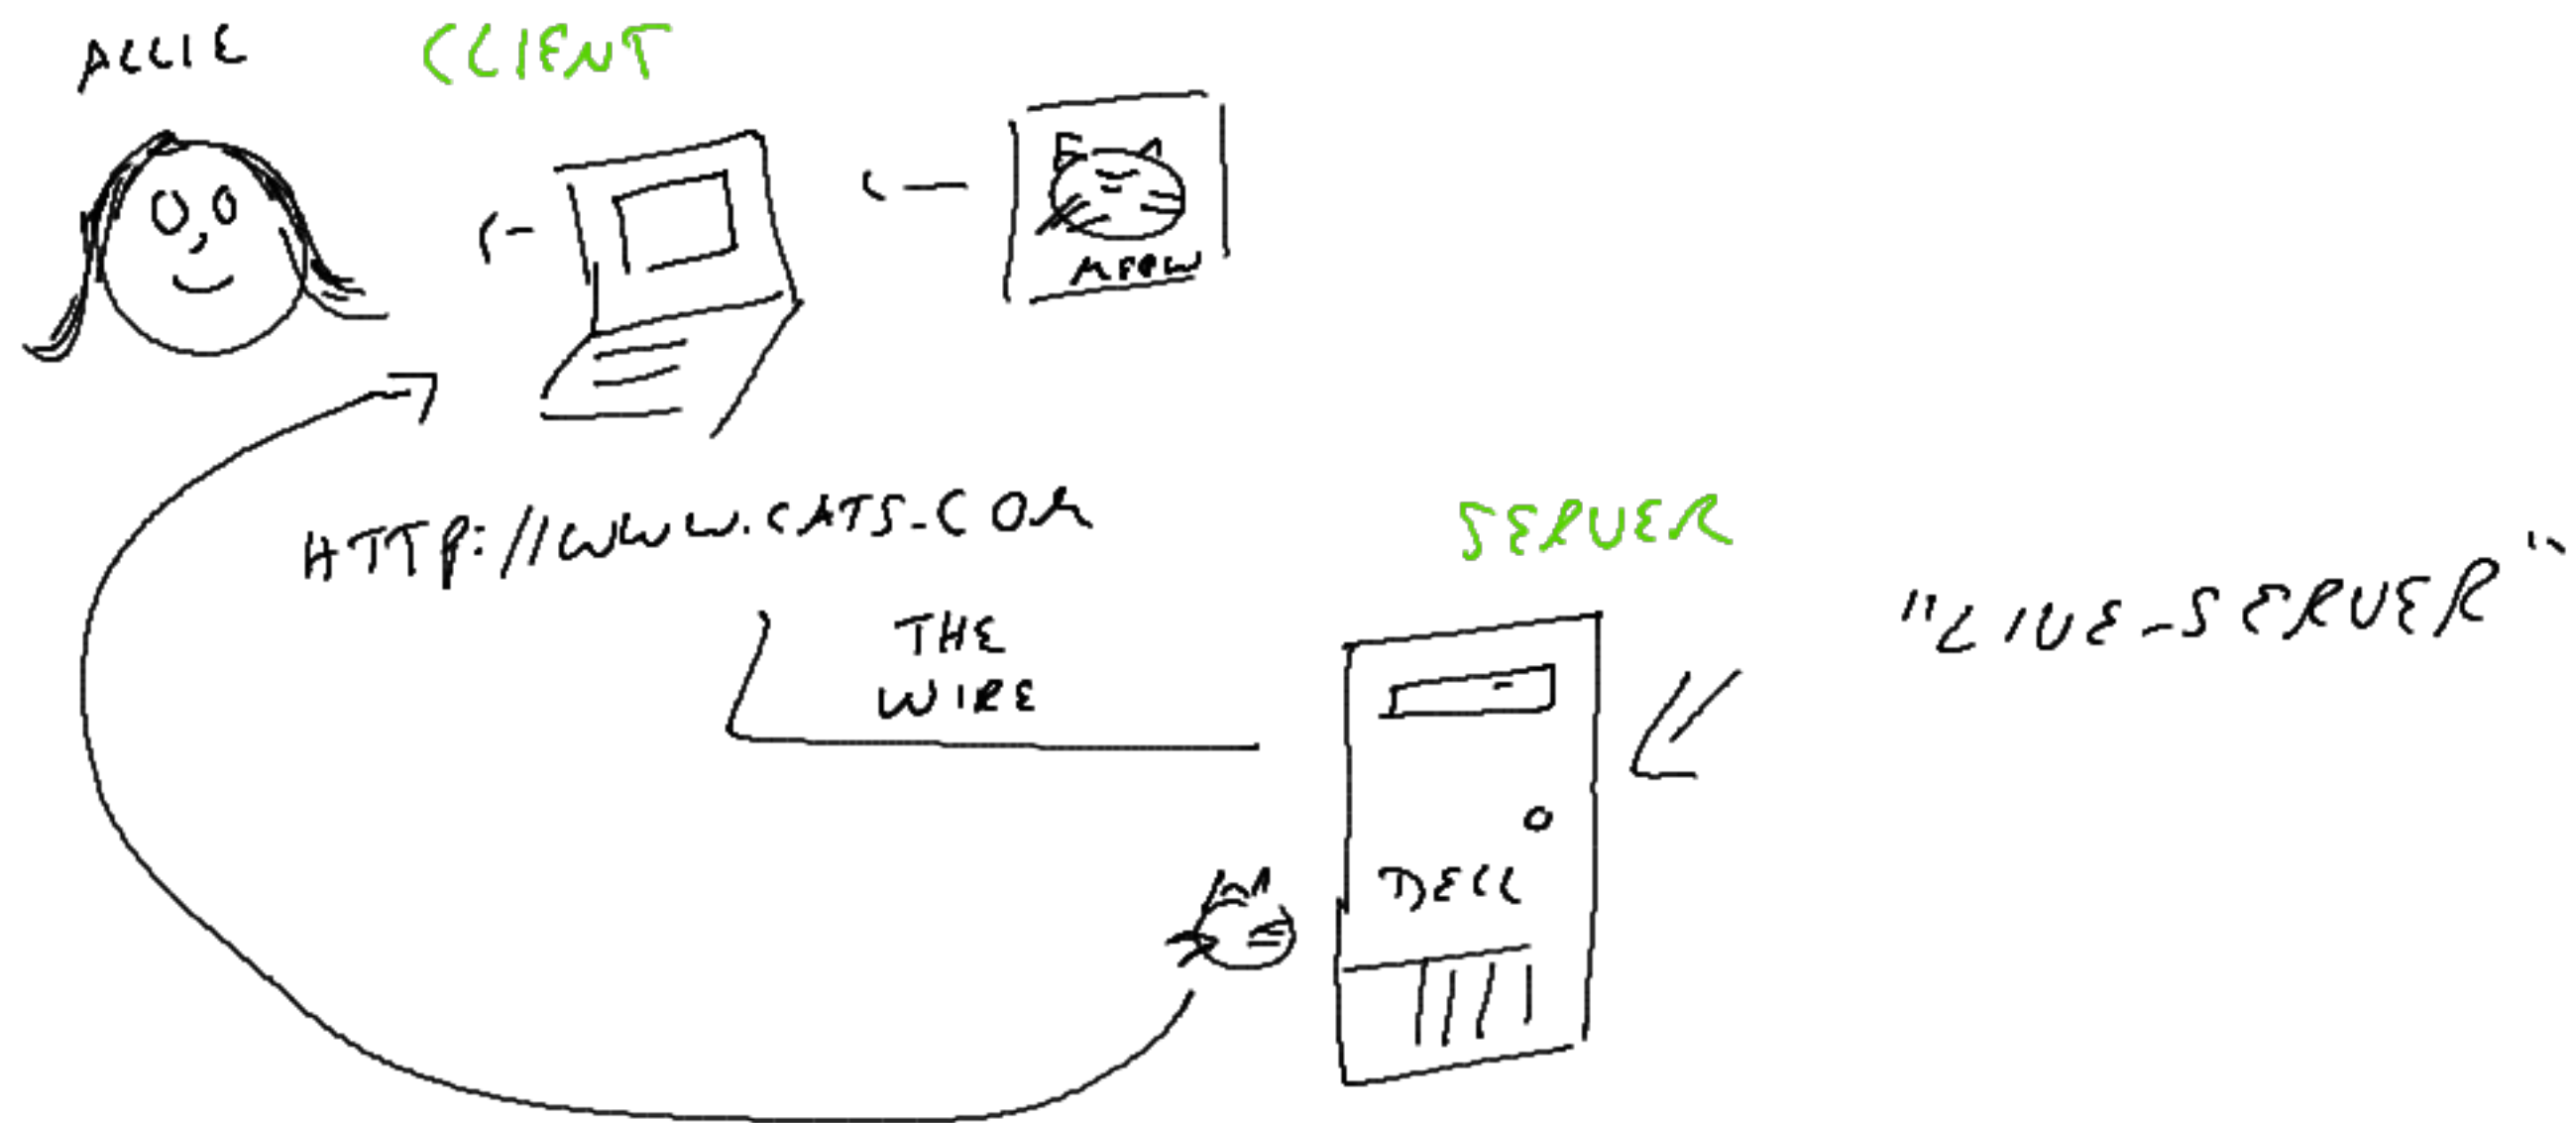



EXTERNAL
DATA

J QUERY

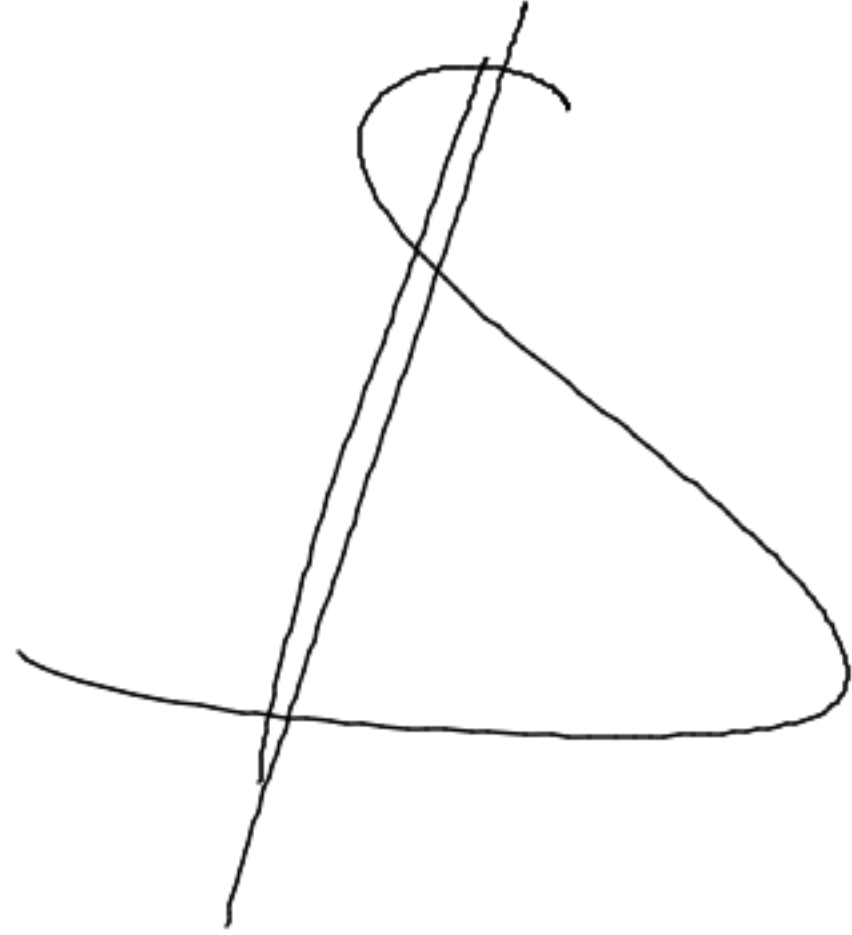

DOCUMENT . GET ELEMENT By Id ('700');
: GET ELEMENTS By TAG ('DIV')
By CLASS ('THANK')
: Query Selector All ('-')

\$ ('SELECTOR') . METHOD (...)
FIND DO


CASHTAG

CONTENT

Delivery


Network

AWS

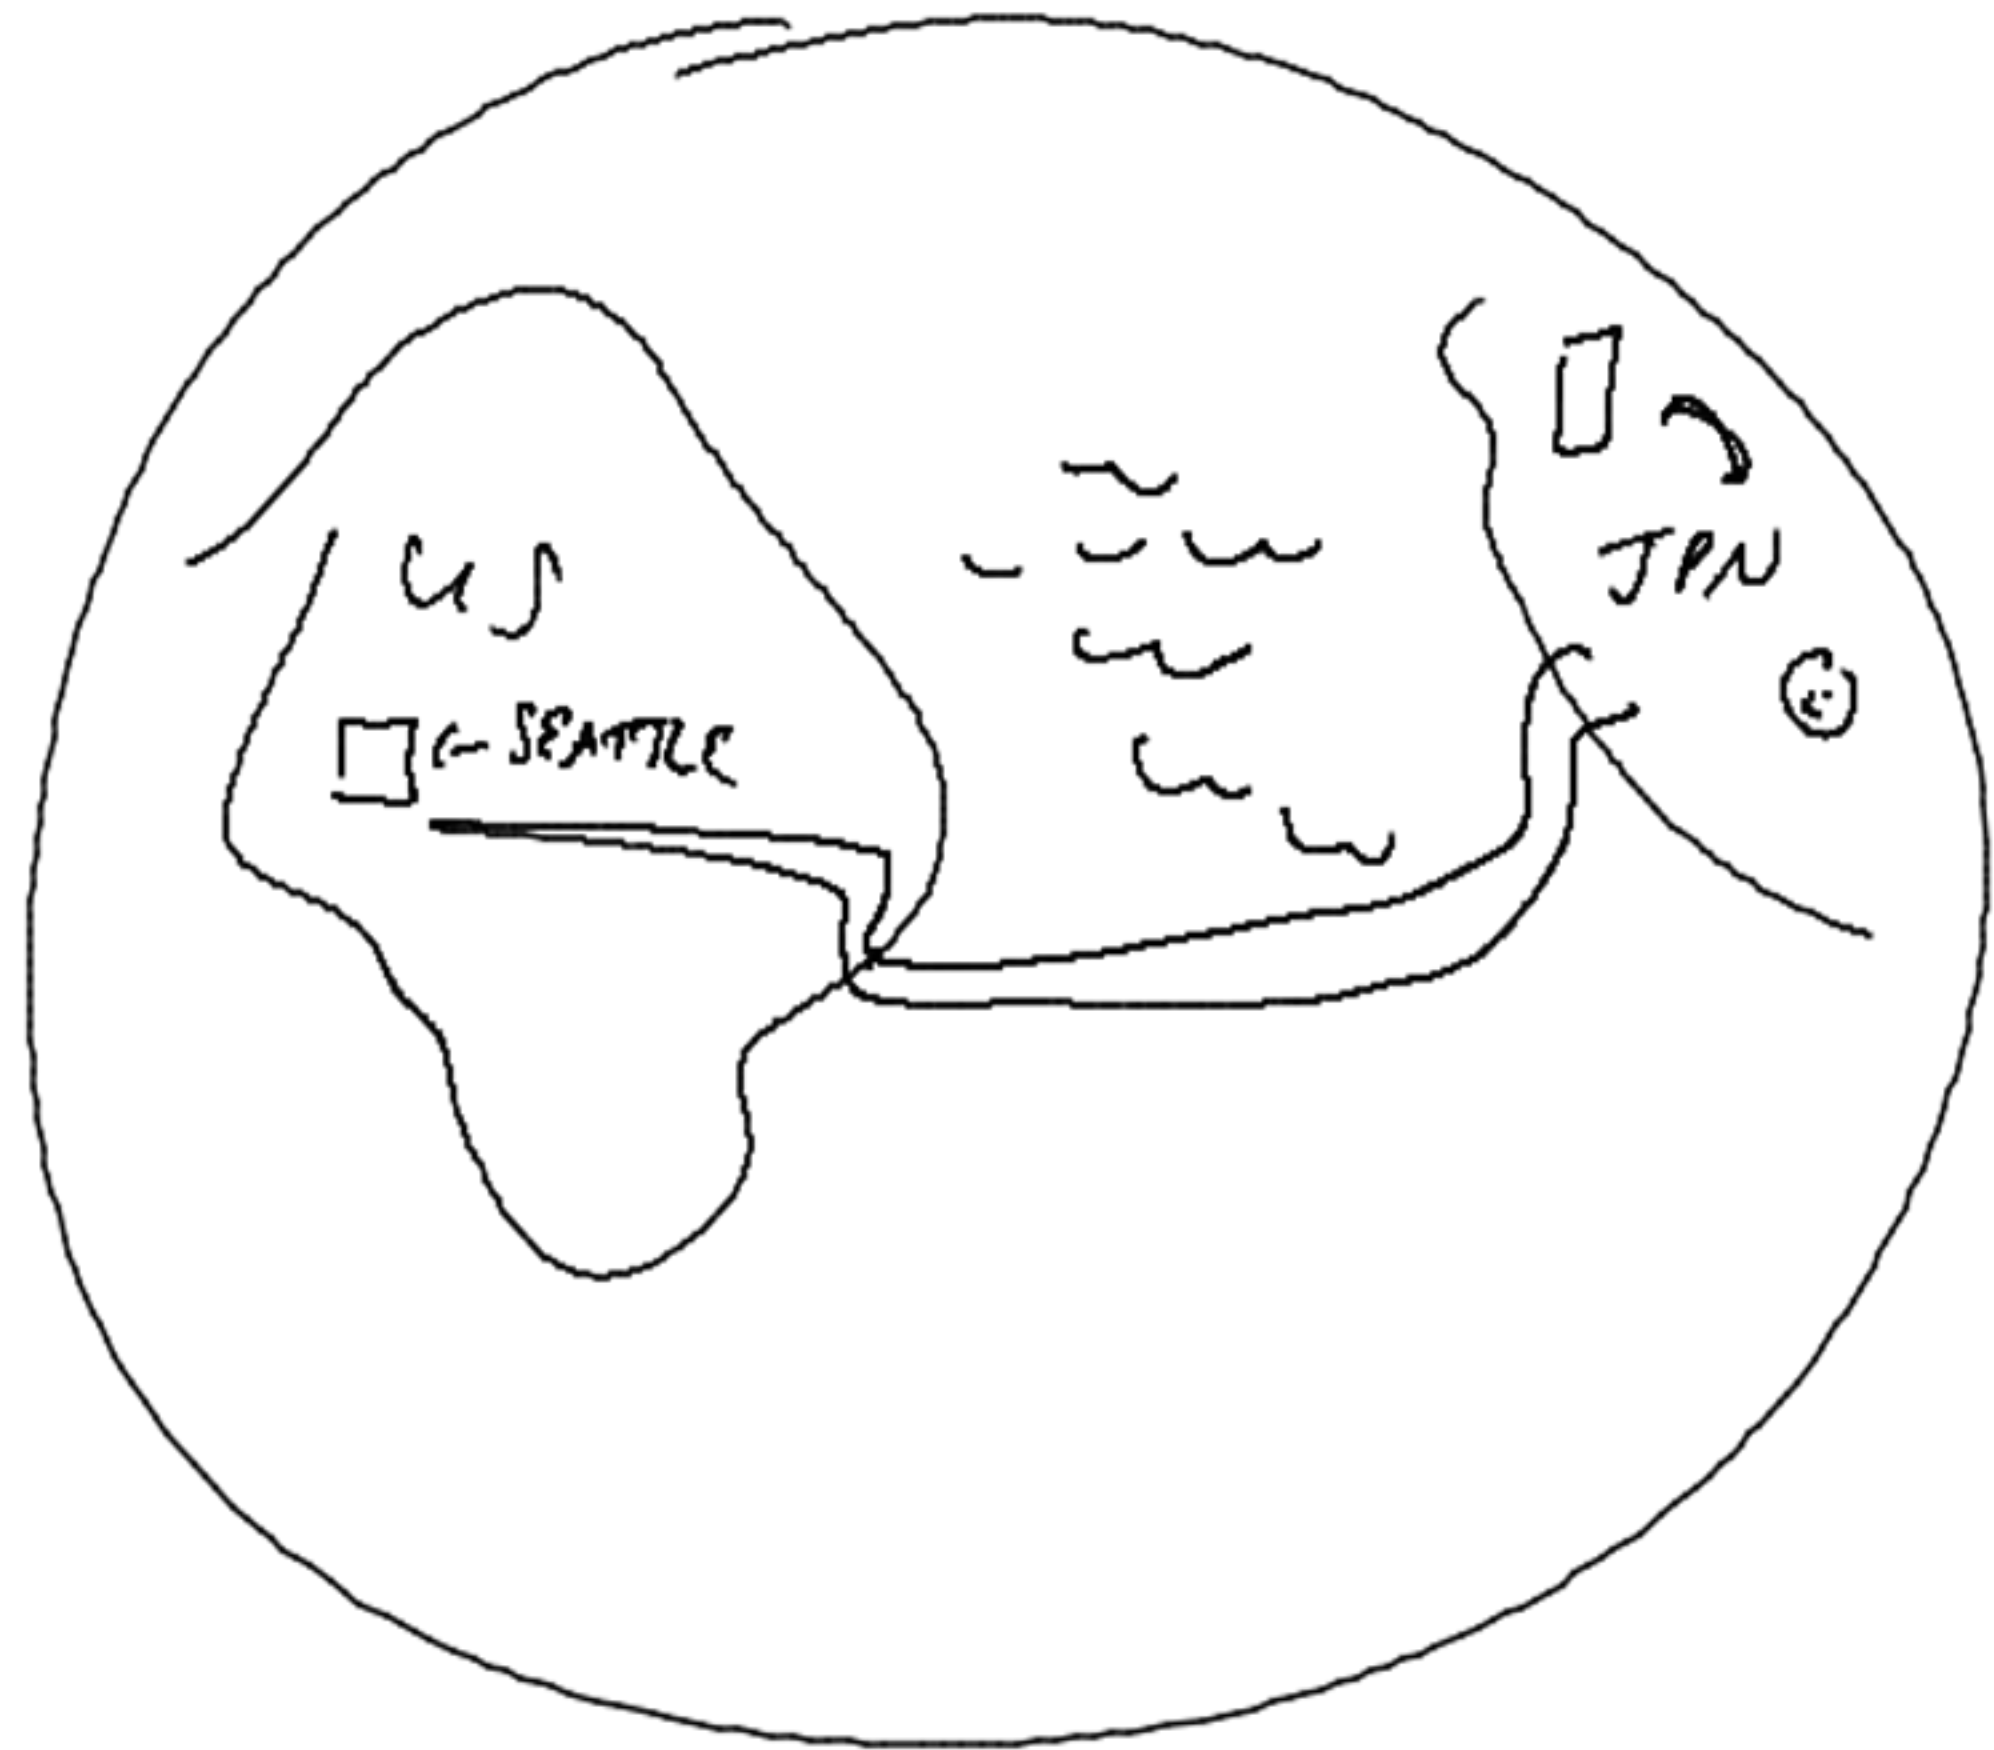

CLIENT
SIDE

~~APP~~ RENDERED
APP

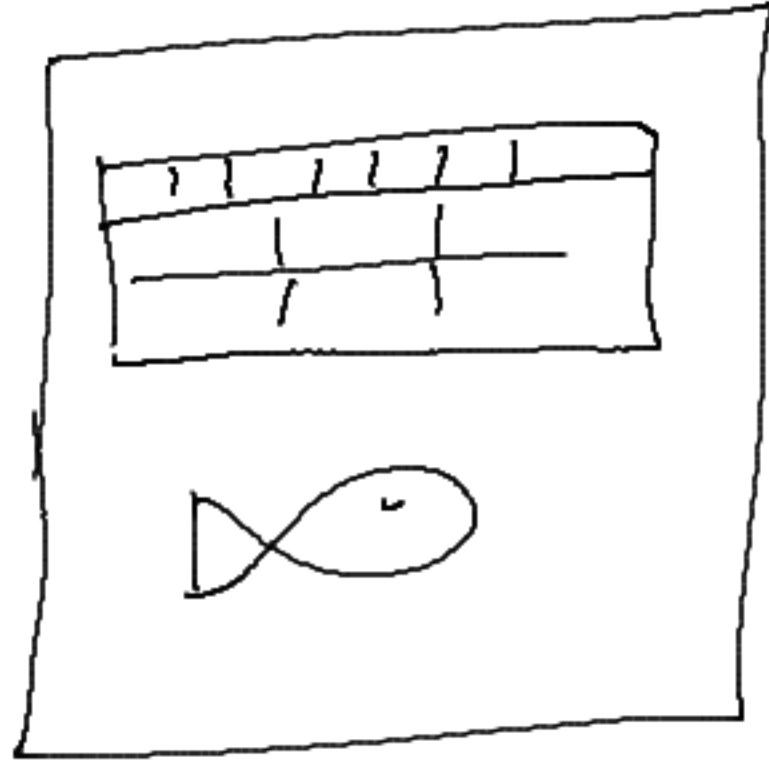

APP.JS \swarrow



$\{ \}$

CLIENT-SERVER

FRONT-END + BACKEND



HI

- ⑤ function yell(words) {
 - ① let newWord = words.toUpperCase()
 - 3
 - ② yell("Hi");}