

(a) Windowing: one window per hour, L input hours and H target hours

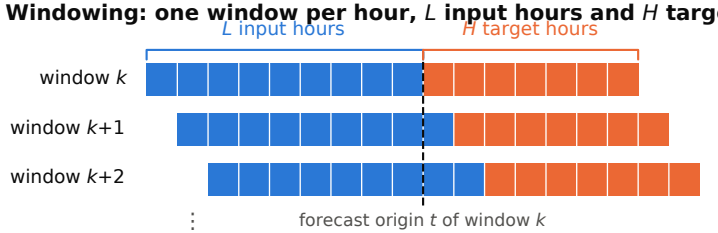

Inputs $\mathbf{x}_{t-L+1}, \ldots, \mathbf{x}_t$; targets $y_{t+1}, \ldots, y_{t+H}$.
Consecutive windows are shifted by one hour.
Windows never cross a site or a period boundary.
Site s contributes n_s training windows $w_1, \ldots, w_{n_s}$.


(b) Moving-block bootstrap: B replicates of the training windows, per site

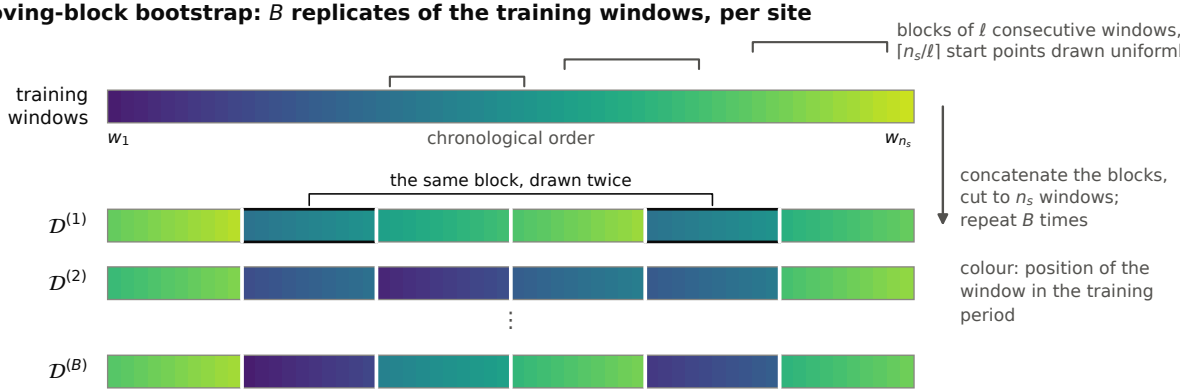

$\mathcal{D}^{(1)}$
$\mathcal{D}^{(2)}$
$\mathcal{D}^{(B)}$

(c) B LSTMs × M MC-Dropout passes → pooled forecasts, mean and 95% interval

same test window (L input hours) into every network

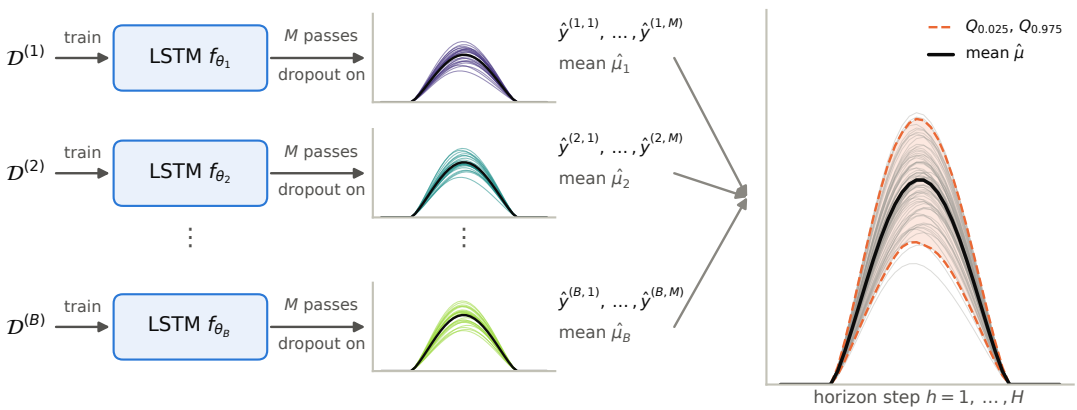

$$\hat{\mu} = \frac{1}{BM} \sum_{b=1}^{B} \sum_{m=1}^{M} \hat{y}^{(b,m)}$$

$$\mathrm{PI}_{95} = [\, Q_{0.025},\ Q_{0.975} \,] \text{ of } \{\hat{y}^{(b,m)}\}$$

for every window and horizon step