


Problem: How to detect and correct transmission errors?

Basic scheme of error correction

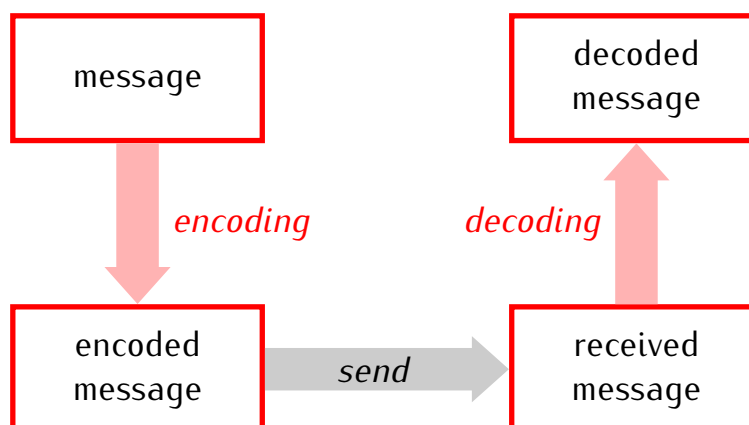

Working assumption for this lecture: We expect at most one transmission error in any message up to 20 bits long.

A simple error correcting code: triple repeat.

message: 1011

Problem: The encoded message is 3 times longer than the original message.

Better error correction: Hamming (7,4) code.

$$E = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 1 & 1 & 1 \\ 1 & 0 & 1 & 1 \\ 1 & 1 & 0 & 1 \end{bmatrix}$$

encoding matrix

$$D = \begin{bmatrix} 0 & 1 & 1 & 1 & 1 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 1 & 0 & 0 & 1 \end{bmatrix}$$

decoding matrix

message: 10111101

Encoding.

1) Split the message into vectors with 4 entries, and multiply each vector by the encoding matrix E .

2) Reduce all numbers obtained in step 1 modulo 2. That is, add or subtract from each number a multiple of 2 to get either 0 or 1.

Encoded message:

Received message:

Decoding. Split the received message into vectors with 7 entries, multiply each vector by the decoding matrix D , and reduce modulo 2.

Decoded message:

How the Hamming code works: