



EE4500

Module 5: Networking and Content Delivery

AWS Academy Cloud Foundations

Module overview

Topics

- Networking basics
- Amazon VPC
- VPC networking
- VPC security
- Amazon Route 53
- Amazon CloudFront

Activities

- Label a network diagram
- Design a basic VPC architecture

Demo

- VPC demonstration

Lab

- Build your VPC and launch a web server



Knowledge check

Module objectives

After completing this module, you should be able to:


- Recognize the basics of networking
- Describe virtual networking in the cloud with Amazon VPC
- Label a network diagram
- Design a basic VPC architecture
- Indicate the steps to build a VPC
- Identify security groups
- Create your own VPC and add additional components to it to produce a customized network
- Identify the fundamentals of Amazon Route 53
- Recognize the benefits of Amazon CloudFront

Section 1: Networking basics

Module 5: Networking and Content Delivery



Networks

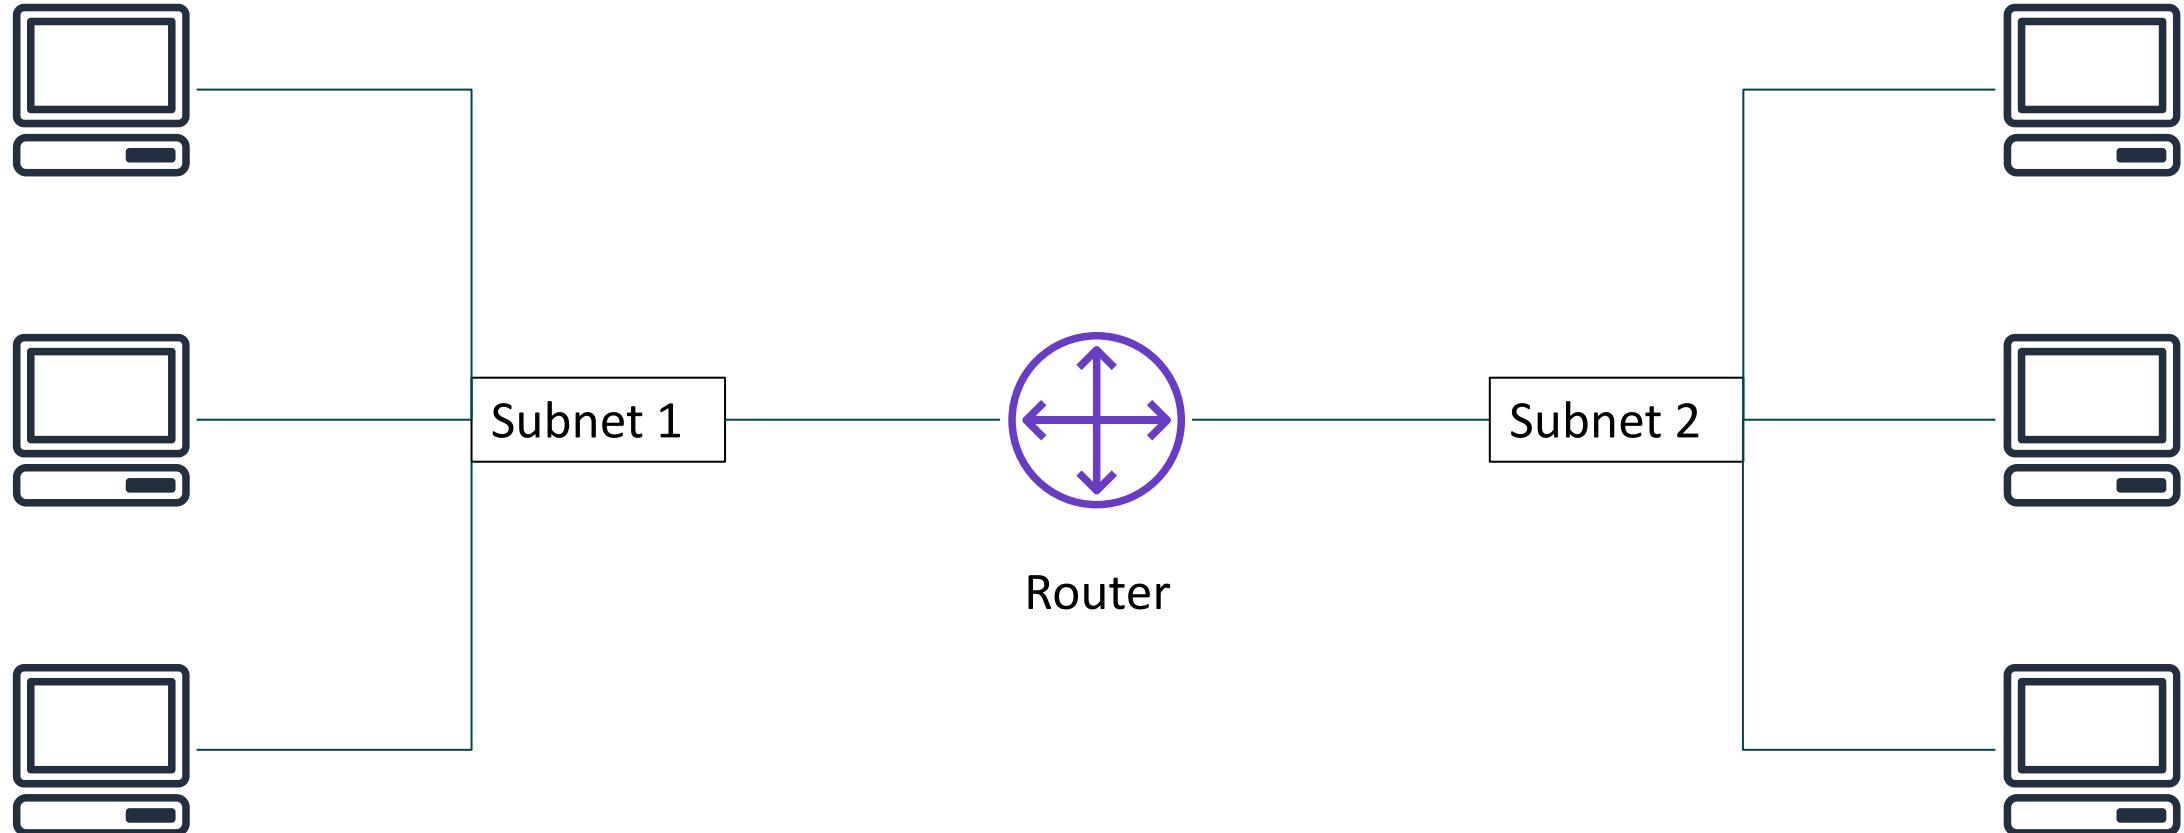

IP addresses

192



11000000

0



00000000

2



00000010

0



00000000


IPv4 and IPv6 addresses

IPv4 (32-bit) address: 192.0.2.0

IPv6 (128-bit) address: 2600:1f18:22ba:8c00:ba86:a05e:a5ba:00FF

Classless Inter-Domain Routing (CIDR)

Network identifier (routing prefix)

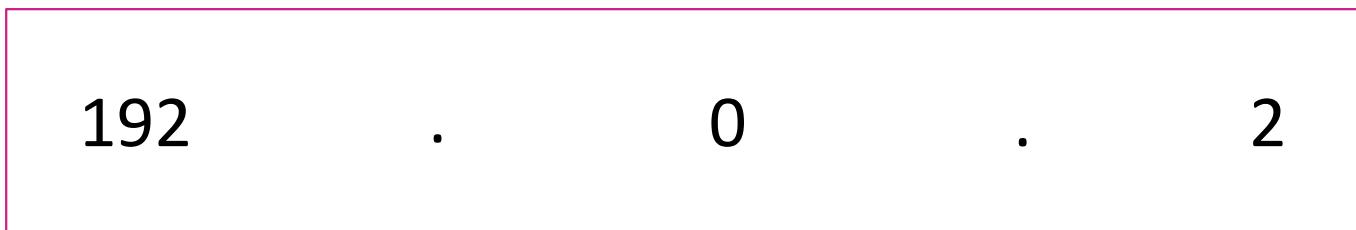


↓ ↓ ↓
11000000 00000000 00000010

Fixed

Fixed

Fixed

Host identifier



↓
00000000
to 11111111

Flexible

Tells you how
many bits are
fixed

Open Systems Interconnection (OSI) model

Layer	Number	Function	Protocol/Address
Application	7	Means for an application to access a computer network	HTTP(S), FTP, DHCP, LDAP
Presentation	6	<ul style="list-style-type: none">Ensures that the application layer can read the dataEncryption	ASCI, ICA
Session	5	Enables orderly exchange of data	NetBIOS, RPC
Transport	4	Provides protocols to support host-to-host communication	TCP, UDP
Network	3	Routing and packet forwarding (routers)	IP
Data link	2	Transfer data in the same LAN network (hubs and switches)	MAC
Physical	1	Transmission and reception of raw bitstreams over a physical medium	Signals (1s and 0s)

Section 2: Amazon VPC

Module 5: Networking and Content Delivery



Amazon VPC




Amazon
VPC

- Enables you to provision a **logically isolated** section of the AWS Cloud where you can launch AWS resources in a virtual network that you define
- Gives you **control over your virtual networking resources**, including:
 - Selection of IP address range
 - Creation of subnets
 - Configuration of route tables and network gateways
- Enables you to **customize the network configuration** for your VPC
- Enables you to use **multiple layers of security**

VPCs and subnets

- VPCs:
 - Logically isolated from other VPCs
 - Dedicated to your AWS account
 - Belong to a single **AWS Region** and can span multiple Availability Zones
- Subnets:
 - Range of IP addresses that divide a VPC
 - Belong to a single **Availability Zone**
 - Classified as **public** or **private**

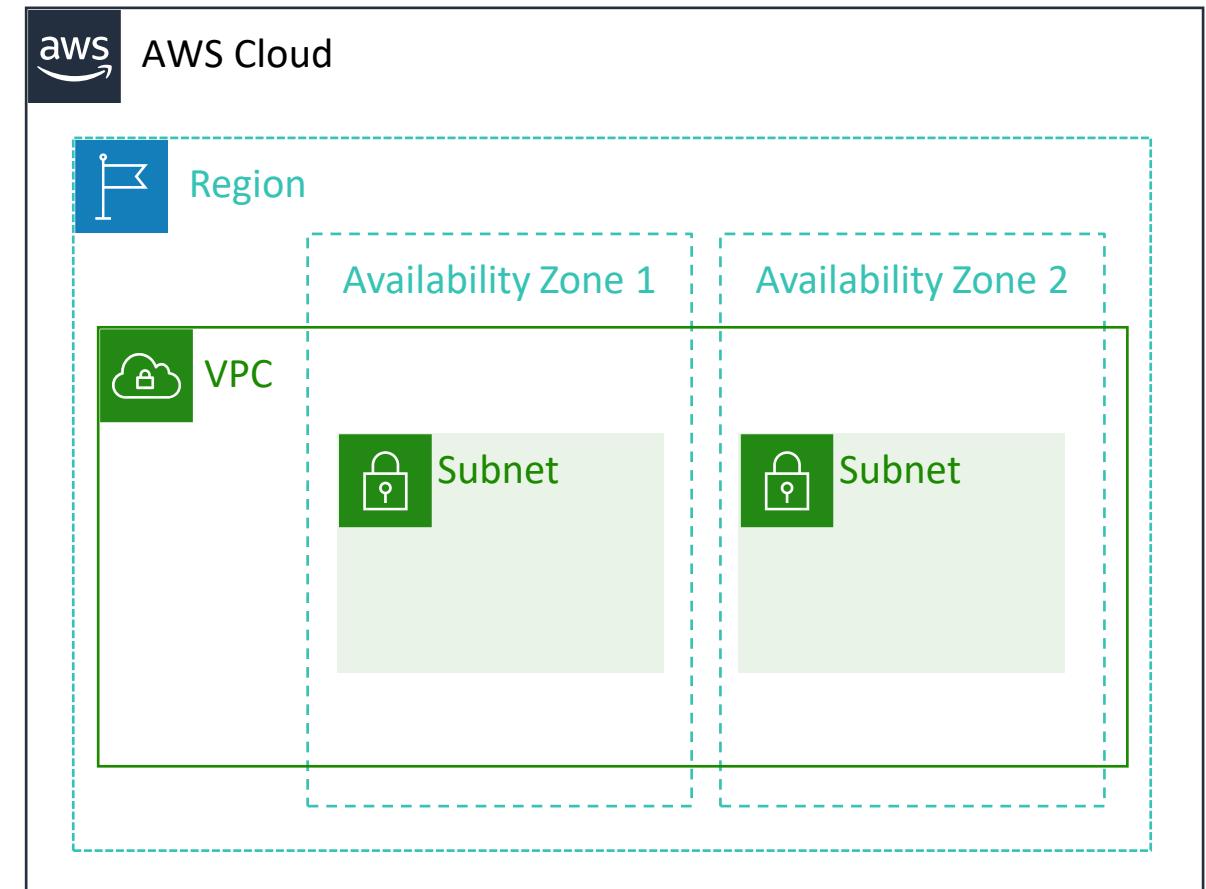

IP addressing

- When you create a VPC, you assign it to an IPv4 CIDR block (range of private IPv4 addresses).
- You cannot change the address range after you create the VPC.
- The largest IPv4 CIDR block size is /16.
- The smallest IPv4 CIDR block size is /28.
- IPv6 is also supported (with a different block size limit).
- CIDR blocks of subnets cannot overlap.




VPC

x.x.x.x/16 or 65,536 addresses (max)
to
x.x.x.x/28 or 16 addresses (min)

Reserved IP addresses

Example: A VPC with an IPv4 CIDR block of 10.0.0.0/16 has 65,536 total IP addresses. The VPC has four equal-sized subnets. Only 251 IP addresses are available for use by each subnet.

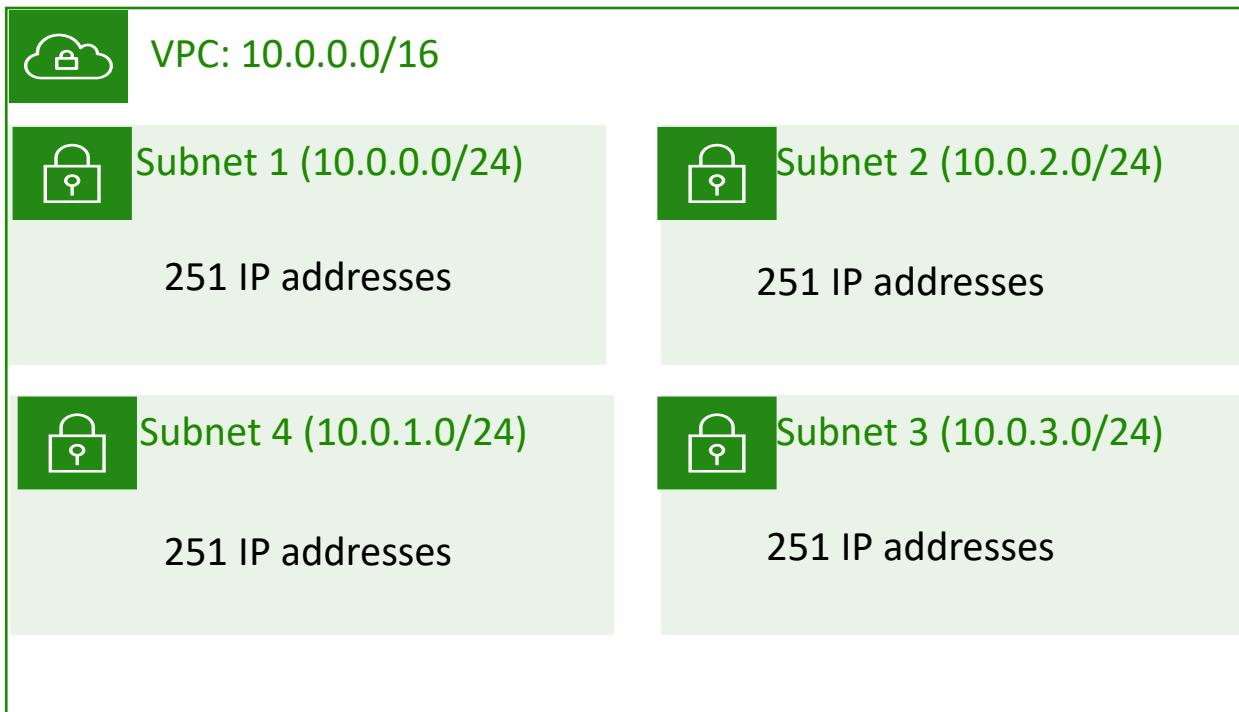

IP Addresses for CIDR block 10.0.0.0/24	Reserved for
10.0.0.0	Network address
10.0.0.1	Internal communication
10.0.0.2	Domain Name System (DNS) resolution
10.0.0.3	Future use
10.0.0.255	Network broadcast address

Public IP address types

Public IPv4 address

- Manually assigned through an Elastic IP address
- Automatically assigned through the auto-assign public IP address settings at the subnet level

Elastic IP address

- Associated with an AWS account
- Can be allocated and remapped anytime
- Additional costs might apply

Elastic network interface

- An elastic network interface is a **virtual network interface** that you can:
 - Attach to an instance.
 - Detach from the instance, and attach to another instance to redirect network traffic.
- Its **attributes follow** when it is reattached to a new instance.
- Each instance in your VPC has a **default network interface** that is assigned a private IPv4 address from the IPv4 address range of your VPC.



Route tables and routes

- A **route table** contains a set of rules (or routes) that you can configure to direct network traffic from your subnet.
- Each **route** specifies a destination and a target.
- By default, every route table contains a **local route** for communication within the VPC.
- Each **subnet** must be associated with a route table (at most one).

Main (Default) Route Table

Destination	Target
10.0.0.0/16	local

VPC CIDR block

Section 2 key takeaways




- A VPC is a logically isolated section of the AWS Cloud.
- A VPC belongs to one Region and requires a CIDR block.
- A VPC is subdivided into subnets.
- A subnet belongs to one Availability Zone and requires a CIDR block.
- Route tables control traffic for a subnet.
- Route tables have a built-in local route.
- You add additional routes to the table.
- The local route cannot be deleted.

Section 3: VPC networking

Module 5: Networking and Content Delivery



Lab 2: Build Your VPC and Launch a Web Server

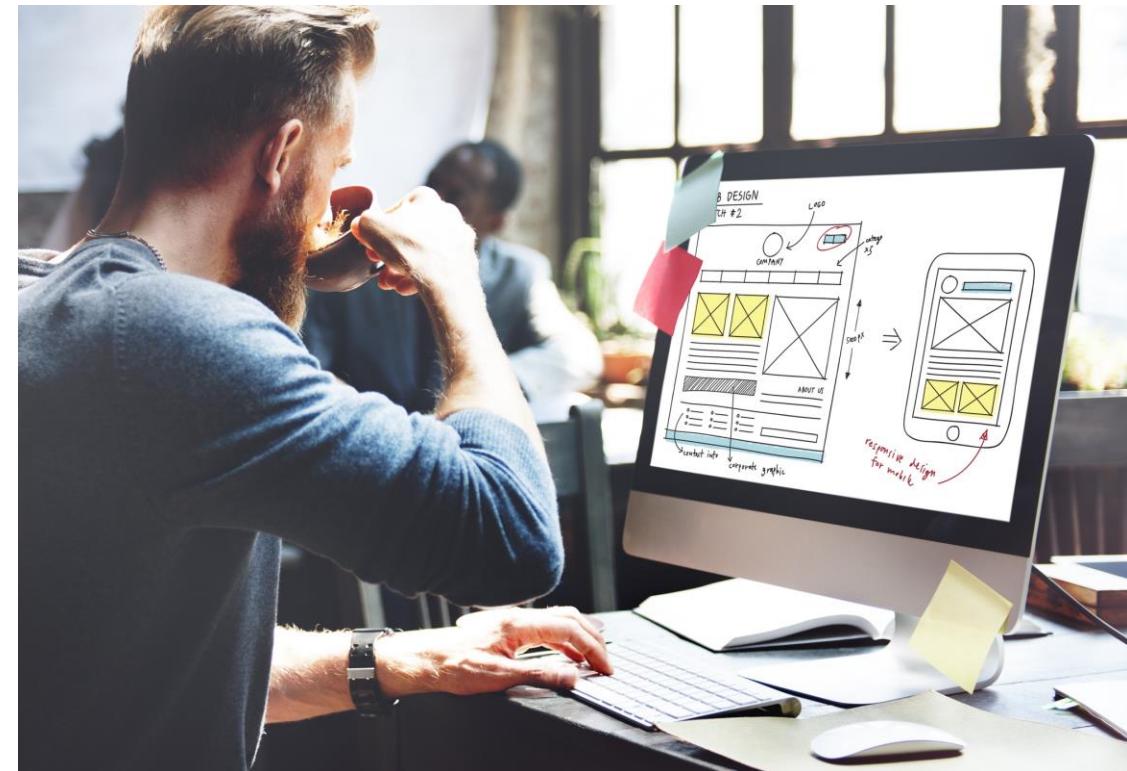


Lab 2: Scenario

In this lab, you use Amazon VPC to **create your own VPC** and add some components to produce a customized network. You **create a security group** for your VPC. You also **create an EC2 instance and configure it** to run a web server and to use the security group. You then launch the EC2 instance into the VPC.



Amazon
VPC



Amazon
EC2

Lab 2: Tasks




- Create a VPC.



- Create additional subnets.


Security group

- Create a VPC security group.



- Launch a web server instance.

Lab 2: Final product

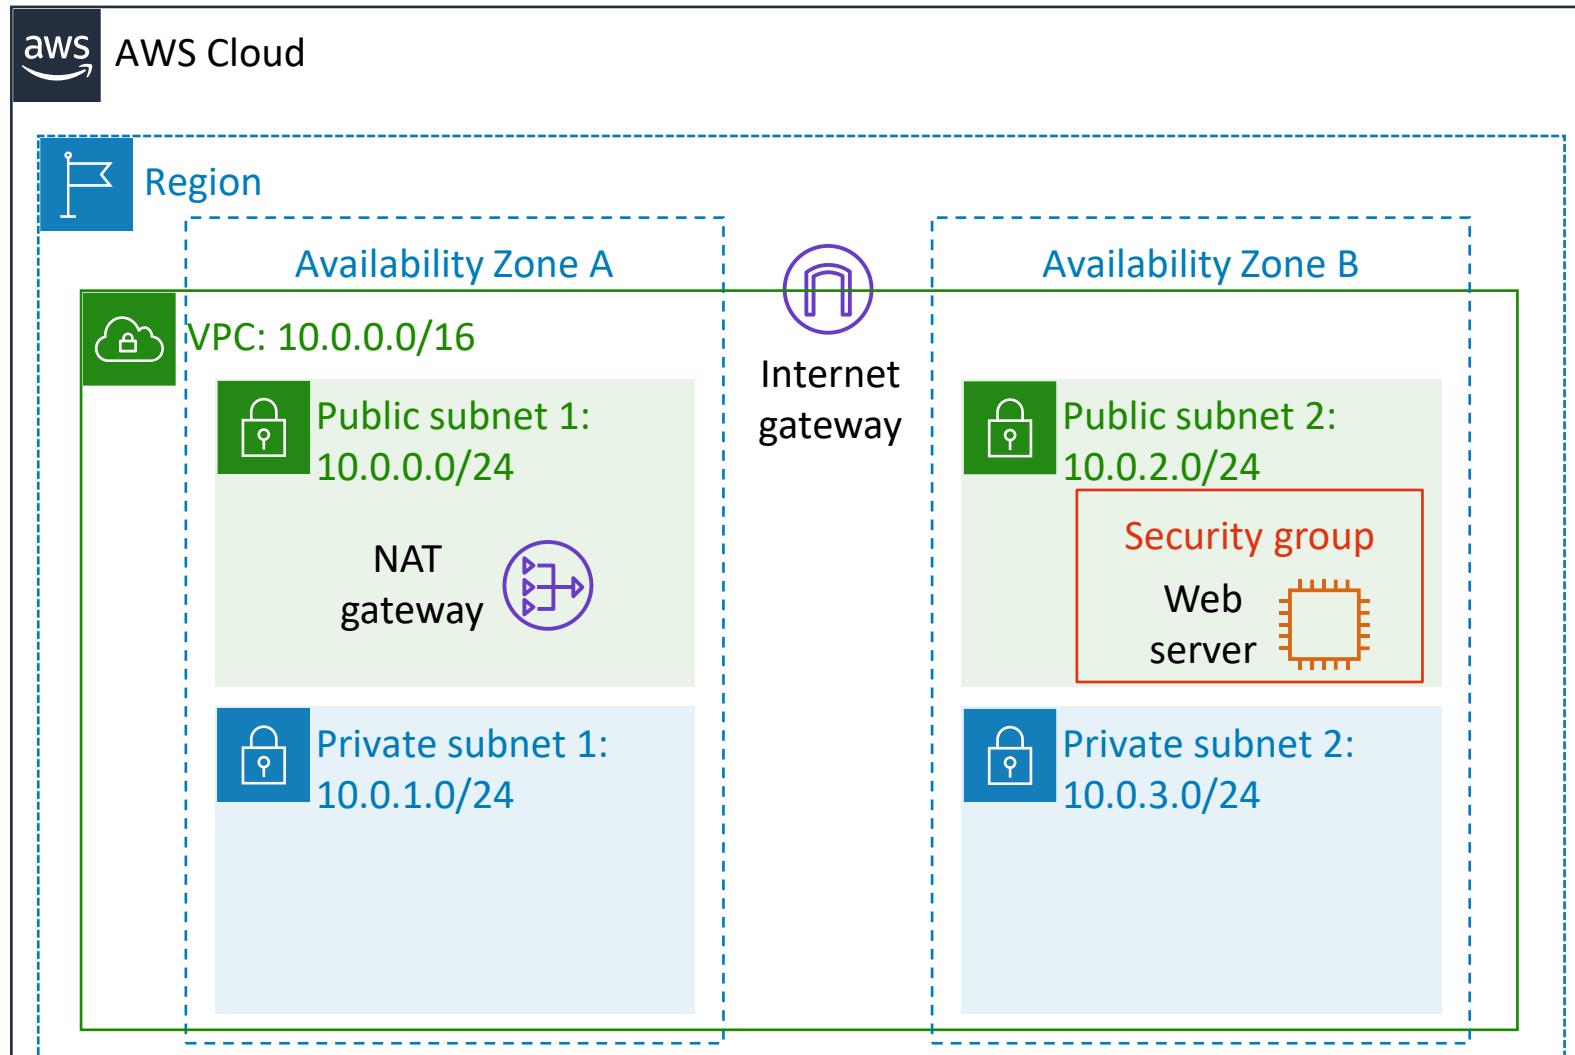

Public Route Table

Destination	Target
10.0.0.0/16	Local
0.0.0.0/0	Internet gateway

Private Route Table

Destination	Target
10.0.0.0/16	Local
0.0.0.0/0	NAT gateway



~ 30 minutes



Begin Lab 2: Build Your VPC and Launch a Web Server

Lab debrief: Key takeaways



Section 5: Amazon Route 53

Module 5: Networking and Content Delivery




Amazon Route 53



Amazon
Route 53

- Is a highly available and scalable Domain Name System (DNS) web service
- Is used to route end users to internet applications by translating names (like www.example.com) into numeric IP addresses (like 192.0.2.1) that computers use to connect to each other
- Is fully compliant with IPv4 and IPv6
- Connects user requests to infrastructure running in AWS and also outside of AWS
- Is used to check the health of your resources
- Features traffic flow
- Enables you to register domain names


Amazon Route 53 DNS resolution

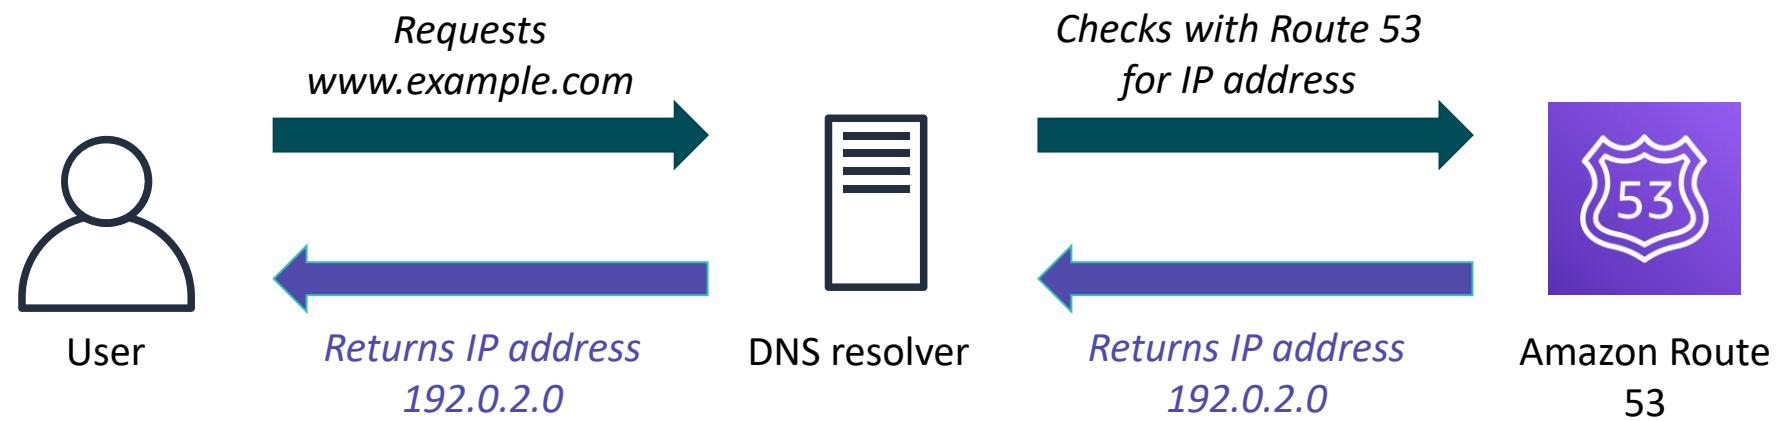

Amazon Route 53 supported routing

- Simple routing – Use in single-server environments
- Weighted round robin routing – Assign weights to resource record sets to specify the frequency
- Latency routing – Help improve your global applications
- Geolocation routing – Route traffic based on location of your users
- Geoproximity routing – Route traffic based on location of your resources
- Failover routing – Fail over to a backup site if your primary site becomes unreachable
- Multivalue answer routing – Respond to DNS queries with up to eight healthy records selected at random


Use case: Multi-region deployment

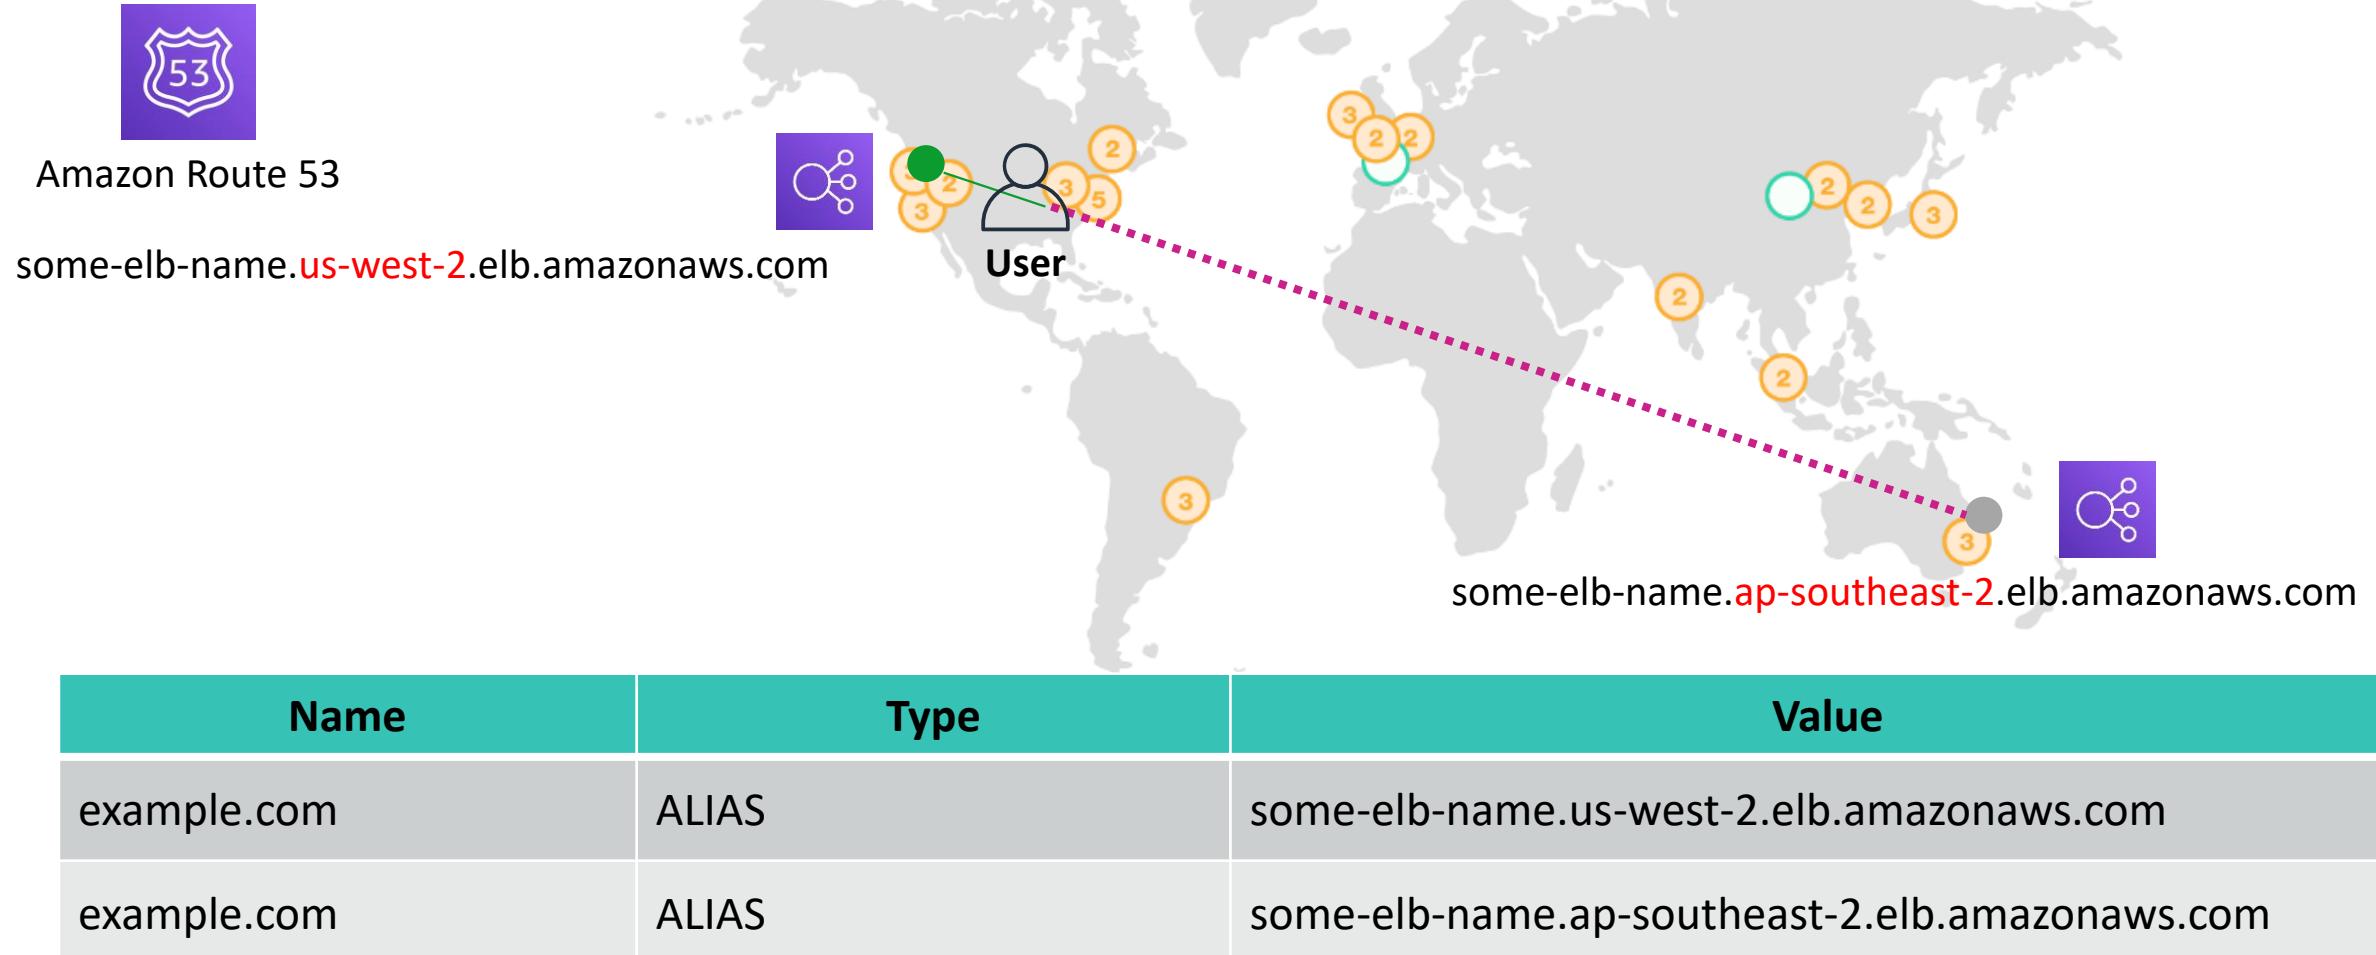



Amazon Route 53 DNS failover

Improve the availability of your applications that run on AWS by:

- Configuring backup and failover scenarios for your own applications
- Enabling highly available multi-region architectures on AWS
- Creating health checks

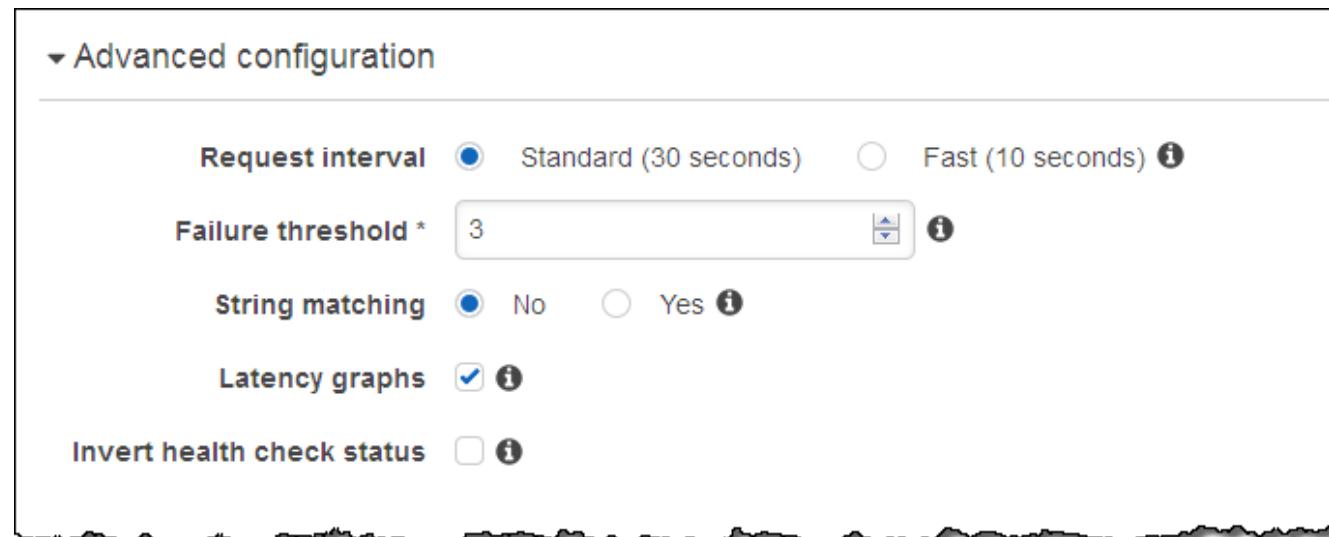

DNS failover for a multi-tiered web application

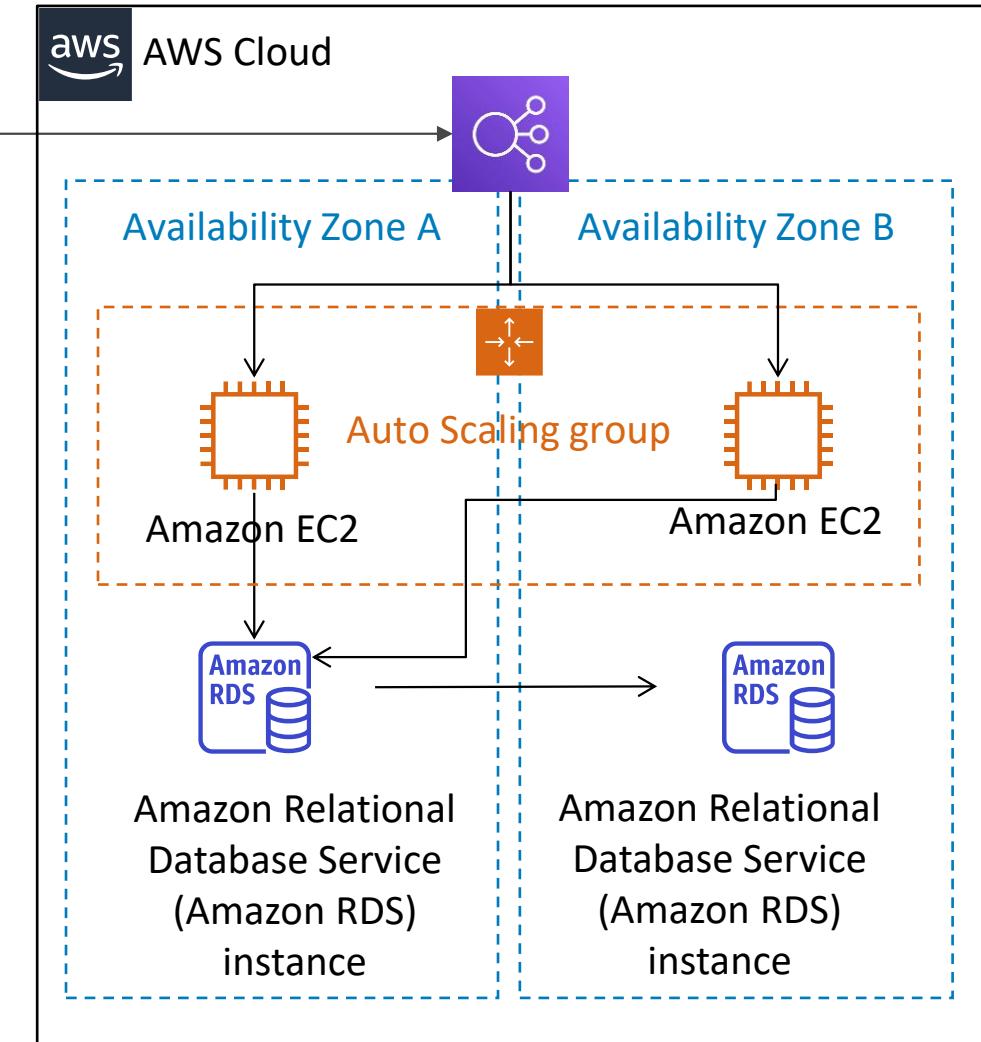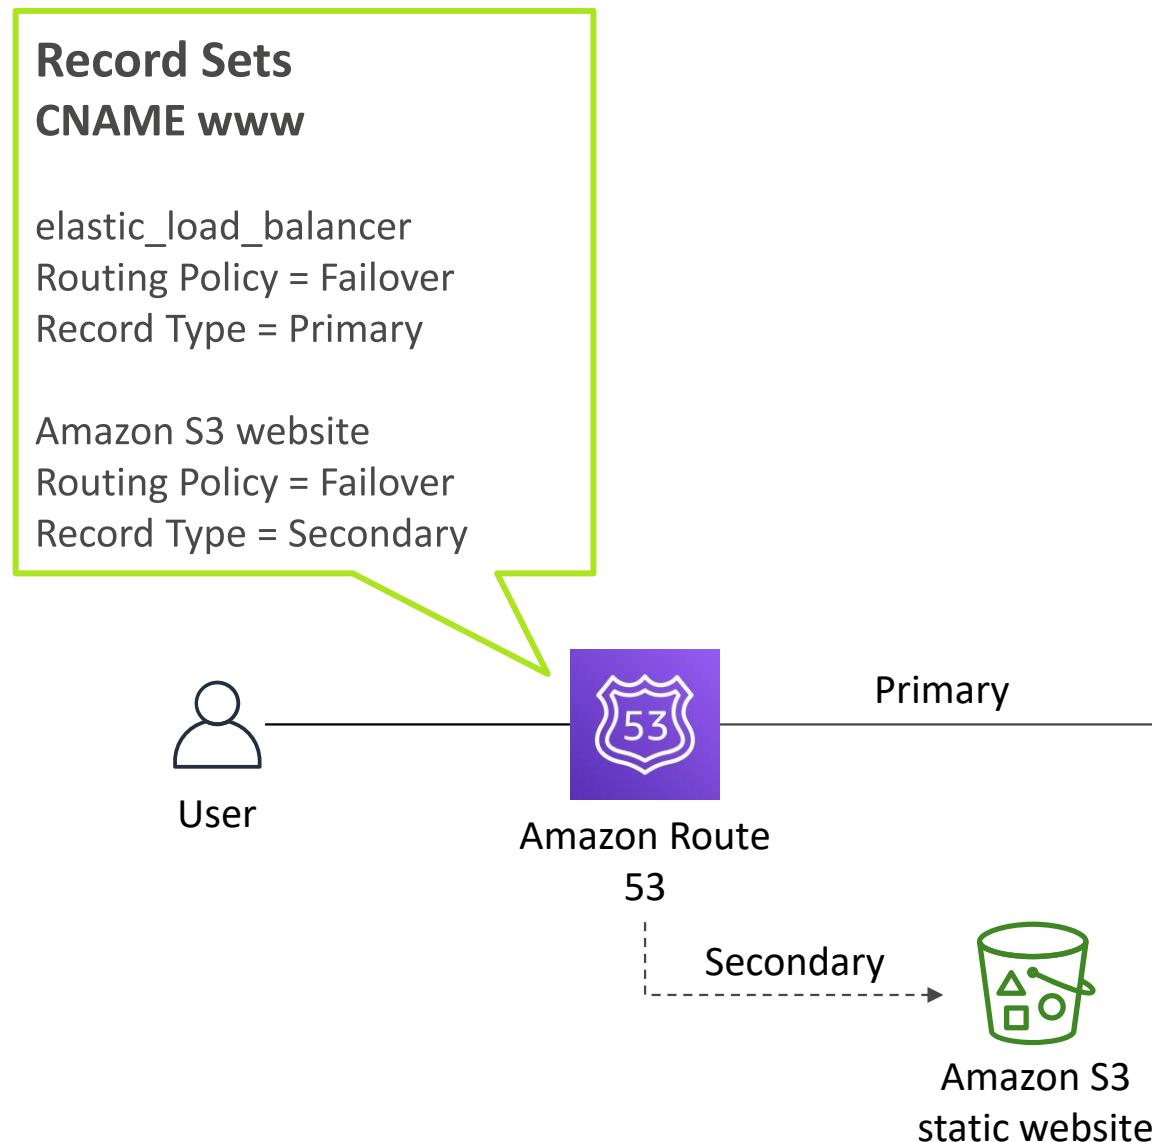

Section 5 key takeaways




- Amazon Route 53 is a highly available and scalable cloud DNS web service that translates domain names into numeric IP addresses.
- Amazon Route 53 supports several types of routing policies.
- Multi-Region deployment improves your application's performance for a global audience.
- You can use Amazon Route 53 failover to improve the availability of your applications.

Section 6: Amazon CloudFront

Module 5: Networking and Content Delivery



Content delivery and network latency

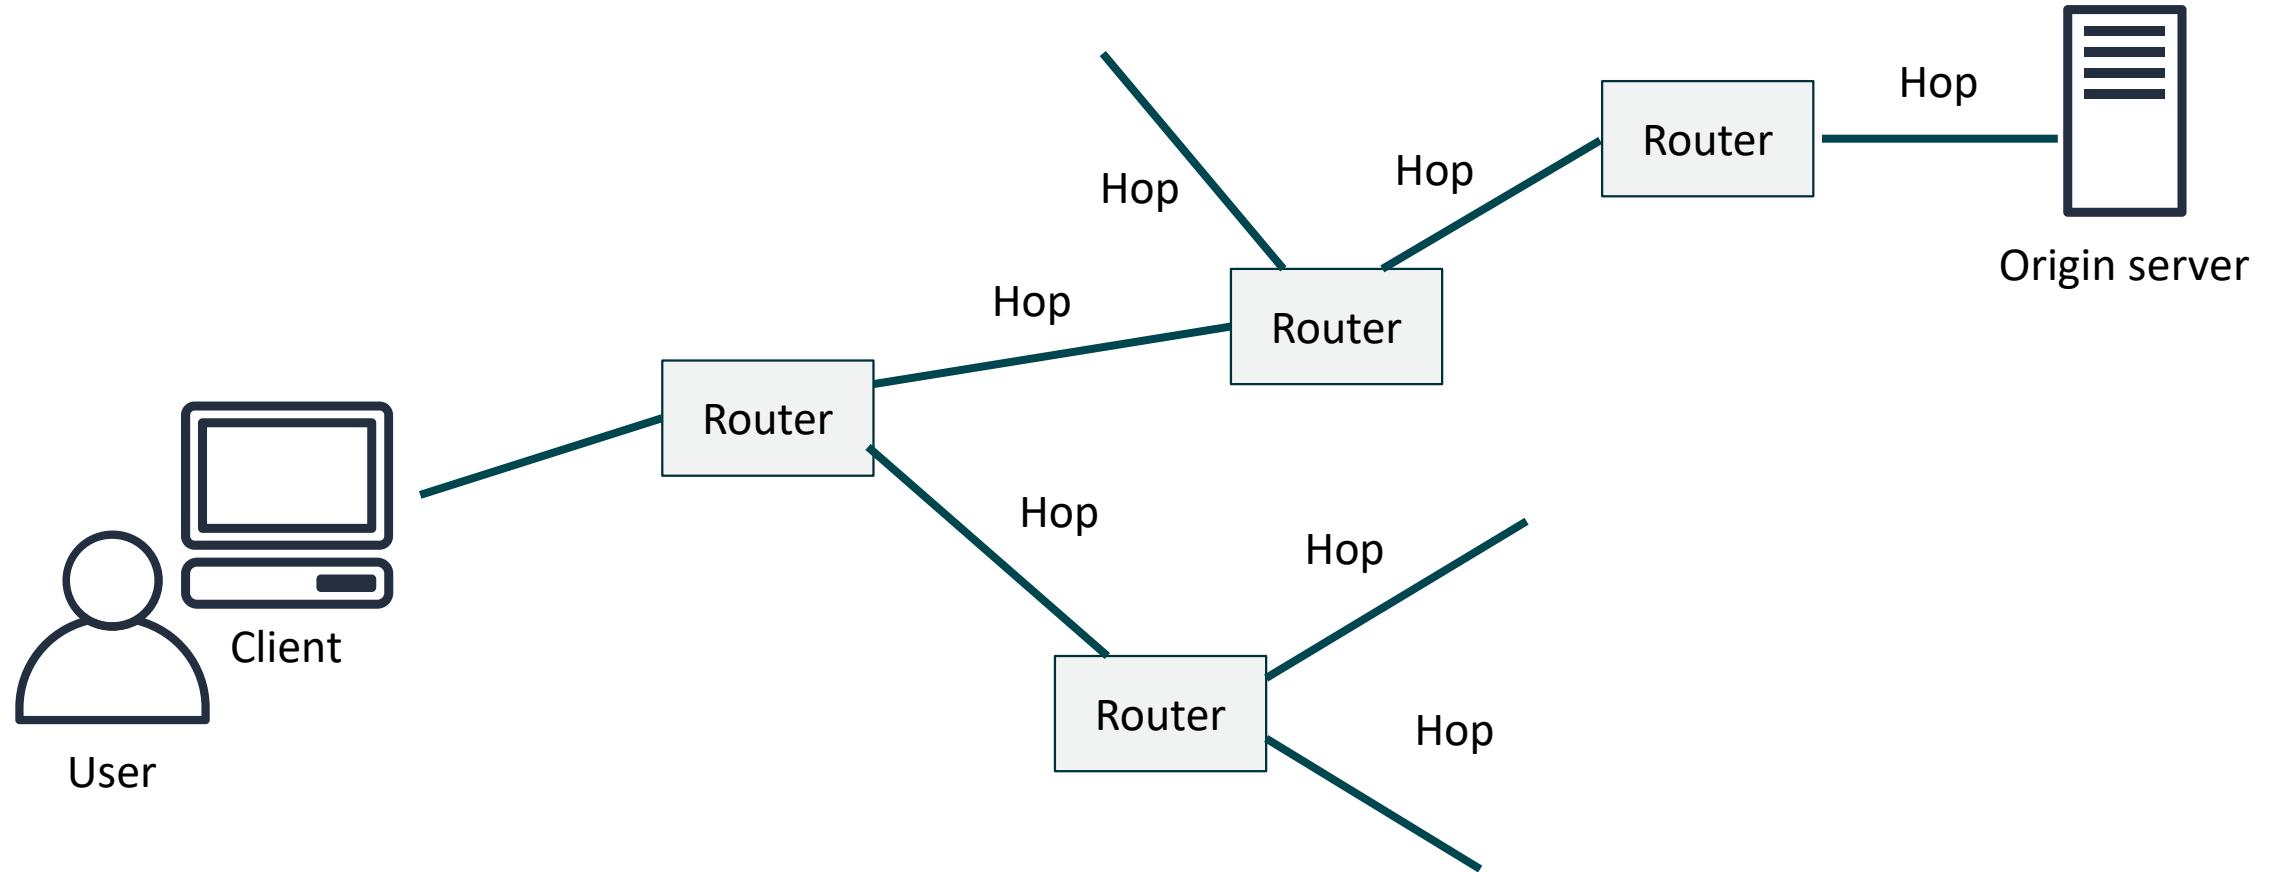

Content delivery network (CDN)

- Is a globally distributed system of caching servers
- Caches copies of commonly requested files (static content)
- Delivers a local copy of the requested content from a nearby cache edge or Point of Presence
- Accelerates delivery of dynamic content
- Improves application performance and scaling

Amazon CloudFront



Amazon
CloudFront

- Fast, global, and secure CDN service
- Global network of edge locations and Regional edge caches
- Self-service model
- Pay-as-you-go pricing


Amazon CloudFront infrastructure

● Edge locations

● Multiple edge locations

● Regional edge caches

- **Edge locations** – Network of data centers that CloudFront uses to serve popular content quickly to customers.
- **Regional edge cache** – CloudFront location that caches content that is not popular enough to stay at an edge location. It is located between the origin server and the global edge location.

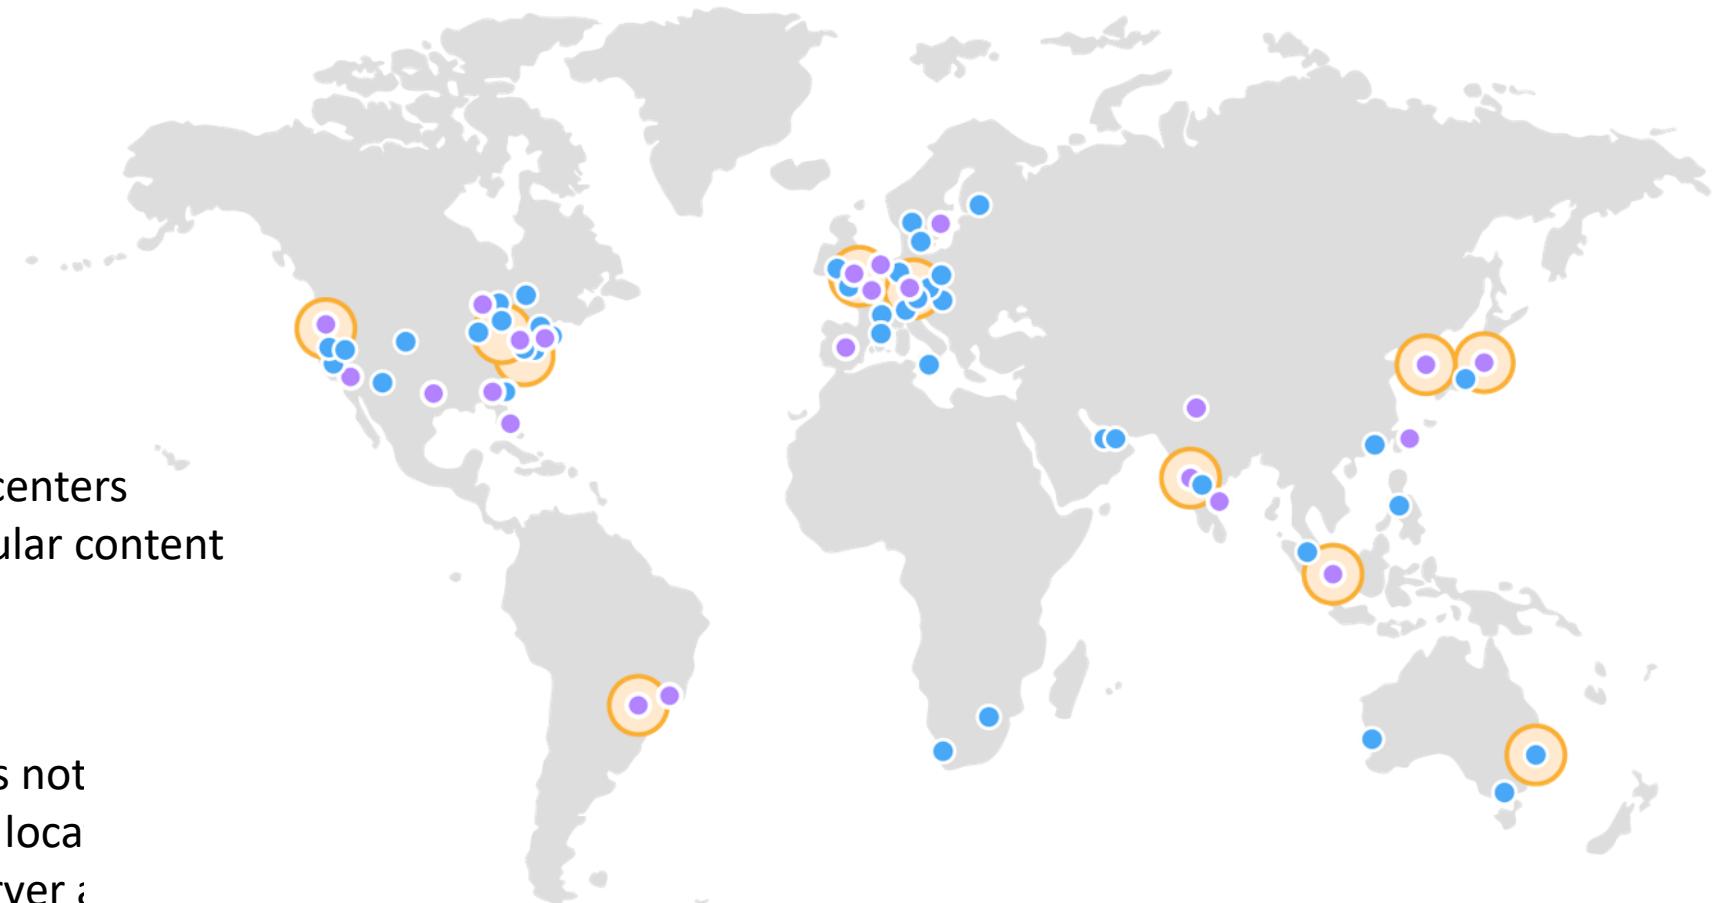

Amazon CloudFront benefits

- Fast and global
- Security at the edge
- Highly programmable
- Deeply integrated with AWS
- Cost-effective

Amazon CloudFront pricing

Data transfer out

- Charged for the volume of data transferred out from Amazon CloudFront edge location to the internet or to your origin.

HTTP(S) requests

- Charged for number of HTTP(S) requests.

Invalidation requests

- No additional charge for the first 1,000 paths that are requested for invalidation each month. Thereafter, \$0.005 per path that is requested for invalidation.

Dedicated IP custom SSL

- \$600 per month for each custom SSL certificate that is associated with one or more CloudFront distributions that use the Dedicated IP version of custom SSL certificate support.

Section 6 key takeaways



- A CDN is a globally distributed system of caching servers that accelerates delivery of content.
- Amazon CloudFront is a fast CDN service that securely delivers data, videos, applications, and APIs over a global infrastructure with low latency and high transfer speeds.
- Amazon CloudFront offers many benefits.

Module wrap-up

Module 5: Networking and Content Delivery



Module summary

In summary, in this module you learned how to:

- Recognize the basics of networking
- Describe virtual networking in the cloud with Amazon VPC
- Label a network diagram
- Design a basic VPC architecture
- Indicate the steps to build a VPC
- Identify security groups
- Create your own VPC and added additional components to it to produce a customized network
- Identify the fundamentals of Amazon Route 53
- Recognize the benefits of Amazon CloudFront



Complete the knowledge check



Sample exam question

Which AWS networking service enables a company to create a virtual network within AWS?

Choice	Response
A	AWS Config
B	Amazon Route 53
C	AWS Direct Connect
D	Amazon VPC

Sample exam question answer

Which AWS networking service enables a company to create a virtual network within AWS?

The correct answer is D.

The keywords in the question are “AWS networking service” and “create a virtual network”.

Additional resources

- Amazon VPC Overview pag:
<https://docs.aws.amazon.com/vpc/latest/userguide/what-is-amazon-vpc.html>
- Amazon Virtual Private Cloud Connectivity Options whitepaper:
<https://docs.aws.amazon.com/whitepapers/latest/aws-vpc-connectivity-options/introduction.html>
- One to Many: Evolving VPC Design AWS Architecture blog post:
<https://aws.amazon.com/blogs/architecture/one-to-many-evolving-vpc-design/>
- Amazon VPC User Guide:
<https://docs.aws.amazon.com/vpc/latest/userguide/what-is-amazon-vpc.html>
- Amazon CloudFront overview page:
<https://aws.amazon.com/cloudfront/?nc=sn&loc=1>

Thank you

All trademarks are the property of their owners.

