

Jobs

Generated by Talend Cloud Data Management Platform

Project Name	TMC_GIT	GENERATION DATE	Oct 15, 2020 2:26:30 PM
AUTHOR	bb, Brahim	Talend Cloud VERSION	7.3.1.20200219_1130

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

Project Description

Properties	Values
Name	TMC_GIT
Language	java

Description	

Description

Properties	Values
Name	j_test_case
Author	bb, Brahim
Version	0.1
Purpose	
Status	
Description	
Creation	Oct 15, 2020 2:20:55 PM
Modification	Oct 15, 2020 2:26:30 PM

Preview Picture



Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Туре	Value	Source

Component List

Component Name	Component Type
tDBOutput_1	tMysqlOutput
tFileInputDelimited_1	tFileInputDelimited
tMap_1	tMap

Components Description

Component tMysqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tMap_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:

Component Parameters:		
Properties	Values	
Database	tMysqlOutput	
Unique Name	tDBOutput_1	
Component Name	tMysqlOutput	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/MySQL	
Startable	false	
SUBTREE_START	false	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tMysqlOutput	
Update components	true	
IREPORT_PATH		
JAVA_LIBRARY_PATH	C:\Talend_DI_7.3.1\Talend-Studio-20200219_1130-V7.3.1\configuration\lib\java	
Subjob color		

Title color Enable parallel execution Enable parallel executions 2 PARALLELIZE_KEEP_EMPTY false Property Type Built-In DB Version MYSQL_5 Use an existing connection false Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SVtrt@CH Schema Built-In Specify a data source alias false Data source alias "" Specify a data source alias "" Insert False "" Password Reposity a data source alias "" "" Password Reject Schema Built-In Specify a data source alias "" "" "" "" Password Reject Schema Built-In Specify a data source alias "" "" "" Password Reject Schema Reject Sc		
Number of parallel executions 2 PARALLELIZE_KEEP_EMPTY false Property Type Built-In DB Version MYSQL_5 Use an existing connection false Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITECH Schema Built-In Reject Schema Built-In Specify a data source alias false	Title color	
PARALLELIZE_KEEP_EMPTY false Property Type Built-In DB Version MYSQL_5 Use an existing connection false Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SVITTIEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Enable parallel execution	false
Property Type Built-In DB Version MYSQL_5 Use an existing connection false Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITEGH Schema Built-In Reject Schema Built-In Specify a data source alias false	Number of parallel executions	2
DB Version MYSQL_5 Use an existing connection false Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITIEH Schema Built-In Reject Schema Built-In Specify a data source alias false	PARALLELIZE_KEEP_EMPTY	false
Use an existing connection false Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password Table "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITIGH Schema Built-In Reject Schema Built-In Specify a data source alias false	Property Type	Built-In
Component List Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWrftleH Schema Built-In Reject Schema Built-In Specify a data source alias false	DB Version	MYSQL_5
Database Driver MYSQL Host "localhost" Port "3306" Database "Training" Username "root" Password """ Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITIEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Use an existing connection	false
Host "localhost" Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWrijeH Schema Built-In Reject Schema Built-In Specify a data source alias false	Component List	
Port "3306" Database "Training" Username "root" Password "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITIEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Database Driver	MYSQL
Database "Training" Username "root" Password "" Table "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWHIEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Host	"localhost"
Username "root" Password "" Table "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITTEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Port	"3306"
Password *********** Table "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SVITUEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Database	"Training"
Table "" Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWINEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Username	"root"
Action on table NONE Action on data INSERT REPOSITORY_ALLOW_AUTO_SWITTEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Password	******
Action on data INSERT REPOSITORY_ALLOW_AUTO_SWthtieH Schema Built-In Reject Schema Built-In Specify a data source alias false	Table	""
REPOSITORY_ALLOW_AUTO_SWITTEH Schema Built-In Reject Schema Built-In Specify a data source alias false	Action on table	NONE
Schema Built-In Reject Schema Built-In Specify a data source alias false	Action on data	INSERT
Reject Schema Built-In Specify a data source alias false	REPOSITORY_ALLOW_AUTO_S\	MHTEH
Specify a data source alias false	Schema	Built-In
	Reject Schema	Built-In
Data source alias	Specify a data source alias	false
	Data source alias	пп

Die on error	false			
Mapping	mysql_id			
Additional JDBC Parameters	""			
Extend Insert	true			
Number of rows per insert	100			
Use Batch Size	true			
Batch Size	10000			
Encoding	"ISO-8859-15"			
Commit every	10000			
Additional columns	0			
Use field options	false			
Field options	[{SCHEMA_COLUMN=ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LAST_NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=EMAIL, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=JOB_TITLE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=COMPANY, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=CITY, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=STATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DATE, UPDATE_KEY=false, UPDATE_KEY=false, UPDATE_KEY=false, UPDATE_KEY=false, UPDATE_KEY=false, UPDATE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=CAMPAIGN_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LEAD_SCORE, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CAMPAIGN_ID, UPDATB_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CREDITCARDNUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CREDITCARDNUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, INSERTABL			
Use Hint Options	false			
Hint Options	0			
Debug query mode	false			
Use duplicate key update mode insert	false			

DUPLICATED_KEYS	0
Support null in "SQL WHERE" statement	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
ID	false	String	7		true	
NAME	false	String	9		true	
LAST_NAME	false	String	9		true	
EMAIL	false	String	28		true	
JOB_TITLE	false	String	36		true	
COMPANY	false	String	12		true	
CITY	false	String	13		true	
STATE	false	String	5		true	

DATE	false	String	14	true	
CAMPAIGN_ID	false	String	18	true	
LEAD_SCORE	false	String	3	true	
CREDITCARDNUMBER	false	String		true	

Original Function Parameters: Component tFileInputDelimited

 UNIQUE NAME	tFileInputDelimited_1	INPUT(S)	none
LABEL	Customer	OUTPUT(S)	tMap_1

Component Parameters:

Component Parameters:						
Properties	Values					
Unique Name	tFileInputDelimited_1					
Component Name	tFileInputDelimited					
Version	0.102 (ALPHA)					
Family	File/Input					
Start	true					
Startable	true					
SUBTREE_START	true					
END_OF_FLOW	false					
Activate	true					
DUMMY	false					

false			
org.talend.help.tFileInputDelimited			
true			
C:\Talend_DI_7.3.1\Talend-Studio-20200219_1130-V7.3.1\configuration\lib\java			
false			
2			
false			
Built-In			
WHIEH			
Built-In			
"C:/Workspace/Talend Cloud/StudentFiles/TalendCloud/Customers.csv"			
false			
"\n"			
"\n"			
" "			
"""			
"""			
1			
0			

Limit				
Skip empty rows	false			
Uncompress as zip file	false			
Die on error	alse			
Schema	Built-In			
Temporary directory	"C:/Talend_DI_7.3.1/Talend-Studio-20200219_1130-V7.3.1/workspace"			
Advanced separator (for numbers)	false			
Thousands separator	","			
Decimal separator	n			
Extract lines at random	false			
Number of lines	10			
Trim all columns	false			
Check column to trim	[{SCHEMA_COLUMN=ID, TRIM=false}, {SCHEMA_COLUMN=NAME, TRIM=false}, {SCHEMA_COLUMN=LAST_NAME, TRIM=false}, {SCHEMA_COLUMN=EMAIL, TRIM=false}, {SCHEMA_COLUMN=JOB_TITLE, TRIM=false}, {SCHEMA_COLUMN=COMPANY, TRIM=false}, {SCHEMA_COLUMN=CITY, TRIM=false}, {SCHEMA_COLUMN=STATE, TRIM=false}, {SCHEMA_COLUMN=DATE, TRIM=false}, {SCHEMA_COLUMN=CAMPAIGN_ID, TRIM=false}, {SCHEMA_COLUMN=LEAD_SCORE, TRIM=false}, {SCHEMA_COLUMN=CREDITCARDNUMBER, TRIM=false}]			
Check each row structure against schema	false			
Check date	false			
Encoding	"UTF-8"			
Split row before field	false			
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types (clear the check box to read Byte type as octal and hexadecimal numbers by default)	false			

[{SCHEMA_COLUMN=ID, DECODE=false}, {SCHEMA_COLUMN=NAME, DECODE=false}, {SCHEMA_COLUMN=LAST_NAME, DECODE=false}, {SCHEMA_COLUMN=EMAIL, DECODE=false}, {SCHEMA_COLUMN=JOB_TITLE, DECODE=false}, {SCHEMA_COLUMN=COMPANY, DECODE=false}, {SCHEMA_COLUMN=CITY, DECODE=false}, {SCHEMA_COLUMN=STATE, DECODE=false}, {SCHEMA_COLUMN=DATE, DECODE=false}, {SCHEMA_COLUMN=CODE=false}, {SCHEMA_COLUMN=CAMPAIGN_ID, DECODE=false}, {SCHEMA_COLUMN=LEAD_SCORE, DECODE=false}, {SCHEMA_COLUMN=CREDITCARDNUMBER, DECODE=false}]					
100					
Customer					
UNIQUE_NAME COMMENT					
row					
false					
false					


Schema for metadata customer:

Schema for metadata_customer.							
Column	Key	Туре	Length	Precision	Nullable	Comment	
ID	false	String	7		true		
NAME	false	String	9		true		
LAST_NAME	false	String	9		true		
EMAIL	false	String	28		true		
JOB_TITLE	false	String	36		true		

COMPANY	false	String	12	true	
CITY	false	String	13	true	
STATE	false	String	5	true	
DATE	false	String	14	true	
CAMPAIGN_ID	false	String	18	true	
LEAD_SCORE	false	String	3	true	
CREDITCARDNUMBER	false	String		true	

Original Function Parameters: Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tFileInputDelimited_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	tDBOutput_1

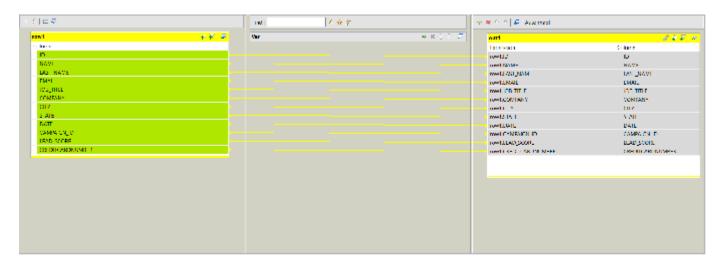

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):
Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Туре	Expression	isNullable
ID	String		true
NAME	String		true
LAST_NAME	String		true
EMAIL	String		true
JOB_TITLE	String		true
COMPANY	String		true
CITY	String		true
STATE	String		true
DATE	String		true
CAMPAIGN_ID	String		true
LEAD_SCORE	String		true
CREDITCARDNUMBER	String		true

Constraint Table Entries(row1):

Name	Туре	Expression	isNullable	

Mapper table for tMap_1 (output): Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Туре	Expression	isNullable
ID	String	row1.ID	true
NAME	String	row1.NAME	true
LAST_NAME	String	row1.LAST_NAME	true
EMAIL	String	row1.EMAIL	true
JOB_TITLE	String	row1.JOB_TITLE	true
COMPANY	String	row1.COMPANY	true
CITY	String	row1.CITY	true
STATE	String	row1.STATE	true
DATE	String	row1.DATE	true
CAMPAIGN_ID	String	row1.CAMPAIGN_ID	true
LEAD_SCORE	String	row1.LEAD_SCORE	true
CREDITCARDNUMBER	String	row1.CREDITCARDNUMBER	true

Constraint Table Entries(out1):

Name	Туре	Expression	isNullable	

Mapper table for tMap_1 (var):

Mapper table Properties (Var):

happer table i reperties (tar).			
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(Var):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable