

Project Design Phase-II Data Flow Diagram & User Stories


Date	31 January 2025
Team ID	SWTID-2026-4968
Project Name	Script - controlled ACL - Restrict Record Access Based On Field Value
Maximum Marks	4 Marks

Data Flow Diagrams:


A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

Example: [\(Simplified\)](#)

Example: DFD Level 0 (Industry Standard)

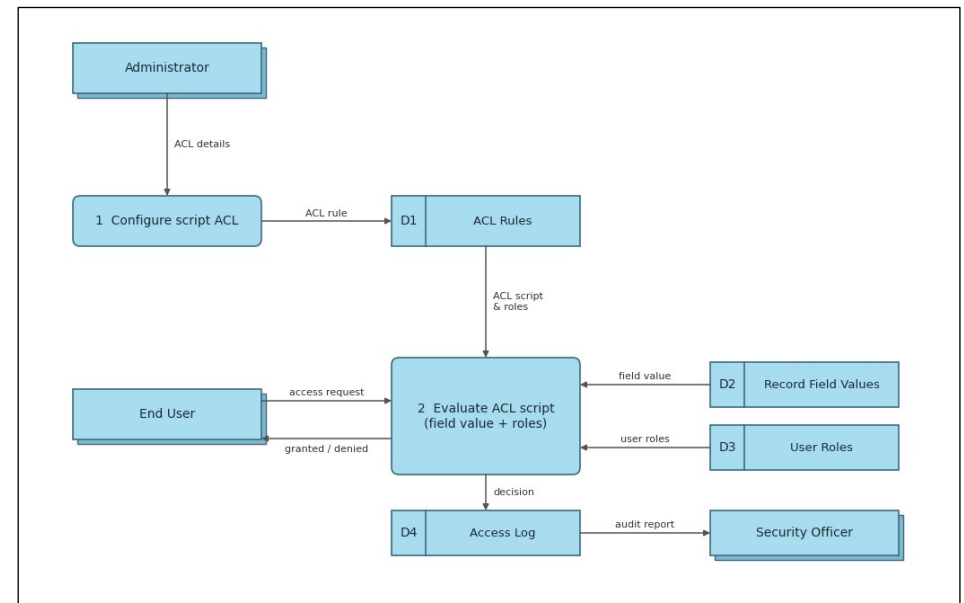

Flow

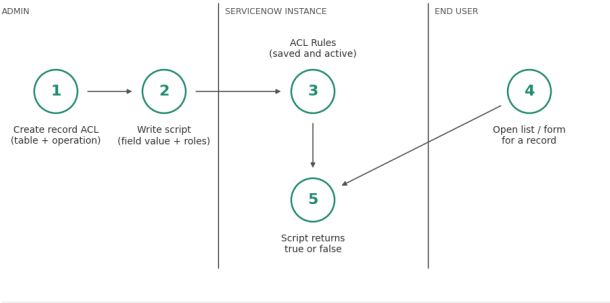

- 1. Administrator opens Access Control and creates a new record ACL for the table and operation.
- 2. Administrator writes the script that checks the record's field value and the user's roles.
- 3. The ACL is saved and becomes active in the ACL rules list.
- 4. End user opens a list or form for a record on that table.
- 5. The script returns true or false: access is granted, or the record is blocked and the attempt is logged.

User Stories

Use the below template to list all the user stories for the product.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Administrator (ACL Developer)	ACL Configuration	USN-1	As an administrator, I can create a new record ACL for a table and operation (read or write).	The ACL appears in the ACL list and is active	High	Sprint-1
		USN-2	As an administrator, I can write a script that checks a field value on the record (current) and returns true or false.	Access is allowed or blocked based on the field value	High	Sprint-1
		USN-3	As an administrator, I can add required roles to the ACL.	Only users with the listed roles pass the role check	Medium	Sprint-1

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
	Testing	USN-4	As an administrator, I can impersonate a user to test the ACL.	Restricted records are hidden for the test user	High	Sprint-2
	Deployment	USN-5	As an administrator, I can capture the ACL in an update set and move it to other instances.	The ACL is present and active on the target instance	Medium	Sprint-2
End User (Authorized)	Record Access	USN-6	As an authorized user, I can open records whose field value allows my access.	The record opens normally in list and form view	High	Sprint-1
		USN-7	As an authorized user, I can update records when the ACL allows write access.	My changes are saved without an access error	Medium	Sprint-2
End User (Restricted)	Record Restriction	USN-8	As a restricted user, I cannot see records whose field value is blocked for me.	Blocked records do not appear in lists, forms, or search	High	Sprint-1
		USN-9	As a restricted user, I see an access-denied message if I open a blocked record through a direct link.	An access-denied message is shown and no record data is revealed	Medium	Sprint-2
Security / Compliance Officer	Audit	USN-10	As a security officer, I can review who accessed or was denied access to restricted records.	The access log lists user, record, and decision	Medium	Sprint-3
	Security Debugging	USN-11	As an administrator, I can use Security Debugging to see which ACL allowed or denied access.	The debug output names the deciding ACL	Low	Sprint-3
	Maintenance	USN-12	As an administrator, I can update the ACL when the field, value, or roles change.	The updated ACL applies without breaking other access	Low	Sprint-3