
Representation-based inference


Per-outcome classifier

training / tuning

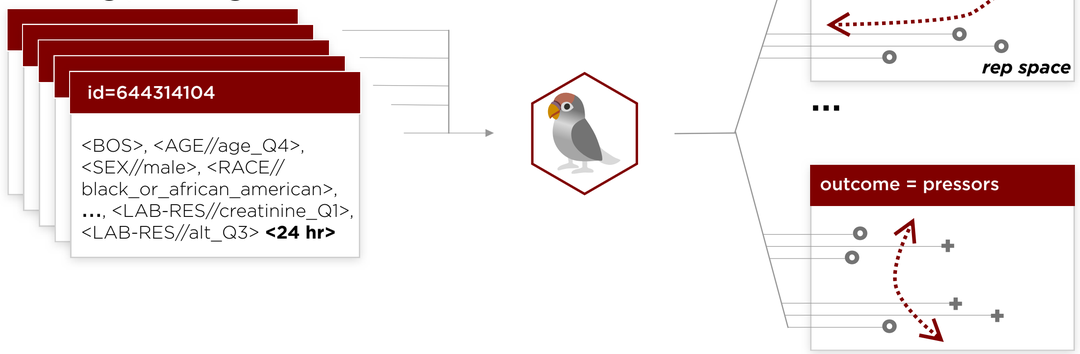


Inference per classifier

held-out

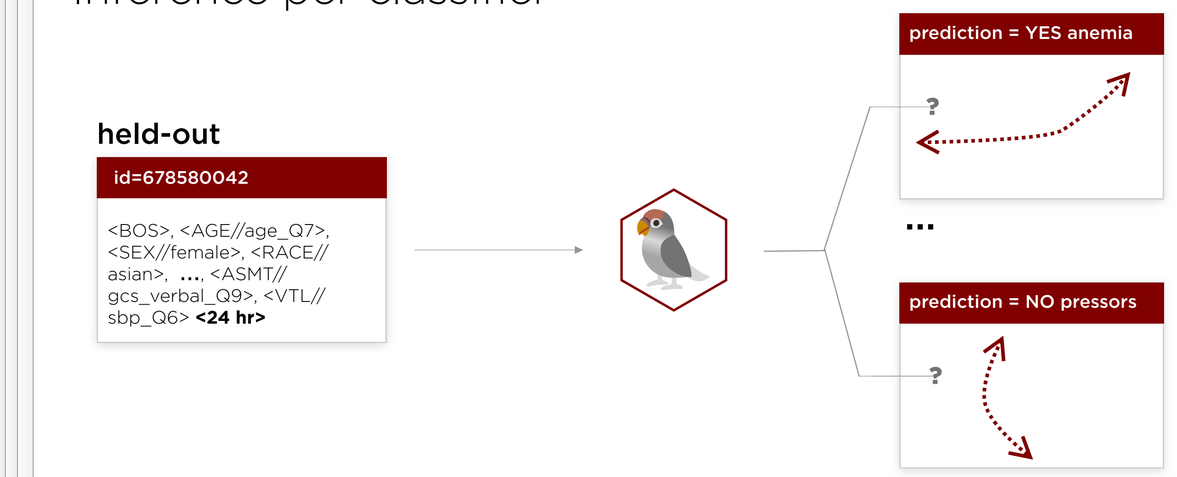

Generative inference

held-out

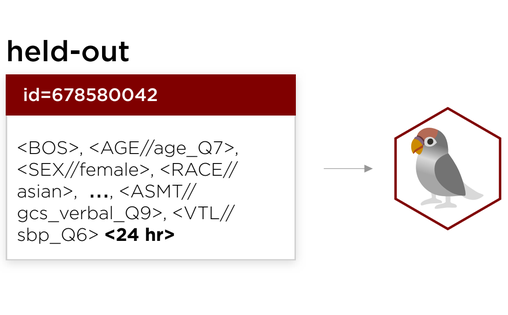

sample 1 ..., <LAB-RES//hemoglobin_Q0>, <LAB-RES//wbc_Q7>, **<LABEL//anemia_init>**, ..., <XFR-OUT//ward>, <DSCG//home>,<EOS>

sample 2 ..., <LAB-RES//pco2_arterial_Q4>, <LAB-RES//lactate_Q2>, **<LABEL//anemia_init>**, ..., <EOS>

sample 3 ..., <VTL//sbp_Q1>, <VTL//dbp_Q1>, <VTL//temp_c_Q9>, <VTL//respiratory_rate_Q0>, **<LABEL//pressor_init>**, ..., <EOS>

...


sample *N* ...,<LAB-RES//lactate_Q2>, **<LABEL//anemia_init>**, ..., **<LABEL//pressor_init>**, ..., <DSCG//assisted_living>, <EOS>

anemia?	pressors?
1	0
1	0
0	1
...	...
1	1
count/N	*count/N*


Inference via supervised finetuning

Multiheaded training with custom loss

modified model



training / tuning

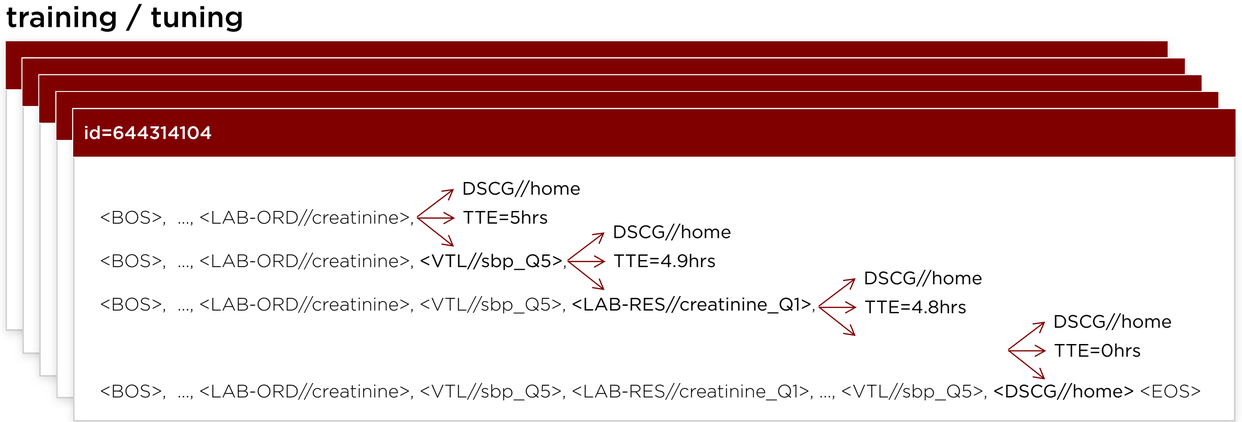

Inference

held-out

