


Hybrid-duration two-state approximation: varying alpha

$R_0 = 2.5$; $K = 10,000$; $r = 0.125$; $\gamma = 1$; hybrid T_T; $\tau = 50$
 $n_{\text{patch}} = 200$; $dt = 0.1$; $t_{\text{max}} = 2000$; $S(0)=K-10$; $I(0)=10$

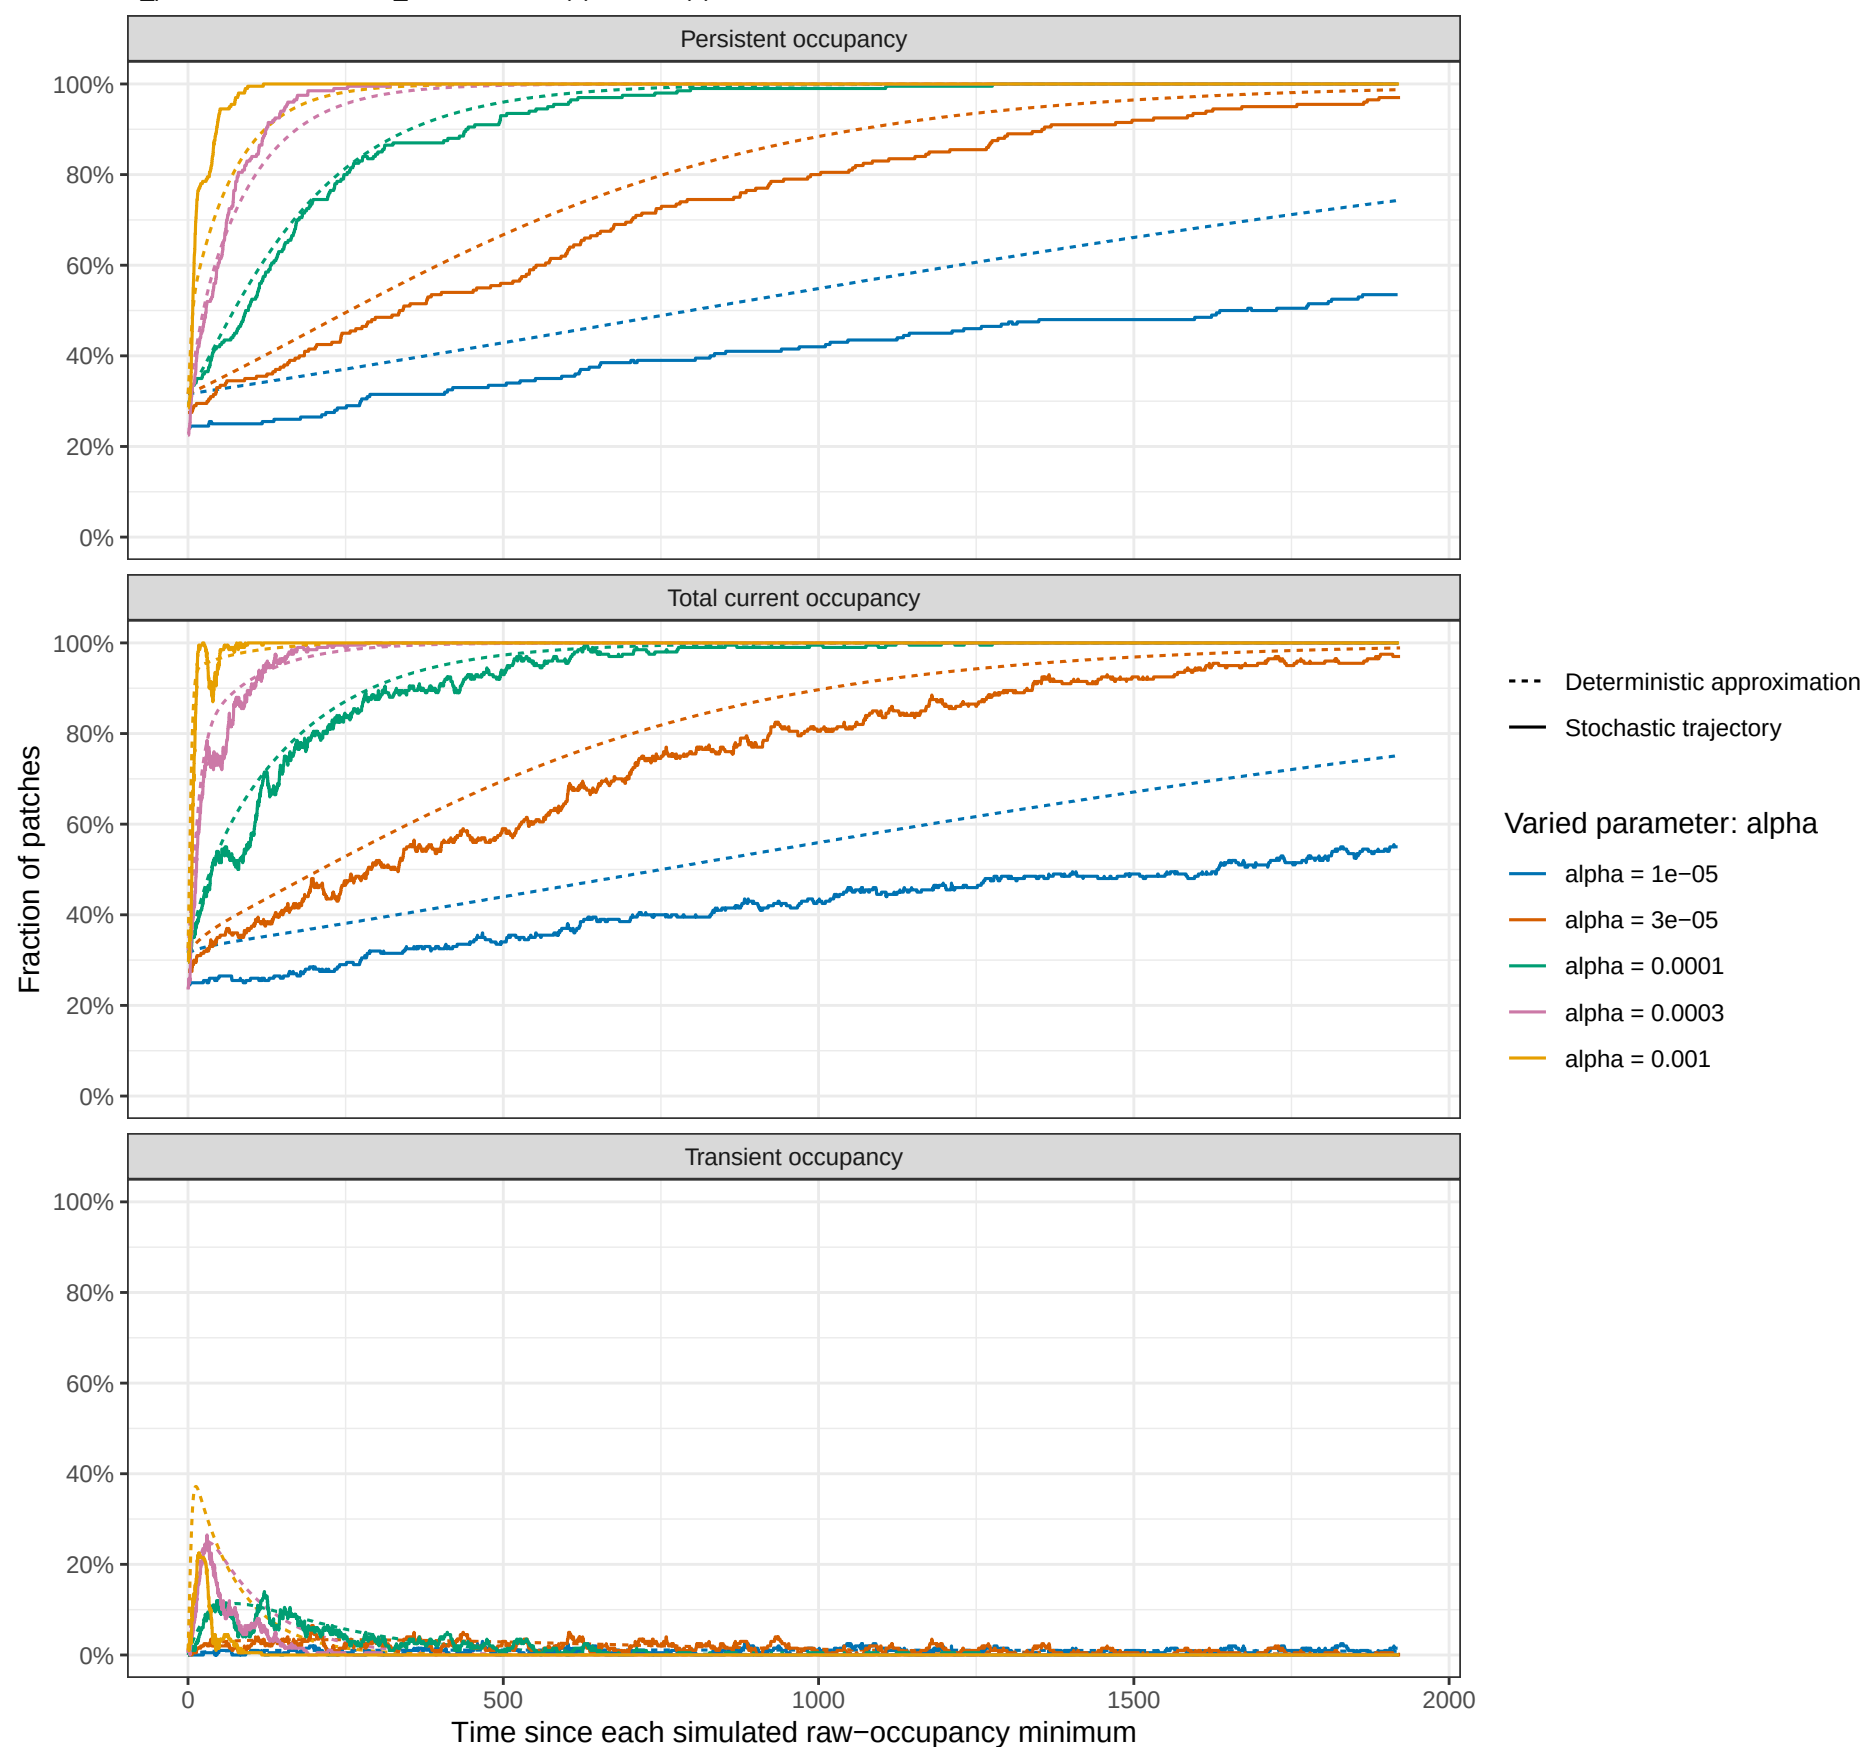

$p(0)=P_1$; $q(0)=$ observed episode-classified transient occupancy at the aligned minimum. $I_{\text{bar_T}}$ is deterministic, not fitted. T_T uses the $I=1$ -or-first-trough hybrid endpoint.