

# Model assessment

7 Mar 2023

## Table of contents

loss functions (regression/quantitative outcome) . . . .	1
loss functions (classification) . . . . .	2
a short rant about categorical loss functions . . . . .	2
from loss functions to model quality metrics . . . . .	3
quality metrics . . . . .	4
what error are we trying to estimate? . . . . .	5
bias/variance etc. . . . .	5
train/validate/test . . . . .	6
within- (training) and out-of-sample (test) error . . . .	6
effective number of parameters . . . . .	7
cross-validation . . . . .	7
bias vs variance in CV . . . . .	8
one-standard-error rule . . . . .	8
data leakage . . . . .	8
dependent data . . . . .	9
solutions . . . . .	10
bootstrapping . . . . .	11
nested cross-validation . . . . .	11
from model assessment to uncertainty estimation . . .	12
coverage . . . . .	13
calibration . . . . .	13


## loss functions (regression/quantitative outcome)

- continuous: L2, L1, **Huber** loss:

```

par(las = 1, bty = "l", lwd = 2)
huber <- function(x, d) ifelse(abs(x)<d, x^2/2, d*abs(x)-d/2)
curve(x^2/2, from = -3, to = 3, ylab = "loss")
curve(abs(x), add = TRUE, col = 2)
curve(huber(x, 1), add = TRUE, col = 4)
legend("top", c("L2", "L1", "Huber"), col = c(1, 2, 4), lty = 1)

```

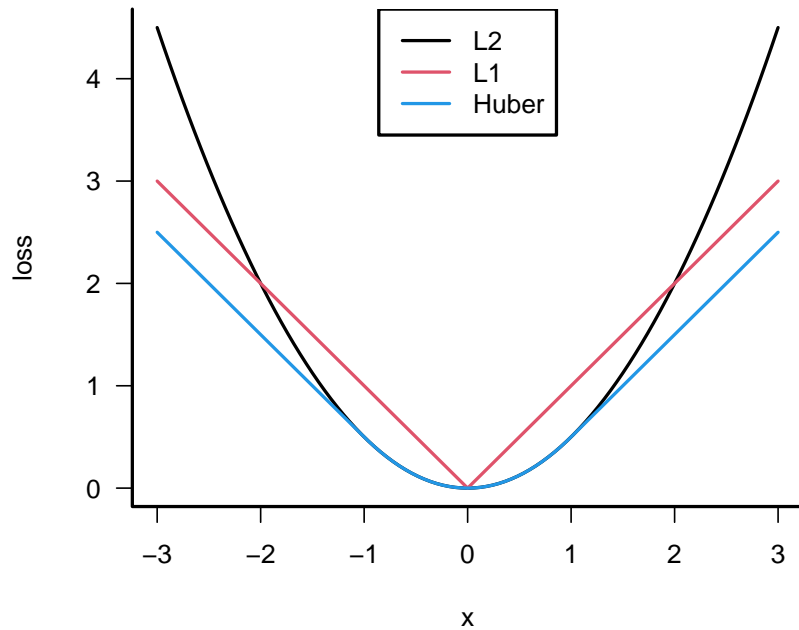

## loss functions (classification)

- 0-1
- **deviance**:  $-2 \sum I(G = k) \log \hat{p}_k = -2 \times \log\text{-likelihood}$
- deviance generalizes to other distributions

## a short rant about categorical loss functions

- 0-1 scoring dichotomizes prematurely
- leads to lots of confusing discussion about balancing data sets

- lots of discussion of what to do about imbalanced data sets (SMOTE etc.) (Chawla et al. 2002; van den Goorbergh et al. 2022)
- when **should** we balance?
  - when we have to use 0-1 scoring for some technical reason
  - when we have too **much** data (downsampling, i.e., throw away majority class)
- (cf. discussion of variable selection)


## from loss functions to model quality metrics

- categorical predictors:
- accuracy (total fraction correct); same problems as 0-1 classification
- AUC (area under the curve)
  - may be problematic in terms of implied misclassification costs? (Hand 2009)

Chawla, N. V., K. W. Bowyer, L. O. Hall, and W. P. Kegelmeyer. 2002. “SMOTE: Synthetic Minority Over-Sampling Technique.” *Journal of Artificial Intelligence Research* 16 (June): 321–57. <https://doi.org/10.1613/jair.953>.


van den Goorbergh, Ruben, Maarten van Smeden, Dirk Timmerman, and Ben Van Calster. 2022. “The Harm of Class Imbalance Corrections for Risk Prediction Models: Illustration and Simulation Using Logistic Regression.” *Journal of the American Medical Informatics Association*, June, ocac093. <https://doi.org/10.1093/jamia/ocac093>.

Hand, David J. 2009. “Measuring Classifier Performance: A Coherent Alternative to the Area Under the ROC Curve.” *Machine Learning* 77 (1): 103–23. <https://doi.org/10.1007/s10994-009-5119-5>.

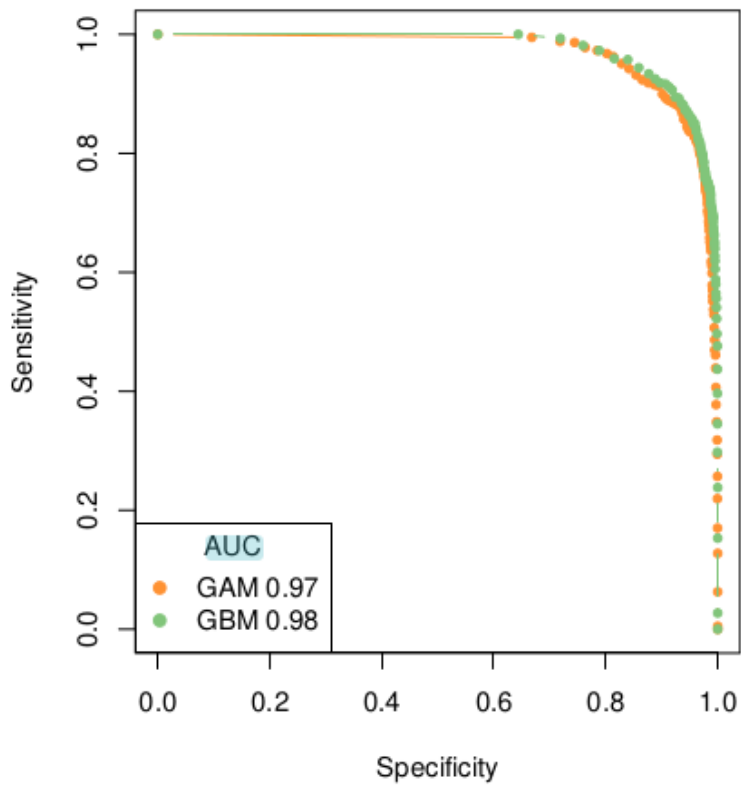

## quality metrics

- some combination of loss functions per point
- scaled for **interpretability**
  - how good is good enough?
  - how much difference in model predictions matters?
  - e.g. [Netflix prize](#)
- $R^2$
- MSE  $\rightarrow$  RMSE  $\rightarrow$  scaled RMSE (or mean-squared log error?)
- always a **business** or **scientific** decision (*value of information*)

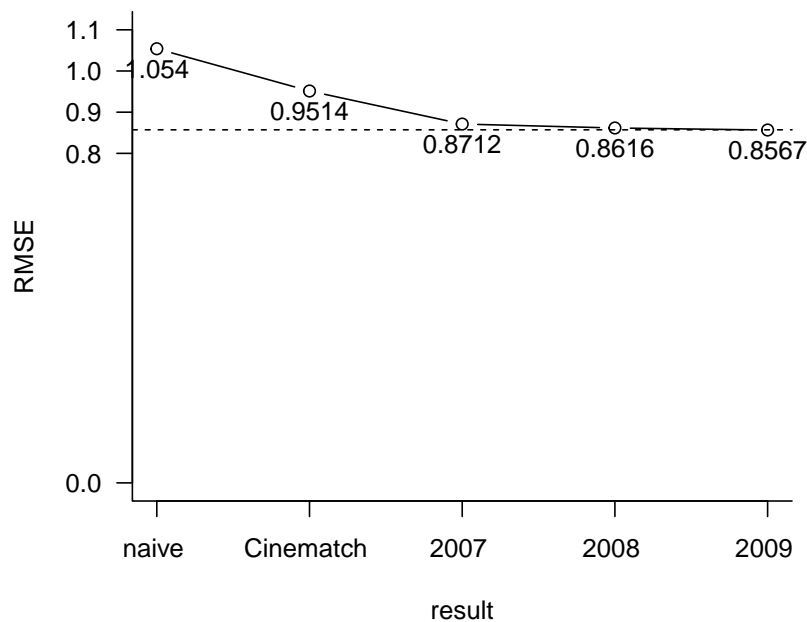


**what error are we trying to estimate?**

- training error (within-sample): average error within sample
- test error (generalization error),  $\text{Err}_T$ : expected prediction error for a **fixed** training sample
- **expected** prediction error: test error *averaged over training sets*  $= E[\text{Err}_T]$

**bias/variance etc.**

$$E[f(x_0) - x_0^\top \beta^*]^2 + E[x_0^\top \beta^* - E x_0^\top \hat{\beta}_\alpha]^2$$

- estimation bias = 0 for linear regression etc., positive for ridge etc. **given correct model**

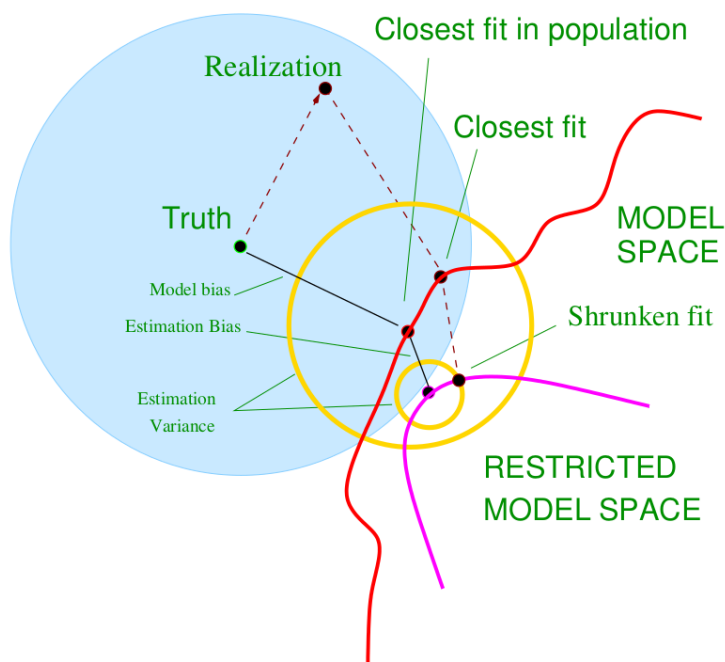

## train/validate/test

- training to estimate parameters
- validation: select models/tune hyperparameters
- test: evaluate; **must be independent**, don't snoop!
- select models based on **estimated test error**: only need to get relative values right

## within- (training) and out-of-sample (test) error

- within-sample:  $R^2$
- out-of-sample: adjusted  $R^2$  (scaled by  $n - p$ ), PRESS (predicted out-of-sample error) = LOOCV SSQ, AIC ( $-2 \log L + 2p$ ), Mallows'  $C_p$  ( $\frac{RSS + 2p\hat{\sigma}^2}{n}$ ). AIC and  $C_p$  equivalent for Gaussian models. AIC asymptotically  $\rightarrow$  LOOCV for linear models.
- finite-size corrections for AIC (AICc): more conservative for smaller samples


- ESL gives a weird/unusual (scaled-by- $N$ ) definition of AIC
- GCV, AUC
- BIC:  $-2\log L + (\log N)p$ ; higher penalty for  $N > e^2$  (almost always)
  - derived from a **Laplace approximation** to the **Bayes factor** (quadratic approx;  $\approx$  multivariate normal posterior) given equal priors on models
  - (¿ what is  $N$  for non-iid data ?)
- BIC is **consistent**, AIC is **predictive** (Yang 2005); M-closed vs M-complete vs M-open (Clarke, Clarke, and Yu 2014)

Yang, Yuhong. 2005. “Can the Strengths of AIC and BIC Be Shared? A Conflict Between Model Identification and Regression Estimation.” *Biometrika* 92 (4): 937–50. <https://doi.org/10.1093/biomet/92.4.937>.

## effective number of parameters

- (generalized, penalized) linear models:  $\text{trace}(\text{Hat})$
- additive-error models:  $\sum (\text{Cov}(\hat{y}_i, y) / \sigma_\epsilon^2)$

Clarke, Bertrand, Jennifer Clarke, and Chi Wai Yu. 2014. “Statistical Problem Classes and Their Links to Information Theory.” *Econometric Reviews* 33 (1-4): 337–71. <https://doi.org/10.1080/07474938.2013.807190>.

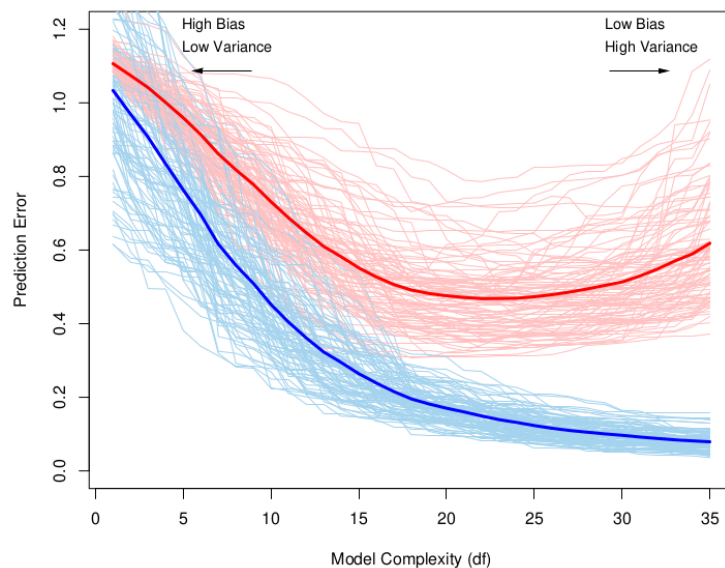

## cross-validation

- typical used for **hyperparameter tuning** (e.g. ridge/lasso/spline penalty, elasticnet  $\alpha$ )

- LOOCV
  - sometimes easy/closed-form solution
  - expensive otherwise
- $k$ -fold

## bias vs variance in CV

- more folds = smaller folds = larger training sets
- training error decreases with training set size (i.e. **decreasing** bias in error estimate)
- high variance because training sets are highly correlated (i.e., we're estimating  $\text{Err}_T$ )

## one-standard-error rule

- account for uncertainty in cross-validation error estimate; choose a slightly more **parsimonious** (i.e. higher penalty/lower complexity) model than min-CV
- is not on strong foundations? “Occam’s razor”: is there a general trend toward overoptimism?
- [CrossValidated q.](#)
- Chen and Yang (2021)

## data leakage

- inadmissible predictors (e.g. palliative care in Cygu et al. (2023))
- ESL § 7.10.2
  - example: screen predictors first
  - then use CV to tune the model
  - the **full** ‘training’ sequence must be done on every CV training set
    - \* can do **unsupervised** model reduction (i.e., not looking at predictions), e.g. select PCA components or high-variance predictors


Chen, Yuchen, and Yuhong Yang. 2021. “The One Standard Error Rule for Model Selection: Does It Work?” *Stats* 4 (4): 868–92. <https://doi.org/10.3390/stats4040051>.

Cygu, Steve, Hsien Seow, Jonathan Dushoff, and Benjamin M. Bolker. 2023. “Comparing Machine Learning Approaches to Incorporate Time-Varying Covariates in Predicting Cancer Survival Time.” *Scientific Reports* 13 (1): 1370. <https://doi.org/10.1038/s41598-023-28393-7>.




## dependent data

- blocking factors: patient, space, time, etc. (Wenger and Olden 2012; Bussola et al. 2020)

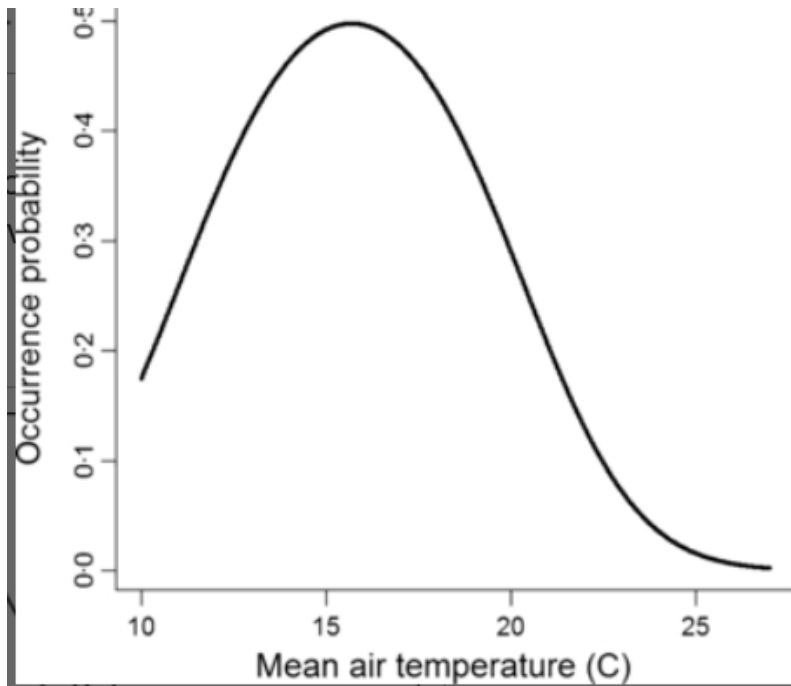

Wenger, Seth J., and Julian D. Olden. 2012. "Assessing Transferability of Ecological Models: An Underappreciated Aspect of Statistical Validation." *Methods in Ecology and Evolution* 3 (2): 260–67. <https://doi.org/10.1111/j.2041-210X.2011.00170.x>.

Bussola, Nicole, Alessia Marcolini, Valerio Maggio, Giuseppe Jurman, and Cesare Furlanello. 2020. "AI Slipping on Tiles: Data Leakage in Digital Pathology." arXiv. <https://doi.org/10.48550/arXiv.1909.06539>.

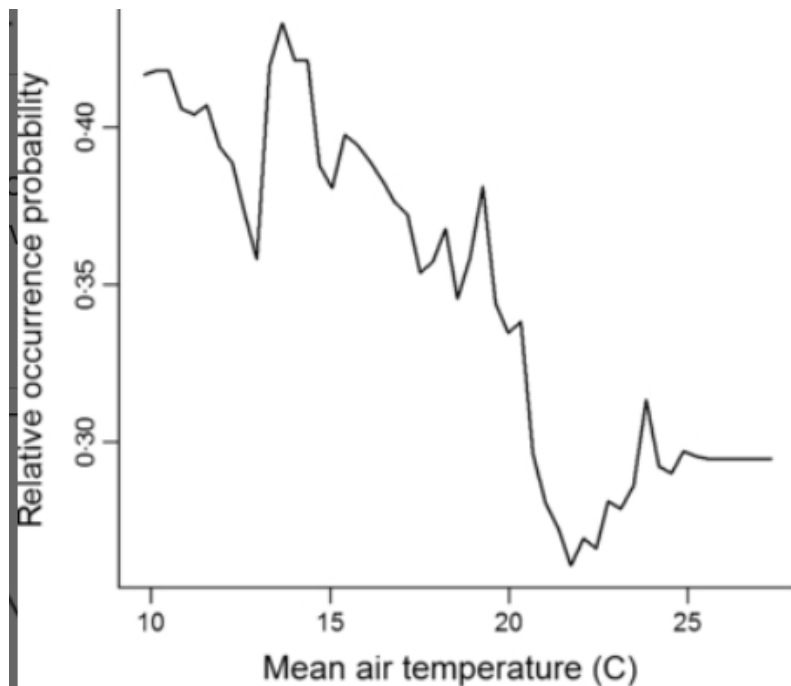


## solutions

- consider admissibility of predictors
- stratify CV folds
- organize spatially blocked or buffered test/train splits (Roberts et al. 2017; Valavi et al. 2019; Milà et al. 2022)
- account for blocking/correlation in the model (mixed models, spatial correlation models ...?)

Roberts, David R., Volker Bahn, Simone Ciuti, Mark S. Boyce, Jane Elith, Gurutzeta Guillera-Arroita, Severin Hauenstein, et al. 2017. "Cross-Validation Strategies for Data with Temporal, Spatial, Hierarchical, or Phylogenetic Structure." *Ecography* 40 (8): 913–29. <https://doi.org/10.1111/ecog.02881>.

Valavi, Roozbeh, Jane Elith, José J. Lahoz-Monfort, and Gurutzeta Guillera-Arroita. 2019. "blockCV: An r Package for Generating Spatially or Environmentally Separated Folds for k-Fold Cross-Validation of Species Distribution Models." *Methods in Ecology and Evolution* 10 (2): 225–32. <https://doi.org/10.1111/2041-210X.13107>.

Milà, Carles, Jorge Mateu, Edzer Pebesma, and Hanna Meyer. 2022. "Nearest Neighbour Distance Matching Leave-One-Out Cross-Validation for Map Validation." *Methods in Ecology and Evolution* 13 (6): 1304–16. <https://doi.org/10.1111/2041-210X.13851>.

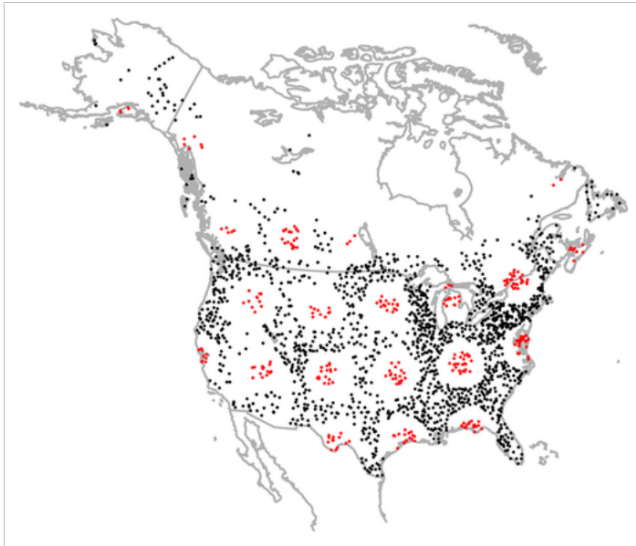

**Figure 2**

[Open in figure viewer](#) | [PowerPoint](#)

Map of the BBS routes used in this analysis. Black points are training routes; red ones are test routes. The training and test routes are separated by a 150-km buffer to minimize spatial autocorrelation across the two partitions.


## bootstrapping

- we can also use bootstrapping
- $\widehat{\text{Err}}_{\text{boot}} = \frac{1}{B} \frac{1}{N} \sum_b \sum_i L(y_i, \hat{f}^{*b}(x_i))$   
(applies bootstrap estimate to *training data*: overlap of  $\phi_b \approx 1 - e^{-1}$ )
- **leave-one-out bootstrap error:**  $\widehat{\text{Err}}_{\text{boot}}^{(1)}$ : only average  $L(i)$  over bootstrap replicates not containing  $i$
- bias correction for smallness of bootstrap set:  $(1 - \phi_b) \cdot \text{sample error} + \phi_b \cdot \widehat{\text{Err}}_{\text{boot}}^{(1)}$

## nested cross-validation

Kuhn (2017)

Kuhn, Max. 2017. “Nested Resampling with Rsample.” *Applied Predictive Modeling*. <http://appliedpredictivemodeling.com/blog/2017/9/2/njdc83d01pzysvvlgik02t5qnaljnd>.

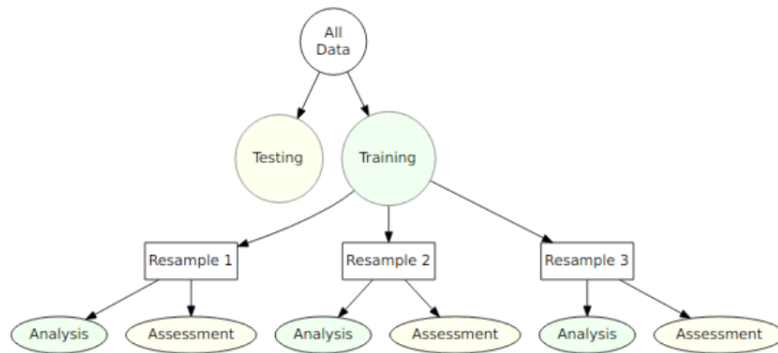

Nested resampling does an additional layer of resampling that separates the tuning activities from the process used to estimate the efficacy of the model. ... For example, if 10-fold cross-validation is used on the outside and 5-fold cross-validation on the inside, a total of 500 models will be fit. The parameter tuning will be conducted 10 times and the best parameters are determined from the average of the 5 assessment sets.

Once the tuning results are complete, a model is fit to each of the outer resampling splits using the best parameter associated with that resample. The average of the outer method's assessment sets are a unbiased estimate of the model.

- maybe overkill for practical purposes (Wainer and Cawley 2021) ?

## from model assessment to uncertainty estimation

- RMSE is the *average* inaccuracy; use it as a standard error?
- conformal prediction (Shafer and Vovk 2008)
- jackknife (Barber et al. 2021; Efron and Gong 1983)
  - $R_i^{\text{LOO}}$  is the leave-one-out residual for point  $i$
  - jackknife pred interval: quantiles of  $\hat{\mu}(X_{n+1}) \pm R_i^{\text{LOO}}$

Wainer, Jacques, and Gavin Cawley. 2021. "Nested Cross-Validation When Selecting Classifiers Is Overzealous for Most Practical Applications." *Expert Systems with Applications* 182 (November): 115222. <https://doi.org/10.1016/j.eswa.2021.115222>.

Shafer, Glenn, and Vladimir Vovk. 2008. "A Tutorial on Conformal Prediction." *Journal of Machine Learning Research* 9: 371–421.

Barber, Rina Foygel, Emmanuel J. Candès, Aaditya Ramdas, and Ryan J. Tibshirani. 2021. "Predictive Inference with the Jackknife+." *The Annals of Statistics* 49 (1): 486–507. <https://doi.org/10.1214/20-AOS1965>.

Efron, Bradley, and Gail Gong. 1983. "A Leisurely Look at the Bootstrap, the Jackknife, and Cross-Validation." *The American Statistician* 37 (1): 36–48. <https://doi.org/10.1080/00031305.1983.10483087>.

- jackknife+: quantiles of  $\hat{\mu}_{-i}(X_{n+1}) \pm R_i^{\text{LOO}}$
- or  $K$ -fold CV+ intervals (Taquet 2021)

## coverage

- a measure of the accuracy of confidence intervals
- do  $(1 - \alpha)$  CIs include the true value a fraction  $\alpha$  of the time?
- $\approx$  accuracy of model assessment
- [MAPIE](#)

## calibration

- for categorical prediction
- do predicted probabilities match observed probabilities (e.g. fraction of positives)?
- (Guo et al. 2017; Minderer et al. 2021)

*Journal of the American Medical Informatics Association*, 2022, Vol. 00, No. 0

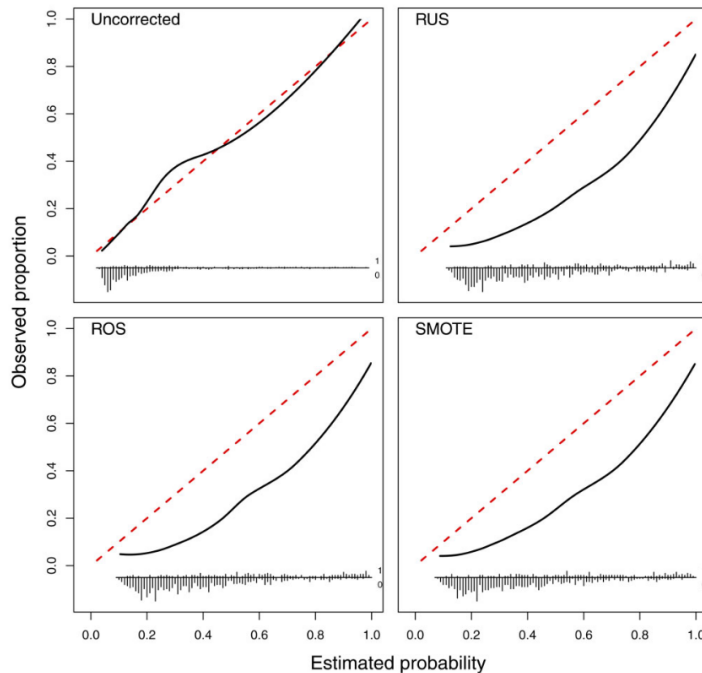


Figure 2. Flexible calibration curves on the test set for the Ridge models to diagnose ovarian cancer.

Taquet, Vianney. 2021. “With MAPIE, Uncertainties Are Back in Machine Learning !” *Medium*. <https://towardsdatascience.com/with-mapie-uncertainties-are-back-in-machine-learning-882d5c17fdc3>.

Guo, Chuan, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. 2017. “On Calibration of Modern Neural Networks.” In *Proceedings of the 34th International Conference on Machine Learning*, 1321–30. PMLR. <https://proceedings.mlr.press/v70/guo17a.html>.

Minderer, Matthias, Josip Djolonga, Rob Romijnders, Frances Hubis, Xiaohua Zhai, Neil Houlsby, Dustin Tran, and Mario Lucic. 2021. “Revisiting the Calibration of Modern Neural Networks.” In *Advances in Neural Information Processing Systems*, 34:15682–94. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2021/hash/8420d359404024567b5aefda1231af24-Abstract.html>.