

Blockchain Experiment No: 7

AIM: Implement the embedding wallet (Metamask) and transaction using Solidity

Theory:

Blockchain is a decentralized and distributed digital ledger that records transactions securely across multiple systems. It ensures transparency, security, and immutability, meaning once data is recorded, it cannot be changed.

Ethereum is a popular blockchain platform that allows the execution of Smart Contracts. Smart contracts are self-executing programs written in Solidity that automatically perform actions when predefined conditions are met, eliminating the need for intermediaries.

MetaMask is a cryptocurrency wallet and browser extension used to interact with blockchain networks. It stores user accounts and private keys securely and allows users to send, receive, and sign transactions. It also acts as a bridge between Remix IDE and the blockchain network.

Testnets such as Sepolia and RSK Testnet are used for testing purposes. They provide free tokens, allowing developers to deploy and test smart contracts without using real cryptocurrency, reducing financial risk.

Remix IDE is a web-based development environment used to write, compile, deploy, and test smart contracts. It provides a user-friendly interface and supports direct integration with MetaMask for deploying contracts on blockchain networks.





The smart contract deployment process includes writing the contract in Solidity, compiling it to remove errors, connecting MetaMask to Remix, and deploying the contract on a testnet by paying gas fees using test tokens.

A blockchain transaction refers to any interaction with the network, such as deploying a contract or calling its functions. Each transaction requires authentication through a digital signature and is permanently recorded on the blockchain. These transactions can be verified using blockchain explorers.

Implementation




Step 1: Install MetaMask

Install MetaMask extension and create a wallet

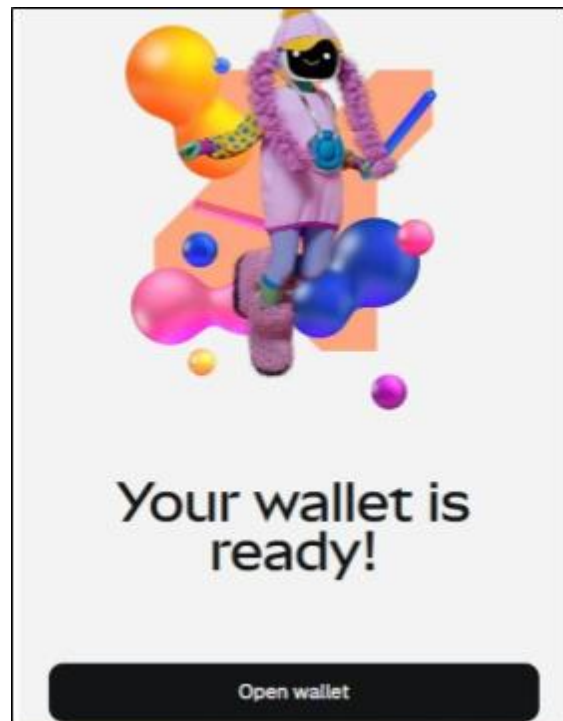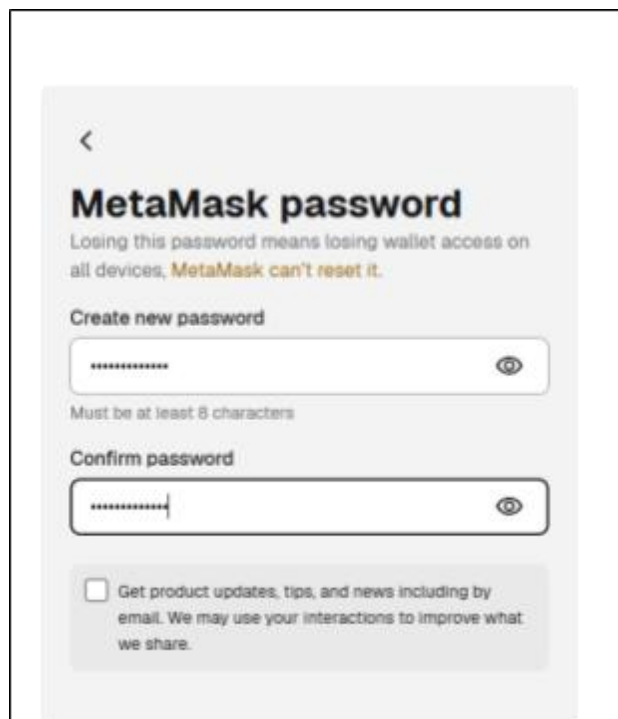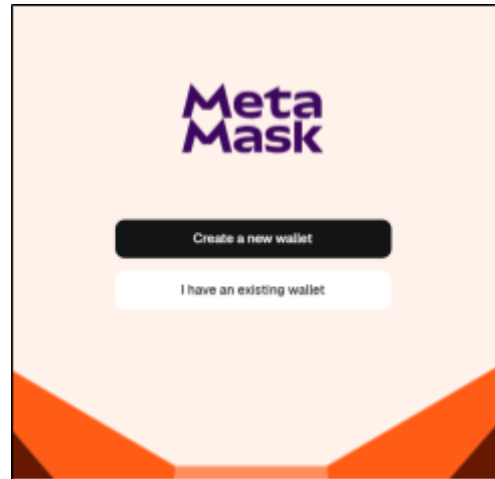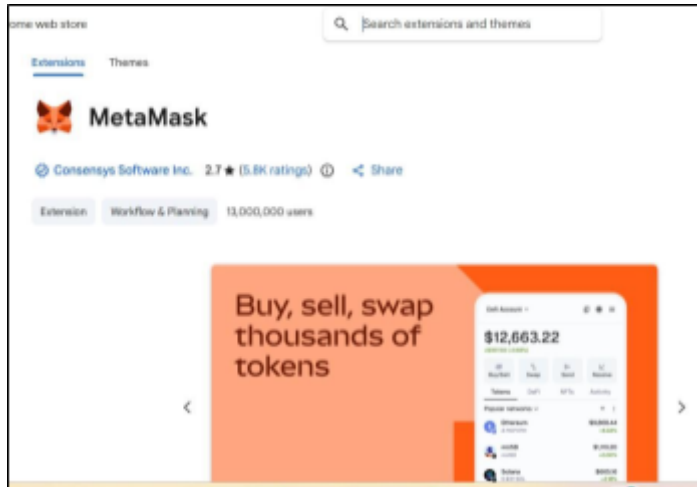



Step 2: Add Sepolia Testnet

Configure MetaMask to connect to Sepolia network.

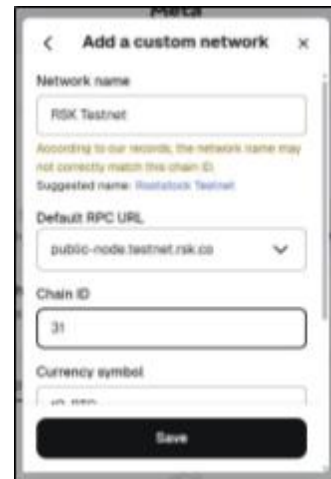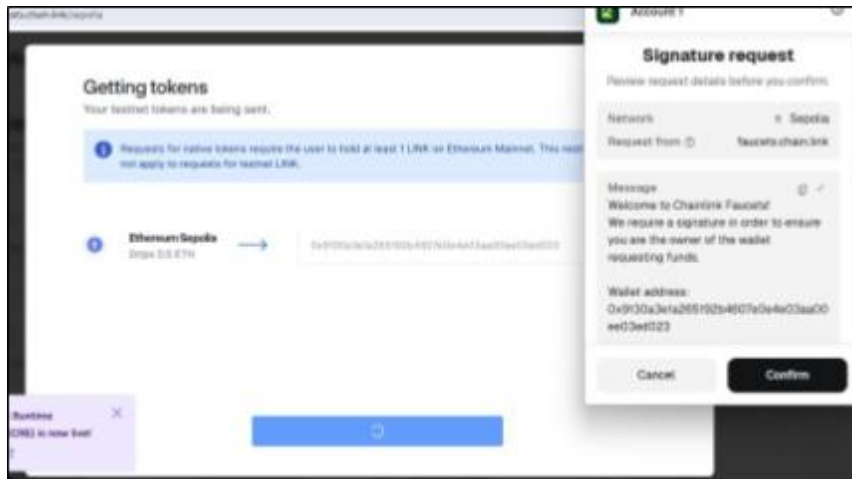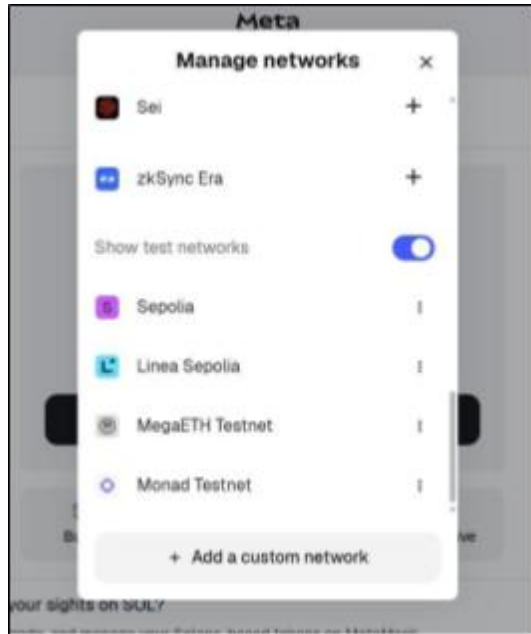

Step 3: Fund Wallet



Use faucet to get test ETH

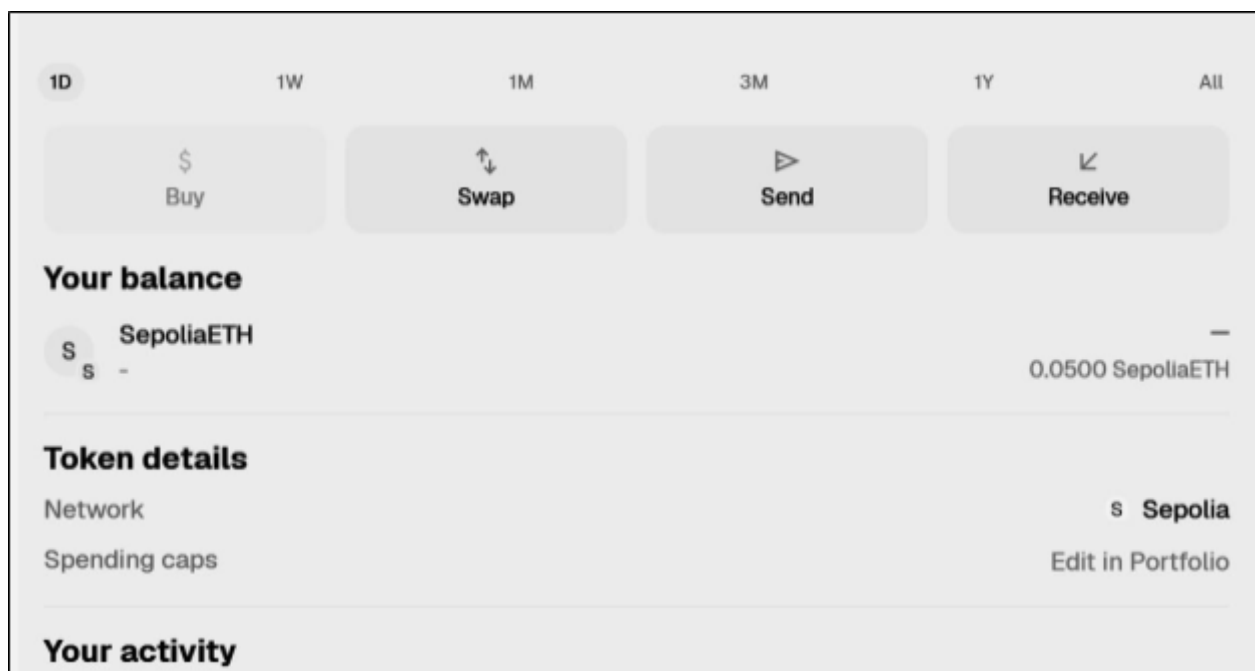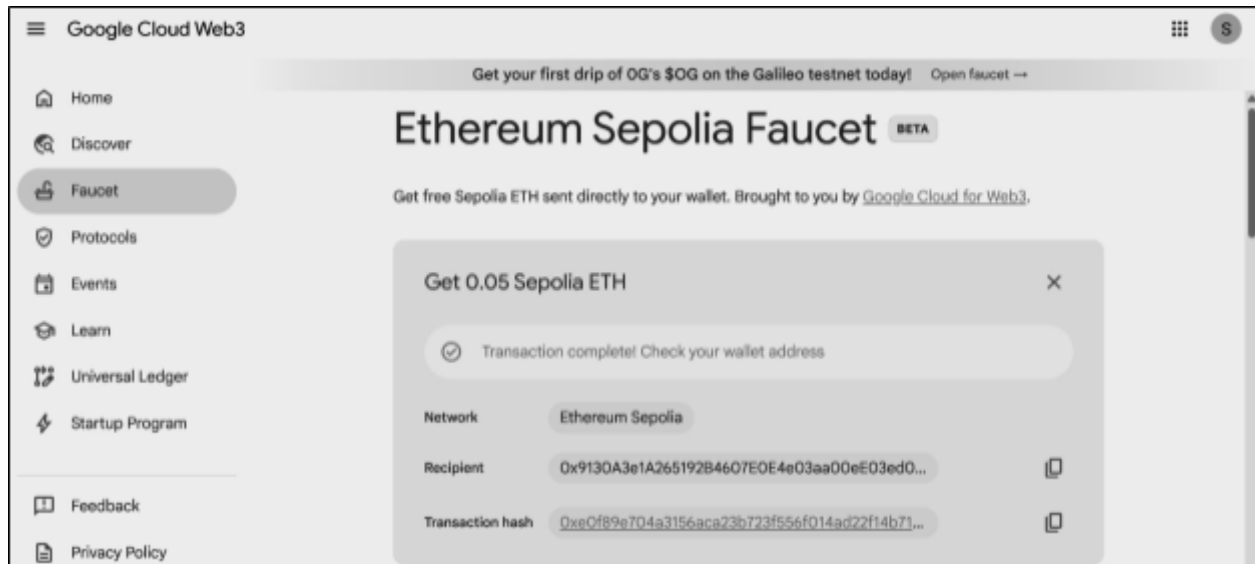

Step4: Connect the Sepolia Testnet / RSK Testnet to Remix IDE


1. In the Remix IDE, select the Environment as Injected Web3.

Note : Injected Web3 connects Remix with the active account in Metamask.

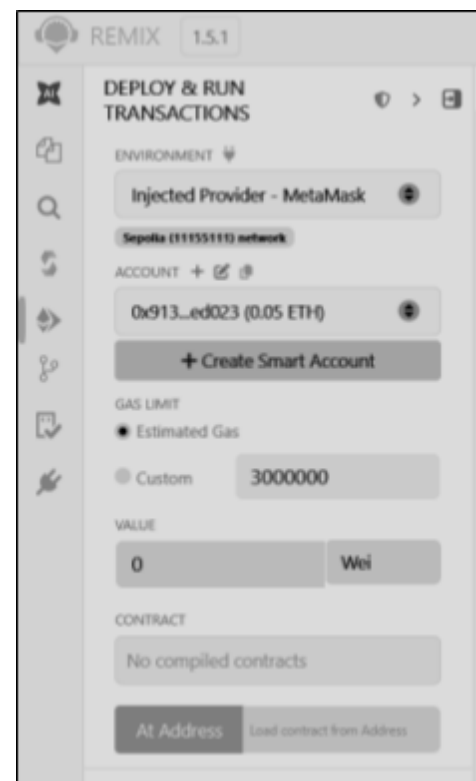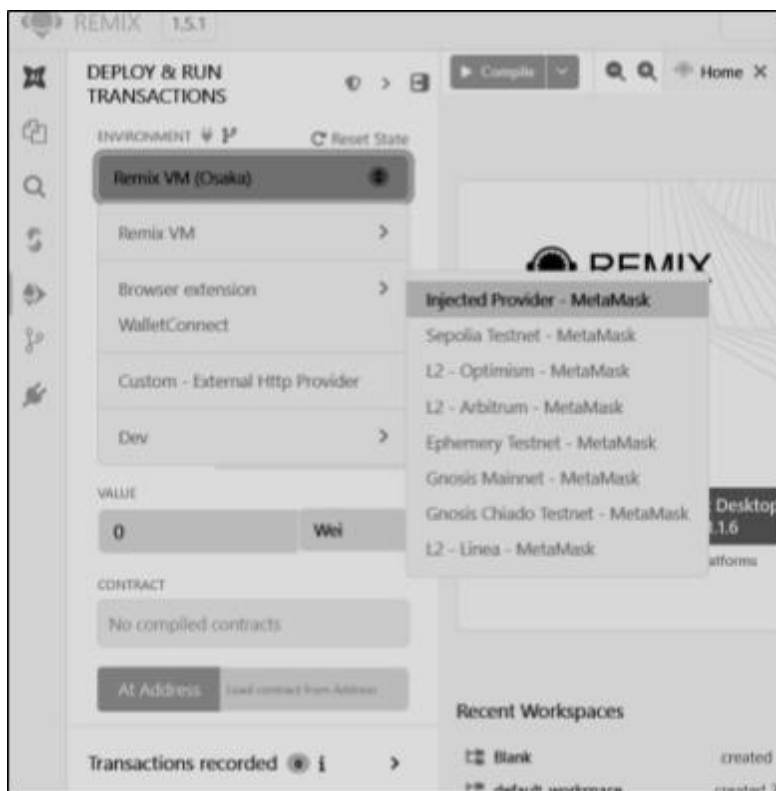

Compile the Contract

1. Open Remix
2. Paste your contract code
3. Go to Solidity Compiler (left panel)
4. Select version 0.8.x (match ^0.8.0)
5. Click Compile Votingssystem.sol

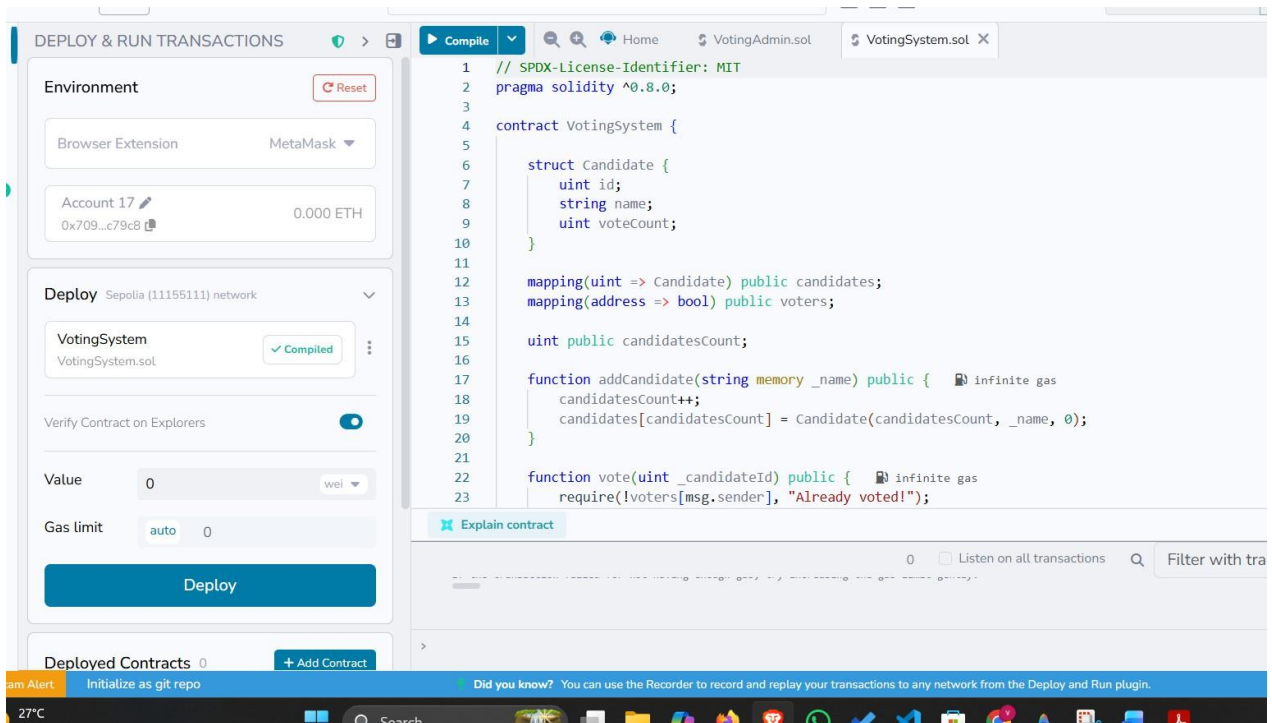

Connect MetaMask (Injected Provider)

1. Go to Deploy & Run Transactions tab
2. In Environment → select Injected Provider - MetaMask
3. MetaMask popup will open → click

Connect Make sure:

- Network = Sepolia Test Network
- You have 0.05 Sepolia ETH

Environment

 Reset

Browser Extensi... MetaMask ▼

Account 19 

0x862...c1199 

0.000 ETH

Deploy Sepolia (11155111) network ▼

VotingSystem

VotingSystem.sol

✓ Compiled



Verify Contract on Explorers



Value

0

wei ▼

Gas limit

custom 3000000

Deploy





Deploy Contract

Your constructor needs a Voting address Steps:

1. Copy your second MetaMask account address (voting)
 - MetaMask → Account 2 → Copy address
2. Paste that address in constructor field
3. Click Deploy
4. MetaMask will pop up → Confirm

transaction Wait a few seconds...

After success → your contract appears under Deployed Contracts

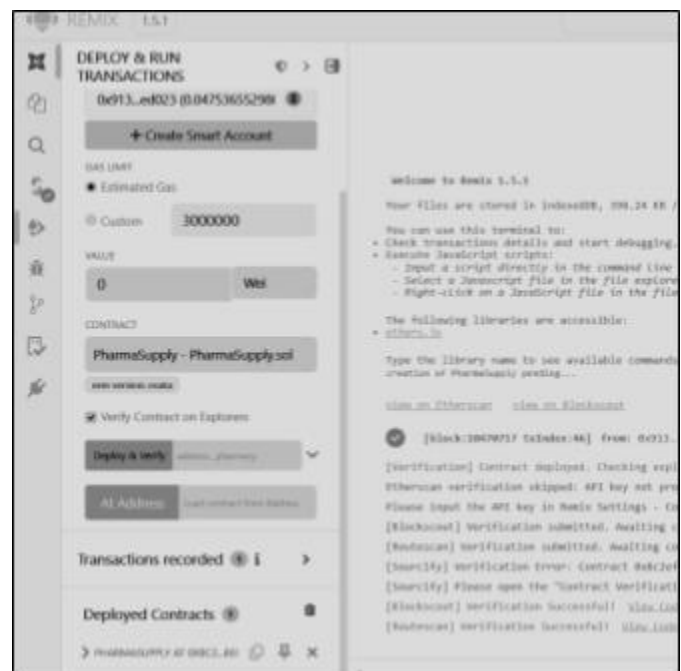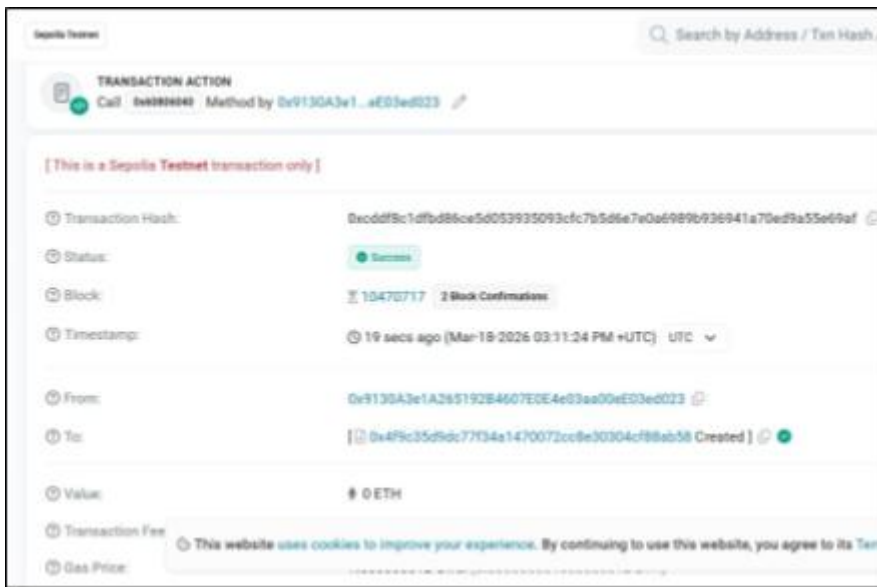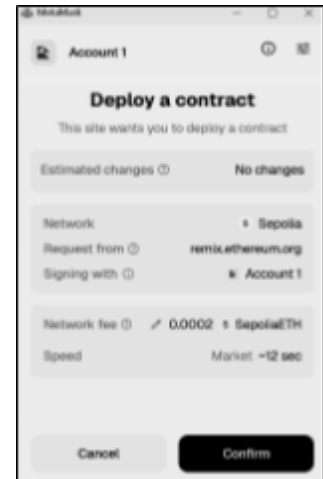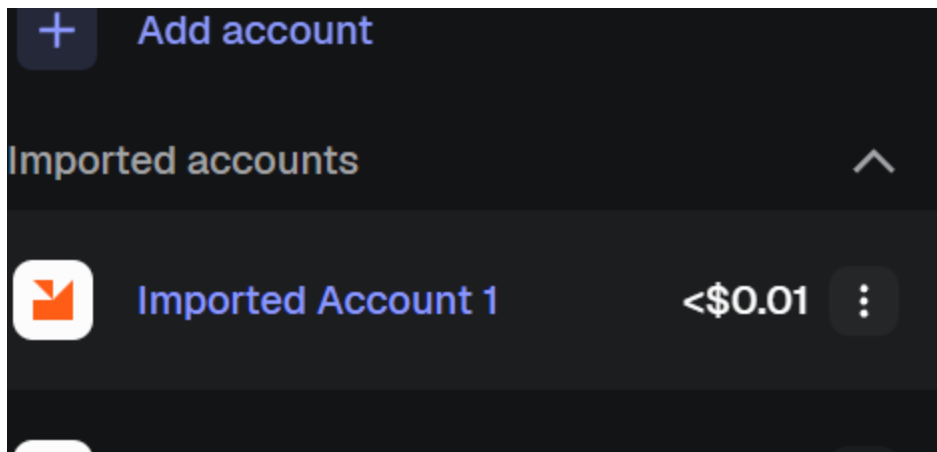



Interact with Contract

Step 1: Add Medicine (Manufacturer only)

- Make sure MetaMask is on Account 1 (manufacturer)
- In Remix:
 - Enter:
 - `_candidate: "Alice"`
- Click




addCandidate Confirm in

MetaMask

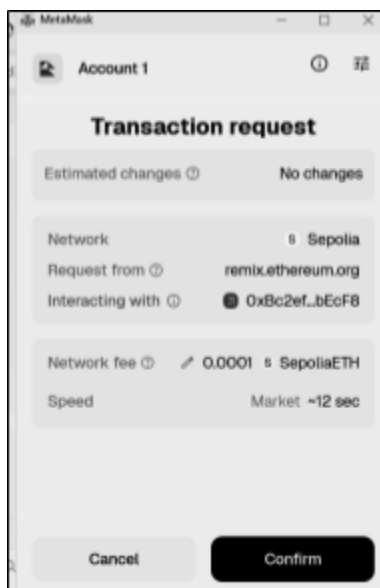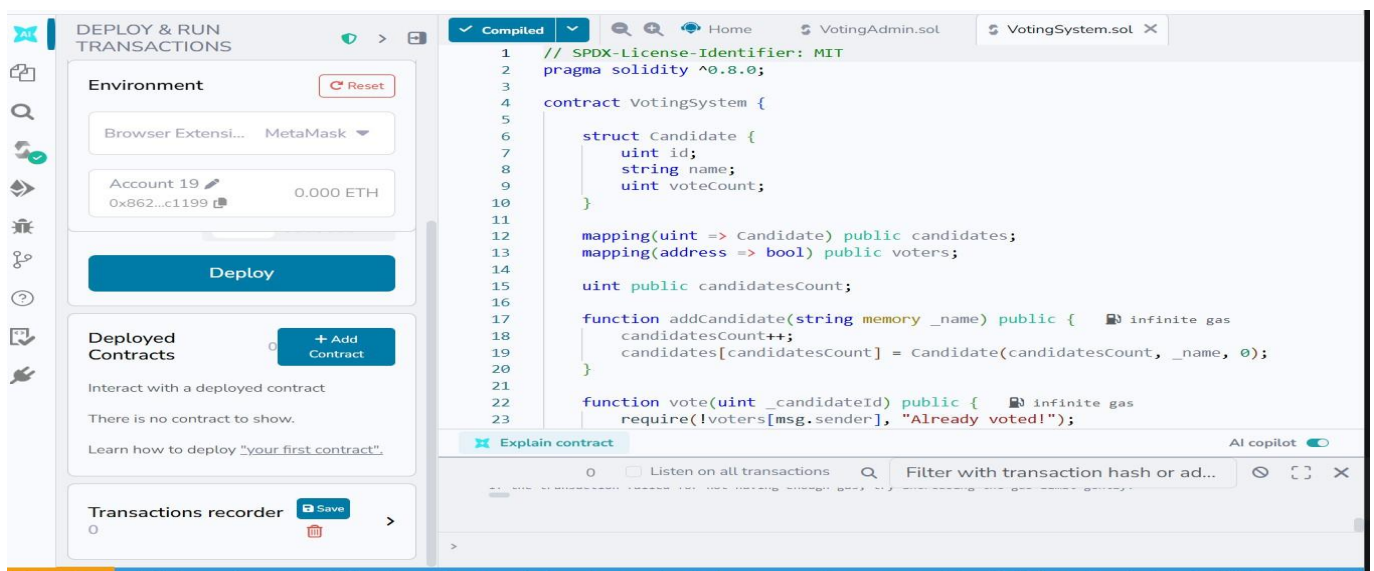

Step 2: Calculate Vote

- Still on Account 1
- Click calculateVote
- Confirm transaction

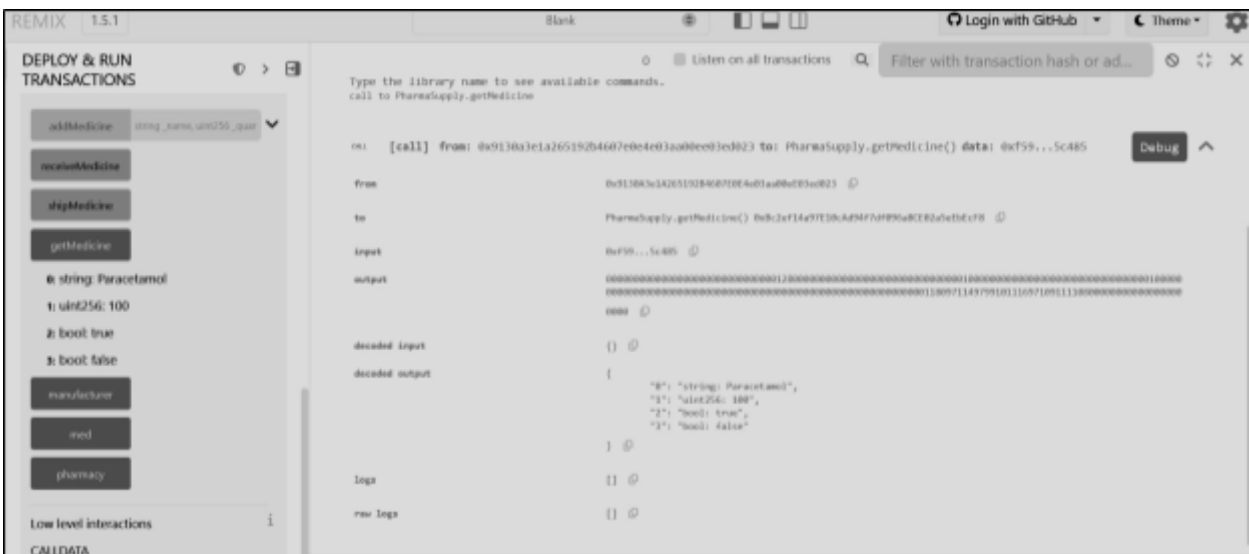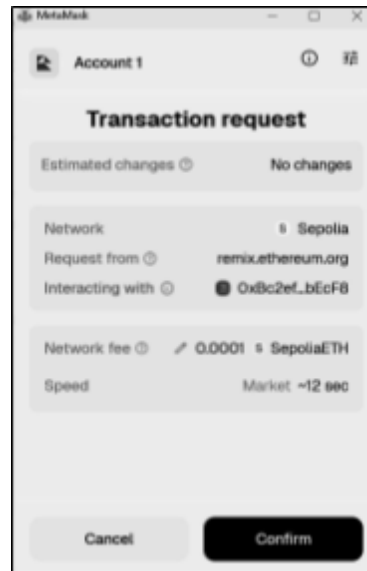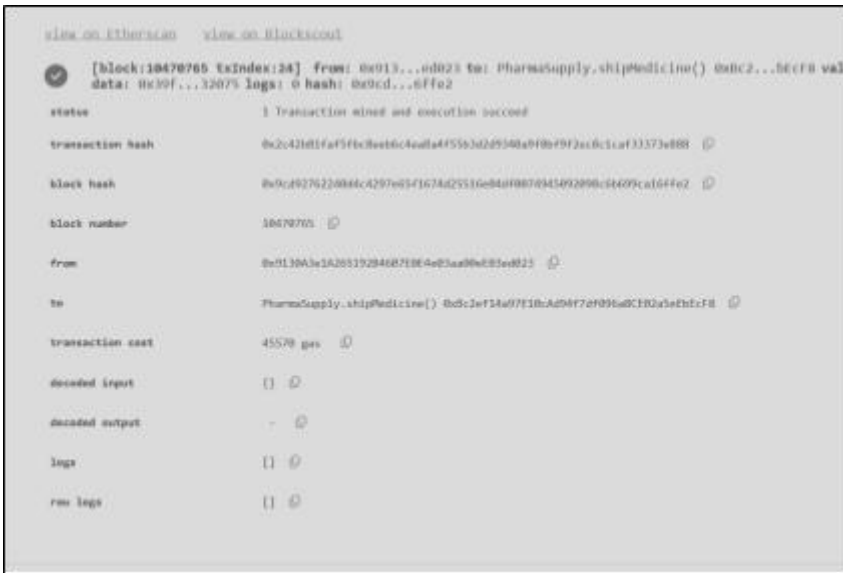

Conclusion

The experiment was successfully carried out by integrating the MetaMask wallet with Remix IDE and performing transactions on the Sepolia test network. The smart contract was compiled, deployed, and interacted with using MetaMask, which enabled secure transaction signing and real-time confirmation on the blockchain.

The use of a test network allowed safe execution without real financial risk, while also providing practical exposure to gas fees, transaction validation, and blockchain explorers. This experiment helped in understanding wallet integration, smart contract deployment, and the overall working of decentralized applications.

Thus, the objective of implementing MetaMask and performing blockchain transactions was successfully achieved.