

1. Complete the translations

Note.

The author of `tutodoc` manages the French and English versions of the translations.

Important.

Although we're going to explain how to translate the documentation, it doesn't seem relevant to do so, as English should suffice these days.^a

^aThe existence of a French version is simply a consequence of the native language of the author of `tutodoc`.

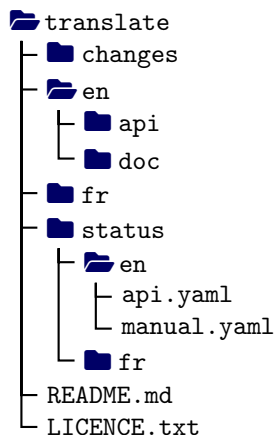


Figure 1: Simplified view of the translation folder

The translations are roughly organized as in figure 1 where just the important folders for the translations have been “opened”.¹ A little further down, the section e explains how to add new translations.

a. The `fr` and `en` folders

These two folders, managed by the author of `tutodoc`, have the same organization; they contain files that are easy to translate even if you're not a coder.

b. The `changes` folder

This folder is a communication tool where important changes are indicated without dwelling on minor modifications specific to one or more translations.

c. The `status` folder

This folder is used to keep track of translations from the project's point of view. Everything is done via well-commented `YAML` files, readable by a non-coder.

d. The `README.md` and `LICENCE.txt` files

The `LICENCE.txt` file is aptly named, while the `README.md` file takes up in English the important points of what is said in this section about new translations.

¹This was the organization on October 5, 2024.

e. New translations

Important.

The `api` folder contains translations relating to the functionalities of `tutodoc`. Here you'll find TXT files for editing with a text or code editor, but not with a document processor. The content of these files uses commented lines in English to explain what `tutodoc` will do; these lines begin with `//`. Here's an extract from such a file, where translations are made after each `=` sign, without touching the preceding, as this initial piece is used internally by the `tutodoc` code.

```
// #1: year   in format YYYY like 2023.
// #2: month  in format MM    like 04.
// #3: day    in format DD    like 29.
date = #1-#2-#3

// #1: the idea is to produce one text like
//      "this word means #1 in English".
in_EN = #1 in english
```

Note.

The `doc` folder is reserved for documentation. It contains TEX files that can be compiled directly for real-time validation of translations.

Warning.

Only start from one of the `fr` and `en` folders, as these are the responsibility of the `tutodoc` author.

Let's say you want to add support for Italian from files written in English.² To do this, you must use git as follows.

1. Recover the entire project folder via <https://github.com/bc-tools/for-latex/tree/tutodoc>. Do not use the `main` branch, which is used to freeze the latest stable versions of projects in the single <https://github.com/bc-tools/for-latex> repository.
2. In the `tutodoc/contrib/translate` folder, create an `it` copy of the `en` folder, with the short name of the language documented in the page "*IETF language tag*" from Wikipedia.
3. Once the translation is complete in the `it` folder, share it via <https://github.com/bc-tools/for-latex/tree/tutodoc> using a classic git push.

²As mentioned above, there is no real need for the `doc` folder.