

# The `askmaps` package

Jesse op den Brouw\*

2020/10/23, version 0.2

## 1 Abstract

This package generates configurable American style Karnaugh maps for 1, 2, 3, 4 and 5 variables as can be found in numerous books on digital design. Note that there are many ways to draw correct Karnaugh maps<sup>†</sup> and this package creates only one version.

There are more packages and examples that produce Karnaugh maps. A highly recommendable package is written by Andreas W. Wieland<sup>‡</sup>. This package creates maps that are frequently found in European textbooks<sup>§</sup> but not in American textbooks.

## 2 Overview

After `\usepackage[option]{askmaps}`, six new commands are available to draw Karnaugh maps:

<code>\askmap i</code>	draws a one-variable Karnaugh map
<code>\askmap ii</code>	draws a two-variable Karnaugh map
<code>\askmap iii</code>	draws a three-variable Karnaugh map
<code>\askmap iiialt</code>	draws an alternate style three-variable Karnaugh map
<code>\askmap iv</code>	draws a four-variable Karnaugh map
<code>\askmap v</code>	draws a five-variable Karnaugh map

These commands have five parameters which have the same meaning for each command. This will be explained in Section 3. As can be seen later on, many of the parameters can include typesetting commands such as coloring and math notation.

The new dimension `\askmapunitlength` is available and specifies the length and width of the squares. It defaults to 1 cm (about 0.4 in) which is good in combination with a 12 pt font size.

The global definitions `\askmapsversion` and `\askmapsdate` will render to the current version and date respectively.

There are three commands that control the size (and shape) of the rendered text. The `\askmapindexsize` command sets the size and shape of the index number, the default

---

\*The Hague University of Applied Sciences, [J.E.J.opdenBrouw@hhs.nl](mailto:J.E.J.opdenBrouw@hhs.nl)

<sup>†</sup>E.g., a four-variable Karnaugh map can be drawn in 384 different and correct ways

<sup>‡</sup>See <http://www.ctan.org/tex-archive/macros/latex/contrib/karnaugh>

<sup>§</sup>E.g. Digitale Techniek, A.P. Thijssen

is `\scriptsize\slshape`. The `\askmapcontentsize` command sets the size of the contents of the cells. It defaults to `\normalsize`. The `\askmapbitcombinationsize` sets the size of the bit combinations on the edges of the Karnaugh map. It defaults to `\footnotesize`. These sizes can be changed using the appropriate `\renewcommand` command.

The command `\askmapvarsep` contains the length of the variable separator line in de Karnaugh maps. The default is 0.7. Note that it is merely a number, not a length. It can be altered using the appropriate `\renewcommand` command. See Section 5 for more details.

The command `\askmap` provides drop-in replacement for the `\karnaughmap` command available in the `kvmacros` package and internally calls one of the five commands (the `\askmapiiialt` command is not supported), but there are some drawbacks on using this command.

### 3 Outline

All six commands take the form `\askmap<spec>{#1}{#2}{#3}{#4}{#5}` where `<spec>` is one of `i`, `ii`, `iii`, `iiialt`, `iv` or `v` and the parameters `#1` to `#5` have the following meaning:

- `#1` is the function output variable.
- `#2` is a list of function input variables.
- `#3` contains a list of options, see table below.
- `#4` is a list of function values.
- `#5` can be used to display user defined picture commands.

If a parameter contains fewer elements than needed, you will get empty spaces in the Karnaugh map. If a parameter contains more elements than needed, all elements in excess are not printed. In both situations, you will not be notified.

The third parameter contains a list of options as explained below.

- `i` index numbers are printed in the lower left corner of each square.
- `I` no index numbers are printed (default).
- `f` function output variable is printed at the upper right corner of the Karnaugh map together with a small line extending from the square to the function name (default, see Package Option Handling).
- `F` no function output variable is printed
- `b` bit combinations of the function input variables are printed on top of the columns and at the left of the the rows (default).
- `B` bit combinations are not printed.
- `c` shortcut for `ifb`.
- `C` shortcut for `IFB`.

Options are evaluated from left to right, so a combination of `iI` will yield in no index numbers being printed. Please note that macros are not expanded to a list of tokens but to one token.

## 4 Package Option Handling

As of version 0.2, the option `disablef` disables the default rendering of the function output variable at the upper right corner of the Karnaugh map together with a small line extending from the square to the function name (option `f` in the third parameter). This is more common found in American textbooks.

## 5 Use

Let's say we have the following truth table for a function  $S$  with two variables  $a$  and  $b$  and the function values 1, 0, 1 and 1 respectively.


**Table 1:** A truth table.

a	b	S
0	0	1
0	1	0
1	0	1
1	1	1

The command

```
\askmapii{S}{ab}{i}{1011}{}
```

will produce the two-variable Karnaugh map as presented in Figure 1.



**Figure 1:** Karnaugh map for two variables.

As you can see, the function output variable is printed top right of the Karnaugh map, with a small line from the variable to the top right square. The most significant function input variable is printed on the top left just above the small line extending from the top left square (the variable separator line). The least significant function input variable is printed just below that line. The bit combinations for the most significant function input variables are printed on top of the columns, the bit combinations of the least significant function input variable are printed left of the rows. You can see how the function values are placed in the squares by observing the small index numbers in the lower left corners of the squares.

The command

```
\askmapiii{S}{abc}{i}{10110110}{}
```

will produce a three-variable Karnaugh map as presented in Figure 2. In this case, the index numbers are not printed.

		ab				
		00	01	11	10	
c	0	1	1	1	0	S
	1	0	1	0	1	

**Figure 2:** Karnaugh map for three variables.

Sometimes you need a three-variable Karnaugh map that is printed in the vertical direction. It will leave you room to print accompanying text to the left or right of the map. The command

```
\askmapiialt{S}{abc}{0}{10110110}{}
```

will produce the vertical oriented version of the three-variable Karnaugh map as can be seen in Figure 3.

		a		
		0	1	
bc	00	1	0	S
	01	0	1	
	11	1	0	
	10	1	1	

**Figure 3:** Vertical version of the Karnaugh map for three variables.

Let's draw a Karnaugh map for a logic function with four inputs. The output will become logic 1 if three or four inputs are logic 1, otherwise the output is logic 0. (Of course you can set up a truth table first; this is left as an exercise to the reader). The command

```
\askmapiv{S}{abcd}{00000000100010111}{}
```

will produce a four-variable Karnaugh map for the given logic function and is presented in Figure 4.

		ab				
		00	01	11	10	
cd	00	0	0	0	0	S
	01	0	0	1	0	
	11	0	1	1	1	
	10	0	0	1	0	

**Figure 4:** Karnaugh map for four variables.

Using the command

```
\askmapv{S}{abcde}{00101101010010111011110011101011}{}
```

a five-variable Karnaugh map is produced as shown in Figure 5.

	abc	000	001	011	010	110	111	101	100	
de	00	0	1	1	0	1	1	1	1	
	01	0	1	0	1	1	0	1	0	
	11	0	1	1	0	0	1	0	1	
	10	1	0	1	0	1	1	0	1	

**Figure 5:** Karnaugh map for five variables.

Of course you can do a lot more with the arguments of the commands. You can use inline math to produce sophisticated variable names, you can use coloring for the function values. However, please note that the second and fourth parameter act as a list of tokens, so you have to use braces to separate the tokens in the lists if they consists of multiple characters. A list of tokens such as

```
{abcd}
```

will yield a, b, c and d as separate tokens, but

```
{${m_0}}${m_1}}${m_0}}${m_1}}}
```

will not work. You have to write

```
{{${m_0}}}${m_1}}${m_0}}${m_1}}}
```

The fifth parameter can be used to supply user created picture commands such as dashed rectangles or ovals to emphasize the simplifications in the function. Note that the origin of the picture (0,0) is at the lower left corner of the lower left square. Sections 6 and 8 show some examples.

The command `\askmap` provides a drop-in replacement for the command `\karnaughmap` from the Karnaugh package. The command

```
\askmap{4}{S}{abcd}{0100101010100011}{}
```

produces the Karnaugh map in Figure 6.

		ab				
		00	01	11	10	
cd	00	0	1	0	1	S
	01	1	0	0	0	
	11	0	0	1	0	
	10	0	1	1	1	
		0	4	12	8	
		1	5	13	9	
		3	7	15	11	
		2	6	14	10	

**Figure 6:** Karnaugh map using drop-in replacement.

Note that when using this command the output function variable is always printed. Only Karnaugh maps of one to five variables are supported, any other number will trigger a warning. Please note that `\kvindex` and `\kvnoindex` are supported as can be seen in Figure 7, but `\kvindexsize` and `\kvcontentsize` commands are not supported.

```
\kvindex
\askmap{4}{f(a,b,c,d):}{abcd}{1110011001100110}{}
```

		ab				
		00	01	11	10	
cd	00	1	0	0	0	f(a,b,c,d):
	01	1	1	1	1	
	11	0	0	0	0	
	10	1	1	1	1	
		0	4	12	8	
		1	5	13	9	
		3	7	15	11	
		2	6	14	10	

**Figure 7:** Karnaugh map using the `kvmacros` package.

The packages `kvmacros` and `askmaps` can be used in the same document as shown in Figure 8.

```
\kvnoindex
\karnaughmap{4}{f(a,b,c,d):}{abcd}{1110011001100110}{}
```

		b				
		d				
a	c	1	1	1	0	f(a,b,c,d):
		1	0	0	1	
		1	0	0	1	
		0	1	1	0	

**Figure 8:** Karnaugh map using the `kvmacros` package.

The length of the line separating the input variables can be set to a different value as shown in Figure 9.

```
\renewcommand{\askmapvarsep}{0.6}
\askmapiii{S}{abc}{00111010}{}
\renewcommand{\askmapvarsep}{0.9}
\askmapiii{F}{xyz}{11111010}{}

```

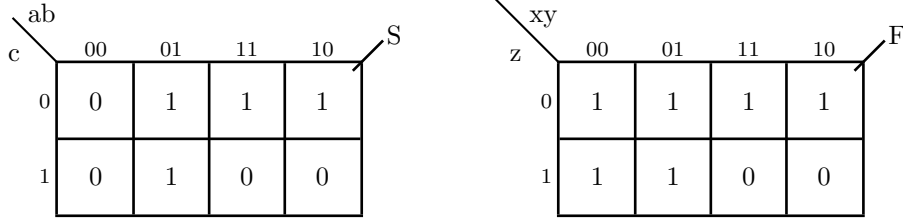


Figure 9: Different lengths of the variable separator line.

## 6 Drawing covers and more

One of the uses of Karnaugh maps is to simplify logic functions. The simplifications are usually shown as (part of) circles or ovals (also squares can be used) combining the function values that make up the simplified terms (either product terms or sum terms).

Let's begin with a simple example. The code is shown below, the map is shown in Figure 10. Note that one function variable is covered by all three ovals, hence it looks as if it is covered by a circle.

```
\askmapiii{s}{abc}{00010111}{%
\put(2.5,1.0){\oval(0.8,1.8)}%
\put(2.0,0.5){\oval(1.8,0.8)}%
\put(3.0,0.5){\oval(1.8,0.8)}%
}%

```

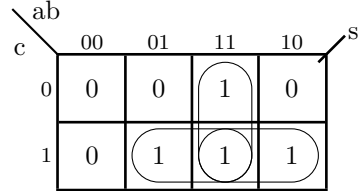


Figure 10: Karnaugh map for three variables.

Function values on the edges of Karnaugh maps can be combined in one term. The values are not adjacent in the maps so covering oval or circle has to be split. This is shown in Figure 11. The code is shown left. As can be seen, for marking the edges only half a circle has to be drawn. Note the lines extending the edges of the map.

```
\askmapiii{s}{abc}{11100111}{%
\put(2.5,1.0){\oval(0.8,1.8)}%
\put(1.0,1.5){\oval(1.8,0.8)}%
\put(3.5,0.5){\oval(0.8,0.8)[l]}%
\put(3.5,0.9){\line(1,0){0.7}}%
\put(3.5,0.1){\line(1,0){0.7}}%
\put(0.5,0.5){\oval(0.8,0.8)[r]}%
\put(0.5,0.9){\line(-1,0){0.7}}%
\put(0.5,0.1){\line(-1,0){0.7}}%
}%

```

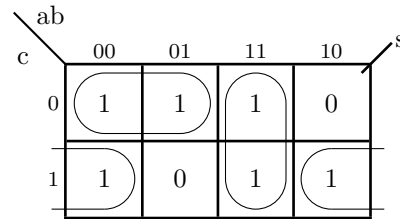


Figure 11: Example of how to mark edges.

Making “square” ovals doesn’t always produce a good result as can be seen in Figure 12. The column second to the right seems to be covered by it’s own oval.

```
\askmapiii{s}{abc}{00111111}{%
\put(2.5,1.0){\oval(0.8,1.8)[rb]]}%
\put(2.5,1.0){\oval(0.8,1.8)[rt]]}%
\put(1.5,1.0){\oval(0.8,1.8)[lb]]}%
\put(1.5,1.0){\oval(0.8,1.8)[lt]]}%
\put(1.5,1.9){\line(1,0){1.0}}%
\put(1.5,0.1){\line(1,0){1.0}}%
\put(3.5,1.0){\oval(0.8,1.8)[rb]]}%
\put(3.5,1.0){\oval(0.8,1.8)[rt]]}%
\put(2.5,1.0){\oval(0.8,1.8)[lb]]}%
\put(2.5,1.0){\oval(0.8,1.8)[lt]]}%
\put(2.5,1.9){\line(1,0){1.0}}%
\put(2.5,0.1){\line(1,0){1.0}}%
}%
```

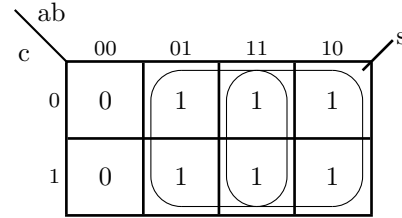


Figure 12: Example of bad use of ovals.

Let’s try a four-variable map, see Figure 13 and accompanying code. Here we have deliberately used an oval with a bigger size (see code line marked \*) otherwise it will interfere with the covering of the lower left and right edges. An example of good use of a “square” oval can be found in Figure 14.

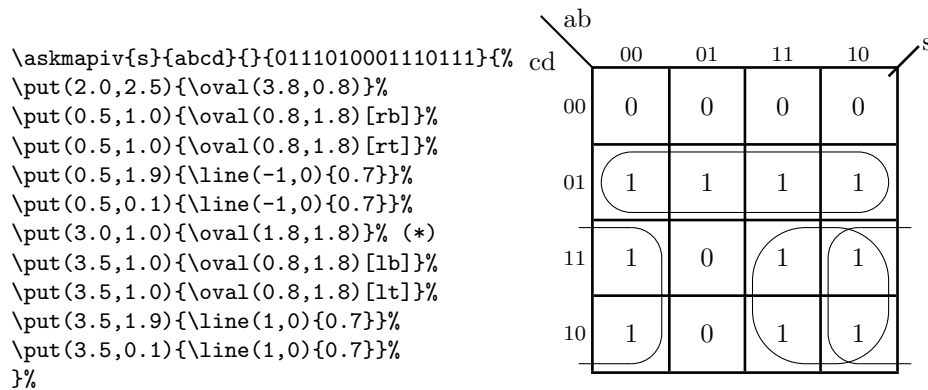


Figure 13: Example of how to mark edges.

Every textbook on using Karnaugh maps shows how to combine the corners of a four-variable map. The complete code is shown below. The result is shown in Figure 14. Each corner marking consists of three drawing command: two lines (to the left, right up or down) and one (part of a) oval (right-bottom, left-bottom, right-top and right-bottom).


```
\begin{figure}[H]
\centering
\askmapiv{s}{abcd}{1010000010100000}{%
\put(0.5,3.5){\oval(0.8,0.8)[rb]]}% left-top
\put(0.5,3.1){\line(-1,0){0.7}}%
\put(0.9,3.5){\line(0,1){0.7}}%
\put(3.5,3.5){\oval(0.8,0.8)[lb]]}% right-top
\put(3.5,3.1){\line(1,0){0.7}}%
\put(3.1,3.5){\line(0,1){0.7}}%
\put(0.5,0.5){\oval(0.8,0.8)[rt]]}% left-bottom
\put(0.5,0.9){\line(-1,0){0.7}}%
\put(0.9,0.5){\line(0,-1){0.7}}%
}%
```



```

\put(3.5,0.5){\oval(0.8,0.8)[lt]]}% right-bottom
\put(3.5,0.9){\line(1,0){0.7}}%
\put(3.1,0.5){\line(0,-1){0.7}}%
\put(2.5,2.0){\oval(0.8,1.8)[rb]]}% the square oval
\put(2.5,2.0){\oval(0.8,1.8)[rt]]}% in the middle
\put(1.5,2.0){\oval(0.8,1.8)[lb]]}% of the map
\put(1.5,2.0){\oval(0.8,1.8)[lt]]}%
\put(1.5,2.9){\line(1,0){1.0}}%
\put(1.5,1.1){\line(1,0){1.0}}%
}%
\caption{The corners of the Karnaugh map are connected.}
\label{fig:kmapfourvarcorner}
\end{figure}

```

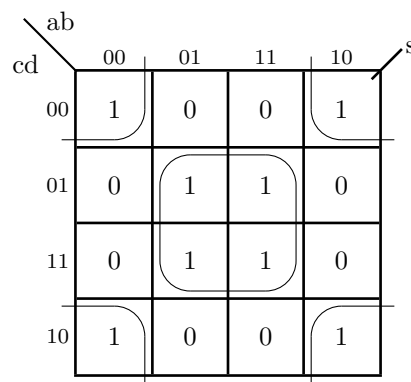

**Figure 14:** The corners of the Karnaugh map are connected.

When writing a textbook on the use of Karnaugh maps, it sometimes helps if a cover is accompanied with the term it covers. Below is a fine example of explaining the simplification of a logic function by showing the product term at each cover. The truth table is shown at the right.

```


\begin{figure}[H]
\begin{subfigure}[c]{0.5\textwidth}
\centering
\askmapiii{s}{abc}{00010111}{%
\put(2.5,1.0){\oval(0.8,1.8)}%
\put(3.0,3.0){\makebox(0,0){$a\cdot b$}}%
\put(3.0,2.8){\line(-1,-5.0){0.2}}%
\put(2.0,0.5){\oval(1.8,0.8)}%
\put(0.5,-0.8){\makebox(0,0){$b\cdot c$}}%
\put(0.5,-0.6){\line(1,0.9){0.8}}%
\put(3.0,0.5){\oval(1.8,0.8)}%
\put(4.5,-0.8){\makebox(0,0){$a\cdot c$}}%
\put(4.5,-0.6){\line(-1,0.9){0.8}}%
}%
\end{subfigure}%
\begin{subfigure}[c]{0.5\textwidth}
\centering
\begin{tabular}{ccc|c}
$a$ & $b$ & $c$ & $s$ \\ \hline
0 & 0 & 0 & 0 \\
0 & 0 & 1 & 0
\end{tabular}
\end{subfigure}

```

```

0 & 1 & 0 & 0 & \\
0 & 1 & 1 & 1 & \\
1 & 0 & 0 & 0 & \\
1 & 0 & 1 & 1 & \\
1 & 1 & 0 & 1 & \\
1 & 1 & 1 & 1 & \\
\end{tabular}
\end{subfigure}%
\bigskip\caption{Karnaugh map for three variables.}
\label{fig:karnaughmajorfunctie}
\end{figure}

```

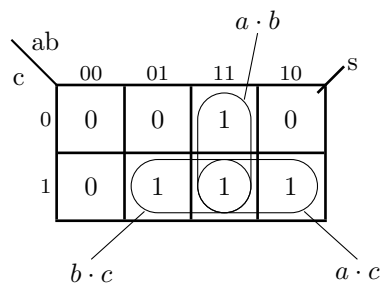

$a$	$b$	$c$	$s$
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

**Figure 15:** Karnaugh map for three variables.

A very notable feature is when you use TikZ. When you use the package with


```
\usepackage{tikz}
```

you can use TikZ' opacity control to add opaque solid rectangles in the back:

```

\askmapii{F}{xy}{f}{0111}{
\setlength{\fboxsep}{0pt}\linethickness{0pt}
\put(1.1,0.1){\pgfsetfillopacity{0.2}\colorbox{red}{\framebox(0.8,1.8){}}\pgfsetfillopacity{1}}%
\put(0.1,0.1){\pgfsetfillopacity{0.2}\colorbox{blue}{\framebox(1.8,0.8){}}\pgfsetfillopacity{1}}%
}

```




In fact, you can use a `tikzpicture` environment to use TikZ commands but you have to set an invisible point to coordinate to (0,0):

```

\askmapii{F}{xy}{f}{0111}{%
\begin{tikzpicture}[x=\askmapunitlength,y=\askmapunitlength]%
\draw[draw=none,fill=none] (0,0) -- (0,0); % Set default corner
\draw[red, ultra thick] (0,0) rectangle (2,2);%
\end{tikzpicture}%
}

```



## 7 Additional command

The command `\askmapindexsize` sets the size and typeface of the minterm numbers in the cells. The default definition is set to

---

```
1 \newcommand{\askmapindexsize}{\scriptsize\slshape}
```

---

The command `\askmapcontentsize` sets the size and typeface for the cell's contents. The default definition is

---

```
1 \newcommand{\askmapcontentsize}{\normalsize}
```

---

The command `\askmapbitcombinationsize` sets the size and typeface for the bit combinations at the top and the left. The default definition is

---

```
1 \newcommand{\askmapbitcombinationsize}{\footnotesize}
```

---

The command `\askmapvarsep` sets the relative line length of the variable separator on the left of the Karnaugh map. The default definition is

---

```
1 \newcommand{\askmapvarsep}{0.70}
```


---

These command may be changed using the appropriate `\renewcommand` command.

## 8 Examples

The most simple Karnaugh maps you can make with only one variable.


```
\askmap{S}{a}{i}{00}{-}
\askmap{S}{a}{-}{01}{-}
\askmap{S}{a}{-}{10}{-}
\askmap{S}{a}{-}{11}{-}
```

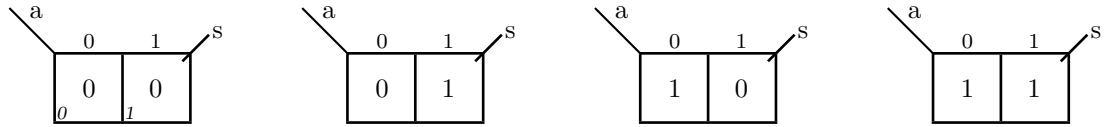

The Karnaugh maps for two variables: plain, with indexes and output variable.

```
\askmapii{S}{ab}{F}{1010}{}
\askmapii{S}{ab}{i}{1110}{}
\askmapii{S}{ab}{}{1110}{}


```

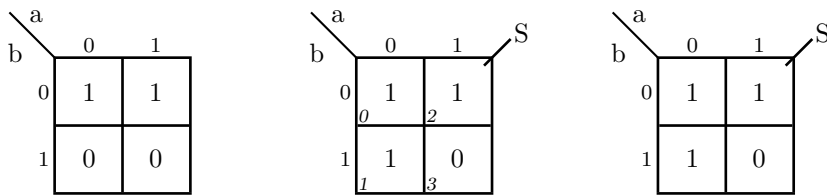

The Karnaugh maps for three variables: plain, with indexes and function output variable.

```
\askmapiii{S}{abc}{F}{00111010}{}
\askmapiii{F}{xyz}{i}{11111010}{}


```

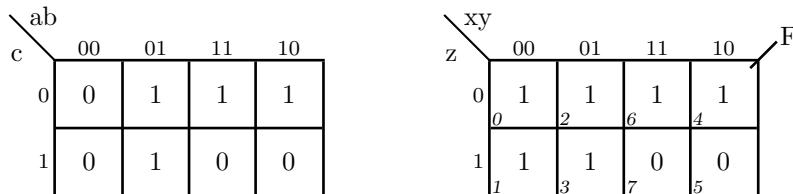

The Karnaugh maps for four variables: plain, with function output variable and indexes.

```
\askmapiv{f}{wxyz}{F}{1110001101000101}{}
\askmapiv{S}{abcd}{i}{1100100100011101}{}

```

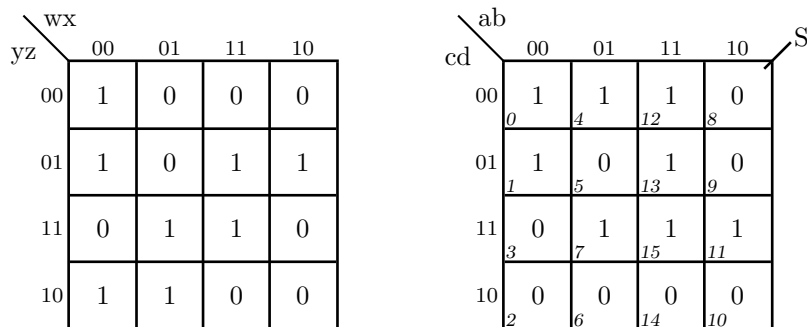

You can also do math things by using the known \$ signs... and you can make an empty map for your exams...

```
\askmapiii{$S_{0}$}{$a_{1}$}{$a_{0}$}{1010}{}
```

```
\askmapiii{}{F}{}{}
```

	$a_1$	0	1	
$a_0$	0	1	1	$S_0$
	1	0	0	

	0	1
0		
1		

You can do the math thing in roman upright font... and of course you can make a *really* empty map for your exams...

```
\askmapiiii{$\mathrm{M}^{n+1}_{0}$}{$\mathrm{M}^n_{2}$}{$\mathrm{M}^n_{1}$}
```

```
{$\mathrm{M}^n_{0}$}{11100111}{}
```

```
\askmapiiii{}{BF}{}{}
```

	$M_2^n$	$M_1^n$		
$M_0^n$	00	01	11	10
0	1	1	1	0
1	1	0	1	1

	$M_0^{n+1}$			

The vertical version of the three variable map, used in a `minipage` environment:

```
\begin{minipage}[c]{0.25\textwidth}
```

```
\askmapiiialt{s}{$c_{in}$}ab}{01101001}{}
```

```
\end{minipage}
```

```
\begin{minipage}[c]{0.25\textwidth}
```

```
\askmapiiialt{c}{$_{out}$}{$c_{in}$}ab}{00010111}{}
```

```
\end{minipage}\hfill%
```

```
\begin{minipage}[c]{0.40\textwidth}
```

As you can see on the left, the function of the sum of the full adder cannot be simplified as all 1's are placed diagonal in the map. This means that the function for the sum can be expressed with XOR ports.

The carry-out function on the otherhand can be simplified.

```
\end{minipage}
```

	$c_{in}$	0	1	
$ab$	00	0	1	$S$
	01	1	0	
	11	0	1	
	10	1	0	

	$c_{in}$	0	1	
$ab$	00	0	0	$c_{out}$
	01	0	1	
	11	1	1	
	10	0	1	

As you can see on the left, the function of the sum of the full adder cannot be simplified as all 1's are placed diagonal in the map. This means that the function for the sum can be expressed with XOR ports.

The carry-out function on the otherhand can be simplified.

You can do things with don't cares...

```
\askmapiii{S}{ab}{{011-}}{ }
\askmapiii{S}{abc}{{001--10-}}{ }
```

		ab			
		0	1		
b	0	0	1	S	
	1	1	-		

		ab					
		00	01	11	10		
c	0	0	1	0	-	S	
	1	0	-	-	1		

You can use colors and empty function values and variables as values too...

```
\askmapiiii{S}{abc}{{\color{blue}{0}}{\color{blue}{0}}{\color{red}{1}}}{ }
{\color{red}{1}}{\color{blue}{0}}{ } }
\askmapiii{S}{ab}{{\color{blue}{0}}{\color{red}{1}}{\color{blue}{0}}{\color{red}{1}}}{ }
```

		ab					
		00	01	11	10		
c	0	0	1	0		S	
	1	0			1		

		ab			
		0	1		
b	0	$i_0$	$i_2$	S	
	1	$i_1$	$i_3$		

You can set the font to something else ... and use sans math font ...

```
{\fontfamily{phv}\selectfont%
\askmapiv{S}{abcd}{{0110111011110011}}{ }%
}
{\fontfamily{phv}\selectfont\sansmath
\askmapiv{{Q^{n+1}}_0}{{P^n}_1}{{P^n}_0}{{Q^n}_1}{{Q^n}_0}}{ }%
}
```


		ab					
		00	01	11	10		
cd	00	0	1	0	1	S	
	01	1	1	0	1		
	11	0	0	1	1		
	10	1	1	1	1		

		$p_1^n p_0^n$					
		00	01	11	10		
$q_1^n q_0^n$	00	0	1	0	1	$Q_0^{n+1}$	
	01	1	1	0	1		
	11	0	0	1	1		
	10	1	1	1	1		

You can use the last parameter to create to your own picture commands. Note that the origin of the picture (0,0) is at the lower left corner of the lower left square. It is also


possible to use `\raisebox` in conjunction with horizontal spacing to adjust the placing of the left (least significant) variable(s).

```
{\fontfamily{phv}\selectfont\sansmath
\askmapiii{F}{xy{\raisebox{2ex}{\ \ z}}}{f}{11100111}{\% raise Z input
\color{red}\put(0.1,0.1){\dashbox{0.1}(0.8,1.8){}}%
\color{blue}\put(1.1,1.1){\dashbox{0.1}(1.8,0.8){}}%
\color{darkgreen}\put(2.1,0.1){\dashbox{0.1}(1.8,0.8){}}%
\color{orange}\put(0.15,1.15){\dashbox{0.1}(1.7,0.7){}}%
}}%
{\fontfamily{phv}\selectfont\sansmath
\askmapiii{F}{xyz}{f}{11100111}{\%
\put(0.5,1.0){\oval(0.8,1.8){}}%
\put(2.0,1.5){\oval(1.8,0.8){}}%
\put(2.5,0.5){\oval(0.8,0.8){}}% circle
\put(3.5,0.5){\oval(0.8,0.8)[1]}% these three create
\put(3.5,0.9){\line(1,0){0.6}}% a oval open to the left
\put(3.5,0.1){\line(1,0){0.6}}%
}}%
```

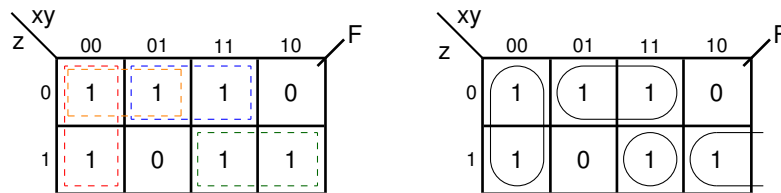

You can set the length of the squares, but please note that this will also affect the rendering of the text...

```
\askmapunitlength=1cm
\askmapiii{S}{ab}{}{1011}{f}
\askmapunitlength=0.88cm
\askmapiii{S}{ab}{}{1011}{f}
\askmapunitlength=0.8cm
\askmapiii{S}{ab}{}{1011}{f}
\askmapunitlength=0.5cm
\askmapiii{S}{ab}{}{1011}{f}
```

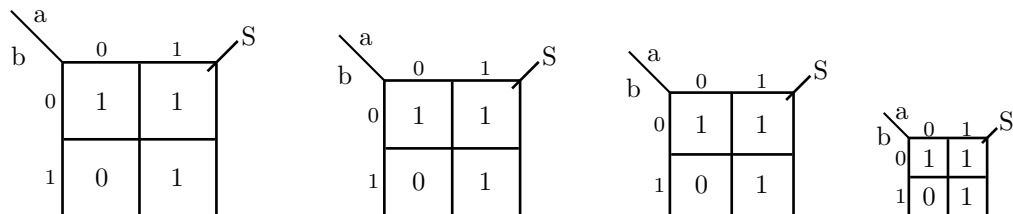

An example directly from the Karnaugh package:

```
\kvnoindex
```

```

\askmap{4}{f(a,b,c,d):$}{a$}{b$}{c$}{d$}%
{0110011001100110}%
{
\put(0,2){\oval(1.9,1.9)[r]}
\put(4,2){\oval(1.9,1.9)[l]}
\put(2,0){\oval(1.9,1.9)[t]}
\put(2,4){\oval(1.9,1.9)[b]}
}

```

$ab$	00	01	11	10	$f(a,b,c,d):$
00	0	0	0	0	
01	1	1	1	1	
11	0	0	0	0	
10	1	1	1	1	

but please note that the ovals do not cover the logic 1's in the Karnaugh map because the function values are placed in a different order.

One can use TikZ. Please note you have to set a default corner to (0,0), because TikZ will create a bounding box around the the `tikzpicture`:

A static hazard can be found by inspecting the Karnaugh map and see if a change of minterms will cross implicants:

```

\askmapiii{F}{xyz}{011100100}{
\begin{tikzpicture}[x=\askmapunitlength,y=\askmapunitlength]
\draw[draw=none,fill=none] (0,0) -- (0,0); % Set default corner
\draw[red] (0.1,0.1) rectangle (1.9,0.9);
\draw[blue] (1.1,1.1) rectangle (2.9,1.9);
\draw[purple,thick,->] (1.6,1.5) to[bend left] (1.6,0.5);
\end{tikzpicture}%
}

```

The function is  $F = \overline{x}z + y\overline{z}$ . But if the circuit is changing from minterm  $m_2$  to  $m_3$ , a static hazard will occur as can be seen by the arrow.

A static hazard can be found by inspecting the Karnaugh map and see if a change of minterms will cross implicants:

$xy$	00	01	11	10	$F$
0	0	1	1	0	
1	1	1	0	0	

The function is  $F = \overline{x}z + y\overline{z}$ . But if the circuit is changing from minterm  $m_2$  to  $m_3$ , a static hazard will occur as can be seen by the arrow.



## 9 Changelog

4-dec-2013 -- v0.1  
initial release

23-oct-2020 -- v0.2  
added option disablef  
added askmapi - a K-map for one variable  
added askmapiiialt - alternate (vertical) version of K-map III  
added formatting index size, contents size and bit combination size.  
added support for \kvindex and \nokvindex macros when kvmacros.tex is loaded  
added formatting for left-placed variables  
implemented a debug possibility  
implemented linelength of variable separator  
resolved an issue with multiple overfull \hbox'es  
added a section on creating covers  
added examples with Tikz

## 10 The source code

The source code is pretty straight forward. It uses a lot of picture primitives for drawing the maps. The package uses three macros for processing variable-length parameters, which were completely reused from the `kvmacros` package.

---

```
1 %%
2 %% askmaps.sty
3 %%
4 %% American Style K-maps (1, 2, 3, 4 and 5 variables)
5 %%
6 %% (c)2020 Jesse op den Brouw, <J.E.J.opdenBrouw@hhs.nl>
7 %%
8 %% LPPL LaTeX Public Project License
9 %%
10 %%
11 %% Original rel 0.1 : 2013-12-04
12 %% Update rel 0.2 : 2020-10-23
13 %% added option oldstylef
14 %% added option newstylef
15 %% added askmapi - a K-map for one variable
16 %% added askmapiiialt - alternate (vertical) version of K-map III
17 %% added formatting index size, contents size and bit combination size.
18 %% added support for \kvindex and \nokvindex macros when kvmacros.tex is
19 %% loaded
20 %% added formatting for left-placed variables
21 %% implemented a debug possibility
22 %% implemented linewidth of variable separator
23 %% resolved an issue with multiple overfull \hbox'es
24 %% added a section on creating covers
25 %% changed the use of \askmapindexsize et al. to include the size and
26 %% shape of the fonts used
27 %%
28 %%
29 \NeedsTeXFormat{LaTeX2e}[1994/06/01]
30 %% Version and date
31 \gdef\askmapsversion{0.2}
32 \gdef\askmapsdate{2020/10/23}
33 %
34 \ProvidesPackage{askmaps}[\askmapsdate\space Version \askmapsversion\space
35 LaTeX package for drawing American Style Karnaugh maps]
36
37 %% This package provides 1, 2, 3, 4 and 5 variable Karnaugh maps that can
38 %% be found in numerous american text books on digital design. Note
39 %% that it is possible to draw many different K-maps that are all
40 %% legitimate as long as a square (minterm) differs only in one
41 %% literal with its adjacent squares. There is an alternate form of the
42 %% 3 variable K-map available.
43 %% This package draws K-maps where the most significant input variables
44 %% are placed on top of the columns and the least significant variables
45 %% are placed left of the rows.
46
47 %% Packages needed
48 \RequirePackage{pict2e}
49
50 %% Get the only possible option
51 \newcommand{\askmap@usecapf}{\askmap@optfftrue}
52 \DeclareOption{disablef}{\renewcommand{\askmap@usecapf}{\askmap@optfffalse}}
53 \DeclareOption*{\PackageWarning{askmaps}{Unknown '\CurrentOption' in package
askmaps}}
54 \ProcessOptions\relax
55
56 %% For debugging purposes, currently draw rectangles around the maps
57 %% Use only for debugging purposes
```

```

58 \newif\ifaskmap@debug\askmap@debugfalse
59
60 %% The macros \askmapargumentstring, \askmapgetchar and \askmapgetonechar are
61 %% needed to process the variable-length parameters in \askmapxxx:
62 %% These routine politely reused from karnaugh package
63 \def\askmapargumentstring#1{\gdef\askmapdummystring{#1}\noexpand\end}}
64 \def\askmapgetchar{\expandafter\askmapgetonechar\askmapdummystring}
65 \def\askmapgetonechar#1#2\end{{#1}\gdef\askmapdummystring{#2\noexpand\end}}%
66
67 %% Dimension for length of one square
68 \newdimen\askmapunitlength
69 \askmapunitlength=10mm
70
71 %% The sizes (and shapes) of the text in the maps
72 \newcommand{\askmapindexsize}{\scriptsize\slshape}
73 \newcommand{\askmapcontentsize}{\normalsize}
74 \newcommand{\askmapbitcombinationsize}{\footnotesize}
75
76 %% Length of the line separating the input variables top-right and
77 %% middle-left
78 \newcommand{\askmapvarsep}{0.70}
79
80 %% Some use options
81 \newif\ifaskmap@opti% want indexes
82 \newif\ifaskmap@optf% want output function printed
83 \newif\ifaskmap@optb% want input variable bit combinations at columns and rows
84
85 %% Process user options
86 \def\askmap@processoptions#1{%
87   \askmap@optifalse\askmap@usecapf\askmap@optbtrue%
88   \@tfor\askmap@opt:=#1\do{%
89     \if i\askmap@opt\askmap@optittrue\fi%
90     \if I\askmap@opt\askmap@optifalse\fi%
91     \if f\askmap@opt\askmap@optftrue\fi%
92     \if F\askmap@opt\askmap@optffalse\fi%
93     \if b\askmap@opt\askmap@optbtrue\fi%
94     \if B\askmap@opt\askmap@optbfalse\fi%
95     \if c\askmap@opt\askmap@optittrue\askmap@optftrue\askmap@optbtrue\fi%
96     \if C\askmap@opt\askmap@optifalse\askmap@optffalse\askmap@optbfalse\fi%
97   }%
98 }%
99
100 %% Replacement for macros from karnaugh package
101 %% #1 = number of input variables
102 %% #2 = function output variable
103 %% #3 = function input variables
104 %% #4 = list of function values
105 %% #5 = user picture commands
106 \newcommand{\askmap}[5]{%
107 % Starred version or not
108 \@ifstar{\gdef\askmap@printoutputname{f}\askmap@askmap}{\gdef\askmap@printoutputname{F}\askmap@askmap}%
109 }
110 \newcommand{\askmap@askmap}[5]{%
111 \newcommand{\askmap}[5]{%
112 \def\askmap@printoutputname{f}
113 %% Check if the \kvcurrentindex is set to using indexes
114 \def\askmap@printindex{i}
115 \ifx\kvcurrentindex\undefined
116 \def\askmap@printindex{I}
117 \else
118 \ifx\kvcurrentindex\empty
119 \def\askmap@printindex{I}
120 \fi
121 \fi
122 %% Sort out the 'call' to the right macro

```

```

123 \ifcase#1\relax
124   \PackageWarning{askmaps}{Sorry, no K-maps with #1 variables supported by
125 package askmaps!}
126 \or
127   \askmapi{#2}{#3}{\askmap@printoutputname\askmap@printindex}{#4}{#5}%
128 \or
129   \askmapii{#2}{#3}{\askmap@printoutputname\askmap@printindex}{#4}{#5}%
130 \or
131   \askmapiii{#2}{#3}{\askmap@printoutputname\askmap@printindex}{#4}{#5}%
132 \or
133   \askmapiv{#2}{#3}{\askmap@printoutputname\askmap@printindex}{#4}{#5}%
134 \or
135   \askmapv{#2}{#3}{\askmap@printoutputname\askmap@printindex}{#4}{#5}%
136 \else
137   \PackageWarning{askmaps}{Sorry, no K-maps with #1 variables supported by
138 package askmaps!}
139 \fi
140 }%
141
142 %% #1= output function variable
143 %% #2= 1 input variable
144 %% #3= options list
145 %% #4= 2 function values
146 %% #5= user defined picture commands
147 \newcommand{\askmapi}[5]{%
148 {\unitlength\askmapunitlength%
149 \askmap@processoptions{#3}%
150 \ifaskmap@debug\fbxsep0pt\fbx{\else\fi%
151 \begin{picture}(4.4,2)(-1.2,0)%
152 \linethickness{1pt}%
153 \put(0,0){\framebox(2,1){}}%
154 \put(1,0){\line(0,1){1}}%
155 \ifaskmap@optf%
156 \put(2.35,1.25){\askmapcontentsize#1}%
157 \put(1.9,0.9){\line(1,1){0.4}}%
158 \fi%
159 \askmapargumentstring{#2}%
160 \put(-0.4,1.55){\askmapcontentsize\askmapgetchar}%
161 \ifaskmap@opti%
162 \put(0.01,0.03){\askmapindexsize 0}%
163 \put(1.03,0.03){\askmapindexsize 1}%
164 \fi%
165 \ifaskmap@optb%
166 \put(0.5,1.1){\makebox(0,0)[b]{\askmapbitcombinationsize 0}}%
167 \put(1.5,1.1){\makebox(0,0)[b]{\askmapbitcombinationsize 1}}%
168 \fi%
169 \askmapargumentstring{#4}%
170 \put(0.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
171 \put(1.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
172 \thicklines%
173 \put(0,1){\line(-1,1){\askmapvarsep}}%
174 \thinlines%
175 #5%
176 \end{picture}}%
177 \ifaskmap@debug\else\fi%
178 }%
179 }% end \askmapi
180
181 %% #1= output function variable
182 %% #2= 2 input variables
183 %% #3= options list
184 %% #4= 4 function values
185 %% #5= user defined picture commands
186 \newcommand{\askmapii}[5]{%
187 {\unitlength\askmapunitlength%
188 \askmap@processoptions{#3}%

```

```

189 \ifaskmap@debug\fbboxsep0pt\fbbox{\else\fi%
190 \begin{picture}(4.4,3)(-1.2,0)%
191 \linethickness{1pt}%
192 \put(0,0){\framebox(2,2){}}%
193 \put(1,0){\line(0,1){2}}%
194 \put(0,1){\line(1,0){2}}%
195 \ifaskmap@optf%
196 \put(2.35,2.25){\askmapcontentsize#1}%
197 \put(1.9,1.9){\line(1,1){0.4}}%
198 \fi%
199 \askmapargumentstring{#2}%
200 \put(-0.4,2.55){\askmapcontentsize\askmapgetchar}%
201 %\put(-0.9,2.1){\askmapcontentsize\askmapgetchar}%
202 %\put(-1.0,1.9){\framebox(0.5,0.5)[r]{\askmapcontentsize\askmapgetchar}}%
203 \put(-0.5,2.1){\makebox(0.0,0.0)[r]{\askmapcontentsize\askmapgetchar\askmapgetchar}}%
204 %\put(-0.9,2.1){\makebox(0.5,0){\askmapcontentsize\askmapgetchar}}%
205 \ifaskmap@opti%
206 \put(0.01,1.05){\askmapindexsize 0}% a little bit to the edge because
207 \put(0.01,0.03){\askmapindexsize 1}% the edge line is thick
208 \put(1.03,1.05){\askmapindexsize 2}%
209 \put(1.03,0.03){\askmapindexsize 3}%
210 \fi%
211 \ifaskmap@optb%
212 \put(-0.6,1.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 0}}%
213 \put(-0.6,0.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 1}}%
214 \put(0.5,2.1){\makebox(0,0)[b]{\askmapbitcombinationsize 0}}%
215 \put(1.5,2.1){\makebox(0,0)[b]{\askmapbitcombinationsize 1}}%
216 \fi%
217 \askmapargumentstring{#4}%
218 \put(0.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
219 \put(0.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
220 \put(1.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
221 \put(1.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
222 \thicklines%
223 \put(0,2){\line(-1,1){\askmapvarsep}}%
224 \thinlines%
225 #5%
226 \end{picture}%
227 \ifaskmap@debug\else\fi%
228 }% end \askmapii
229 }
230
231 %% #1= output function variable
232 %% #2= 3 input variables
233 %% #3= options list
234 %% #4= 8 function values
235 %% #5= user defined picture commands
236 \newcommand{\askmapiii}[5]{%
237 {\unitlength\askmapunitlength%
238 \askmap@processoptions{#3}%
239 \ifaskmap@debug\fbboxsep0pt\fbbox{\else\fi%
240 \begin{picture}(6.4,3)(-1.2,0)%
241 \linethickness{1pt}%
242 \put(0,0){\framebox(4,2){}}%
243 \multiput(1,0)(1,0){3}{\line(0,1){2}}%
244 \put(0,1){\line(1,0){4}}%
245 \ifaskmap@optf%
246 \put(4.35,2.25){\askmapcontentsize#1}%
247 \put(3.9,1.9){\line(1,1){0.4}}%
248 \fi%
249 \askmapargumentstring{#2}%
250 \put(-0.4,2.55){\askmapcontentsize\askmapgetchar\askmapgetchar}%
251 %\put(-0.9,2.1){\framebox(0.5,0.5)[rt]{\askmapcontentsize\askmapgetchar}}%
252 %\put(-1.0,1.9){\framebox(0.5,0.5)[rt]{\askmapcontentsize\askmapgetchar}}%
253 %\put(-1.0,1.9){\framebox(0.5,0.5)[r]{\askmapcontentsize\askmapgetchar}}%

```

```

254 %\put (-0.9,2.1){\askmapcontentsize\askmapgetchar}%
255 %\put (-0.9,2.1){\makebox(0.5,0){\askmapcontentsize\askmapgetchar}}%
256 \put (-0.5,2.1){\makebox(0.0,0.0)[r]{\askmapcontentsize\askmapgetchar\
askmapgetchar}}%
257 %\put (-1.0,1.9){\makebox(0.5,0.45)[rt]{\askmapcontentsize\askmapgetchar}}%
258 \ifaskmap@opti%
259 \put (0.01,1.05){\askmapindexsize 0}%
260 \put (0.01,0.03){\askmapindexsize 1}%
261 \put (1.03,1.05){\askmapindexsize 2}%
262 \put (1.03,0.03){\askmapindexsize 3}%
263 \put (3.03,1.05){\askmapindexsize 4}%
264 \put (3.03,0.03){\askmapindexsize 5}%
265 \put (2.03,1.05){\askmapindexsize 6}%
266 \put (2.03,0.03){\askmapindexsize 7}%
267 \fi%
268 \askmapargumentstring{#4}%
269 \put (0.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
270 \put (0.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
271 \put (1.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
272 \put (1.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
273 \put (3.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
274 \put (3.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
275 \put (2.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
276 \put (2.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
277 \ifaskmap@optb%
278 \put (-0.6,1.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 0}}%
279 \put (-0.6,0.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 1}}%
280 \put (0.5,2.1){\makebox(0,0)[b]{\askmapbitcombinationsize 00}}%
281 \put (1.5,2.1){\makebox(0,0)[b]{\askmapbitcombinationsize 01}}%
282 \put (2.5,2.1){\makebox(0,0)[b]{\askmapbitcombinationsize 11}}%
283 \put (3.5,2.1){\makebox(0,0)[b]{\askmapbitcombinationsize 10}}%
284 \fi%
285 \thicklines%
286 \put (0,2){\line(-1,1){\askmapvarsep}}%
287 \thinlines%
288 #5%
289 \end{picture}%
290 \ifaskmap@debug\else\fi%
291}%
292}% end \askmapiii
293
294 %% #1= output function variable
295 %% #2= 4 input variables
296 %% #3= options list
297 %% #4= 16 function values
298 %% #5= user defined picture commands
299 \newcommand{\askmapiiialt}[5]{%
300 {\unitlength\askmapunitlength%
301 \askmap@processoptions{#3}%
302 \ifaskmap@debug\fbboxsep0pt\fbbox{\else\fi%
303 \begin{picture}(4.4,5)(-1.2,0)%
304 \linethickness{1pt}%
305 \put (0,0){\framebox(2,4){}}%
306 \put (1,0){\line(0,1){4}}%
307 \multiput (0,1)(0,1){3}{\line(1,0){2}}%
308 \ifaskmap@optf%
309 \put (2.35,4.25){\askmapcontentsize#1}%
310 \put (1.9,3.9){\line(1,1){0.4}}%
311 \fi%
312 \askmapargumentstring{#2}%
313 \put (-0.4,4.55){\askmapcontentsize\askmapgetchar}%
314 %\put (-1.0,4.1){\framebox(0.5,0){\askmapcontentsize\askmapgetchar\askmapgetchar
}}%
315 %\put (-1.0,3.9){\framebox(0.5,0.5)[r]{\askmapcontentsize\askmapgetchar\
askmapgetchar}}%
316 \put (-0.5,4.1){\makebox(0.0,0.0)[r]{\askmapcontentsize\askmapgetchar\

```

```

askmapgetchar}}%
317 %\put (-0.9,4.1){\makebox(0.5,0){\askmapcontentsize\askmapgetchar\askmapgetchar
}}%
318 \ifaskmap@opti%
319 \put(0.01,3.05){\askmapindexsize 0}%
320 \put(0.01,2.05){\askmapindexsize 1}%
321 \put(0.01,0.03){\askmapindexsize 2}%
322 \put(0.01,1.05){\askmapindexsize 3}%
323 \put(1.03,3.05){\askmapindexsize 4}%
324 \put(1.03,2.05){\askmapindexsize 5}%
325 \put(1.03,0.03){\askmapindexsize 6}%
326 \put(1.03,1.05){\askmapindexsize 7}%
327 \fi%
328 \askmapargumentstring{#4}%
329 \put(0.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
330 \put(0.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
331 \put(0.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
332 \put(0.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
333 \put(1.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
334 \put(1.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
335 \put(1.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
336 \put(1.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
337 \ifaskmap@optb%
338 \put(-0.6,3.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 00}}%
339 \put(-0.6,2.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 01}}%
340 \put(-0.6,1.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 11}}%
341 \put(-0.6,0.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 10}}%
342 \put(0.5,4.1){\makebox(0,0)[b]{\askmapbitcombinationsize 0}}%
343 \put(1.5,4.1){\makebox(0,0)[b]{\askmapbitcombinationsize 1}}%
344 \fi
345 \thicklines%
346 \put(0,4){\line(-1,1){\askmapvarsep}}%
347 \thinlines%
348 #5%
349 \end{picture}%
350 \ifaskmap@debug\else\fi%
351 }%
352 }% end \askmapiiialt
353
354 %% #1= output function variable
355 %% #2= 4 input variables
356 %% #3= options list
357 %% #4= 16 function values
358 %% #5= user defined picture commands
359 \newcommand{\askmapiv}[5]{%
360 {\unitlength\askmapunitlength%
361 \askmap@processoptions{#3}%
362 \ifaskmap@debug\fbboxsep0pt\fbbox{\else\fi%
363 \begin{picture}(6.4,5)(-1.2,0)%
364 \linethickness{1pt}%
365 \put(0,0){\framebox(4,4){}}%
366 \multiput(1,0)(1,0){3}{\line(0,1){4}}%
367 \multiput(0,1)(0,1){3}{\line(1,0){4}}%
368 \ifaskmap@optf%
369 \put(4.35,4.25){\askmapcontentsize#1}%
370 \put(3.9,3.9){\line(1,1){0.4}}%
371 \fi%
372 \askmapargumentstring{#2}%
373 \put(-0.4,4.55){\askmapcontentsize\askmapgetchar\askmapgetchar}%
374 %\put(-1.0,4.1){\framebox(0.5,0){\askmapcontentsize\askmapgetchar\askmapgetchar
}}%
375 \put(-0.5,4.1){\makebox(0.0,0.0)[r]{\askmapcontentsize\askmapgetchar\
askmapgetchar}}%
376 %\put(-1.0,4.1){\makebox(0.5,0){\askmapcontentsize\askmapgetchar\askmapgetchar
}}%
377 \ifaskmap@opti%

```

```

378 \put(0.01,3.05){\askmapindexsize 0}%
379 \put(0.01,2.05){\askmapindexsize 1}%
380 \put(0.01,0.03){\askmapindexsize 2}%
381 \put(0.01,1.05){\askmapindexsize 3}%
382 \put(1.03,3.05){\askmapindexsize 4}%
383 \put(1.03,2.05){\askmapindexsize 5}%
384 \put(1.03,0.03){\askmapindexsize 6}%
385 \put(1.03,1.05){\askmapindexsize 7}%
386 \put(3.03,3.05){\askmapindexsize 8}%
387 \put(3.03,2.05){\askmapindexsize 9}%
388 \put(3.03,0.03){\askmapindexsize 10}%
389 \put(3.03,1.05){\askmapindexsize 11}%
390 \put(2.03,3.05){\askmapindexsize 12}%
391 \put(2.03,2.05){\askmapindexsize 13}%
392 \put(2.03,0.03){\askmapindexsize 14}%
393 \put(2.03,1.05){\askmapindexsize 15}%
394 \fi%
395 \askmapargumentstring{#4}%
396 \put(0.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
397 \put(0.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
398 \put(0.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
399 \put(0.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
400 \put(1.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
401 \put(1.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
402 \put(1.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
403 \put(1.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
404 \put(3.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
405 \put(3.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
406 \put(3.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
407 \put(3.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
408 \put(2.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
409 \put(2.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
410 \put(2.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
411 \put(2.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
412 \ifaskmap@optb%
413 \put(-0.6,3.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 00}}%
414 \put(-0.6,2.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 01}}%
415 \put(-0.6,1.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 11}}%
416 \put(-0.6,0.5){\makebox(0.5,0)[r]{\askmapbitcombinationsize 10}}%
417 \put(0.5,4.1){\makebox(0,0)[b]{\askmapbitcombinationsize 00}}%
418 \put(1.5,4.1){\makebox(0,0)[b]{\askmapbitcombinationsize 01}}%
419 \put(2.5,4.1){\makebox(0,0)[b]{\askmapbitcombinationsize 11}}%
420 \put(3.5,4.1){\makebox(0,0)[b]{\askmapbitcombinationsize 10}}%
421 \fi
422 \thicklines%
423 \put(0,4){\line(-1,1){\askmapvarsep}}%
424 \thinlines%
425 #5%
426 \end{picture}%
427 \ifaskmap@debug\else\fi%
428 }%
429 }% end \askmapiv
430
431 %% #1= output function variable
432 %% #2= 5 input variables
433 %% #3= options list
434 %% #4= 32 function values
435 %% #5= user defined picture commands
436 \newcommand{\askmapv}[5]{%
437 {\unitlength\askmapunitlength%
438 \askmap@processoptions{#3}%
439 \ifaskmap@debug\fbboxsep0pt\fbbox{\else\fi%
440 \begin{picture}(10.4,5)(-1.2,0)%
441 \linethickness{1pt}%
442 \put(0,0){\framebox(8,4){}}%
443 \multiput(1,0)(1,0){7}{\line(0,1){4}}%

```



```

444 \multiput (0,1) (0,1) {3}{\line(1,0){8}}%
445 \ifaskmap@optf%
446 \put (8.35,4.25){\askmapcontentsize#1}%
447 \put (7.9,3.9){\line(1,1){0.4}}%
448 \fi%
449 \askmapargumentstring{#2}%
450 \put (-0.4,4.55){\askmapcontentsize\askmapgetchar\askmapgetchar\askmapgetchar}%
451 %\put (-1.0,3.9){\framebox(0.5,0.5)[r]{\askmapcontentsize\askmapgetchar\askmapgetchar}}%
452 %\put (-1.0,4.1){\framebox(0.5,0)[r]{\askmapcontentsize\askmapgetchar\askmapgetchar}}%
453 \put (-0.5,4.1){\makebox(0.0,0.0)[r]{\askmapcontentsize\askmapgetchar\askmapgetchar}}%
454 %\put (-1.0,4.1){\makebox(0.5,0){\askmapcontentsize\askmapgetchar\askmapgetchar}}%
455 \ifaskmap@opti%
456 \put (0.01,3.05){\askmapindexsize 0}%
457 \put (0.01,2.05){\askmapindexsize 1}%
458 \put (0.01,0.03){\askmapindexsize 2}%
459 \put (0.01,1.05){\askmapindexsize 3}%
460 \put (1.03,3.05){\askmapindexsize 4}%
461 \put (1.03,2.05){\askmapindexsize 5}%
462 \put (1.03,0.03){\askmapindexsize 6}%
463 \put (1.03,1.05){\askmapindexsize 7}%
464 \put (3.03,3.05){\askmapindexsize 8}%
465 \put (3.03,2.05){\askmapindexsize 9}%
466 \put (3.03,0.03){\askmapindexsize 10}%
467 \put (3.03,1.05){\askmapindexsize 11}%
468 \put (2.03,3.05){\askmapindexsize 12}%
469 \put (2.03,2.05){\askmapindexsize 13}%
470 \put (2.03,0.03){\askmapindexsize 14}%
471 \put (2.03,1.05){\askmapindexsize 15}%
472 \put (7.03,3.05){\askmapindexsize 16}%
473 \put (7.03,2.05){\askmapindexsize 17}%
474 \put (7.03,0.03){\askmapindexsize 18}%
475 \put (7.03,1.05){\askmapindexsize 19}%
476 \put (6.03,3.05){\askmapindexsize 20}%
477 \put (6.03,2.05){\askmapindexsize 21}%
478 \put (6.03,0.03){\askmapindexsize 22}%
479 \put (6.03,1.05){\askmapindexsize 23}%
480 \put (4.03,3.05){\askmapindexsize 24}%
481 \put (4.03,2.05){\askmapindexsize 25}%
482 \put (4.03,0.03){\askmapindexsize 26}%
483 \put (4.03,1.05){\askmapindexsize 27}%
484 \put (5.03,3.05){\askmapindexsize 28}%
485 \put (5.03,2.05){\askmapindexsize 29}%
486 \put (5.03,0.03){\askmapindexsize 30}%
487 \put (5.03,1.05){\askmapindexsize 31}%
488 \fi%
489 \askmapargumentstring{#4}%
490 \put (0.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
491 \put (0.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
492 \put (0.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
493 \put (0.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
494 \put (1.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
495 \put (1.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
496 \put (1.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
497 \put (1.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
498 \put (3.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
499 \put (3.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
500 \put (3.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
501 \put (3.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
502 \put (2.5,3.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
503 \put (2.5,2.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
504 \put (2.5,0.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%
505 \put (2.5,1.5){\makebox(0,0){\askmapcontentsize\askmapgetchar}}%

```

```

506 \put (7.5, 3.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
507 \put (7.5, 2.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
508 \put (7.5, 0.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
509 \put (7.5, 1.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
510 \put (6.5, 3.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
511 \put (6.5, 2.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
512 \put (6.5, 0.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
513 \put (6.5, 1.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
514 \put (4.5, 3.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
515 \put (4.5, 2.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
516 \put (4.5, 0.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
517 \put (4.5, 1.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
518 \put (5.5, 3.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
519 \put (5.5, 2.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
520 \put (5.5, 0.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
521 \put (5.5, 1.5) {\makebox (0, 0) {\askmapcontentsize\askmapgetchar}}%
522 \ifaskmap@optb%
523 \put (-0.6, 3.5) {\makebox (0.5, 0) [r] {\askmapbitcombinationsize 00}}%
524 \put (-0.6, 2.5) {\makebox (0.5, 0) [r] {\askmapbitcombinationsize 01}}%
525 \put (-0.6, 1.5) {\makebox (0.5, 0) [r] {\askmapbitcombinationsize 11}}%
526 \put (-0.6, 0.5) {\makebox (0.5, 0) [r] {\askmapbitcombinationsize 10}}%
527 \put (0.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 000}}%
528 \put (1.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 001}}%
529 \put (2.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 011}}%
530 \put (3.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 010}}%
531 \put (4.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 110}}%
532 \put (5.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 111}}%
533 \put (6.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 101}}%
534 \put (7.5, 4.1) {\makebox (0, 0) [b] {\askmapbitcombinationsize 100}}%
535 \fi%
536 \thicklines%
537 \put (0, 4) {\line (-1, 1) {\askmapvarsep}}%
538 \thinlines%
539 #5%
540 \end{picture}%
541 \ifaskmap@debug\else\fi%
542 }%
543 }% end \askmapv
544
545 \endinput
546 %%
547 %% End of file 'askmaps.sty'.

```

---

*askmaps.sty*