
Physical Data Diagram (Sprint 8)

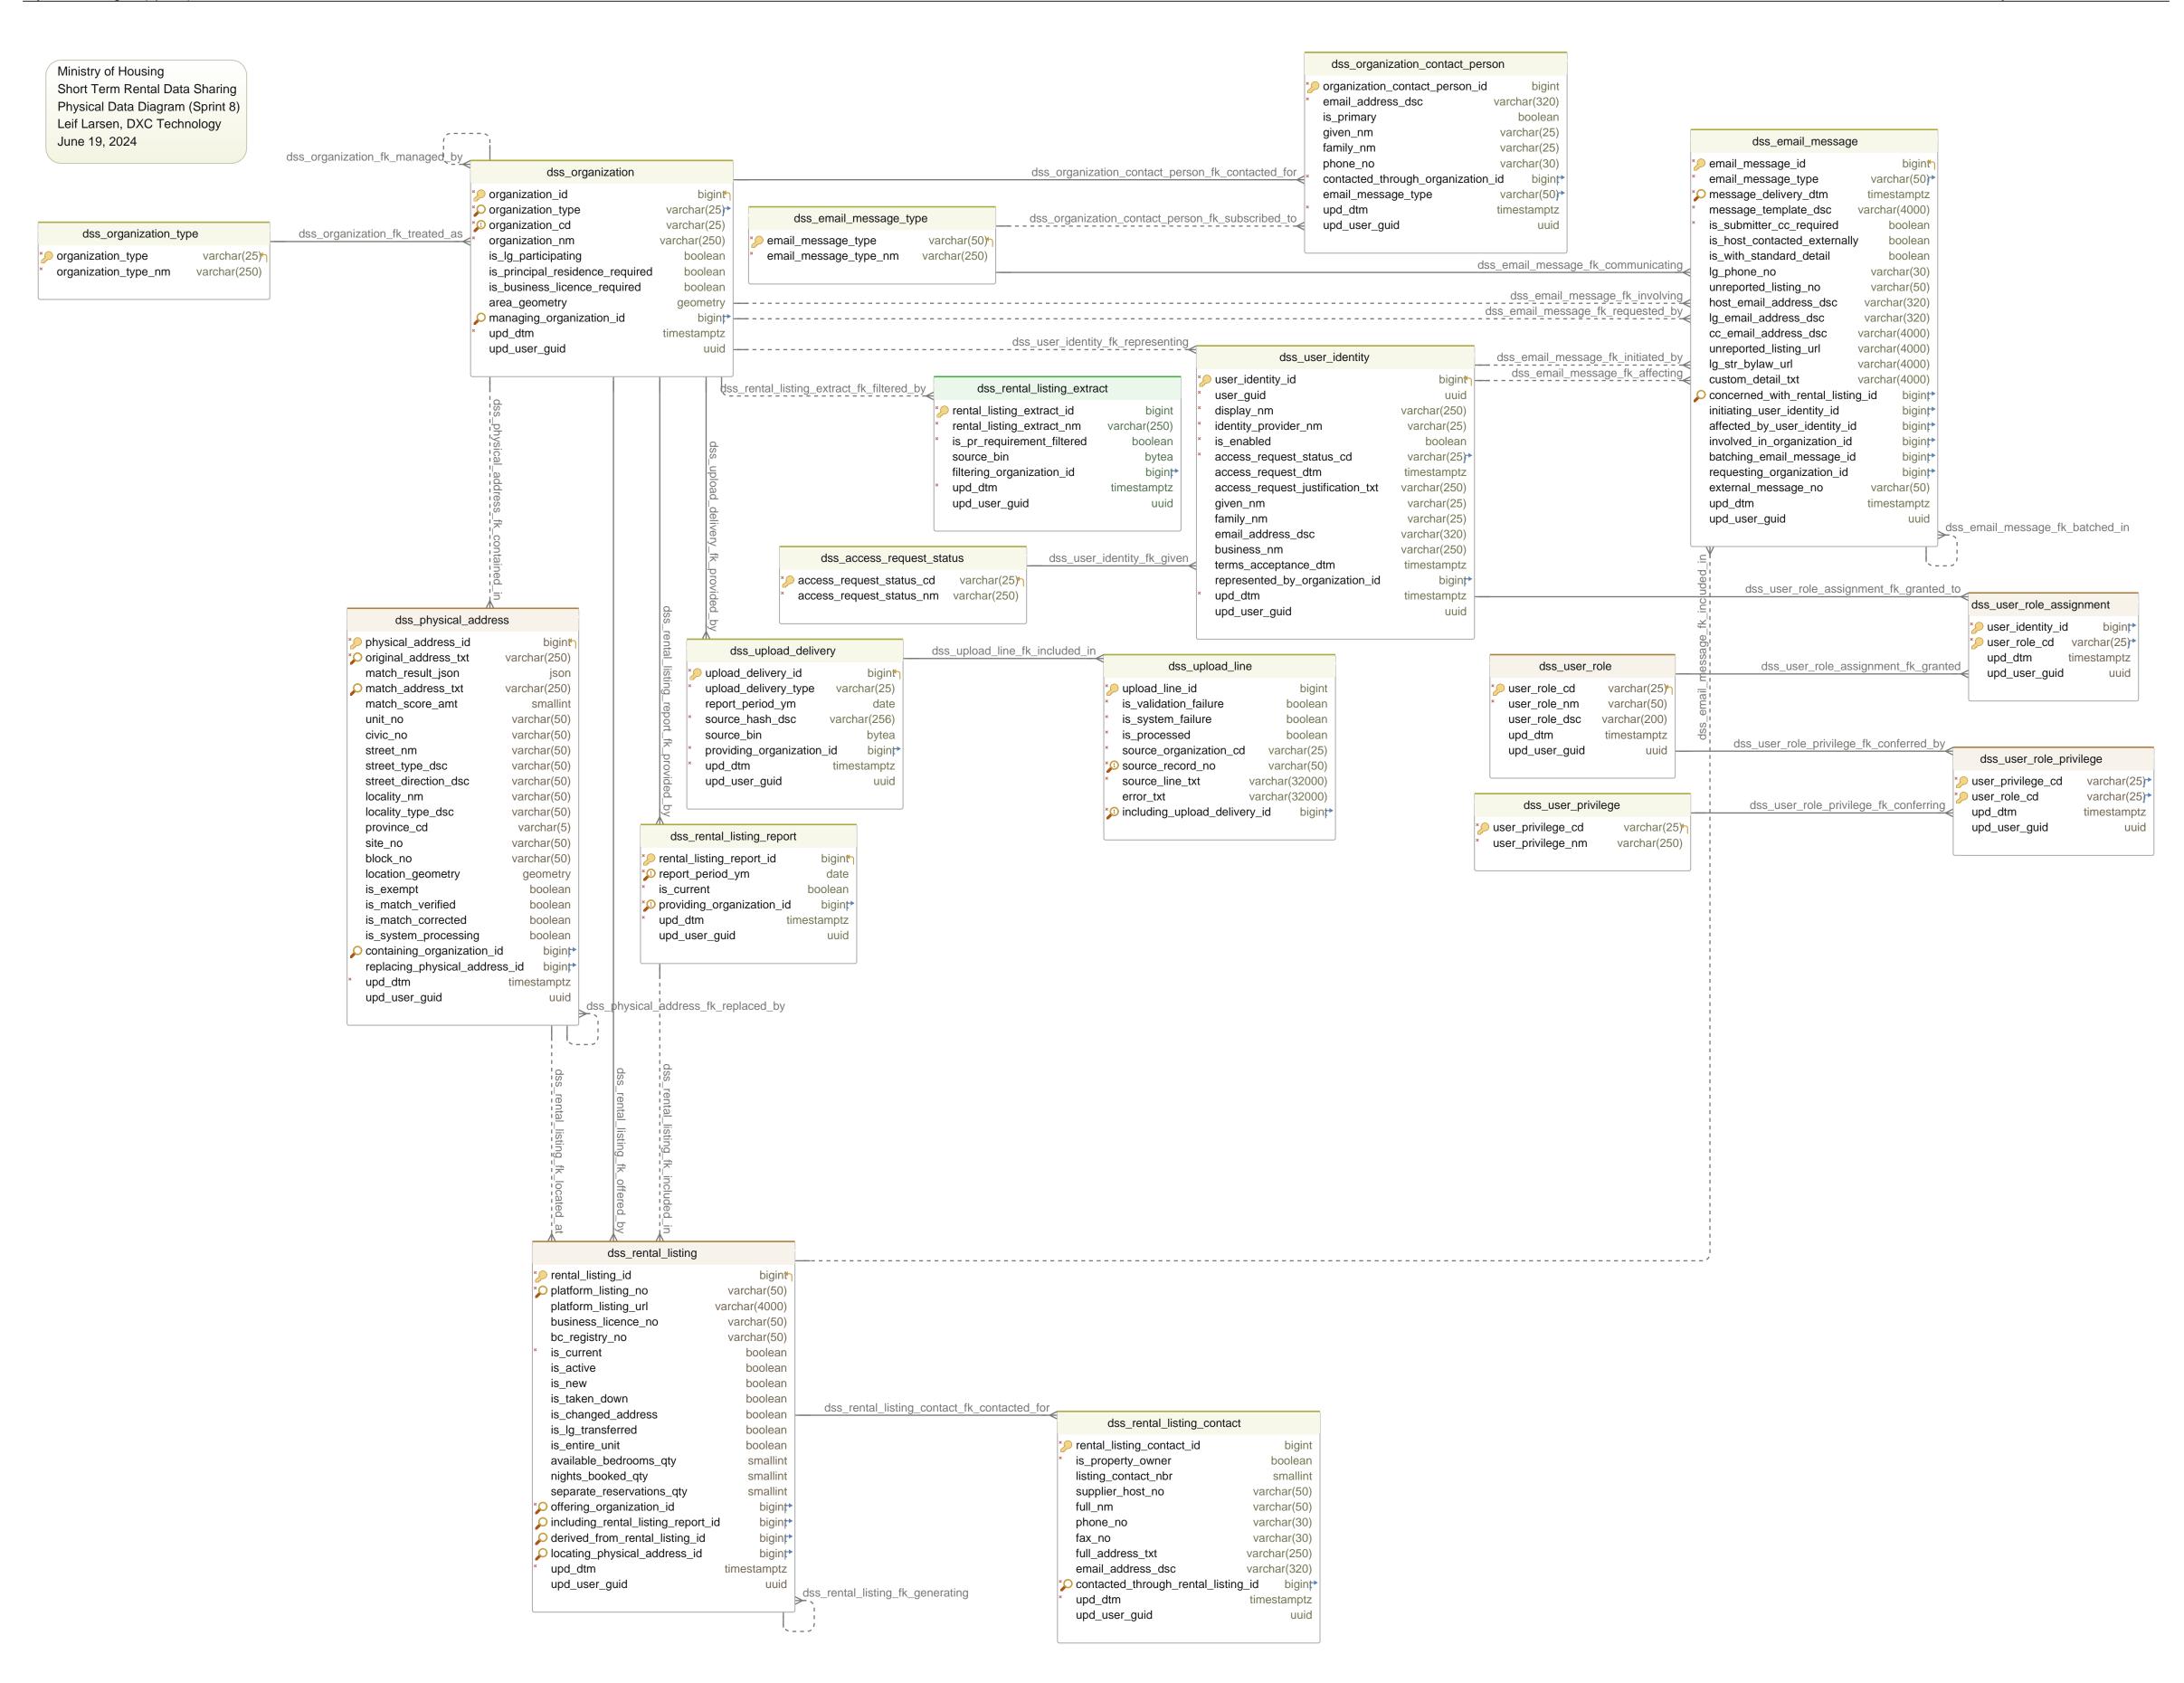

Physical Data Diagram (Sprint 8)

Table	Table dss_access_request_status				
ldx	Name	Data Type	Description		
A pote	A potential status for a user access request (e.g. Requested, Approved, or Denied)				
* Pk	access_request_status_cd	varchar(25)	System-consistent code for the request status		
*	access_request_status_nm	varchar(250)	Business term for the request status		
Index	es				
Туре	Name	On	Description		
Pk	dss_access_request_status_pk	access_request_status_cd			

	e dss_email_message		
dx	Name	Data Type	Description
	ssage that is sent to one or more re-	•	
' Pk	email_message_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
•	email_message_type	varchar(50)	Foreign key
ldx	message_delivery_dtm	timestamptz	A timestamp indicating when the message delivery was initiated
	message_template_dsc	varchar(4000)	The full text or template for the message that is sent
ŧ	is_submitter_cc_required	boolean	Indicates whether the user initiating the message should receive a copy of the email
	is_host_contacted_externally	boolean	Indicates whether the the property host has already been contacted by external means
	is_with_standard_detail	boolean	Indicates whether message body should include text a block of detatext that is standard for the message type
	lg_phone_no	varchar(30)	A phone number associated with a Local Government contact
	unreported_listing_no	varchar(50)	The platform issued identification number for the listing (if not included in a rental listing report)
	host_email_address_dsc	varchar(320)	E-mail address of a short term rental host (directly entered by the user as a message recipient)
	lg_email_address_dsc	varchar(320)	E-mail address of a local government contact (directly entered by the user as a message recipient)
	cc_email_address_dsc	varchar(4000)	E-mail address of a secondary message recipient (directly entered the user)
	unreported_listing_url	varchar(4000)	User-provided URL for a short-term rental platform listing that is the subject of the message
	lg_str_bylaw_url	varchar(4000)	User-provided URL for a local government bylaw that is the subject the message
	custom_detail_txt	varchar(4000)	Free form text that should be included in the message body
dx	concerned_with_rental_listing_id	bigint	Foreign key
	initiating_user_identity_id	bigint	Foreign key
	affected_by_user_identity_id	bigint	Foreign key
	involved_in_organization_id	bigint	Foreign key
	batching_email_message_id	bigint	Foreign key
	requesting_organization_id	bigint	Foreign key
	external_message_no	varchar(50)	External identifier for tracking the message delivery progress
	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
ndex	es		
Гуре	Name	On	Description
Pk	dss_email_message_pk	email_message_id	
	dss_email_message_i1	concerned_with_rental_list ing_id, message_delivery_dtm	
		message_uelivery_utm	

Table dss_email_message

Foreign Keys

Туре	Name	On	Description
	dss_email_message_fk_initiated initiating_user_identity_id) ref ds user_identity_id)		
	dss_email_message_fk_affectinaffected_by_user_identity_id) reuser_identity_id)		
	dss_email_message_fk_involvin involved_in_organization_id) ref organization_id)	g(dss_organization(
	dss_email_message_fk_commu email_message_type) ref dss_e email_message_type)		
	dss_email_message_fk_batched batching_email_message_id) re email_message_id)		
	dss_email_message_fk_request requesting_organization_id) ref organization_id)		
	dss_email_message_fk_includer concerned_with_rental_listing_id rental_listing_id)		

Triggers

Name	Definition	Description	
dss_email_message_br_iu_ti	r		

 $\label{local_control_control_control} CREATE\ TRIGGER\ dss_email_message_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_email_message\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()$

Table	Table dss_email_message_type			
ldx	Name	Data Type	Description	
The ty	ype or purpose of a system generat ss Granted Notification, Access Der	ed message (e.g. Notice of Tiled Notification)	Fakedown, Takedown Request, Delisting Warning, Delisting Request,	
* Pk	email_message_type	varchar(50)	System-consistent code for the type or purpose of the message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)	
*	email_message_type_nm	varchar(250)	Business term for the type or purpose of the message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)	
Indexes				
Туре	Name	On	Description	
Pk	dss_email_message_type_pk	email_message_type		

Table	Table dss_organization			
ldx	Name	Data Type	Description	
A priv	rate company or governing body co	mponent that plays a role in	short term rental reporting or enforcement	
* Pk	organization_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
* ldx	organization_type	varchar(25)	Foreign key	
* Unq	organization_cd	varchar(25)	An immutable system code that identifies the organization (e.g. CEU, AIRBNB)	
*	organization_nm	varchar(250)	A human-readable name that identifies the organization (e.g. Corporate Enforecement Unit, City of Victoria)	
	is_lg_participating	boolean	Indicates whether a LOCAL GOVERNMENT ORGANIZATION participates in Short Term Rental Data Sharing	
	is_principal_residence_required	boolean	Indicates whether a LOCAL GOVERNMENT SUBDIVISION is subject to Provincial Principal Residence Short Term Rental restrictions	

			a business licence for Short Term Rental operation
	area_geometry	geometry	the multipolygon shape identifying the boundaries of a local government subdivision
ldx	managing_organization_id	bigint	Self-referential hierarchical foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Туре	Name	On	Description
Pk	dss_organization_pk	organization_id	
	dss_organization_i1	organization_type	
Unq	dss_organization_uk	organization_cd	
	dss_organization_i2	managing_organization_id	
Foreig	gn Keys		
Туре	Name	On	Description
	dss_organization_fk_managed_by managing_organization_id) ref ds organization_id)	r(s_organization(
	dss_organization_fk_treated_as (dss_organization_type (organizat		
Trigge	ers		

Indicates whether a LOCAL GOVERNMENT SUBDIVISION requires

Table dss_organization

Name

dss_organization_br_iu_tr

is_business_licence_required

boolean

Definition

 $\label{local_control_control} \text{CREATE TRIGGER dss_organization_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_organization FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns() \\$

Description

Table	Table dss_organization_contact_person				
ldx	Name	Data Type	Description		
A pers	A person who has been identified as a notable contact for a particular organization				
* Pk	organization_contact_person_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	email_address_dsc	varchar(320)	E-mail address given for the contact by the organization		
	is_primary	boolean	Indicates whether the contact should receive all communications directed at the organization		
	given_nm	varchar(25)	A name given to a person so that they can easily be identified among their family members (in some cultures, this is often the first name)		
	family_nm	varchar(25)	A name that is often shared amongst members of the same family (commonly known as a surname within some cultures)		
	phone_no	varchar(30)	Phone number given for the contact by the organization (contains only digits)		
*	contacted_through_organization_i	bigint	Foreign key		
	email_message_type	varchar(50)	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Indexe	es				
Туре	Name	On	Description		
Pk	dss_organization_contact_person _pk	organization_contact_pers on_id			
Foreig	ın Keys				
Туре	Name	On	Description		

Table dss_organization_contact_person

dss_organization_contact_person_fk_contacted_for (
contacted_through_organization_id) ref dss_organization (
organization_id)

dss_organization_contact_person_fk_subscribed_to (email_message_type) ref dss_email_message_type (email_message_type)

Triggers

Name	Definition	Description	
dss_organization_contac _br_iu_tr	ct_person		

 ${\tt CREATE\ TRIGGER\ dss_organization_contact_person_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_organization_contact_person\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()}$

Tabl	Table dss_organization_type				
ldx	Name	Data Type	Description		
A leve	el of government or business catego	ory			
* Pk	organization_type	varchar(25)	System-consistent code for a level of government or business category		
*	organization_type_nm	varchar(250)	Business term for a level of government or business category		
Index	Indexes				
Туре	Name	On	Description		
Pk	dss_organization_type_pk	organization_type			

Tabl	Fable dss_physical_address				
ldx	Name	Data Type	Description		
A pro	perty address that includes any ver	ifiable BC attributes	·		
* Pk	physical_address_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
* ldx	original_address_txt	varchar(250)	The source-provided address of a short-term rental offering		
	match_result_json	json	Full JSON result of the source address matching attempt		
ldx	match_address_txt	varchar(250)	The sanitized physical address (returned as fullAddress) that has been derived from the original		
	match_score_amt	smallint	The relative score returned from the address matching attempt		
	unit_no	varchar(50)	The unitNumber (suite) returned by the address match (e.g. 100)		
	civic_no	varchar(50)	The civicNumber (building number) returned by the address match (e.g. 1285)		
	street_nm	varchar(50)	The streetName returned by the address match (e.g. Pender)		
	street_type_dsc	varchar(50)	The streetType returned by the address match (e.g. St or Street)		
	street_direction_dsc	varchar(50)	The streetDirection returned by the address match (e.g. W or West)		
	locality_nm	varchar(50)	The localityName (community) returned by the address match (e.g. Vancouver)		
	locality_type_dsc	varchar(50)	The localityType returned by the address match (e.g. City)		
	province_cd	varchar(5)	The provinceCode returned by the address match		
	site_no	varchar(50)	The siteID returned by the address match		
	block_no	varchar(50)	The blockID returned by the address match		
	location_geometry	geometry	The computed location point of the matched address		
	is_exempt	boolean	Indicates whether the address has been identified as exempt from Short Term Rental regulations		
	is_match_verified	boolean	Indicates whether the matched address has been verified as correct for the listing by the responsible authorities		
	is_match_corrected	boolean	Indicates whether the matched address has been manually changed to one that is verified as correct for the listing		
	is_system_processing	boolean	Indicates whether the physical address is being processed by the system and may not yet be in its final form		

Table	e dss_physical_address		
ldx	containing_organization_id	bigint	Foreign key
	replacing_physical_address_id	bigint	Foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Indexe	es		
Туре	Name	On	Description
Pk	dss_physical_address_pk	physical_address_id	
	dss_physical_address_i1	original_address_txt	
	dss_physical_address_i2	match_address_txt	
	dss_physical_address_i3	containing_organization_id	
Foreig	ın Keys		
Туре	Name	On	Description
	dss_physical_address_fk_contain containing_organization_id) ref ds organization_id)	ed_in(ss_organization(
	dss_physical_address_fk_replace replacing_physical_address_id) r physical_address_id)	d_by (ef dss_physical_address (
Trigge	ers		
	Name	Definition	Description
	dss_physical_address_br_iu_tr		
CREATE TRIGGER dss_physical_address_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_physical_address FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()			

Tabl	e dss_rental_listing		
ldx	Name	Data Type	Description
A ren	tal listing snapshot that is either rele	evant to a specific monthly re	eport, or is the current, master version
* Pk	rental_listing_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
* ldx	platform_listing_no	varchar(50)	The platform issued identification number for the listing
	platform_listing_url	varchar(4000)	URL for the short-term rental platform listing
	business_licence_no	varchar(50)	The local government issued licence number that applies to the rental offering
	bc_registry_no	varchar(50)	The Short Term Registry issued permit number
*	is_current	boolean	Indicates whether the RENTAL LISTING VERSION is a CURRENT RENTAL LISTING (if it is a copy of the most current REPORTED RENTAL LISTING (having the same listing number for the same offering platform)
	is_active	boolean	Indicates whether a CURRENT RENTAL LISTING was included in the most recent RENTAL LISTING REPORT
	is_new	boolean	Indicates whether a CURRENT RENTAL LISTING appeared for the first time in the last reporting period
	is_taken_down	boolean	Indicates whether a CURRENT RENTAL LISTING has been reported as taken down by the offering platform
	is_changed_address	boolean	Indicates whether a CURRENT RENTAL LISTING has been subjected to address changes
	is_lg_transferred	boolean	Indicates whether a CURRENT RENTAL LISTING has been transferred to a different Local Government Organization as a result of address changes
	is_entire_unit	boolean	Indicates whether the entire dwelling unit is offered for rental (as opposed to a single bedroom)
	available_bedrooms_qty	smallint	The number of bedrooms in the dwelling unit that are available for short term rental
	nights_booked_qty	smallint	The number of nights that short term rental accommodation services were provided during the reporting period

Table dss_rental_listing				
	separate_reservations_qty	smallint	The number of separate reservations that were taken during the reporting period	
* ldx	offering_organization_id	bigint	Foreign key	
ldx	including_rental_listing_report_id	bigint	Foreign key	
ldx	derived_from_rental_listing_id	bigint	Foreign key	
ldx	locating_physical_address_id	bigint	Foreign key	
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Indexes				
Туре	Name	On	Description	

Type	Name	On	Description
Pk	dss_rental_listing_pk	rental_listing_id	
	dss_rental_listing_i1	offering_organization_id, platform_listing_no	
	dss_rental_listing_i2	including_rental_listing_re port_id	
	dss_rental_listing_i3	derived_from_rental_listing _id	
	dss_rental_listing_i4	locating_physical_address _id	

Foreign Keys

Туре	Name	On	Description
	dss_rental_listing_fk_offered_by ref dss_organization (organization	(offering_organization_id) on_id)	
	dss_rental_listing_fk_included_in including_rental_listing_report_id dss_rental_listing_report (rental_) ref	
	dss_rental_listing_fk_located_at (locating_physical_address_id) rephysical_address_id)		
	dss_rental_listing_fk_generating derived_from_rental_listing_id) rental_listing_id)	(ef dss_rental_listing (

Triggers

~~		
Name	Definition	Description

dss_rental_listing_br_iu_tr

 $\label{listing_br_iu_tr} \mbox{CREATE TRIGGER dss_rental_listing_br_iu_tr} \mbox{ BEFORE INSERT OR UPDATE ON dss.dss_rental_listing FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()} \\$

Table	Table dss_rental_listing_contact			
ldx	Name	Data Type	Description	
A per	son who has been identified as a no	table contact for a particular	rental listing	
* Pk	rental_listing_contact_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
*	is_property_owner	boolean	Indicates a person with the legal right to the unit being short-term rental	
	listing_contact_nbr	smallint	Indicates which of the five possible supplier hosts is represented by this contact	
	supplier_host_no	varchar(50)	The platform identifier for the supplier host	
	full_nm	varchar(50)	The full name of the contact person as inluded in the listing	
	phone_no	varchar(30)	Phone number given for the contact	
	fax_no	varchar(30)	Facsimile numbrer given for the contact	
	full_address_txt	varchar(250)	Mailing address given for the contact	
	email_address_dsc	varchar(320)	E-mail address given for the contact	
* ldx	contacted_through_rental_listing_ id	bigint	Foreign key	

*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Туре	Name	On	Description
Pk	dss_rental_listing_contact_pk	rental_listing_contact_id	
	dss_rental_listing_contact_i1	contacted_through_rental_ listing_id	
Foreig	gn Keys		
Туре	Name	On	Description
	dss_rental_listing_contact_fk_contacted_for (contacted_through_rental_listing_id) ref dss_rental_listing (rental_listing_id)		
Trigge	ers		
	Name	Definition	Description
	dss_rental_listing_contact_br_iu_r	t	

 $\label{listing_contact_br_iu_tr} CREATE\ TRIGGER\ dss_rental_listing_contact_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_rental_listing_contact\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()$

Table dss_rental_listing_extract

ldx	Name	Data Type	Description		
A pre	A prebuilt report that is specific to a subset of rental listings				
* Pk	rental_listing_extract_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	rental_listing_extract_nm	varchar(250)	A description of the information contained in the extract		
*	is_pr_requirement_filtered	boolean	Indicates whether the report is filtered by jurisdictional principal residence requirement		
	source_bin	bytea	The binary image of the information in the report		
	filtering_organization_id	bigint	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Index	es				
Type	Name	On	Description		
Pk	dss_rental_listing_extract_pk	rental_listing_extract_id			
Forei	gn Keys				
Type	Name	On	Description		
	dss_rental_listing_extract_fk_filter filtering_organization_id) ref dss_ organization_id)	red_by (organization (
Trigge	ers				
	Name	Definition	Description		
	dss_rental_listing_extract_br_iu_t				

 $\label{listing_extract_br_iu_tr} CREATE\ TRIGGER\ dss_rental_listing_extract_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_rental_listing_extract\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()$

Table dss_rental_listing_report				
ldx	Name	Data Type	Description	
A platform-specific collection of rental listing information that is relevant to a specific month				
* Pk	rental_listing_report_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	

Table	Table dss_rental_listing_report				
	report_period_ym	date	The month to which the listing information is relevant (always set to the first day of the month)		
*	is_current	boolean	Indicates whether the rental listing version is the most recent one reported by the platform		
* Unq	providing_organization_id	bigint	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Indexe	es				
Type	Name	On	Description		
Pk	dss_rental_listing_report_pk	rental_listing_report_id			
Unq	dss_rental_listing_report_uk	providing_organization_id, report_period_ym			
Foreig	gn Keys				
Type	Name	On	Description		
	dss_rental_listing_report_fk_providing_organization_id) ref dss organization_id)	ded_by(s_organization(
Triggers					
	Name	Definition	Description		
	dss_rental_listing_report_br_iu_tr				

CREATE TRIGGER dss_rental_listing_report_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_rental_listing_report FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Table	e dss_upload_delivery				
ldx	Name	Data Type	Description		
A deli	very of uploaded information that is	relevant to a specific month			
* Pk	upload_delivery_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	upload_delivery_type	varchar(25)	Identifies the treatment applied to ingesting the uploaded information		
	report_period_ym	date	The month to which the delivery batch is relevant (always set to the first day of the month)		
*	source_hash_dsc	varchar(256)	The hash value of the information that was uploaded		
	source_bin	bytea	The binary image of the information that was uploaded		
*	providing_organization_id	bigint	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Index	es				
Туре	Name	On	Description		
Pk	dss_upload_delivery_pk	upload_delivery_id			
Foreig	n Keys				
Туре	Name	On	Description		
	dss_upload_delivery_fk_provided_providing_organization_id) ref dssorganization_id)	_by (s_organization (
Trigge	ers				
	Name	Definition	Description		
	dss_upload_delivery_br_iu_tr				
	CREATE TRIGGER dss_upload_delivery_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_upload_delivery FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()				

Table	e dss_upload_line				
ldx	Name	Data Type	Description		
An up	load delivery line that has been ext	racted from the source			
* Pk	upload_line_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	is_validation_failure	boolean	Indicates that there has been a validation problem that prevents successful ingestion of the upload line		
*	is_system_failure	boolean	Indicates that a system fault has prevented complete ingestion of the upload line		
*	is_processed	boolean	Indicates that no further ingestion attempt is required for the upload line		
*	source_organization_cd	varchar(25)	An immutable system code identifying the organization who created the information in the upload line (e.g. AIRBNB)		
* Unq	source_record_no	varchar(50)	The immutable identification number for the source record, such as a rental listing number		
*	source_line_txt	varchar(32000)	Full text of the uploaod line		
	error_txt	varchar(32000)	Freeform description of the problem found while attempting to interpret the report line		
* Unq	including_upload_delivery_id	bigint	Foreign key		
Indexe	es				
Туре	Name	On	Description		
Pk	dss_upload_line_pk	upload_line_id			
Unq	dss_upload_line_uk	including_upload_delivery _id, source_record_no			
Foreig	Foreign Keys				
Туре	Name	On	Description		
	dss_upload_line_fk_included_in (including_upload_delivery_id) ref upload_delivery_id)	dss_upload_delivery(

Table	Table dss_user_identity				
ldx	Name	Data Type	Description		
An ex	An externally defined domain directory object representing a potential application user or group				
* Pk	user_identity_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	user_guid	uuid	An immutable unique identifier assigned by the identity provider		
*	display_nm	varchar(250)	A human-readable full name that is assigned by the identity provider (this may include a preferred name and/or business unit name)		
*	identity_provider_nm	varchar(25)	A directory or domain that authenticates system users to allow access to the application or its API (e.g. idir, bceidbusiness)		
*	is_enabled	boolean	Indicates whether access is currently permitted using this identity		
*	access_request_status_cd	varchar(25)	The current status of the most recent access request made by the user (restricted to Requested, Approved, or Denied)		
	access_request_dtm	timestamptz	A timestamp indicating when the most recent access request was made by the user		
	access_request_justification_txt	varchar(250)	The most recent user-provided reason for requesting application access		
	given_nm	varchar(25)	A name given to a person so that they can easily be identified among their family members (in some cultures, this is often the first name)		
	family_nm	varchar(25)	A name that is often shared amongst members of the same family (commonly known as a surname within some cultures)		
	email_address_dsc	varchar(320)	E-mail address associated with the user by the identity provider		
	business_nm	varchar(250)	A human-readable organization name that is associated with the use by the identity provider		
	terms_acceptance_dtm	timestamptz	A timestamp indicating when the user most recently accepted the published Terms and Conditions of application access		
	represented_by_organization_id	bigint	Foreign key		

Table dss_user_identity				
upd_dtm	timestamptz	Trigger-updated timestamp of last change		
upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
es				
Name	On	Description		
dss_user_identity_pk	user_identity_id			
Foreign Keys				
Name	On	Description		
dss_user_identity_fk_representing (represented_by_organization_id) ref dss_organization (organization_id)				
dss_user_identity_fk_given (access_request_status_cd) ref dss_access_request_status (access_request_status_cd)				
	upd_dtm upd_user_guid es Name dss_user_identity_pk gn Keys Name dss_user_identity_fk_representing represented_by_organization_id) organization_id) dss_user_identity_fk_given (acce	upd_dtm timestamptz upd_user_guid uuid es Name On dss_user_identity_pk user_identity_id gn Keys Name On dss_user_identity_fk_representing (represented_by_organization_id) ref dss_organization (organization_id) dss_user_identity_fk_given (access_request_status_cd) ref		

Triggers

Name Definition Description

dss_user_identity_br_iu_tr

 $\label{lem:created} \textbf{CREATE TRIGGER dss_user_identity_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_identity FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Table dss_user_privilege				
ldx	Name	Data Type	Description	
A granular access right or privilege within the application that may be granted to a role				
* Pk	user_privilege_cd	varchar(25)	The immutable system code that identifies the privilege	
*	user_privilege_nm	varchar(250)	The human-readable name that is given for the role	
Indexes				
Туре	Name	On	Description	
Pk	dss_user_privilege_pk	user_privilege_cd		

Table dss_user_role				
ldx	Name	Data Type	Description	
A set	of access rights and privileges with	in the application that may be	e granted to users	
* Pk	user_role_cd	varchar(25)	The immutable system code that identifies the role	
*	user_role_nm	varchar(50)	The human-readable name that is given for the role	
	user_role_dsc	varchar(200)	The human-readable description that is given for the role	
	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Index	es			
Type	Name	On	Description	
Pk	dss_user_role_pk	user_role_cd		
Triggers				
	Name	Definition	Description	
	dss_user_role_br_iu_tr			

 $\label{localization} \mbox{CREATE TRIGGER dss_user_role_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_role FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Table dss_user_role_assignment						
ldx	Idx Name Data Type Description					
The association of a grantee credential to a role for the purpose of conveying application privileges						
* Pk	* Pk user_identity_id bigint Foreign key					
* Pk	user_role_cd	varchar(25)	Foreign key			

Table dss_user_role_assignment				
	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Index	es			
Туре	Name	On	Description	
Pk	dss_user_role_assignment_pk	user_identity_id, user_role_cd		
Foreig	n Keys			
Туре	Name	On	Description	
	dss_user_role_assignment_fk_granted (user_role_cd) ref dss_user_role (user_role_cd)			
	dss_user_role_assignment_fk_graref dss_user_identity (user_identity	anted_to (user_identity_id) ty_id)		
Triggers				
	Name	Definition	Description	

Name Definition Description

dss_user_role_assignment_br_iu
_tr

 $\label{localization} \mbox{CREATE TRIGGER dss_user_role_assignment_br_iu_tr \mbox{ BEFORE INSERT OR UPDATE ON dss.dss_user_role_assignment FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns() \\$

Table dss_user_role_privilege				
ldx	Name	Data Type	Description	
The a	ssociation of a granular application	privilege to a role		
* Pk	user_privilege_cd	varchar(25)	Foreign key	
* Pk	user_role_cd	varchar(25)	Foreign key	
	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Indexes				
Туре	Name	On	Description	
Pk	dss_user_role_privilege_pk	user_privilege_cd, user_role_cd		
Foreig	gn Keys			
Туре	Name	On	Description	
	dss_user_role_privilege_fk_confedss_user_role (user_role_cd)	rred_by (user_role_cd) ref		
	dss_user_role_privilege_fk_conferring (user_privilege_cd) ref dss_user_privilege (user_privilege_cd)			
Triggers				

Triggers

33			
Name	Definition	Description	
dss user role priviled	ie hr iu tr		

CREATE TRIGGER dss_user_role_privilege_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_role_privilege FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Schema dss

Functions

dss_containing_organization_id
dss_update_audit_columns