
Physical Data Diagram (Sprint 4) 12-04-2024 by DbSchema.com - Wise Coders

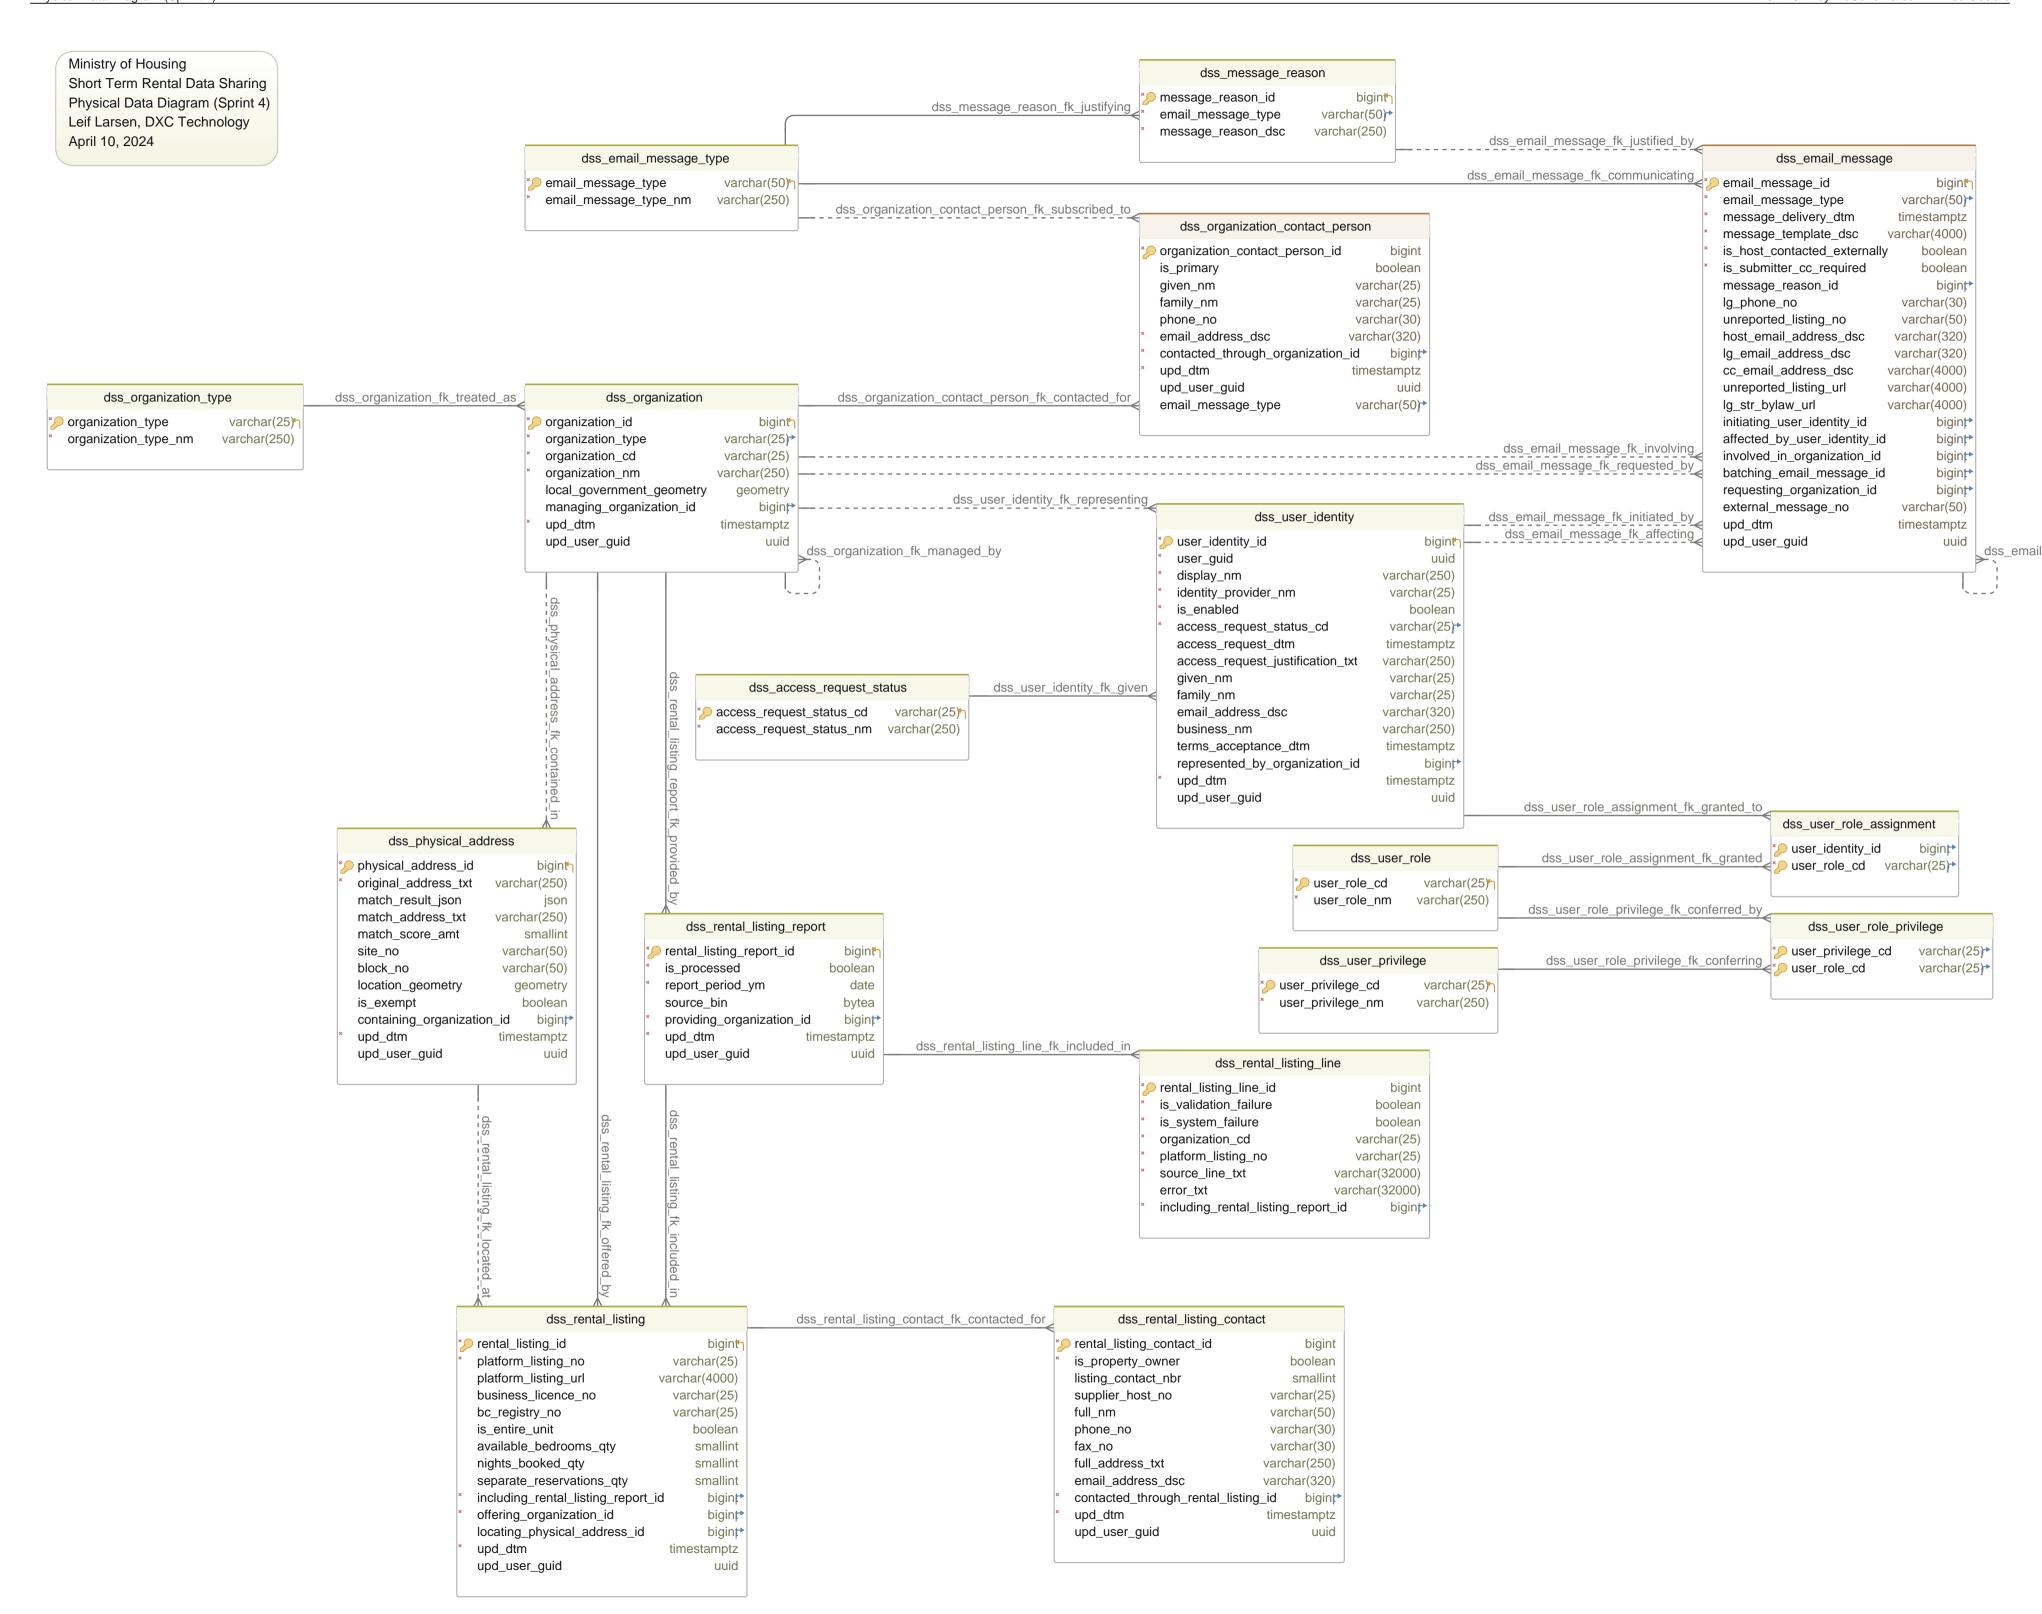

Physical Data Diagram (Sprint 4)

Table dss_access_request_status				
ldx	Name	Data Type	Description	
A potential status for a user access request (e.g. Requested, Approved, or Denied)				
* Pk	access_request_status_cd	varchar(25)	System-consistent code for the request status	
*	access_request_status_nm	varchar(250)	Business term for the request status	
Index	es			
Туре	Name	On	Description	
Pk	dss_access_request_status_pk	access_request_status_cd		

xb	Name	Data Type	Description
mes	ssage that is sent to one or more	recipients via email	
Pk	email_message_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
	email_message_type	varchar(50)	Foreign key
	message_delivery_dtm	timestamptz	A timestamp indicating when the message delivery was initiated
	message_template_dsc	varchar(4000)	The full text or template for the message that is sent
	is_host_contacted_externally	boolean	Indicates whether the the property host has already been contacted by external means
	is_submitter_cc_required	boolean	Indicates whether the user initiating the message should receive a copy of the email
	message_reason_id	bigint	Foreign key
	lg_phone_no	varchar(30)	A phone number associated with a Local Government contact
	unreported_listing_no	varchar(50)	The platform issued identification number for the listing (if not included in a rental listing report)
	host_email_address_dsc	varchar(320)	E-mail address of a short term rental host (directly entered by the user as a message recipient)
	lg_email_address_dsc	varchar(320)	E-mail address of a local government contact (directly entered by tuser as a message recipient)
	cc_email_address_dsc	varchar(4000)	E-mail address of a secondary message recipient (directly entered the user)
	unreported_listing_url	varchar(4000)	User-provided URL for a short-term rental platform listing that is the subject of the message
	lg_str_bylaw_url	varchar(4000)	User-provided URL for a local government bylaw that is the subject the message
	initiating_user_identity_id	bigint	Foreign key
	affected_by_user_identity_id	bigint	Foreign key
	involved_in_organization_id	bigint	Foreign key
	batching_email_message_id	bigint	Foreign key
	requesting_organization_id	bigint	Foreign key
	external_message_no	varchar(50)	External identifier for tracking the message delivery progress
	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
ndex	es		
уре	Name	On	Description
'nk	dss_email_message_pk	email_message_id	
oreig	gn Keys		
vpe	Name	On	Description

dss_email_message_fk_initiated_by (
initiating_user_identity_id) ref dss_user_identity (
user_identity_id)

Table dss_email_message fk a

dss_email_message_fk_affecting (
affected_by_user_identity_id) ref dss_user_identity (
user_identity_id)

dss_email_message_fk_involving (

involved_in_organization_id) ref dss_organization (organization_id)

dss_email_message_fk_communicating (email_message_type) ref dss_email_message_ty

email_message_type) ref dss_email_message_type (email_message_type) $\,$

dss_email_message_fk_justified_by (message_reason_id) ref dss_message_reason (message_reason_id)

dss_email_message_fk_batched_in (
batching_email_message_id) ref dss_email_message (
email_message_id)

dss_email_message_fk_requested_by (
requesting_organization_id) ref dss_organization (
organization_id)

Triggers

Name Definition Description

dss_email_message_br_iu_tr

CREATE TRIGGER dss_email_message_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_email_message FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Table dss_email_message_type

Idx Name Data Type Description

The type or purpose of a system generated message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)

* Pk email_message_type varchar(50) System-consistent code for the type or purpose of the message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)

email_message_type_nm varchar(250) Business term for the type or purpose of the message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)

Indexes

Type Name On Description

Pk dss_email_message_type_pk email_message_type

Table dss_message_reason

ldx Name Data Type Description

A description of the justification for initiating a message

* Pk message_reason_id bigint GENERATED Unique generated key ALWAYS AS IDENTITY

* email_message_type varchar(50) Foreign key

* message_reason_dsc varchar(250) A description of the justification for initiating a message

Indexes

Type Name On Description

Pk dss_message_reason_pk message_reason_id

Foreign Keys

Type Name On Description

dss_message_reason_fk_justifying (email_message_type)
ref dss_email_message_type (email_message_type)

Table dss_organization

ldx Name Data Type Description

A private company or governing body that plays a role in short term rental reporting or enforcement

Table	e dss_organization		
* Pk	organization_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
*	organization_type	varchar(25)	Foreign key
*	organization_cd	varchar(25)	An immutable system code that identifies the organization (e.g. CEU, AIRBNB)
*	organization_nm	varchar(250)	A human-readable name that identifies the organization (e.g. Corporate Enforecement Unit, City of Victoria)
	local_government_geometry	geometry	the shape identifying the boundaries of a local government
	managing_organization_id	bigint	Self-referential hierarchical foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Туре	Name	On	Description
Pk	dss_organization_pk	organization_id	
Forei	gn Keys		
Туре	Name	On	Description
	dss_organization_fk_managed_bymanaging_organization_id) ref dsorganization_id)		
	dss_organization_fk_treated_as (dss_organization_type (organization_type)		
Trigge	ers		

Triggers

Definition Description Name dss_organization_br_iu_tr

 $\label{lem:created} \textbf{CREATE TRIGGER dss_organization_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_organization FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

_					
Table	Table dss_organization_contact_person				
ldx	Name	Data Type	Description		
A pers	son who has been identified as a no	table contact for a particular	organization		
* Pk	organization_contact_person_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
	is_primary	boolean	Indicates whether the contact should receive all communications directed at the organization		
	given_nm	varchar(25)	A name given to a person so that they can easily be identified among their family members (in some cultures, this is often the first name)		
	family_nm	varchar(25)	A name that is often shared amongst members of the same family (commonly known as a surname within some cultures)		
	phone_no	varchar(30)	Phone number given for the contact by the organization (contains only digits)		
*	email_address_dsc	varchar(320)	E-mail address given for the contact by the organization		
*	contacted_through_organization_i	bigint	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
	email_message_type	varchar(50)	Foreign key		
Indexe	98				
Туре	Name	On	Description		
Pk	dss_organization_contact_person _pk	organization_contact_pers on_id			
Foreig	n Keys				
Туре	Name	On	Description		

Table dss_organization_contact_person

dss_organization_contact_person_fk_contacted_for (
contacted_through_organization_id) ref dss_organization (
organization_id)

dss_organization_contact_person_fk_subscribed_to (email_message_type) ref dss_email_message_type (email_message_type)

Triggers

Name	Definition	Description	
dss_organization_conta _br_iu_tr	ct_person		

 $\label{lem:contact_person_br_iu_tr} CREATE\ TRIGGER\ dss_organization_contact_person_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_organization_contact_person\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()$

Tabl	Table dss_organization_type				
ldx	Name	Data Type	Description		
A leve	el of government or business catego	ory			
* Pk	organization_type	varchar(25)	System-consistent code for a level of government or business category		
*	organization_type_nm	varchar(250)	Business term for a level of government or business category		
Index	es				
Туре	Name	On	Description		
Pk	dss_organization_type_pk	organization_type			

Tabl	e dss_physical_address		
ldx	Name	Data Type	Description
A pro	perty address that includes any ver	rifiable BC attributes	
* Pk	physical_address_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
*	original_address_txt	varchar(250)	The source-provided address of a short-term rental offering
	match_result_json	json	Full JSON result of the source address matching attempt
	match_address_txt	varchar(250)	The sanitized physical address that has been derived from the original
	match_score_amt	smallint	The relative score returned from the address matching attempt
	site_no	varchar(50)	The siteID returned by the address match
	block_no	varchar(50)	The blockID returned by the address match
	location_geometry	geometry	The computed location point of the matched address
	is_exempt	boolean	Indicates whether the address has been identified as exempt from Short Term Rental regulations
	containing_organization_id	bigint	Foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Туре	Name	On	Description
Pk	dss_physical_address_pk	physical_address_id	
Forei	gn Keys		
Туре	Name	On	Description
	dss_physical_address_fk_contain containing_organization_id) ref organization_id)		
Trigge	ers		
	Name	Definition	Description

dss_physical_address_br_iu_tr

Table dss_physical_address

CREATE TRIGGER dss_physical_address_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_physical_address FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

ldx	Name	Data Type	Description
A rent	al listing snapshot that is relevant to	a specific month	
* Pk	rental_listing_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
*	platform_listing_no	varchar(25)	The platform issued identification number for the listing
	platform_listing_url	varchar(4000)	URL for the short-term rental platform listing
	business_licence_no	varchar(25)	The local government issued licence number that applies to the rental offering
	bc_registry_no	varchar(25)	The Short Term Registry issued permit number
	is_entire_unit	boolean	Indicates whether the entire dwelling unit is offered for rental (as opposed to a single bedroom)
	available_bedrooms_qty	smallint	The number of bedrooms in the dwelling unit that are available for short term rental
	nights_booked_qty	smallint	The number of nights that short term rental accommodation service were provided during the reporting period
	separate_reservations_qty	smallint	The number of separate reservations that were taken during the reporting period
*	including_rental_listing_report_id	bigint	Foreign key
*	offering_organization_id	bigint	Foreign key
	locating_physical_address_id	bigint	Foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Туре	Name	On	Description
Pk	dss_rental_listing_pk	rental_listing_id	
Foreig	n Keys		
Туре	Name	On	Description
	dss_rental_listing_fk_offered_by (ref dss_organization (organization		
	dss_rental_listing_fk_included_in including_rental_listing_report_id dss_rental_listing_report (rental_l	ref	
	dss_rental_listing_fk_located_at (locating_physical_address_id) ref physical_address_id)	dss_physical_address (
Trigge	ers		
	Name	Definition	Description
	dss_rental_listing_br_iu_tr		

 $\label{listing_br_iu} \mbox{CREATE TRIGGER dss_rental_listing_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_rental_listing FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Tabl	Table dss_rental_listing_contact				
ldx	Name	Data Type	Description		
A per	rson who has been identified as a ne	otable contact for a particular	r rental listing		
* Pk	rental_listing_contact_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	is_property_owner	boolean	Indicates a person with the legal right to the unit being short-term rental		
	listing_contact_nbr	smallint	Indicates which of the five possible supplier hosts is represented by this contact		

Table of	dss_rental_listing_contact		
s	supplier_host_no	varchar(25)	The platform identifier for the supplier host
fu	full_nm	varchar(50)	The full name of the contact person as inluded in the listing
р	phone_no	varchar(30)	Phone number given for the contact
fa	ax_no	varchar(30)	Facsimile numbrer given for the contact
fu	full_address_txt	varchar(250)	Mailing address given for the contact
е	email_address_dsc	varchar(320)	E-mail address given for the contact
* c		bigint	Foreign key
* u	upd_dtm	timestamptz	Trigger-updated timestamp of last change
u	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Indexes	3		
Type N	Name	On	Description
Pk d	dss_rental_listing_contact_pk	rental_listing_contact_id	
Foreign	Keys		
Type N	Name	On	Description
С	dss_rental_listing_contact_fk_cont contacted_through_rental_listing_i rental_listing_id)		
Triggers	S		
N	Name	Definition	Description
d r	dss_rental_listing_contact_br_iu_t r		

 $\label{listing_contact_br_iu_tr} CREATE\ TRIGGER\ dss_rental_listing_contact_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_rental_listing_contact\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()$

Table	Table dss_rental_listing_line				
ldx	Name	Data Type	Description		
A rent	tal listing report line that has been e	xtracted from the source			
* Pk	rental_listing_line_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	is_validation_failure	boolean	Indicates that there has been a validation problem that prevents successful ingestion of the rental listing		
*	is_system_failure	boolean	Indicates that a system fault has prevented complete ingestion of the rental listing		
*	organization_cd	varchar(25)	An immutable system code that identifies the listing organization (e.g. AIRBNB)		
*	platform_listing_no	varchar(25)	The platform issued identification number for the listing		
*	source_line_txt	varchar(32000)	Full text of the report line that could not be interpreted		
	error_txt	varchar(32000)	Freeform description of the problem found while attempting to interpret the report line		
*	including_rental_listing_report_id	bigint	Foreign key		
Index	es				
Туре	Name	On	Description		
Pk	dss_rental_listing_line_pk	rental_listing_line_id			
Foreig	gn Keys				
Туре	Name	On	Description		
	dss_rental_listing_line_fk_included_in (including_rental_listing_report_id) ref				

dss_rental_listing_line_tk_included_in (
including_rental_listing_report_id) ref
dss_rental_listing_report (rental_listing_report_id)

Table	e dss_rental_listing_report		
ldx	Name	Data Type	Description

Table	e dss_rental_listing_report					
A deli	very of rental listing information tha	t is relevant to a specific mor	nth			
* Pk	rental_listing_report_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key			
*	is_processed	boolean				
*	report_period_ym	date	The month to which the listing information is relevant (always set to the first day of the month)			
	source_bin	bytea	The binary image of the information that was uploaded			
*	providing_organization_id	bigint	Foreign key			
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change			
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change			
Index	es					
Type	Name	On	Description			
Pk	dss_rental_listing_report_pk	rental_listing_report_id				
Forei	gn Keys					
Type	Name	On	Description			
	dss_rental_listing_report_fk_provided_by (providing_organization_id) ref dss_organization (organization_id)					
Trigge	ers					
	Name	Definition	Description			
	dss_rental_listing_report_br_iu_tr					
CREATE TRICGER des contal licting report by in the RECORE INSERT OR LIDDATE ON des des contal licting report EOR EACH ROW						

CREATE TRIGGER dss_rental_listing_report_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_rental_listing_report FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Table dss_user_identity

labl	e dss_user_identity		
ldx	Name	Data Type	Description
An ex	ternally defined domain directory of	oject representing a potentia	l application user or group
* Pk	user_identity_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
*	user_guid	uuid	An immutable unique identifier assigned by the identity provider
*	display_nm	varchar(250)	A human-readable full name that is assigned by the identity provider (this may include a preferred name and/or business unit name)
*	identity_provider_nm	varchar(25)	A directory or domain that authenticates system users to allow access to the application or its API (e.g. idir, bceidbusiness)
*	is_enabled	boolean	Indicates whether access is currently permitted using this identity
*	access_request_status_cd	varchar(25)	The current status of the most recent access request made by the user (restricted to Requested, Approved, or Denied)
	access_request_dtm	timestamptz	A timestamp indicating when the most recent access request was made by the user
	access_request_justification_txt	varchar(250)	The most recent user-provided reason for requesting application access
	given_nm	varchar(25)	A name given to a person so that they can easily be identified among their family members (in some cultures, this is often the first name)
	family_nm	varchar(25)	A name that is often shared amongst members of the same family (commonly known as a surname within some cultures)
	email_address_dsc	varchar(320)	E-mail address associated with the user by the identity provider
	business_nm	varchar(250)	A human-readable organization name that is associated with the user by the identity provider
	terms_acceptance_dtm	timestamptz	A timestamp indicating when the user most recently accepted the published Terms and Conditions of application access
	represented_by_organization_id	bigint	Foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change

Table	e dss_user_identity		
Index	es		
Type	Name	On	Description
Pk	dss_user_identity_pk	user_identity_id	
Foreig	gn Keys		
Туре	Name	On	Description
	dss_user_identity_fk_reprepresented_by_organizorganization_id)	oresenting(ation_id)ref dss_organizatio	on (
		ven (access_request_status_ atus (access_request_status	

Triggers

Name Definition Description

dss_user_identity_br_iu_tr

 $\label{lem:created} \textbf{CREATE TRIGGER dss_user_identity_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_identity FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Tabl	e dss_user_privilege		
ldx	Name	Data Type	Description
A gra	nular access right or privilege within	the application that may be	granted to a role
* Pk	user_privilege_cd	varchar(25)	The immutable system code that identifies the privilege
*	user_privilege_nm	varchar(250)	The human-readable name that is given for the role
Index	es		
Туре	Name	On	Description
Pk	dss_user_privilege_pk	user_privilege_cd	

Table	e dss_user_role		
ldx	Name	Data Type	Description
A set	of access rights and privileges with	in the application that may be	e granted to users
* Pk	user_role_cd	varchar(25)	The immutable system code that identifies the role
*	user_role_nm	varchar(250)	The human-readable name that is given for the role
Index	es		
Туре	Name	On	Description
Pk	dss_user_role_pk	user_role_cd	

Table	e dss_user_role_assignment		
ldx	Name	Data Type	Description
The a	ssociation of a grantee credential to	a role for the purpose of co	nveying application privileges
* Pk	user_identity_id	bigint	Foreign key
* Pk	user_role_cd	varchar(25)	Foreign key
Index	es		
Туре	Name	On	Description
Pk	dss_user_role_assignment_pk	user_identity_id, user_role_cd	
Foreig	gn Keys		
Туре	Name	On	Description
	dss_user_role_assignment_fk_grdss_user_role (user_role_cd)	anted (user_role_cd) ref	
	dss_user_role_assignment_fk_gr ref dss_user_identity (user_ident	anted_to (user_identity_id) ity_id)	

Toble	a dee weer rele minilere		
Table	e dss_user_role_privilege		
ldx	Name	Data Type	Description
The a	ssociation of a granular application	privilege to a role	
* Pk	user_privilege_cd	varchar(25)	Foreign key
* Pk	user_role_cd	varchar(25)	Foreign key
Indexe	es		
Туре	Name	On	Description
Pk	dss_user_role_privilege_pk	user_privilege_cd, user_role_cd	
Foreig	ın Keys		
Туре	Name	On	Description
	dss_user_role_privilege_fk_confer dss_user_role (user_role_cd)	rred_by (user_role_cd) ref	
	dss_user_role_privilege_fk_confer ref dss_user_privilege (user_privi	rring(user_privilege_cd) lege_cd)	

Schema dss

Functions

dss_update_audit_columns