
Physical Data Diagram (Sprint 13)

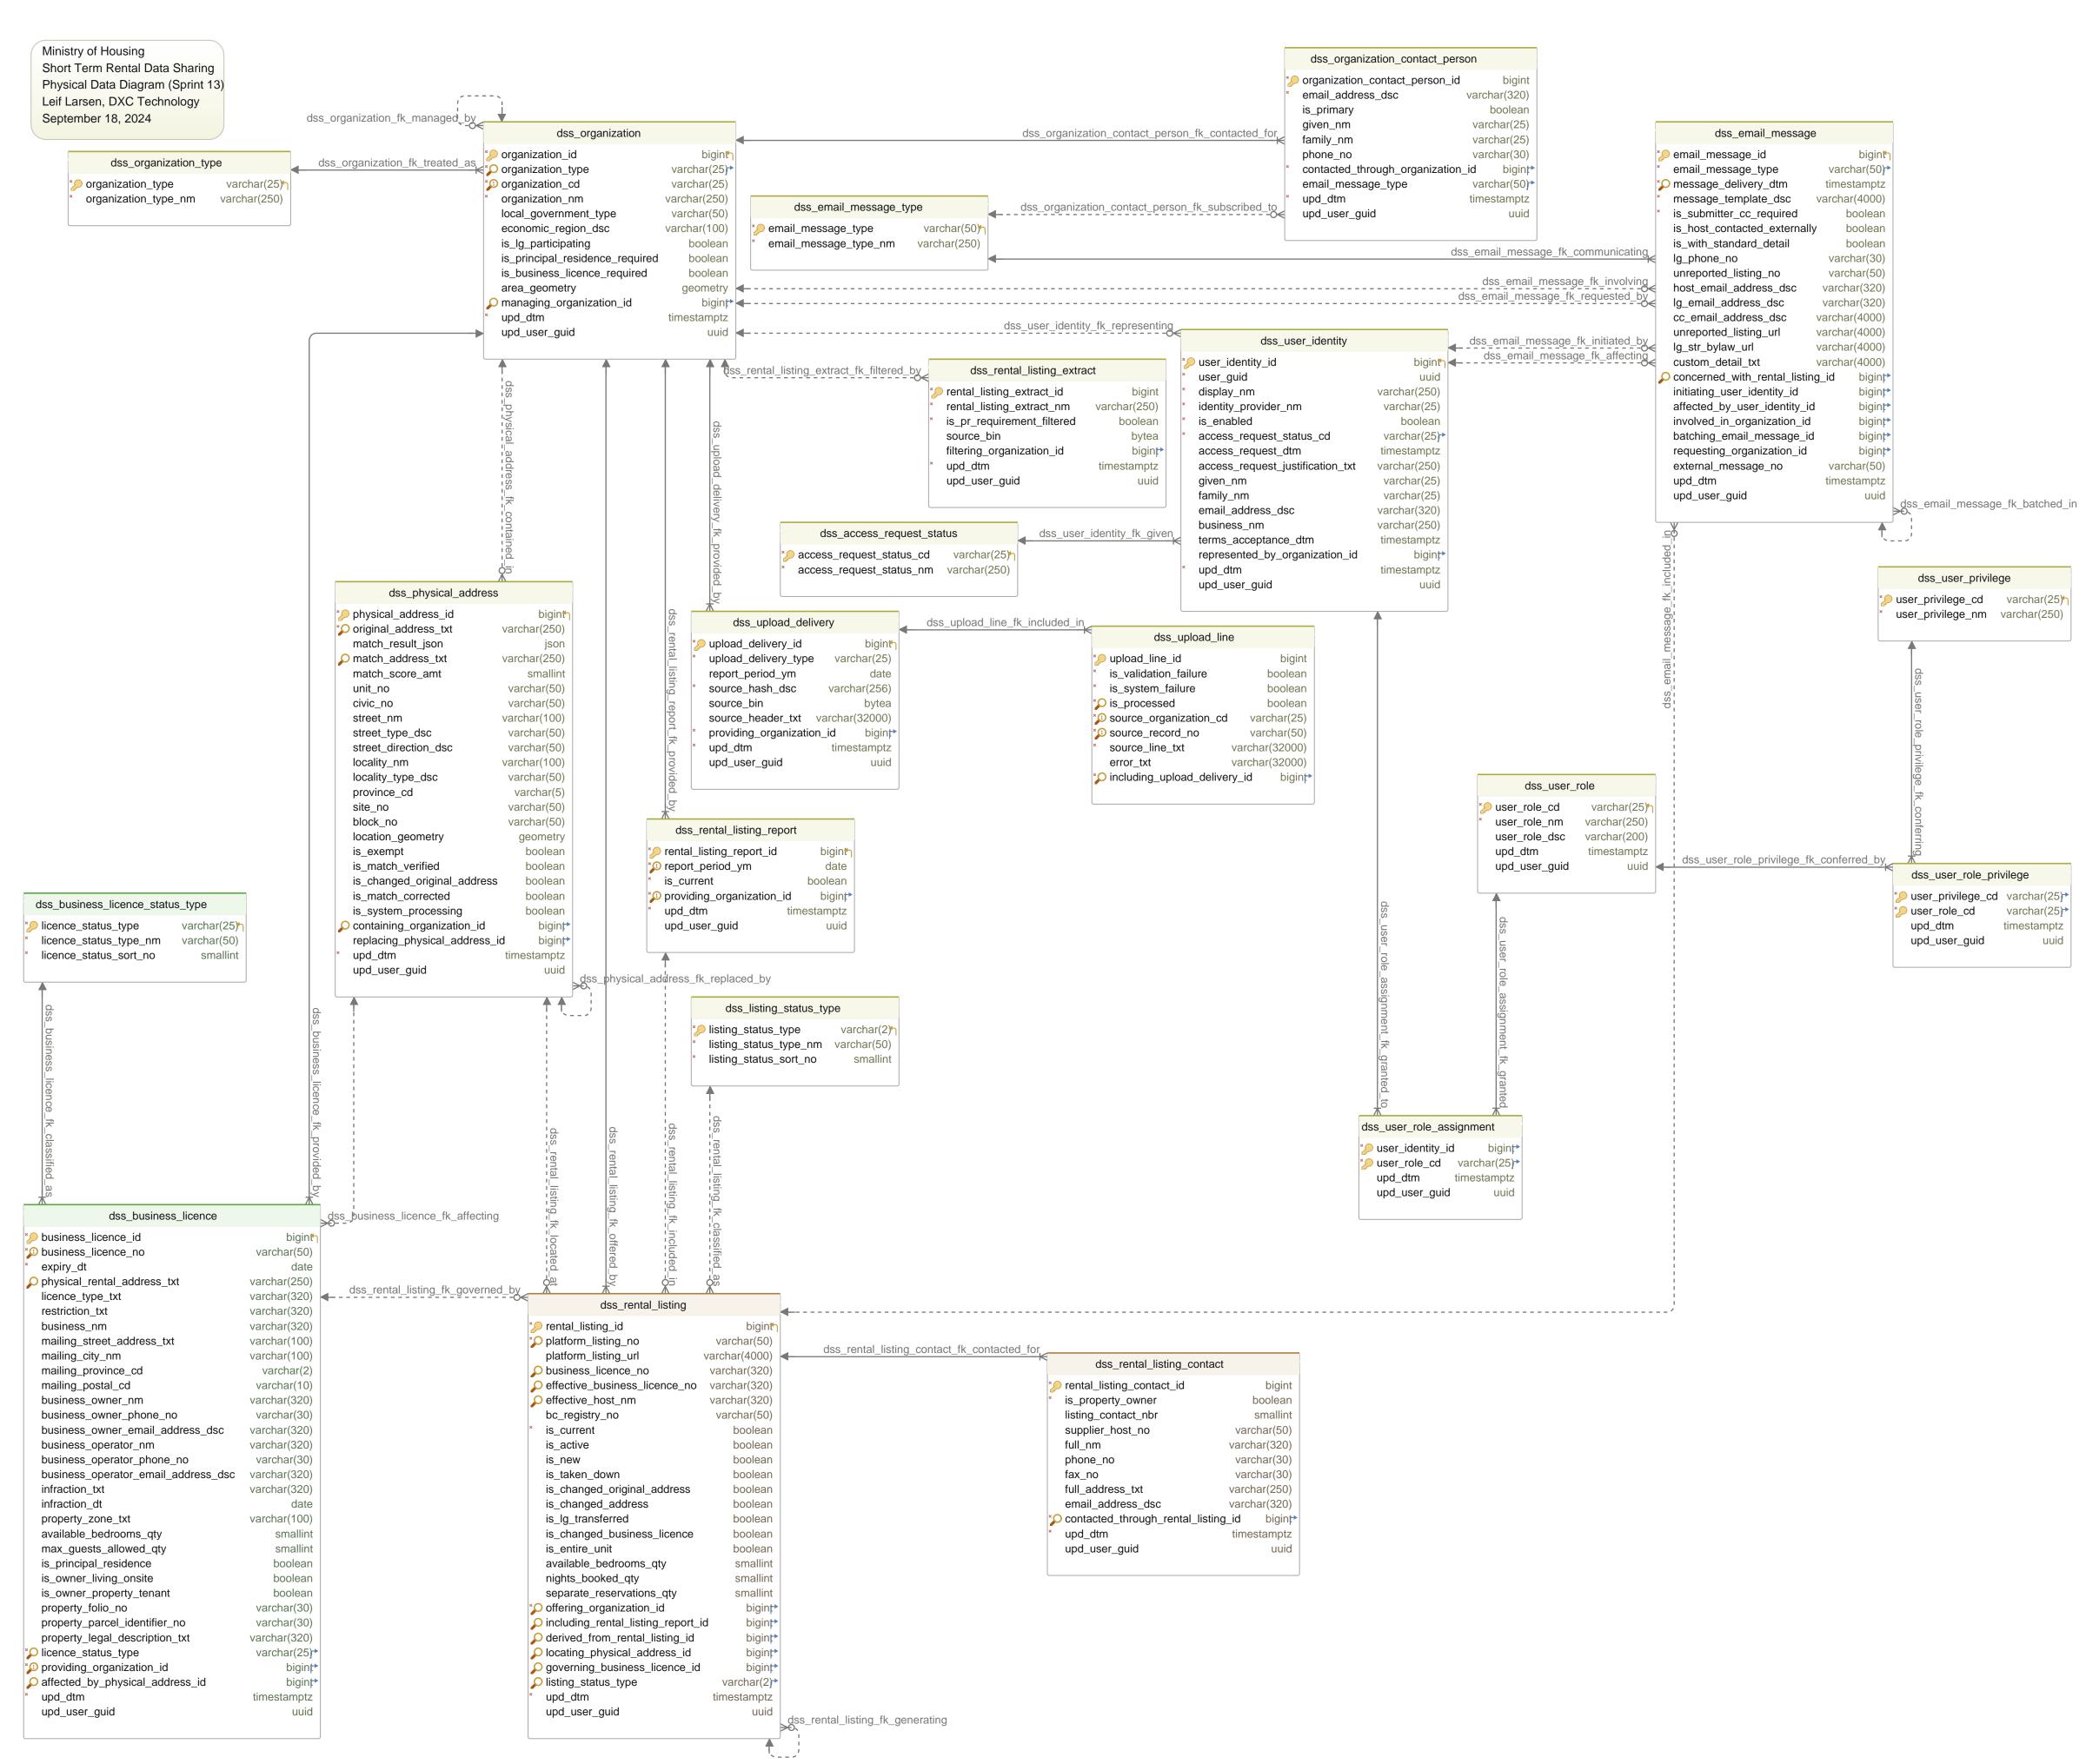

Physical Data Diagram (Sprint 13)

Tabl	Table dss_access_request_status				
ldx	Name	Data Type	Description		
A potential status for a user access request (e.g. Requested, Approved, or Denied)					
* Pk	access_request_status_cd	varchar(25)	System-consistent code for the request status		
*	access_request_status_nm	varchar(250)	Business term for the request status		
Indexes					
Туре	Name	On	Description		
Pk	dss_access_request_status_pk	access_request_status_cd			

dx	Name	Data Type	Description
Pk	business_licence_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
Unq	business_licence_no	varchar(50)	The local government issued licence number that applies to the rental offering
	expiry_dt	date	The date on which the business licence expires
dx	physical_rental_address_txt	varchar(250)	The full physical address of the location that is licenced as a shor term rental business
	licence_type_txt	varchar(320)	Free form description of the type of business licence issued (e.g. short-term rental, bed and breakfast, boarding and lodging, touris accommodation)
	restriction_txt	varchar(320)	Notes related to any restrictions associated with the licence
	business_nm	varchar(320)	Official name of the business
	mailing_street_address_txt	varchar(100)	Street address component of the business mailing address
	mailing_city_nm	varchar(100)	City component of the business mailing address
	mailing_province_cd	varchar(2)	Province component of the business mailing address
	mailing_postal_cd	varchar(10)	Postal code component of the business mailing address
	business_owner_nm	varchar(320)	Full name of the registered business owner
	business_owner_phone_no	varchar(30)	Phone number of the business owner
	business_owner_email_address_ dsc	varchar(320)	Email address of the business owner
	business_operator_nm	varchar(320)	Full name of the business operator or property manager
	business_operator_phone_no	varchar(30)	Phone number of the business operator
	business_operator_email_addres s_dsc	varchar(320)	Email address of the business operator
	infraction_txt	varchar(320)	Description of an infraction
	infraction_dt	date	The date on which the described infraction occurred
	property_zone_txt	varchar(100)	Description or name of the property zoning
	available_bedrooms_qty	smallint	The number of bedrooms in the dwelling unit that are available for short term rental
	max_guests_allowed_qty	smallint	The number of guests that can be accommodated
	is_principal_residence	boolean	Indicates whether the short term rental property is a principal residence
	is_owner_living_onsite	boolean	Indicates whether the owner lives on the property
	is_owner_property_tenant	boolean	Indicates whether the business owner rents the property
	property_folio_no	varchar(30)	The number used to identify the property
	property_parcel_identifier_no	varchar(30)	The PID number assigned by the Land Title and Survey Authority that identifies the piece of land
	property_legal_description_txt	varchar(320)	The physical description of the property as it is registered with the Land Title and Survey Authority
ldx	licence_status_type	varchar(25)	Foreign key

Table	e dss_business_licence		
ldx	affected_by_physical_address_id	bigint	Foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Indexe	es		
Туре	Name	On	Description
Pk	dss_business_licence_pk	business_licence_id	
	dss_business_licence_i2	affected_by_physical_addr ess_id	
Unq	dss_business_licence_uk	providing_organization_id, business_licence_no	
	dss_business_licence_i1	licence_status_type	
	dss_business_licence_i3	physical_rental_address_t xt	
Foreig	ın Keys		
Туре	Name	On	Description
	dss_business_licence_fk_provided providing_organization_id) ref dss organization_id)		
	dss_business_licence_fk_affecting affected_by_physical_address_id physical_address_id)		
	dss_business_licence_fk_classifie ref dss_business_licence_status_t	d_as (licence_status_type) ype (licence_status_type)	
Trigge	ers		
	Name	Definition	Description
	dss_business_licence_br_iu_tr		

 $\label{local_control_control} \begin{cal} CREATE TRIGGER dss_business_licence_br_iu_tr \ BEFORE \ INSERT \ OR \ UPDATE \ ON \ dss.dss_business_licence \ FOR \ EACH \ ROW \ EXECUTE FUNCTION \ dss.dss_update_audit_columns() \end{cal}$

Table	Table dss_business_licence_status_type				
ldx	Name	Data Type	Description		
A pote	ential status for a BUSINESS LICEN	ICE (e.g. Pending, Issued, S	suspended, Revoked, Cancelled, Expired)		
* Pk	licence_status_type	varchar(25)	System-consistent code for the business licence status (e.g. Pending, Issued, Suspended, Revoked, Cancelled, Expired)		
*	licence_status_type_nm	varchar(50)	Business term for the licence status (e.g. Pending, Issued, Suspended, Revoked, Cancelled, Expired)		
*	licence_status_sort_no	smallint	Relative order in which the business prefers to see the status listed		
Indexe	es				
Туре	Name	On	Description		
Pk	dss_business_licence_status_typ e_pk	licence_status_type			

Tabl	Table dss_email_message			
ldx	Name	Data Type	Description	
A me	ssage that is sent to one or more re	cipients via email		
* Pk	email_message_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
*	email_message_type	varchar(50)	Foreign key	
* ldx	message_delivery_dtm	timestamptz	A timestamp indicating when the message delivery was initiated	
*	message_template_dsc	varchar(4000)	The full text or template for the message that is sent	
*	is_submitter_cc_required	boolean	Indicates whether the user initiating the message should receive a copy of the email	
	is_host_contacted_externally	boolean	Indicates whether the the property host has already been contacted by external means	

Table	e dss_email_message		
	is_with_standard_detail	boolean	Indicates whether message body should include text a block of detail text that is standard for the message type
	lg_phone_no	varchar(30)	A phone number associated with a Local Government contact
	unreported_listing_no	varchar(50)	The platform issued identification number for the listing (if not included in a rental listing report)
	host_email_address_dsc	varchar(320)	E-mail address of a short term rental host (directly entered by the user as a message recipient)
	lg_email_address_dsc	varchar(320)	E-mail address of a local government contact (directly entered by the user as a message recipient)
	cc_email_address_dsc	varchar(4000)	E-mail address of a secondary message recipient (directly entered by the user)
	unreported_listing_url	varchar(4000)	User-provided URL for a short-term rental platform listing that is the subject of the message
	lg_str_bylaw_url	varchar(4000)	User-provided URL for a local government bylaw that is the subject of the message
	custom_detail_txt	varchar(4000)	Free form text that should be included in the message body
ldx	concerned_with_rental_listing_id	bigint	Foreign key
	initiating_user_identity_id	bigint	Foreign key
	affected_by_user_identity_id	bigint	Foreign key
	involved_in_organization_id	bigint	Foreign key
	batching_email_message_id	bigint	Foreign key
	requesting_organization_id	bigint	Foreign key
	external_message_no	varchar(50)	External identifier for tracking the message delivery progress
	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Type	Name	On	Description
Pk	dss_email_message_pk	email_message_id	
	dss_email_message_i1	concerned_with_rental_list ing_id, message_delivery_dtm	
Foreig	ın Keys	0 = ,=	
	Name	On	Description
	dss_email_message_fk_initiated_initiating_user_identity_id) ref dss user_identity_id)		·
	dss_email_message_fk_affecting affected_by_user_identity_id) ref user_identity_id)	(dss_user_identity (
	dss_email_message_fk_involving involved_in_organization_id) ref organization_id)		
	dss_email_message_fk_communi email_message_type) ref dss_em email_message_type)		
	dss_email_message_fk_batched_ batching_email_message_id) ref email_message_id)		
	dss_email_message_fk_requested requesting_organization_id) ref ds organization_id)		
	dss_email_message_fk_included_concerned_with_rental_listing_id) rental_listing_id)	_in(ref dss_rental_listing(
Trigge	ers		
	Name	Definition	Description

dss_email_message_br_iu_tr

Table dss_email_message

CREATE TRIGGER dss_email_message_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_email_message FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Tabl	Table dss_email_message_type				
ldx	Name	Data Type	Description		
The type or purpose of a system generated message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)					
* Pk	email_message_type	varchar(50)	System-consistent code for the type or purpose of the message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)		
*	email_message_type_nm	varchar(250)	Business term for the type or purpose of the message (e.g. Notice of Takedown, Takedown Request, Delisting Warning, Delisting Request, Access Granted Notification, Access Denied Notification)		
Indexes					
Type	Name	On	Description		
Pk	dss_email_message_type_pk	email_message_type			

Table dss_listing_status_type				
ldx	Name	Data Type	Description	
A pote	ential status for a CURRENT RENT	AL LISTING (e.g. New, Activ	ve, Inactive, Reassigned, Taken Down)	
* Pk	listing_status_type	varchar(2)	System-consistent code for the listing status (e.g. N, A, I, R, T)	
*	listing_status_type_nm	varchar(50)	Business term for the listing status (e.g. New, Active, Inactive, Reassigned, Taken Down)	
*	listing_status_sort_no	smallint	Relative order in which the business prefers to see the status listed	
Indexe	es			
Туре	Name	On	Description	
Pk	dss_listing_status_type_pk	listing_status_type		

lable	able dss_organization				
ldx	Name	Data Type	Description		
A priva	A private company or governing body component that plays a role in s		short term rental reporting or enforcement		
* Pk	organization_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
* ldx	organization_type	varchar(25)	Foreign key		
* Unq	organization_cd	varchar(25)	An immutable system code that identifies the organization (e.g. CEU, AIRBNB)		
*	organization_nm	varchar(250)	A human-readable name that identifies the organization (e.g. Corporate Enforecement Unit, City of Victoria)		
	local_government_type	varchar(50)	A sub-type of local government organization used for sorting and grouping or members		
	economic_region_dsc	varchar(100)	A free form description of the economic region to which a Local Government Subdivision belongs		
	is_lg_participating	boolean	Indicates whether a LOCAL GOVERNMENT ORGANIZATION participates in Short Term Rental Data Sharing		
	is_principal_residence_required	boolean	Indicates whether a LOCAL GOVERNMENT SUBDIVISION is subject to Provincial Principal Residence Short Term Rental restrictions		
	is_business_licence_required	boolean	Indicates whether a LOCAL GOVERNMENT SUBDIVISION requires a business licence for Short Term Rental operation		
	area_geometry	geometry	the multipolygon shape identifying the boundaries of a local government subdivision		
ldx	managing_organization_id	bigint	Self-referential hierarchical foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		

lable	able dss_organization				
Index	Indexes				
Туре	Name	On	Description		
Pk	dss_organization_pk	organization_id			
	dss_organization_i1	organization_type			
Unq	dss_organization_uk	organization_cd			
	dss_organization_i2	managing_organization_id			
Foreig	gn Keys				
Туре	Name	On	Description		
	dss_organization_fk_managed_by (managing_organization_id) ref dss_organization (organization_id)				
	dss_organization_fk_treated_as (organization_type) ref dss_organization_type (organization_type)				

Triggers

dss_organization_contact_person _br_iu_tr

Name	Definition	Description	
dss_organization_br_iu_tr			

 $\label{local_control_control} \textbf{CREATE TRIGGER dss_organization_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_organization FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Table	e dss_organization_contact_r	person		
ldx	Name	Data Type	Description	
A person who has been identified as a notable contact for a particular organization				
* Pk	organization_contact_person_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
*	email_address_dsc	varchar(320)	E-mail address given for the contact by the organization	
	is_primary	boolean	Indicates whether the contact should receive all communications directed at the organization	
	given_nm	varchar(25)	A name given to a person so that they can easily be identified among their family members (in some cultures, this is often the first name)	
	family_nm	varchar(25)	A name that is often shared amongst members of the same family (commonly known as a surname within some cultures)	
	phone_no	varchar(30)	Phone number given for the contact by the organization (contains only digits)	
*	contacted_through_organization_i	bigint	Foreign key	
	email_message_type	varchar(50)	Foreign key	
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Indexe	es			
Туре	Name	On	Description	
Pk	dss_organization_contact_person _pk	organization_contact_pers on_id		
Foreig	n Keys			
Туре	Name	On	Description	
	dss_organization_contact_person_contacted_through_organization_icorganization_id)	_fk_contacted_for (d) ref dss_organization (
	dss_organization_contact_person_ email_message_type) ref dss_em email_message_type)	_fk_subscribed_to (ail_message_type (
Trigge	ers			
	Name	Definition	Description	

Table dss_organization_contact_person

CREATE TRIGGER dss_organization_contact_person_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_organization_contact_person FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Table dss_organization_type				
ldx	Name	Data Type	Description	
A level of government or business category				
* Pk	organization_type	varchar(25)	System-consistent code for a level of government or business category	
*	organization_type_nm	varchar(250)	Business term for a level of government or business category	
Indexes				
Туре	Name	On	Description	
Pk	dss_organization_type_pk	organization_type		

Tabl	able dss_physical_address			
ldx	Name	Data Type	Description	
A property address that includes any verifiable BC attributes				
* Pk	physical_address_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
* ldx	original_address_txt	varchar(250)	The source-provided address of a short-term rental offering	
	match_result_json	json	Full JSON result of the source address matching attempt	
ldx	match_address_txt	varchar(250)	The sanitized physical address (returned as fullAddress) that has been derived from the original	
	match_score_amt	smallint	The relative score returned from the address matching attempt	
	unit_no	varchar(50)	The unitNumber (suite) returned by the address match (e.g. 100)	
	civic_no	varchar(50)	The civicNumber (building number) returned by the address match (e.g. 1285)	
	street_nm	varchar(100)	The streetName returned by the address match (e.g. Pender)	
	street_type_dsc	varchar(50)	The streetType returned by the address match (e.g. St or Street)	
	street_direction_dsc	varchar(50)	The streetDirection returned by the address match (e.g. W or West)	
	locality_nm	varchar(100)	The localityName (community) returned by the address match (e.g. Vancouver)	
	locality_type_dsc	varchar(50)	The localityType returned by the address match (e.g. City)	
	province_cd	varchar(5)	The provinceCode returned by the address match	
	site_no	varchar(50)	The siteID returned by the address match	
	block_no	varchar(50)	The blockID returned by the address match	
	location_geometry	geometry	The computed location point of the matched address	
	is_exempt	boolean	Indicates whether the address has been identified as exempt from Short Term Rental regulations	
	is_match_verified	boolean	Indicates whether the matched address has been verified as correct for the listing by the responsible authorities	
	is_changed_original_address	boolean	Indicates whether the original address has received a different property address from the platform in the last reporting period	
	is_match_corrected	boolean	Indicates whether the matched address has been manually changed to one that is verified as correct for the listing	
	is_system_processing	boolean	Indicates whether the physical address is being processed by the system and may not yet be in its final form	
ldx	containing_organization_id	bigint	Foreign key	
	replacing_physical_address_id	bigint	Foreign key	
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Index	es			
Туре	Name	On	Description	

Table dss_physical_address				
Pk	dss_physical_address_pk	physical_address_id		
	dss_physical_address_i1	original_address_txt		
	dss_physical_address_i2	match_address_txt		
	dss_physical_address_i3	containing_organization_id		
Foreign Keys				
Туре	Name	On	Description	
	dss_physical_address_fk_contained_in (containing_organization_id) ref dss_organization (organization_id)			
	dss_physical_address_fk_replaced_by (replacing_physical_address_id) ref dss_physical_address (physical_address_id)			
Triage	Triggers			

Triggers

Name	Definition	Description
dss_physical_address_br_iu_tr		

CREATE TRIGGER dss_physical_address_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_physical_address FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

ldx	Name	Data Type	Description
A rental listing snapshot that is either relevant to a specific monthly report, or is the current, mast		eport, or is the current, master version	
* Pk	rental_listing_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
* ldx	platform_listing_no	varchar(50)	The platform issued identification number for the listing
	platform_listing_url	varchar(4000)	URL for the short-term rental platform listing
ldx	business_licence_no	varchar(320)	The business licence number that is published for the rental offering
ldx	effective_business_licence_no	varchar(320)	The local government issued licence number that should be used fo compariing the rental offering with others
ldx	effective_host_nm	varchar(320)	The full name of the rental offering host that should be used for comparison with others
	bc_registry_no	varchar(50)	The Short Term Registry issued permit number
*	is_current	boolean	Indicates whether the RENTAL LISTING VERSION is a CURRENT RENTAL LISTING (if it is a copy of the most current REPORTED RENTAL LISTING (having the same listing number for the same offering platform)
	is_active	boolean	Indicates whether a CURRENT RENTAL LISTING was included in the most recent RENTAL LISTING REPORT
	is_new	boolean	Indicates whether a CURRENT RENTAL LISTING appeared for the first time in the last reporting period
	is_taken_down	boolean	Indicates whether a CURRENT RENTAL LISTING has been reporte as taken down by the offering platform
	is_changed_original_address	boolean	Indicates whether a CURRENT RENTAL LISTING has received a different property address in the last reporting period
	is_changed_address	boolean	Indicates whether a CURRENT RENTAL LISTING has been subjected to address match changes by a user
	is_lg_transferred	boolean	Indicates whether a CURRENT RENTAL LISTING has been transferred to a different Local Government Organization as a result of address changes
	is_changed_business_licence	boolean	Indicates whether a CURRENT RENTAL LISTING has been subjected to business licence linking changes by a user
	is_entire_unit	boolean	Indicates whether the entire dwelling unit is offered for rental (as opposed to a single bedroom)
	available_bedrooms_qty	smallint	The number of bedrooms in the dwelling unit that are available for short term rental
	nights_booked_qty	smallint	The number of nights that short term rental accommodation services were provided during the reporting period
	separate_reservations_qty	smallint	The number of separate reservations that were taken during the reporting period

Table	e dss_rental_listing		
* Idx	offering_organization_id	bigint	Foreign key
ldx	including_rental_listing_report_id	bigint	Foreign key
ldx	derived_from_rental_listing_id	bigint	Foreign key
ldx	locating_physical_address_id	bigint	Foreign key
ldx	governing_business_licence_id	bigint	Foreign key
ldx	listing_status_type	varchar(2)	Foreign key
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change
Index	es		
Type	Name	On	Description
Pk	dss_rental_listing_pk	rental_listing_id	
	dss_rental_listing_i1	offering_organization_id, platform_listing_no	
	dss_rental_listing_i2	including_rental_listing_re port_id	
	dss_rental_listing_i3	derived_from_rental_listing _id	
	dss_rental_listing_i4	locating_physical_address _id	
	dss_rental_listing_i5	listing_status_type, offering_organization_id	
	dss_rental_listing_i6	governing_business_licenc e_id	
	dss_rental_listing_i7	business_licence_no	
	dss_rental_listing_i8	effective_business_licence _no	
	dss_rental_listing_i9	effective_host_nm	
Foreig	gn Keys		
Type	Name	On	Description
	dss_rental_listing_fk_offered_by (ref dss_organization (organization		
	dss_rental_listing_fk_included_in (including_rental_listing_report_id) dss_rental_listing_report (rental_l	ref	
	dss_rental_listing_fk_located_at (locating_physical_address_id) ref physical_address_id)	dss_physical_address (
	dss_rental_listing_fk_generating (derived_from_rental_listing_id) re rental_listing_id)	f dss_rental_listing (
	dss_rental_listing_fk_classified_as dss_listing_status_type (listing_st		
	dss_rental_listing_fk_governed_by governing_business_licence_id) r business_licence_id)	/(ef dss_business_licence(
Trigge	Triggers		
	Name	Definition	Description
	dss_rental_listing_br_iu_tr		

 $\label{listing_br_iu} \mbox{CREATE TRIGGER dss_rental_listing_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_rental_listing FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Idx Name Data Type Description

Table	Table dss_rental_listing_contact				
* Pk	rental_listing_contact_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	is_property_owner	boolean	Indicates a person with the legal right to the unit being short-term rental		
	listing_contact_nbr	smallint	Indicates which of the five possible supplier hosts is represented by this contact		
	supplier_host_no	varchar(50)	The platform identifier for the supplier host		
	full_nm	varchar(320)	The full name of the contact person as included in the listing		
	phone_no	varchar(30)	Phone number given for the contact		
	fax_no	varchar(30)	Facsimile numbrer given for the contact		
	full_address_txt	varchar(250)	Mailing address given for the contact		
	email_address_dsc	varchar(320)	E-mail address given for the contact		
* ldx	contacted_through_rental_listing_ id	bigint	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Index	es				
Туре	Name	On	Description		
Pk	dss_rental_listing_contact_pk	rental_listing_contact_id			
	dss_rental_listing_contact_i1	contacted_through_rental_ listing_id			
Foreig	n Keys				
Туре	Name	On	Description		
	dss_rental_listing_contact_fk_concontacted_through_rental_listing_rental_listing_id)	tacted_for (id) ref dss_rental_listing (
Trigge	ers				
	Name Definition I dss_rental_listing_contact_br_iu_t		Description		

CREATE TRIGGER dss_rental_listing_contact_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_rental_listing_contact FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Tabl	Table dss_rental_listing_extract			
ldx	Name	Data Type	Description	
A pre	built report that is specific to a subs	et of rental listings		
* Pk	rental_listing_extract_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
*	rental_listing_extract_nm	varchar(250)	A description of the information contained in the extract	
*	is_pr_requirement_filtered	boolean	Indicates whether the report is filtered by jurisdictional principal residence requirement	
	source_bin	bytea	The binary image of the information in the report	
	filtering_organization_id	bigint	Foreign key	
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Index	es			
Type	Name	On	Description	
Pk	dss_rental_listing_extract_pk	rental_listing_extract_id		
Forei	gn Keys			
Type	Name	On	Description	

Table dss_rental_listing_extract

dss_rental_listing_extract_fk_filtered_by (
filtering_organization_id) ref dss_organization (
organization_id)

Triggers

Name	Definition	Description	
dss_rental_listing_extract_br_iu_t r			

 $\label{listing_extract_br_iu_tr} CREATE\ TRIGGER\ dss_rental_listing_extract_br_iu_tr\ BEFORE\ INSERT\ OR\ UPDATE\ ON\ dss.dss_rental_listing_extract\ FOR\ EACH\ ROW\ EXECUTE\ FUNCTION\ dss.dss_update_audit_columns()$

Table	Table dss_rental_listing_report				
ldx	Name	Data Type	Description		
A plat	form-specific collection of rental list	ing information that is releval	nt to a specific month		
* Pk	rental_listing_report_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
* Unq	report_period_ym	date	The month to which the listing information is relevant (always set to the first day of the month)		
*	is_current	boolean	Indicates whether the rental listing version is the most recent one reported by the platform		
* Unq	providing_organization_id	bigint	Foreign key		
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Index	es				
Type	Name	On	Description		
Pk	dss_rental_listing_report_pk	rental_listing_report_id			
Unq	dss_rental_listing_report_uk	providing_organization_id, report_period_ym			
Foreign Keys					
Type	Name	On	Description		
	dss_rental_listing_report_fk_provi providing_organization_id) ref dss organization_id)	ded_by(s_organization(
Trigge	riggers				

Triggers

	Name	Definition	Description
dss_rental_listing_report_br_iu_tr			

 $\label{listing_report_br_iu_tr} \begin{tabular}{l} CREATE TRIGGER dss_rental_listing_report_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_rental_listing_report FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns() \\ \end{tabular}$

Tabl	Table dss_upload_delivery			
ldx	Name	Data Type	Description	
A deli	ivery of uploaded information that is	relevant to a specific month		
* Pk	upload_delivery_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key	
*	upload_delivery_type	varchar(25)	Identifies the treatment applied to ingesting the uploaded information	
	report_period_ym	date	The month to which the delivery batch is relevant (always set to the first day of the month)	
*	source_hash_dsc	varchar(256)	The hash value of the information that was uploaded	
	source_bin	bytea	The binary image of the information that was uploaded	
	source_header_txt	varchar(32000)	Full text of the header line	
*	providing_organization_id	bigint	Foreign key	
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	

Table	Table dss_upload_delivery			
Indexes				
Туре	Name	On	Description	
Pk	dss_upload_delivery_pk	upload_delivery_id		
Foreig	n Keys			
Туре	Name	On	Description	
	dss_upload_delivery_fk_provided_providing_organization_id) ref dssorganization_id)	_by (s_organization (
Triggers				
	Name	Definition	Description	

CREATE TRIGGER dss_upload_delivery_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_upload_delivery FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

dss_upload_delivery_br_iu_tr

Table	e dss_upload_line				
ldx	Name	Data Type	Description		
An upl	An upload delivery line that has been extracted from the source				
* Pk	upload_line_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key		
*	is_validation_failure	boolean	Indicates that there has been a validation problem that prevents successful ingestion of the upload line		
*	is_system_failure	boolean	Indicates that a system fault has prevented complete ingestion of the upload line		
* ldx	is_processed	boolean	Indicates that no further ingestion attempt is required for the upload line		
* Unq	source_organization_cd	varchar(25)	An immutable system code identifying the organization who created the information in the upload line (e.g. AIRBNB)		
* Unq	source_record_no	varchar(50)	The immutable identification number for the source record, such as a rental listing number		
*	source_line_txt	varchar(32000)	Full text of the upload line		
	error_txt	varchar(32000)	Freeform description of the problem found while attempting to interpret the report line		
* Unq	including_upload_delivery_id	bigint	Foreign key		
Indexe	es				
Туре	Name	On	Description		
Pk	dss_upload_line_pk	upload_line_id			
Unq	dss_upload_line_uk	including_upload_delivery _id, source_organization_cd, source_record_no			
	dss_upload_line_i1	is_processed, including_upload_delivery _id			
Foreig	n Keys				
Туре	Name	On	Description		
	dss_upload_line_fk_included_in (including_upload_delivery_id) ref upload_delivery_id)	dss_upload_delivery (

Table dss_user_identity			
ldx	Name	Data Type	Description
An ex	sternally defined domain directory of	oject representing a potentia	l application user or group
* Pk	user_identity_id	bigint GENERATED ALWAYS AS IDENTITY	Unique generated key
*	user_guid	uuid	An immutable unique identifier assigned by the identity provider

Tabl	Table dss_user_identity			
1 abi	<u> </u>	(050)		
*	display_nm	varchar(250)	A human-readable full name that is assigned by the identity provider (this may include a preferred name and/or business unit name)	
*	identity_provider_nm	varchar(25)	A directory or domain that authenticates system users to allow access to the application or its API (e.g. idir, bceidbusiness)	
*	is_enabled	boolean	Indicates whether access is currently permitted using this identity	
*	access_request_status_cd	varchar(25)	The current status of the most recent access request made by the user (restricted to Requested, Approved, or Denied)	
	access_request_dtm	timestamptz	A timestamp indicating when the most recent access request was made by the user	
	access_request_justification_txt	varchar(250)	The most recent user-provided reason for requesting application access	
	given_nm	varchar(25)	A name given to a person so that they can easily be identified among their family members (in some cultures, this is often the first name)	
	family_nm	varchar(25)	A name that is often shared amongst members of the same family (commonly known as a surname within some cultures)	
	email_address_dsc	varchar(320)	E-mail address associated with the user by the identity provider	
	business_nm	varchar(250)	A human-readable organization name that is associated with the use by the identity provider	
	terms_acceptance_dtm	timestamptz	A timestamp indicating when the user most recently accepted the published Terms and Conditions of application access	
	represented_by_organization_id	bigint	Foreign key	
*	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Index	es			
Туре	Name	On	Description	
Pk	dss_user_identity_pk	user_identity_id		
Foreig	gn Keys			
Туре	Name	On	Description	
	dss_user_identity_fk_representing represented_by_organization_id) organization_id)	g(ref dss_organization(
	dss_user_identity_fk_given (accedss_access_request_status (acceds_access_request_status)	ess_request_status_cd) ref ess_request_status_cd)		

Triggers

Name Definition Description

dss_user_identity_br_iu_tr

 $\label{lem:created} \textbf{CREATE TRIGGER dss_user_identity_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_identity FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Table dss_user_privilege				
ldx	Name	Data Type	Description	
A granular access right or privilege within the application that may be granted to a role				
* Pk	user_privilege_cd	varchar(25)	The immutable system code that identifies the privilege	
*	user_privilege_nm	varchar(250)	The human-readable name that is given for the role	
Indexes				
Туре	Name	On	Description	
Pk	dss user privilege pk	user privilege cd		

Table dss_user_role			
ldx	Name	Data Type	Description
A set	of access rights and privileges with	in the application that may b	e granted to users
* Pk	user_role_cd	varchar(25)	The immutable system code that identifies the role
*	user_role_nm	varchar(250)	The human-readable name that is given for the role

Table dss_user_role				
	user_role_dsc	varchar(200)	The human-readable description that is given for the role	
	upd_dtm	timestamptz	Trigger-updated timestamp of last change	
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change	
Indexes				
Type	Name	On	Description	
Pk	dss_user_role_pk	user_role_cd		
Triggers				
	Name	Definition	Description	
	dss_user_role_br_iu_tr			

 $\label{localization} \mbox{CREATE TRIGGER dss_user_role_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_role FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()$

Table	Table dss_user_role_assignment				
ldx	Name	Data Type	Description		
The a	The association of a grantee credential to a role for the purpose of conveying application privileges				
* Pk	user_identity_id	bigint	Foreign key		
* Pk	user_role_cd	varchar(25)	Foreign key		
	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Index	es				
Туре	Name	On	Description		
Pk	dss_user_role_assignment_pk	user_identity_id, user_role_cd			
Foreig	n Keys				
Туре	Name	On	Description		
	dss_user_role_assignment_fk_granted (user_role_cd) ref dss_user_role (user_role_cd)				
	dss_user_role_assignment_fk_graref dss_user_identity (user_identi				
Triage	Triggers				

Triggers

Name Definition Description

dss_user_role_assignment_br_iu

CREATE TRIGGER dss_user_role_assignment_br_iu_tr BEFORE INSERT OR UPDATE ON dss.dss_user_role_assignment FOR EACH ROW EXECUTE FUNCTION dss.dss_update_audit_columns()

Table	Table dss_user_role_privilege				
ldx	Name	Data Type	Description		
The a	ssociation of a granular application	privilege to a role			
* Pk	user_privilege_cd	varchar(25)	Foreign key		
* Pk	user_role_cd	varchar(25)	Foreign key		
	upd_dtm	timestamptz	Trigger-updated timestamp of last change		
	upd_user_guid	uuid	The globally unique identifier (assigned by the identity provider) for the most recent user to record a change		
Index	es				
Туре	Name	On	Description		
Pk	dss_user_role_privilege_pk	user_privilege_cd, user_role_cd			
Foreig	Foreign Keys				
Туре	Name	On	Description		

Table dss_user_role_privilege

 ${\tt dss_user_role_privilege_fk_conferred_by~(~user_role_cd~)~ref~dss_user_role~(~user_role_cd~)}$

 ${\tt dss_user_role_privilege_fk_conferring~(~user_privilege_cd~)} \\ {\tt ref~dss_user_privilege~(~user_privilege_cd~)} \\$

Triggers

Name Definition Description

dss_user_role_privilege_br_iu_tr

 $\label{linear_condition} \begin{cal} CREATE TRIGGER dss_user_role_privilege_br_iu_tr \ BEFORE \ INSERT \ OR \ UPDATE \ ON \ dss.dss_user_role_privilege \ FOR \ EACH \ ROW \ EXECUTE FUNCTION \ dss.dss_update_audit_columns() \end{cal}$

Schema dss

Functions

dss_containing_organization_id

dss_update_audit_columns

Procedures

dss_process_biz_lic_table_delete

dss_process_biz_lic_table_insert

dss_process_biz_lic_table_update