

Faster Responsive Design with JavaScript & Foundation

Installation

Clearing

Joyride

Orbit

Reveal

Interchange

Abide

Tabs

Modernizr

```
<html>
<head>
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="normalize.css">
  <link rel="stylesheet" href="foundation.css" />

  <script src="js/vendor/modernizr.js"></script>
</head>

<body>
  ...
</body>
</html>
```

jQuery Embed

```
<body>
  ...
  <script src="js/vendor/jquery.js"></script>
</body>
</html>
```

Include Foundation

```
<body>
...
<script src="js/vendor/jquery.js"></script>

// used for touch detection in JS
<script src="../js/foundation.min.js"></script>
</body>
</html>
```

Initialize Foundation.js

```
<script>  
  $(document).foundation();  
</script>
```

Initialize Foundation.js

```
<body>
...
<script src="js/vendor/jquery.js"></script>
<script src="../js/foundation.min.js"></script>
<script>
  $(document).foundation();
</script>
</body>
</html>
```

Initialize Foundation.js

```
<script>
  $(document).foundation();
</script>
```

```
<script>
  $(document).foundation({tab: {toggleable: false}});
</script>
```

```
<script>
  $('#myAlert').foundation({alert: {speed: 3000}});
</script>
```



Installation

Clearing

Joyride

Orbit

Reveal

Interchange

Abide

Accordion

Tabs

Clearing Markup

```
<ul class="clearing-thumbs" data-clearing>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
</ul>
```

Clearing Markup

```
<ul class="clearing-thumbs" data-clearing>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
</ul>
```

Clearing Markup

```
<ul class="clearing-thumbs" data-clearing>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
</ul>
```

Clearing Captions

```
<ul class="clearing-thumbs" data-clearing>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
</ul>
```

Clearing Captions

```
<ul class="clearing-thumbs" data-clearing>
<li><a href="img"></a></li>
<li><a href="path/to/your/img"></a></li>
<li><a href="path/to/your/img"></a></li>
</ul>
```

Installation
Clearing

Joyride

Joyride
Orbit
Reveal
Interchange
Abide
Accordion
Tabs



Initialize Foundation.js

```
<script>  
  $(document).foundation();  
</script>
```

Running Joyride

```
<script>
  $(document).foundation().foundation('joyride', 'start');
</script>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-button="Next">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-button="Close">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ol>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-button="Next">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-button="Close">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-button="Next">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-button="Close">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-button="Next">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-button="Close">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-button="Next">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-button="Close">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-button="Next">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-button="Close">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Markup

```
<ol class="joyride-list" data-joyride>
  <li data-id="firstStop" data-options="tip_location: top">
    <p>Hello and welcome to my cool corner.</p>
  </li>
  <li data-class="so-awesome" data-options="tip_location: left; tip_animation: fade">
    <h4>Stop #1</h4>
    <p>You can control all the details for your tour stop.</p>
  </li>
</ul>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration


```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

Joyride Configuration

```
<script>
$(document)
  .foundation({joyride: {
    scroll_speed : 300,
    timer : 0,
    start_timer_on_click : true,
    next_button : true,
    tip_animation : 'fade', // 'pop' or 'fade'
    tip_animation_fade_speed : 300,
    cookie_monster : false,
    cookie_expires : 365,
    post_ride_callback : function () {},
    post_step_callback : function () {}
  }})
  .foundation('joyride', 'start');
</script>
```

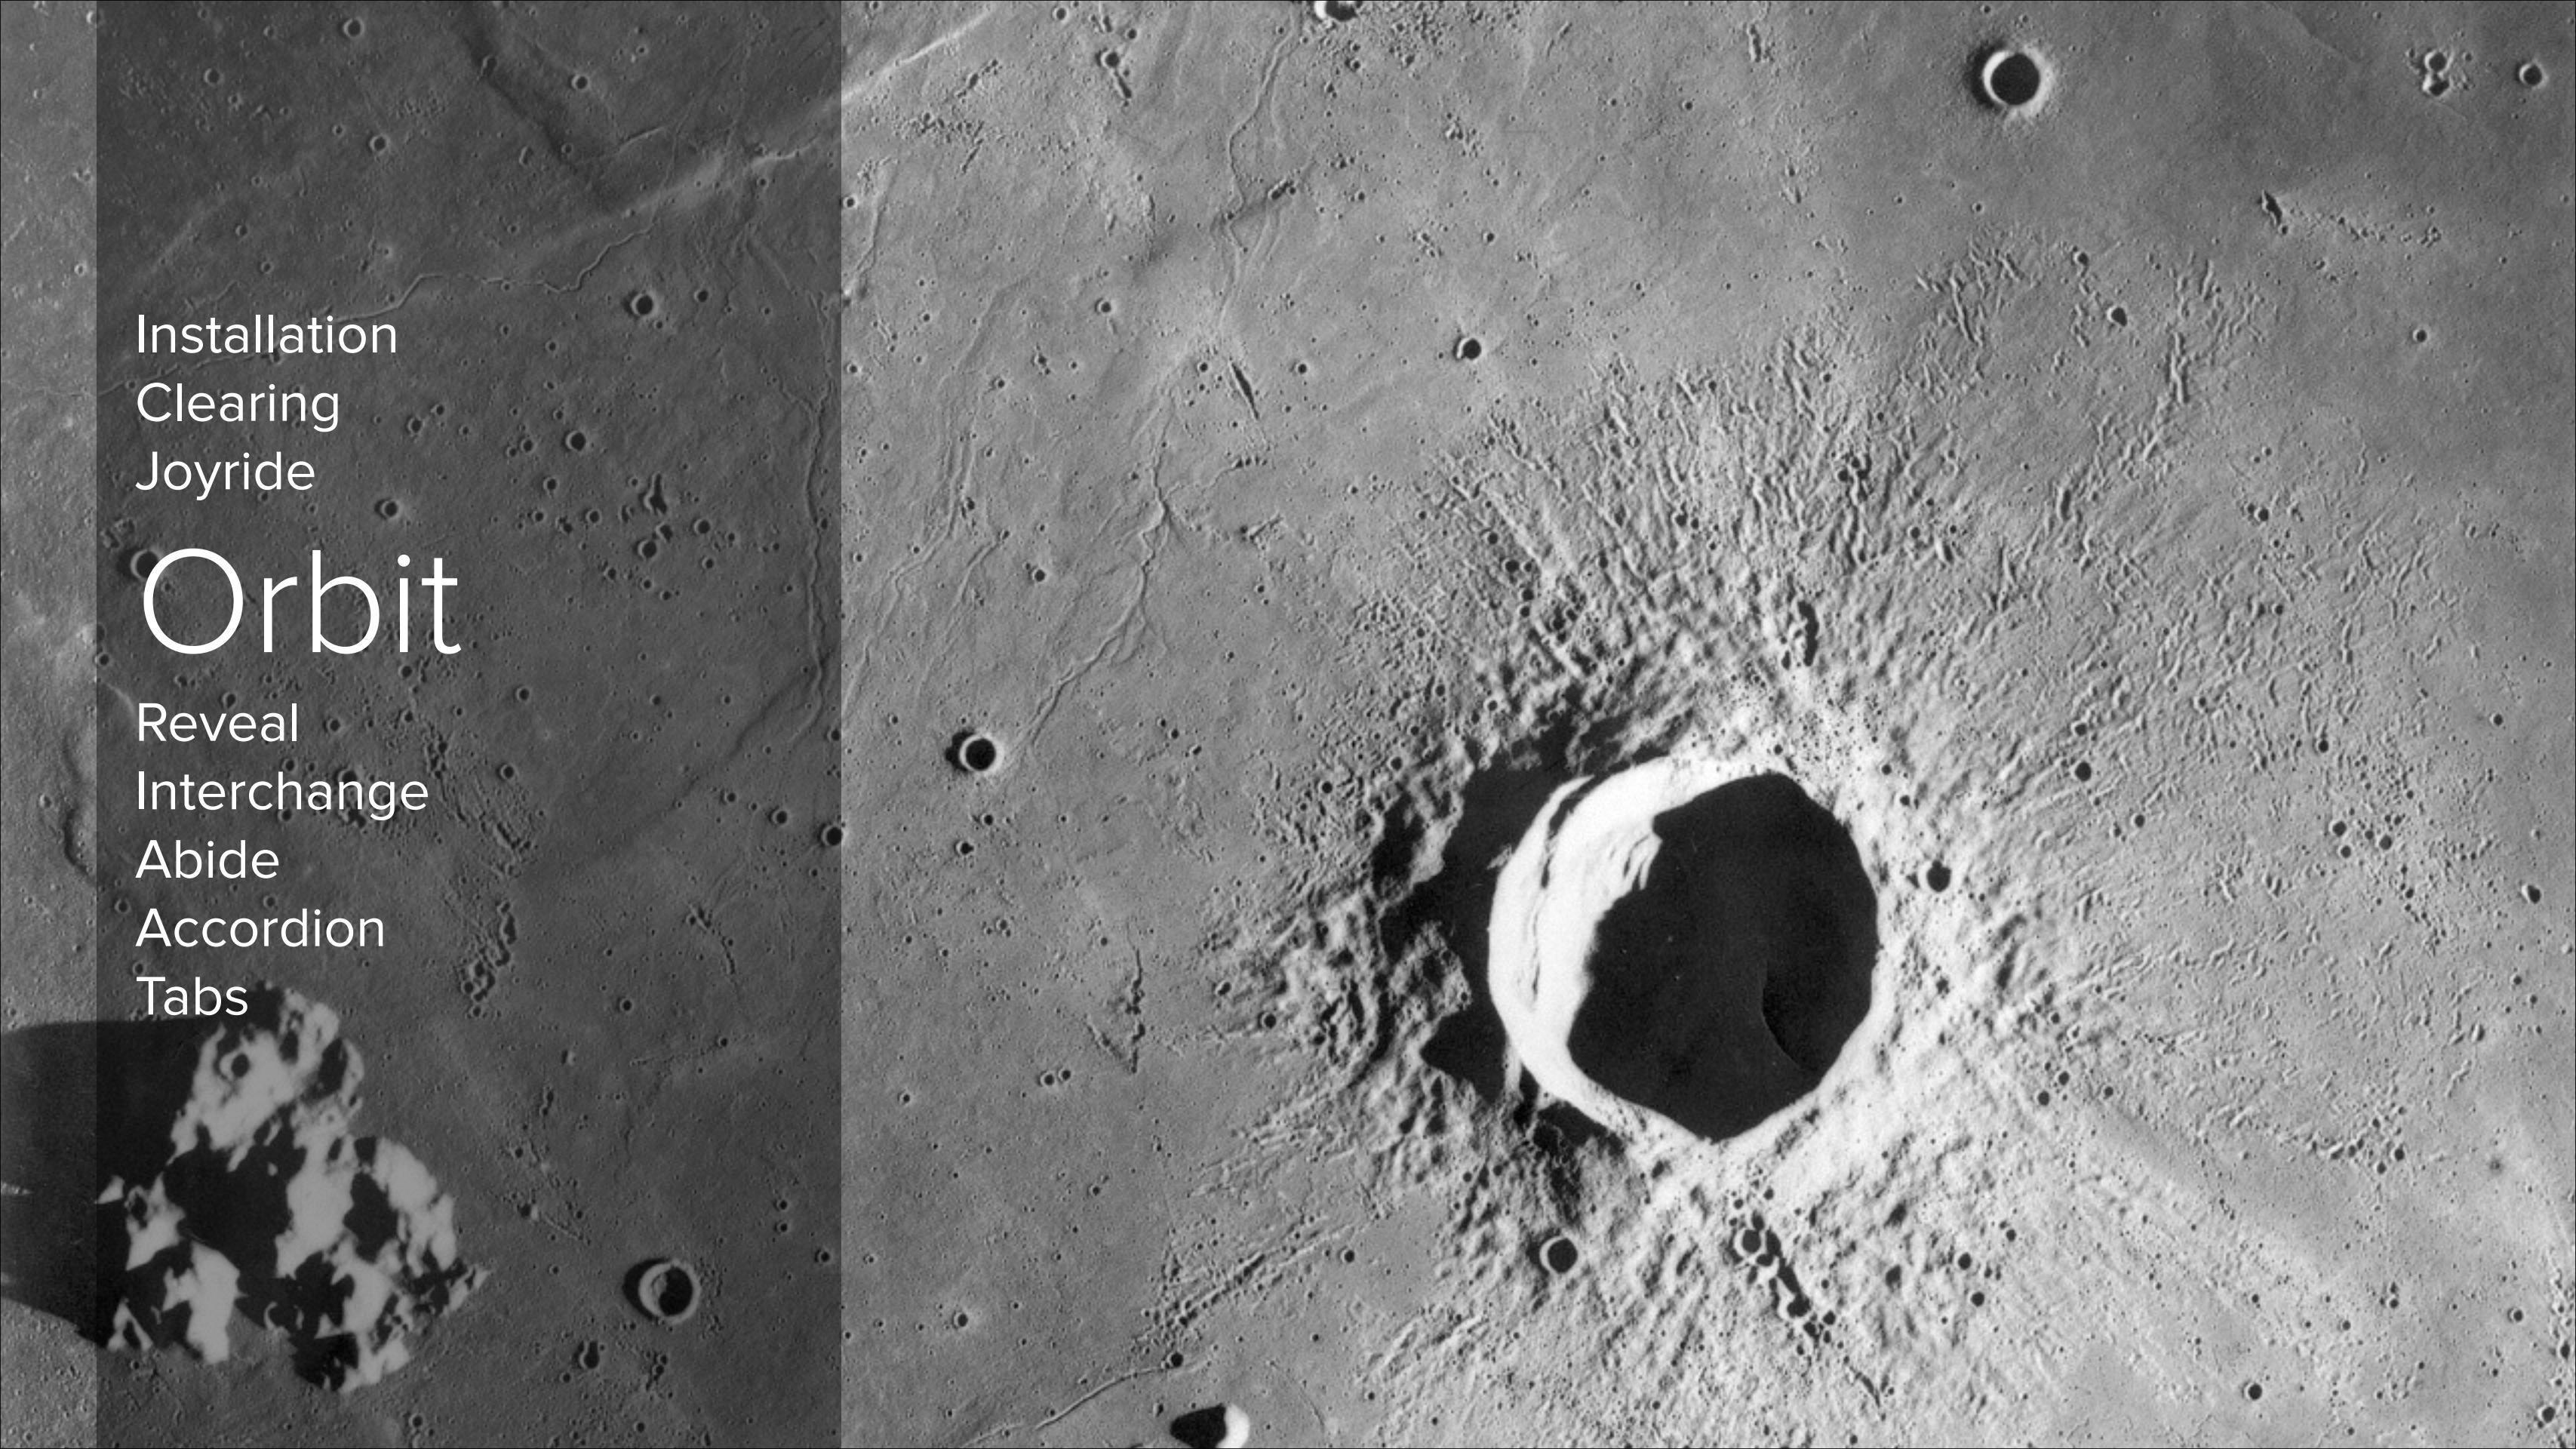

Installation
Clearing
Joyride

Orbit

Reveal
Interchange
Abide
Accordion
Tabs

Orbit Markup

```
<ul data-orbit>
  <li>
    
    <div class="orbit-caption">...</div>
  </li>
  <li>
    <h2>Content Slide</h2>
    <p>A really intriguing bit of content.</p>
  </li>
</ul>
```

Orbit Markup

```
<ul data-orbit>
  <li>
    
    <div class="orbit-caption">...</div>
  </li>
  <li>
    <h2>Content Slide</h2>
    <p>A really intriguing bit of content.</p>
  </li>
</ul>
```

Orbit Markup

```
<ul data-orbit>
<li>
  
  <div class="orbit-caption">...</div>
</li>
<li>
  <h2>Content Slide</h2>
  <p>A really intriguing bit of content.</p>
</li>
</ul>
```

```
<div class="orbit-container">
  <ul data-orbit>
    <li>
      
      <div class="orbit-caption">...</div>
    </li>
    <li>
      <h2>Content Slide</h2>
      <p>A really intriguing bit of content.</p>
    </li>
  </ul>

  <a href="#" class="orbit-prev">Prev <span></span></a>
  <a href="#" class="orbit-next">Next <span></span></a>

  <div class="orbit-slide-number">
    <span>1</span> of <span>3</span>
  </div>

  <div class="orbit-timer">
    <span></span>
    <div class="orbit-progress"></div>
  </div>
</div>

<ol class="orbit-bullets">
  <li data-orbit-slide-number="1"></li>
  <li data-orbit-slide-number="2" class="active"></li>
  <li data-orbit-slide-number="3"></li>
</ol>
```

orbit/example1.html

```
<div class="orbit-container">
  <ul data-orbit>
    <li>
      
      <div class="orbit-caption">...</div>
    </li>
    <li>
      <h2>Content Slide</h2>
      <p>A really intriguing bit of content.</p>
    </li>
  </ul>

  <a href="#" class="orbit-prev">Prev <span></span></a>
  <a href="#" class="orbit-next">Next <span></span></a>

  <div class="orbit-slide-number">
    <span>1</span> of <span>3</span>
  </div>

  <div class="orbit-timer">
    <span></span>
    <div class="orbit-progress"></div>
  </div>
</div>

<ol class="orbit-bullets">
  <li data-orbit-slide-number="1"></li>
  <li data-orbit-slide-number="2" class="active"></li>
  <li data-orbit-slide-number="3"></li>
</ol>
```

orbit/example1.html

```
<div class="orbit-container">
  <ul data-orbit>
    <li>
      
      <div class="orbit-caption">...</div>
    </li>
    <li>
      <h2>Content Slide</h2>
      <p>A really intriguing bit of content.</p>
    </li>
  </ul>

  <a href="#" class="orbit-prev">Prev <span></span></a>
  <a href="#" class="orbit-next">Next <span></span></a>

  <div class="orbit-slide-number">
    <span>1</span> of <span>3</span>
  </div>

  <div class="orbit-timer">
    <span></span>
    <div class="orbit-progress"></div>
  </div>
</div>

<ol class="orbit-bullets">
  <li data-orbit-slide-number="1"></li>
  <li data-orbit-slide-number="2" class="active"></li>
  <li data-orbit-slide-number="3"></li>
</ol>
```

orbit/example1.html

```
<div class="orbit-container">
  <ul data-orbit>
    <li>
      
      <div class="orbit-caption">...</div>
    </li>
    <li>
      <h2>Content Slide</h2>
      <p>A really intriguing bit of content.</p>
    </li>
  </ul>

  <a href="#" class="orbit-prev">Prev <span></span></a>
  <a href="#" class="orbit-next">Next <span></span></a>

  <div class="orbit-slide-number">
    <span>1</span> of <span>3</span>
  </div>

  <div class="orbit-timer">
    <span></span>
    <div class="orbit-progress"></div>
  </div>
</div>

<ol class="orbit-bullets">
  <li data-orbit-slide-number="1"></li>
  <li data-orbit-slide-number="2" class="active"></li>
  <li data-orbit-slide-number="3"></li>
</ol>
```

orbit/example1.html

```
<div class="orbit-container">
  <ul data-orbit>
    <li>
      
      <div class="orbit-caption">...</div>
    </li>
    <li>
      <h2>Content Slide</h2>
      <p>A really intriguing bit of content.</p>
    </li>
  </ul>

  <a href="#" class="orbit-prev">Prev <span></span></a>
  <a href="#" class="orbit-next">Next <span></span></a>

  <div class="orbit-slide-number">
    <span>1</span> of <span>3</span>
  </div>

  <div class="orbit-timer">
    <span></span>
    <div class="orbit-progress"></div>
  </div>
</div>

<ol class="orbit-bullets">
  <li data-orbit-slide-number="1"></li>
  <li data-orbit-slide-number="2" class="active"></li>
  <li data-orbit-slide-number="3"></li>
</ol>
```

orbit/example1.html

```
<div class="orbit-container">
  <ul data-orbit>
    <li>
      
      <div class="orbit-caption">...</div>
    </li>
    <li>
      <h2>Content Slide</h2>
      <p>A really intriguing bit of content.</p>
    </li>
  </ul>

  <a href="#" class="orbit-prev">Prev <span></span></a>
  <a href="#" class="orbit-next">Next <span></span></a>

  <div class="orbit-slide-number">
    <span>1</span> of <span>3</span>
  </div>

  <div class="orbit-timer">
    <span></span>
    <div class="orbit-progress"></div>
  </div>
</div>

<ol class="orbit-bullets">
  <li data-orbit-slide-number="1"></li>
  <li data-orbit-slide-number="2" class="active"></li>
  <li data-orbit-slide-number="3"></li>
</ol>
```

orbit/example1.html

Orbit Markup

```
<ul data-orbit>
  <li data-orbit-slide="slide-1">
    
    <div class="orbit-caption">...</div>
  </li>
  <li data-orbit-slide="slide-2">
    <h2>Content Slide</h2>
    <p>A really intriguing bit of content.</p>
  </li>
</ul>

<a href="#" data-orbit-link="slide-1">Slide 1</a>
<a href="#" data-orbit-link="slide-2">Slide 2</a>
```

Orbit Markup

```
<ul data-orbit>
  <li data-orbit-slide="slide-1">
    
    <div class="orbit-caption">...</div>
  </li>
  <li data-orbit-slide="slide-2">
    <h2>Content Slide</h2>
    <p>A really intriguing bit of content.</p>
  </li>
</ul>

<a href="#" data-orbit-link="slide-1">Slide 1</a>
<a href="#" data-orbit-link="slide-2">Slide 2</a>
```

Orbit Configuration

```
$(document).foundation('orbit', {  
    timer_speed: 10000,  
    animation_speed: 500,  
    bullets: true,  
    stack_on_small: true,  
    container_class: 'orbit-container',  
    stack_on_small_class: 'orbit-stack-on-small',  
    next_class: 'orbit-next',  
    prev_class: 'orbit-prev',  
    ...  
});
```

Orbit Configuration

```
$(document).foundation('orbit', {  
    timer_speed: 10000,  
    animation_speed: 500,  
    bullets: true,  
    stack_on_small: true,  
    container_class: 'orbit-container',  
    stack_on_small_class: 'orbit-stack-on-small',  
    next_class: 'orbit-next',  
    prev_class: 'orbit-prev',  
    ...  
});
```

Orbit Configuration

```
$(document).foundation('orbit', {  
    timer_speed: 10000,  
    animation_speed: 500,  
    bullets: true,  
    stack_on_small: true,  
    container_class: 'orbit-container',  
    stack_on_small_class: 'orbit-stack-on-small',  
    next_class: 'orbit-next',  
    prev_class: 'orbit-prev',  
    ...  
});
```

Orbit Configuration

```
$(document).foundation('orbit', {  
    timer_speed: 10000,  
    animation_speed: 500,  
    bullets: true,  
    stack_on_small: true,  
    container_class: 'orbit-container',  
    stack_on_small_class: 'orbit-stack-on-small',  
    next_class: 'orbit-next',  
    prev_class: 'orbit-prev',  
    ...  
});
```

Orbit Configuration

```
$(document).foundation('orbit', {  
    timer_speed: 10000,  
    animation_speed: 500,  
    bullets: true,  
    stack_on_small: true,  
    container_class: 'orbit-container',  
    stack_on_small_class: 'orbit-stack-on-small',  
    next_class: 'orbit-next',  
    prev_class: 'orbit-prev',  
    // and more  
});
```

Orbit Configuration

```
$(document).foundation('orbit', {  
    timer_speed: 10000,  
    animation_speed: 500,  
    bullets: true,  
    stack_on_small: true,  
    container_class: 'orbit-container',  
    stack_on_small_class: 'orbit-stack-on-small',  
    next_class: 'orbit-next',  
    prev_class: 'orbit-prev',  
    // and more  
});
```

Orbit Markup

```
<ul data-orbit data-options="timer_speed:2500; bullets:false;">
<li>
  
  <div class="orbit-caption">...</div>
</li>
<li>
  <h2>Content Slide</h2>
  <p>A really intriguing bit of content.</p>
</li>
</ul>
```

Installation
Clearing
Joyride
Orbit

Reveal

Interchange
Abide
Accordion
Tabs

Reveal Markup

```
<div id="myModal" class="reveal-modal" data-reveal>
  <h2>Read me. I'm important.</h2>
  <p class="lead">Modals should be fun.</p>
  <p>I'm a cool paragraph that lives inside of an even cooler modal. Wins</p>
  <a class="close-reveal-modal">✖</a>
</div>
```

Reveal Markup

```
<div id="myModal" class="reveal-modal" data-reveal>
  <h2>Read me. I'm important.</h2>
  <p class="lead">Modals should be fun.</p>
  <p>I'm a cool paragraph that lives inside of an even cooler modal. Wins</p>
  <a class="close-reveal-modal">✖</a>
</div>
```

Reveal Markup

```
<div id="myModal" class="reveal-modal" data-reveal>
  <h2>Read me. I'm important.</h2>
  <p class="lead">Modals should be fun.</p>
  <p>I'm a cool paragraph that lives inside of an even cooler modal. Wins</p>
  <a class="close-reveal-modal">✖</a>
</div>
```

Reveal Markup

```
<div id="myModal" class="reveal-modal" data-reveal>
  <h2>Read me. I'm important.</h2>
  <p class="lead">Modals should be fun.</p>
  <p>I'm a cool paragraph that lives inside of an even cooler modal. Wins</p>
  <a class="close-reveal-modal">✖</a>
</div>
```

Reveal Interaction

// Two ways:

```
<a href="#" data-reveal-id="myModal">Important Message</a>
```

// OR with JavaScript:

```
$( '#myModal' ).foundation( 'reveal', 'open' );
$( '#myModal' ).foundation( 'reveal', 'close' );
```

Reveal Interaction

// Two ways:

```
<a href="#" data-reveal-id="myModal">Important Message</a>
```

// OR with JavaScript:

```
$( '#myModal' ).foundation( 'reveal', 'open' );
$( '#myModal' ).foundation( 'reveal', 'close' );
```

Reveal Interaction

// Two ways:

```
<a href="#" data-reveal-id="myModal">Important Message</a>
```


// OR with JavaScript:

```
$( '#myModal' ).foundation( 'reveal', 'open' );
$( '#myModal' ).foundation( 'reveal', 'close' );
```

Reveal Event Binding

```
var callback = function () {  
  console.log('cool event');  
};
```

```
$('#myModal')  
  .on('open', callback)  
  .on('opened', callback)  
  .on('close', callback)  
  .on('closed', callback);
```

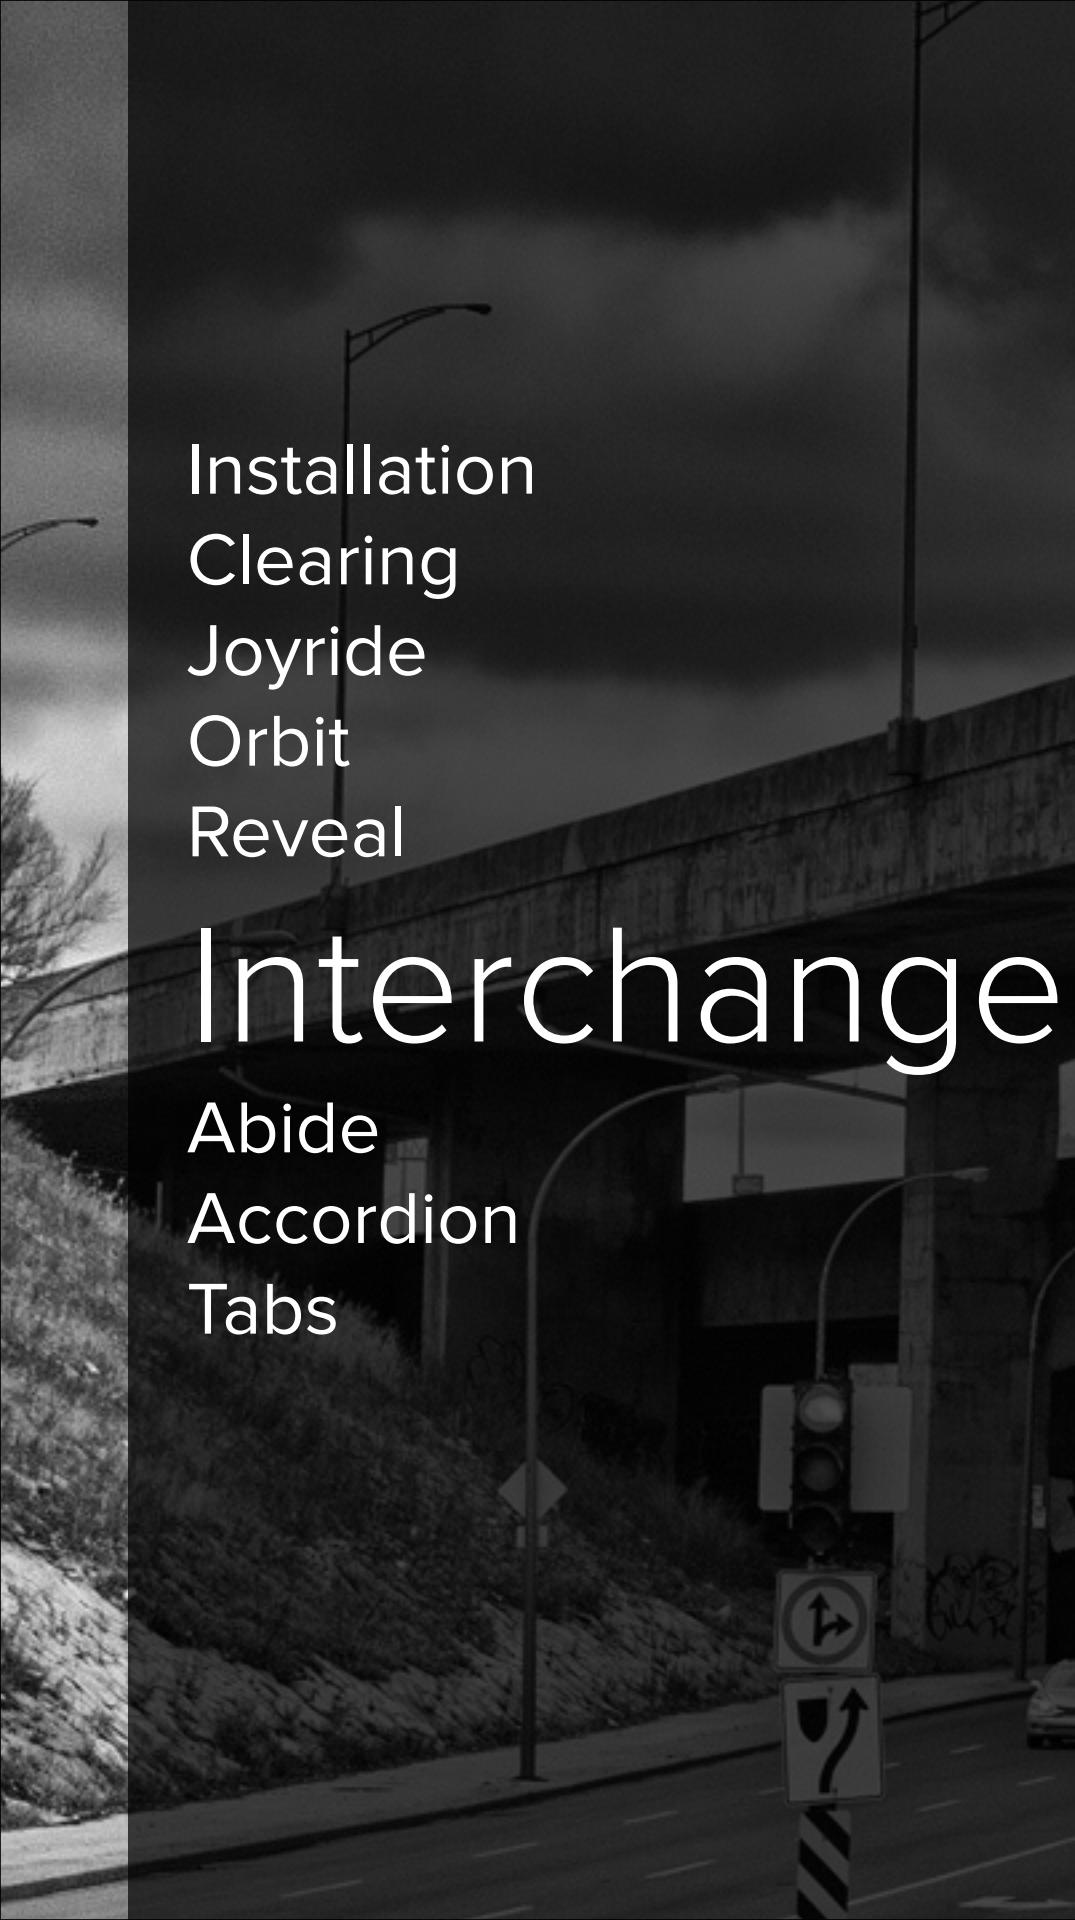

Installation
Clearing
Joyride
Orbit
Reveal

Interchange

Abide
Accordion
Tabs



Interchange

```
<div class="show-for-small">  
    
</div>  
  
<div class="show-for-medium">  
    
</div>  
  
<div class="show-for-large">  
    
</div>
```

[interchange/example1.html](#)

Interchange

```
<div class="show-for-small">  
    
</div>
```

```
<div class="show-for-medium">  
    
</div>
```

```
<div class="show-for-large">  
    
</div>
```

[interchange/example1.html](#)

Interchange (with named queries)

```
<img data-interchange="[default.jpg, (default)], [medium.jpg, (small)],  
[large.jpg, (medium)]" />
```

[interchange/example1.html](#)

Interchange (custom queries)

```
<img data-interchange="[my-image.jpg, (only screen and (max-width: 800px))]">
```

[interchange/example1.html](#)

Interchange with Content

```
<div data-interchange="[default.jpg, (default)], [medium.jpg, (small)],  
[large.jpg, (medium)]">  
  Loading...  
</div>
```

[interchange/example1.html](#)

Interchange Noscript Fallback

```
<img data-interchange="[default.jpg, (default)], [medium.jpg, (small)],  
[large.jpg, (medium)]" />  
<noscript>  
    
</noscript>
```

[interchange/example1.html](#)

Installation
Clearing
Joyride
Orbit
Reveal
Interchange

Abide

Accordion
Tabs



Abide Markup

```
<form action="/events/purchase" class="new_guest" method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text"></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div clas="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text"></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text"></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide Markup

```
<form action="/events/purchase" class="new_guest" data-abide method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text" pattern=".+@.+"
        required></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div class="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text" required></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text" pattern="number"
        required></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide Markup

```
<form action="/events/purchase" class="new_guest" data-abide method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text" pattern=".+@.+" required></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div clas="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text" required></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text" pattern="number" required></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide Markup

```
<form action="/events/purchase" class="new_guest" data-abide method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text" pattern=".+@.+" required></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div clas="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text" required></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text" pattern="number" required></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide Markup

```
<form action="/events/purchase" class="new_guest" data-abide method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text" pattern=".+@.+" required></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div clas="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text" required></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text" pattern="number"></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide with AJAX

```
<form action="/events/purchase" class="new_guest" data-abide method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text" pattern=".+@.+" required></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div clas="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text" required></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text" pattern="number" required></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide with AJAX

Foundation 4.3.2+

```
<form action="/events/purchase" class="new_guest" data-abide="ajax" method="post">
  <div class="row">
    <div class="large-6 small-12 columns">
      <label>Email <input name="email" type="text" pattern=".+@.+" required></label>
      <label>Address <input name="address" type="text"></label>
    </div>
  </div>
  <div clas="row">
    <div class="large-6 small-9 columns">
      <label>City <input name="city" type="text" required></label>
    </div>
    <div class="small-6 large-3 columns">
      <label>ZIP <input name="zipcode" type="text" pattern="number" required></label>
    </div>
  </div>

  <button type="submit" class="large blue button">Purchase Tickets</button>
</form>
```

Abide with AJAX

Foundation 4.3.2+

```
$('.new-guest')
.on('valid', function () {
  $.put(url, data, callback);
})
.on('invalid', function () {
  alert('Your form is invalid!');
});
```

Abide with AJAX

Foundation 4.3.2+

```
$('.new-guest')
.on('valid', function () {
  $.put(url, data, callback);
})
.on('invalid', function () {
  alert('Your form is invalid!');
});
```

Abide with AJAX

Foundation 4.3.2+

```
$('.new-guest')
.on('valid', function () {
  $.put(url, data, callback);
})
.on('invalid', function () {
  alert('Your form is invalid!');
});
```

Installation
Clearing
Joyride
Orbit
Reveal
Interchange
Abide

Accordion

Tabs



Accordion Markup

```
<dl class="accordion" data-accordion>
  <dd>
    <a href="#panel1">Accordion 1</a>
    <div id="panel1" class="content active">
      content
    </div>
  </dd>
  <dd>
    <a href="#panel2">Accordion 2</a>
    <div id="panel2" class="content">
      content
    </div>
  </dd>
</dl>
```

[accordion/example1.html](#)

Accordion Markup

```
<dl class="accordion" data-accordion>
  <dd>
    <a href="#panel1">Accordion 1</a>
    <div id="panel1" class="content active">
      content
    </div>
  </dd>
  <dd>
    <a href="#panel2">Accordion 2</a>
    <div id="panel2" class="content">
      content
    </div>
  </dd>
</dl>
```

[accordion/example1.html](#)

Accordion Markup

```
<dl class="accordion" data-accordion>
  <dd>
    <a href="#panel1">Accordion 1</a>
    <div id="panel1" class="content active">
      content
    </div>
  </dd>
  <dd>
    <a href="#panel2">Accordion 2</a>
    <div id="panel2" class="content">
      content
    </div>
  </dd>
</dl>
```

[accordion/example1.html](#)

Accordion Markup

```
<dl class="accordion" data-accordion>
<dd>
  <a href="#panel1">Accordion 1</a>
  <div id="panel1" class="content active">
    content
  </div>
</dd>
<dd>
  <a href="#panel2">Accordion 2</a>
  <div id="panel2" class="content">
    content
  </div>
</dd>
</dl>
```

[accordion/example1.html](#)

Accordion Markup

```
<dl class="accordion" data-accordion>
  <dd>
    <a href="#panel1">Accordion 1</a>
    <div id="panel1" class="content active">
      content
    </div>
  </dd>
  <dd>
    <a href="#panel2">Accordion 2</a>
    <div id="panel2" class="content">
      content
    </div>
  </dd>
</dl>
```

[accordion/example1.html](#)

Accordion Markup

```
<dl class="accordion" data-accordion>
  <dd>
    <a href="#panel1">Accordion 1</a>
    <div id="panel1" class="content active">
      content
    </div>
  </dd>
  <dd>
    <a href="#panel2">Accordion 2</a>
    <div id="panel2" class="content">
      content
    </div>
  </dd>
</dl>
```

[accordion/example1.html](#)

Accordion Markup

```
<dl class="accordion" data-accordion>
  <dd>
    <a href="#panel1">Accordion 1</a>
    <div id="panel1" class="content active">
      content
    </div>
  </dd>
  <dd>
    <a href="#panel2">Accordion 2</a>
    <div id="panel2" class="content">
      content
    </div>
  </dd>
</dl>
```

[accordion/example1.html](#)



Installation
Clearing
Joyride
Orbit
Reveal
Interchange
Abide
Accordion

Tabs

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Tabs Markup

```
<dl class="tabs" data-tab>
  <dd class="active"><a href="#panel2-1">Tab 1</a></dd>
  <dd><a href="#panel2-2">Tab 2</a></dd>
</dl>
<div class="tabs-content">
  <div class="content active" id="panel2-1">
    <p>First panel content goes here...</p>
  </div>
  <div class="content" id="panel2-2">
    <p>Second panel content goes here...</p>
  </div>
</div>
```

[tabs/example1.html](#)

Thank You