
Nu Html Checker

This tool is an ongoing experiment in better HTML checking, and its behavior remains subject to change

Showing results for contents of text-input area

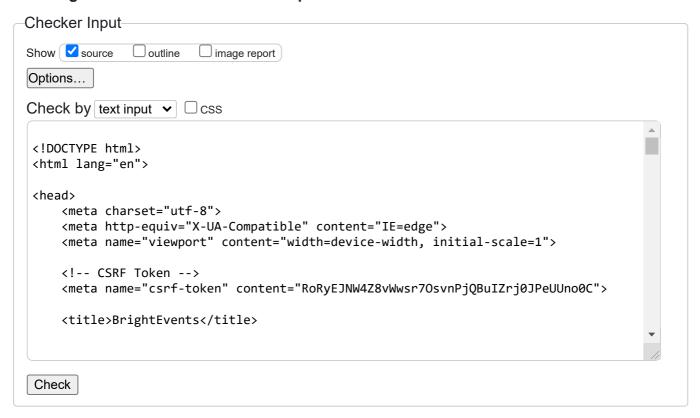

Use the Message Filtering button below to hide/show particular messages, and to see total counts of errors and warnings.

Message Filtering

```
1. Warning The type attribute is unnecessary for JavaScript resources.

From line 37, column 1; to line 37, column 73

</script>
</script>
</script type="text/javascript" src=http://localhost:8000/js/app.js

defer>

2. Warning The type attribute is unnecessary for JavaScript resources.

From line 38, column 1; to line 38, column 78

</script>
</script>
</script type="text/javascript"

src=http://localhost:8000/js/comments.js defer>

3. Warning The type attribute is unnecessary for JavaScript resources.

From line 39, column 1; to line 39, column 79
```

</script>

<script type="text/javascript"

src=http://localhost:8000/js/attendees.js defer></scri</pre>

```
Warning | The | type | attribute is unnecessary for JavaScript resources.
4.
   From line 40, column 1; to line 40, column 76
    </script>

</script type="text/javascript"
   src=http://localhost:8000/js/notification.js></scri</pre>
```

Warning | The type attribute is unnecessary for JavaScript resources. 5. From line 41, column 1; to line 41, column 75 </script>

</script type="text/javascript" src=http://localhost:8000/js/report.form.js></scri</pre>

Warning The type attribute is unnecessary for JavaScript resources. 6. From line 42, column 1; to line 42, column 69 </script>

</script type="text/javascript" src=http://localhost:8000/js/polls.js></scri</pre>

7. Warning | The type attribute is unnecessary for JavaScript resources. From line 43, column 1; to line 43, column 75 </script>

</script type="text/javascript" src=http://localhost:8000/js/style.js defer></scri</pre>

Warning The type attribute is unnecessary for JavaScript resources. 8. From line 47, column 1; to line 47, column 72 </script>

</script type="text/javascript" src=http://localhost:8000/js/location.js></scri</pre>

Warning The type attribute is unnecessary for JavaScript resources. From line 49, column 1; to line 49, column 31 /script>↔<script type="text/javascript">↔

Warning | The type attribute is unnecessary for JavaScript resources. 10. From line 66, column 9; to line 66, column 82 <script type="text/javascript" src=http://localhost:8000/js/auth.js</pre> defer></scri

Warning The navigation role is unnecessary for element nav . 11. From line 72, column 5; to line 73, column 38 <nav class="navbar navbar-expand-md navbar-light flex-wrap py-4</pre> fixed-top d-flex flex-collumn align-items-center"↔ role="navigation" id="navbar">←

```
12. Warning Consider using the h1 element as a top-level heading only (all h1 elements are treated as top-level headings by many screen readers and other tools).

From line 109, column 13; to line 109, column 16

<h1>Regist
```

```
13. Error A document must not include more than one autofocus attribute.

From line 113, column 13; to line 113, column 163

⟨input class="input" onchange="removeErrors('username');"

id="username" type="text" name="username" value="" placeholder="Username" required autofocus>↩
```

```
14. Error Duplicate attribute name.

At line 121, column 53

[e="gender" name="gender" id="g]
```

```
15. Error Stray start tag span.

From line 122, column 52; to line 122, column 76

disabled><span class="text-muted">Gender
```

```
16. Error Stray end tag span .

From line 122, column 83; to line 122, column 89

[ed">Gender</span></opti
```

```
17. Warning Section lacks heading. Consider using h2 h6 elements to add identifying headings to all sections.

From line 100, column 5; to line 100, column 75

nav>↔ <section class="w-100 position-relative wrapper flex-grow-1" id="main">↔
```

Document checking completed.

Source

```
<meta name="csrf-token"</pre>
11
   content="RoRyEJNW4Z8vWwsr7OsvnPjQBuIZrj0JPeUUno0C">←
12.
13.
        <title>BrightEvents</title>↔
14. ←
15. ←
16.
        <!-- Styles -->↔
        <link href="http://localhost:8000/css/milligram.min.css"</pre>
17.
   rel="stylesheet">↔
18.
        <link href="http://localhost:8000/css/app.css" rel="stylesheet">←
        <link href="http://localhost:8000/css/nav.css" rel="stylesheet">←
19.
        <link href="http://localhost:8000/css/breadcrumbs.css" rel="stylesheet">↔
20.
21.
        link
   href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css"
   rel="stylesheet"↔
22.
            integrity="sha384-
   1BmE4kWBq78iYhFldvKuhfTAU6auU8tT94WrHftjDbrCEXSU1oBoqyl2QvZ6jIW3"
   crossorigin="anonymous">↔
        <link rel="preconnect" href="https://fonts.googleapis.com">←
23.
        <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>←
24.
25.
        <link href="https://fonts.googleapis.com/css2?family=Spartan&display=swap"</pre>
   rel="stylesheet">↔
26.
        <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-</pre>
   icons@1.7.2/font/bootstrap-icons.css">↔
        k rel="stylesheet"
27.
   href="https://unpkg.com/leaflet@1.7.1/dist/leaflet.css"↔
            integrity="sha512-
28.
   xodZBNTC5n17Xt2atTPuE1HxjVMSvLVW9ocqUKLsCC5CXdbqCmblAshOMAS6/keqq/sMZMZ19scR4Ps
   ZChSR7A=="↔
            crossorigin="" />↩
29.
30. ←
31.
        <script src="https://code.jquery.com/jquery-3.2.1.slim.min.js"
</pre>
32. integrity="sha384-
   KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hXpG5KkN"
   crossorigin="anonymous"></script>↔
   src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.12.9/umd/popper.min.js"

34. integrity="sha384-
   ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusvfa0b4Q"
   crossorigin="anonymous"></script>↔
35. <script
   src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.
    js"←
36. integrity="sha384-
    ka7Sk0Gln4gmtz2MlQnikT1wXgYsOg+OMhuP+I1RH9sENBO0LRn5q+8nbTov4+1p"
   crossorigin="anonymous"></script>↔
37. <script type="text/javascript" src=http://localhost:8000/js/app.js defer>
    </script>↔
38. <script type="text/javascript" src=http://localhost:8000/js/comments.js defer>
    </script>↔
39. <script type="text/javascript" src=http://localhost:8000/js/attendees.js defer>
    </script>←
40. <script type="text/javascript" src=http://localhost:8000/js/notification.js>
41. <script type="text/javascript" src=http://localhost:8000/js/report.form.js>
42. <script type="text/javascript" src=http://localhost:8000/js/polls.js>
43. <script type="text/javascript" src=http://localhost:8000/js/style.js defer>
   </script>↔
44. <script src="https://unpkg.com/leaflet@1.7.1/dist/leaflet.js"↔
45. integrity="sha512-
   XQoYMqMTK8LvdxXYG3nZ448h0EQiglfqkJs1N0QV44cWnUrBc8PkAOcXy20w0vlaXaVUearIOBhiXZ5
   V3ynxwA=="↔
46. crossorigin=""></script>↔
47. <script type="text/javascript" src=http://localhost:8000/js/location.js>
    </script>↩
48. ←
49. <script type="text/javascript">↔
50.
        // Fix for Firefox autofocus CSS bug // See:
   http://stackoverflow.com/questions/18943276/html-5-autofocus-messes-up-css-
```

```
loading/18945951#18945951↔
 51. </script>↔
 52. ←
 53. ←
 54. ←
 55. <script src="//js.pusher.com/3.1/pusher.min.js"></script>↔
 56. ←
 57. <script>↔
 58.
         let pusher = new Pusher('5aaef3148145a5edc935', { ←
 59.
              encrypted: true, ←
              cluster: 'eu'↩
 60.
 61.
         });↩
 62.
 63.
         // Subscribe to the channel we specified in our Laravel Event↔
 64.
         </script>↔
              <link href="http://localhost:8000/css/auth.css" rel="stylesheet">↔
 65.
              <script type="text/javascript" src=http://localhost:8000/js/auth.js</pre>
 66.
     defer></script>↔
 67.
    \leftarrow
 68. </head>←
 69. ←
 70. <body class="min-vh-100 d-flex flex-column">←
 71. ←
 72.
         <nav class="navbar navbar-expand-md navbar-light flex-wrap py-4 fixed-top</pre>
     d-flex flex-collumn align-items-center"↔
              role="navigation" id="navbar">↩
 73.
 74.
              <div class="d-flex flex-grow-1 flex-wrap align-items-center w-100">←
 75.
                  <div class="d-flex flex-grow-1 align-items-center col-sm-12 col-md-</pre>
     auto">↩
                      <a class="navbar-brand" href=" http://localhost:8000 ">←
 76.
 77.
                          <h1><span class="highlight">B</span>right Events</h1>↔
 78.
                      </a>←
                      <a class="nav-item nav-link"</pre>
 79
     href="http://localhost:8000/events">↔
 80.
                          <h2>Events</h2>↔
 81.
                      </a>←
                      <a class="nav-item nav-link me-auto"</pre>
 82.
     href="http://localhost:8000/users">↔
 83.
                          <h2>Users</h2>↔
 84.
                      </a>←
 85.
                                       <button class="navbar-toggler" type="button"</pre>
     data-bs-toggle="collapse" data-bs-target="#collapsable"↔
 86.
                          aria-controls="collapsable" aria-expanded="false" aria-
     label="Toggle navigation">↔
 87.
                          <span class="navbar-toggler-icon"></span>↔
 88.
                      </button>↔
 89.
                  </div>←
                  <div id="collapsable" class="collapse navbar-collapse flex-grow-0</pre>
 90.
     col-sm-12 col-md-auto">←
 91.
                                           <a class="nav-item nav-link"</pre>
     href="http://localhost:8000/login">↔
 92.
                               <h2>Login</h2>↔
 93.
                          </a>←
 94.
                                   </div>←
 95.
 96.
              <div class="d-flex align-items-center w-100">←
 97.
                          </div>←
 98.
         </nav>←
 99. ←
100.
         <section class="w-100 position-relative wrapper flex-grow-1" id="main">←
101.
              <div id="growls">↔
102.
              </div>←
103.
              <section id="content" class="w-100 min-vh-100">←
104.
                  <div class="d-flex justify-content-center">↔
105.
         <div class="col-6 d-flex flex-column justify-content-center align-items-</p>
     center" id="edit-col">↔
              <form method="POST" action="http://localhost:8000/register" class="d-</pre>
106.
     flex flex-column col-lg-6 col-md-8 col-sm-10 gap-4">↔
                  <input type="hidden" name="_token</pre>
107.
     value="RoRyEJNW4Z8vWwsr7OsvnPjQBuIZrj0JPeUUno0C">←
108.
```

```
109.
                  <h1>Register</h1>↔
110.
                 <input class="input" onchange="removeErrors('name');" id="name"
name="name" value="" placeholder = "Name" required autofocus>←
111.
     type="text"
112.
113.
                  <input class="input" onchange="removeErrors('username');"</pre>
     id="username" type="text" name="username" value="" placeholder="Username"
     required autofocus>←
114.
                  <input class="input" onchange="removeErrors('email');" id="email"</pre>
115.
     type="email" name="email" value="" placeholder="Email" required>←
116.
117.
                  <input class="input" onchange="removeErrors('password');"</pre>
     id="password" type="password" name="password" placeholder="Password"
     required>↔
118.
119.
                  <input class="input" id="password-confirm" type="password"</pre>
     name="password_confirmation" placeholder="Confirm your password" required >↔
120.
                  <select class="input" name="gender" name="gender" id="gender"</pre>
121.
     required>←
                      <option value="" selected disabled><span class="text-</pre>
122.
     muted">Gender</span></option>←
                      <option value="Female">Female</option>←
123.
124.
                      <option value="Male">Male</option>←
                      <option value="Other">Other</option>←
125.
126.
                  </select>←
127. ←
128.
                  <button type="submit" class="btn btn-custom">←
129.
                  Register↩
130.
                  </button>←
131. ←
132.
                  <hr class="m-0">↔
133. ←
134.
                  ←
135.
                      Already registered?←
136.
                      <a class="register-link"</pre>
     href="http://localhost:8000/login">Login</a>↔
137.
                  ←
138.
              </form>←
139.
         </div>←
         <div id="thumbnail" class="d-none d-xl-block col-xl-6 bg-dark">\leftarrow
140.
141.
              <img src="/images/auth/register.jpg" alt="">←
142.
143. </div>←
144. ←
145. ←
146.
              </section>←
147.
         </section>←
148. ←
149.
         <footer class="footer mt-auto d-block" id="footer">←
150.
         <div class="w-100 p-2 d-flex justify-content-between align-items-center">←
151.
              <div class="d-inline-flex align-items-center">←
152.
                  @Bright Events 2021↔
153.
              </div>←
154.
              <div class="p-0 d-inline-flex justify-content-end">←
155.
                  <a class="btn" href="http://localhost:8000/contacts">←
156.
                      <h2 class="d-flex flex-no-wrap">Contact Us</h2>↔
157.
                  <a class="btn" href="http://localhost:8000/faq">←
158.
159.
                      <h2>FAQ</h2>←
160.
                  </a>←
                  <a class="btn" href="http://localhost:8000/about">←
161.
162.
                      <h2>About</h2>↔
163.
                  </a>←
164.
              </div>←
         </div>↩
165.
166. </footer>↔
167. ←
168. </body>←
169. ←
```

170. </html>

Used the HTML parser.

Total execution time 22 milliseconds.

About this checker • Report an issue • Version: 22.1.25