

Discrete Mathematics: Lecture 16

Part III. Mathematical Logic

proposition, truth value, propositional constant/variable, negation, conjunction, disjunction, implication, bi-implication, formula, precedence, translation

Xuming He

Associate Professor

School of Information Science and Technology
ShanghaiTech University

Spring Semester, 2023

Notes by Prof. Liangfeng Zhang

Mathematical Logic

Logic: the study of reasoning, the basis of all mathematical reasoning.

Mathematical logic: the mathematical study of reasoning and the study of mathematical reasoning //foundation of mathematics


- Leibniz: introduced the idea of mathematical logic in “Dissertation on the Art of Combinations” in 1666
 - universal system of reasoning: reasoning based on **symbols+calculations**
- **Contributors:** Boole, De Morgan, Frege, Peano, Russell, Hilbert, Gödel,...
- **Areas:** (1) set theory, (2) proof theory, (3) recursion theory, (4) model theory, and their foundation (5) propositional logic and predicate logic
- **Our focus:** propositional logic and predicate logic

Application: Logic-based Symbolic AI

- Logic (Knowledge-Based) AI
 - Knowledge base
 - set of sentences in a formal language to represent knowledge about the “world”
 - Inference engine
 - answers any answerable question following the knowledge base



IBM Watson

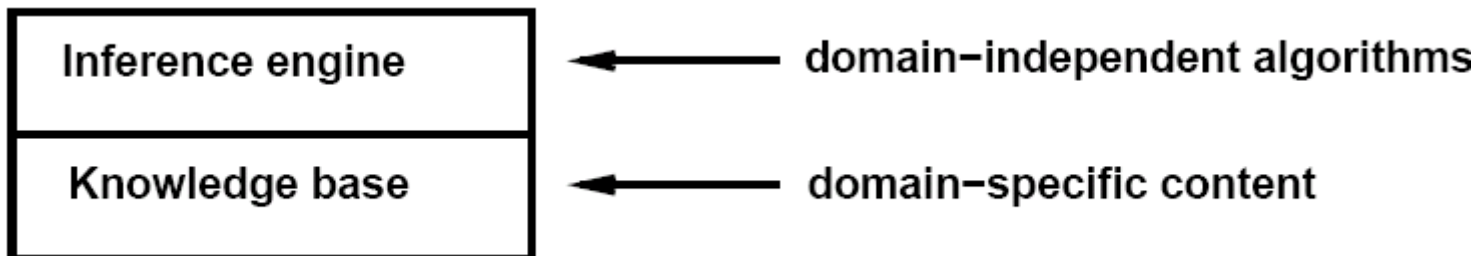

Proposition

DEFINITION: A **proposition** (命题) is a declarative sentence that is either true or false.

- Lower-case letters represent propositions: p, q, r, \dots
- **truth value** (真值): The truth value of p is true (**T**) if p is a true proposition. The truth value of p is false (**F**) if p is a false proposition.

EXAMPLE:

- $\sqrt{2}$ is irrational. (**T**)
- $1 + 1 = 2$. (**T**)
- $1 + 1 = 0$. (**F**)
- $(x^2)' = 2x$. (**T**)

Proposition

- Every even integer $n > 2$ is the sum of two primes.
 - Goldbach's conjecture
 - A proposition whose truth value is not known now
- 2 is rational and $\sqrt{2}$ is irrational.
 - A proposition that is not atomic
- What time is it?
 - Not a proposition. It's not declarative.
- Do not smoke!
 - Not a proposition. It's not declarative.
- $x + 1 = 2$.
 - Not a proposition. It's neither true nor false

Proposition

Simple Proposition_(简单命题): cannot be broken into 2 or more propositions

- $\sqrt{2}$ is irrational.

Compound Proposition_(复合命题): not simple

- 2 is rational and $\sqrt{2}$ is irrational.

Propositional Constant_(命题常项): a concrete proposition

- Every even integer $n > 2$ is the sum of two primes.

Propositional Variable_(命题变项): a variable that represents any proposition

- Lowercase letters denote proposition variables: p, q, r, s, \dots
 - Truth value is not determined until it is assigned a concrete proposition

Propositional Logic_(命题逻辑): the area of logic that deals with propositions

Negation (\neg)

DEFINITION: Let p be any proposition.

- The **negation** (否定) of p is the statement “It is not the case that p ”
- notation: $\neg p$; read as “not p ”
- **truth table** (真值表):

| p | $\neg p$ |
|----------|----------|
| T | F |
| F | T |

EXAMPLE:

- p : “Snow is black.”
 - $\neg p$: “It is not the case that snow is black.”
 - $\neg p$: “Snow is not black.”
 - $\neg p$ is not equal to “Snow is white.”

Negation (\neg)

DEFINITION: Let p be any proposition.

- The **negation** (否定) of p is the statement “It is not the case that p ”
- notation: $\neg p$; read as “not p ”
- **truth table** (真值表):

| p | $\neg p$ |
|----------|----------|
| T | F |
| F | T |

EXAMPLE:

- p : “Amy’s smartphone has at least 32 GB of memory.”
 - $\neg p$: “It is not the case that Amy’s smartphone has at least 32 GB of memory.”
 - $\neg p$: “Amy’s smartphone does not have at least 32 GB.”
 - $\neg p$: “Amy’s smartphone has less than 32 GB.”

Conjunction (\wedge)

DEFINITION: Let p, q be any propositions.

- The **conjunction** (合取) of p and q is the statement “ p and q ”
- Notation: $p \wedge q$; read as “ p and q ”
- Truth table:

| p | q | $p \wedge q$ |
|----------|----------|--------------|
| T | T | T |
| T | F | F |
| F | T | F |
| F | F | F |

EXAMPLE:

- p : “ $3 < 5$.”; q : “ $3^5 < 5^3$.”
 - $p \wedge q$: “ $3 < 5$ and $3^5 < 5^3$.” (**F**)

Disjunction (\vee)

DEFINITION: Let p, q be any propositions.

- The **disjunction** (析取) of p and q is the statement “ p or q ”
- Notation: $p \vee q$; read as “ p or q ”
- Truth table:

| p | q | $p \vee q$ |
|----------|----------|------------|
| T | T | T |
| T | F | T |
| F | T | T |
| F | F | F |

EXAMPLE:

- p : “ $e^{i\pi} = -1$.”; q : “Dog can fly.”
 - $p \vee q$: “ $e^{i\pi} = -1$ or dog can fly.” (T)

Implication (\rightarrow)

DEFINITION: Let p, q be any propositions.

- The conditional statement $p \rightarrow q$ (蕴涵) is the proposition “if p , then q .”
 - p : hypothesis; q : conclusion; read as “ p implies q ”, or “if p , then q ”
- Truth table:

| p | q | $p \rightarrow q$ |
|----------|----------|-------------------|
| T | T | T |
| T | F | F |
| F | T | T |
| F | F | T |

EXAMPLE:

- p : “you get 100 on the final”; q : “you will receive A+”
 - $p \rightarrow q$: “If you get 100 on the final, then you will receive A+.”
 - This is false when you get 100 on the final but don’t receive A+.
 - i.e., when p is true but q is false.

Bi-Implication (\leftrightarrow)

DEFINITION: Let p, q be any propositions.

- The biconditional statement $p \leftrightarrow q$ (等值) is the proposition “ p if and only if q .”
 - read as “ p if and only if q ”
- Truth table:

| p | q | $p \leftrightarrow q$ |
|----------|----------|-----------------------|
| T | T | T |
| T | F | F |
| F | T | F |
| F | F | T |

EXAMPLE:

- p : “you can take the flight”; q : “you buy a ticket”
 - $p \leftrightarrow q$: “You can take the flight if and only if you buy a ticket.”
 - False when $(p, q) = (\mathbf{T}, \mathbf{F})$ or (\mathbf{F}, \mathbf{T})

Well-Formed Formulas (合式公式)

DEFINITION: recursive definition of **well-formed formulas (WFFs)**

- ① propositional constants (**T**, **F**) and propositional variables are WFFs
- ② If A is a WFF, then $\neg A$ is a WFF
- ③ If A, B are WFFs, then $(A \wedge B)$, $(A \vee B)$, $(A \rightarrow B)$, $(A \leftrightarrow B)$ are WFFs
- ④ WFFs are results of finitely many applications of ①, ②, and ③

EXAMPLE:

- $\left(((p \rightarrow q) \wedge (q \rightarrow r)) \leftrightarrow (p \rightarrow r) \right)$ WFF
- $\neg p \vee q \vee$ not WFF
- $\neg(p \wedge q) \rightarrow (r \wedge s)$ WFF
- $(p \wedge q)\neg r$ not WFF

Use tree structure to check

REMARK: well-formed formulas=propositional formulas=formulas

Precedence of Logical Operators

Precedence (priority):

- ① Formulas inside () are computed firstly
- ② Different connectives: \neg , \wedge , \vee , \rightarrow , \leftrightarrow (Decreasing Precedence)
- ③ Same connectives: from left to the right

EXAMPLE:

- $\neg p \wedge q$:

$$(\neg p) \wedge q$$

- $\neg(p \wedge q)$:

First $p \wedge q$, then \neg

- $p \vee q \wedge r$:

$$p \vee (q \wedge r)$$

- $((p \rightarrow q) \wedge (q \rightarrow r)) \leftrightarrow (p \rightarrow r)$:

$$\underbrace{\underbrace{(p \rightarrow q)}_{\text{blue}} \wedge \underbrace{(q \rightarrow r)}_{\text{green}}}_{\text{blue}} \leftrightarrow \underbrace{(p \rightarrow r)}_{\text{blue}}$$

From Natural Language to WFFs

The Method of Translation:

- Introduce symbols $p, q, r \dots$ to represent simple propositions
- Connect the symbols with logical connectives to obtain WFFs

EXAMPLE:

- “It is not the case that snow is black.”
 - p : “Snow is black” Translation: $\neg p$
- “ π and e are both irrational.”
 - p : “ π is irrational.”; q : “ e is irrational.” Translation: $p \wedge q$
- “If π is irrational, then 2π is irrational”
 - p : “ π is irrational”; q : “ 2π is irrational” Translation: $p \rightarrow q$
- “ $e^\pi > \pi^e$ if and only if $\pi > e \ln \pi$.”
 - p : “ $e^\pi > \pi^e$ ”; q : “ $\pi > e \ln \pi$ ” Translation: $p \leftrightarrow q$

Remark: it is better to choose the simple proposition to be affirmative sentence.

Example

- $(\sqrt{2})^{\sqrt{2}}$ is rational or irrational. (ambiguity in natural language)
 - p : “ $(\sqrt{2})^{\sqrt{2}}$ is rational”; q : “ $(\sqrt{2})^{\sqrt{2}}$ is irrational”
 - **Explanation 1:** $(\sqrt{2})^{\sqrt{2}}$ cannot be neither rational nor irrational.
 - Translation 1: $p \vee q$
 - We agree that $p \vee q$ is the correct translation of “ $(\sqrt{2})^{\sqrt{2}}$ is rational or irrational .”
 - **Explanation 2:** $(\sqrt{2})^{\sqrt{2}}$ cannot be both rational and irrational.
 - Translation 2: $(p \wedge \neg q) \vee (q \wedge \neg p)$
 - We agree that $(p \wedge \neg q) \vee (q \wedge \neg p)$ is the translation of “ $(\sqrt{2})^{\sqrt{2}}$ is rational or irrational, but not both.”

Example

- You are eligible to be President of the U.S.A. only if you are at least 35 years old, were born in the U.S.A, or at the time of your birth both of your parents were citizens, and you have lived at least 14 years in the country.
 - e : “You are eligible to be President of the U.S.A.”
 - a : “You are at least 35 years old,”
 - b : “You were born in the U.S.A,”
 - p : “At the time of your birth, both of your parents were citizens,”
 - r : “You have lived at least 14 years in the U.S.A.”
 - Translation: $e \rightarrow (a \wedge (b \vee p) \wedge r)$

Example

- A comes to the party if and only if B doesn't come, but, if B comes, then C doesn't come and D comes.
- A sufficient condition for A coming to the party is that, if B does not come, then at least one of C and D must come.
 - a : "A comes to the party."
 - b : "B comes to the party."
 - c : "C comes to the party."
 - d : "D comes to the party."
 - Translation 1: $(a \leftrightarrow \neg b) \wedge (b \rightarrow (\neg c \wedge d))$
 - Translation 2: $(\neg b \rightarrow (c \vee d)) \rightarrow a$

Example

- **System Specifications:** Determine if there is a system that satisfy all of the following requirements.
 1. The diagnostic message is stored in the buffer or it is retransmitted.
 2. The diagnostic message is not stored in the buffer.
 3. If the diagnostic message is stored in the buffer, then it's retransmitted.
 - s : "The diagnostic message is stored in the buffer"
 - r : "The diagnostic message is retransmitted"
 - $s \vee r; \neg s; s \rightarrow r$
 - There is a system that satisfies 1, 2 and 3. ($s = \mathbf{F}, r = \mathbf{T}$)
 4. Add one more requirement "The diagnostic message is not retransmitted"
 - $s \vee r; \neg s; s \rightarrow r; \neg r$
 - There is no system that satisfies 1, 2, 3 and 4.