


Exercício 01, 02 e 03

Programa já instalado e conta já havia sido criada, segue print:

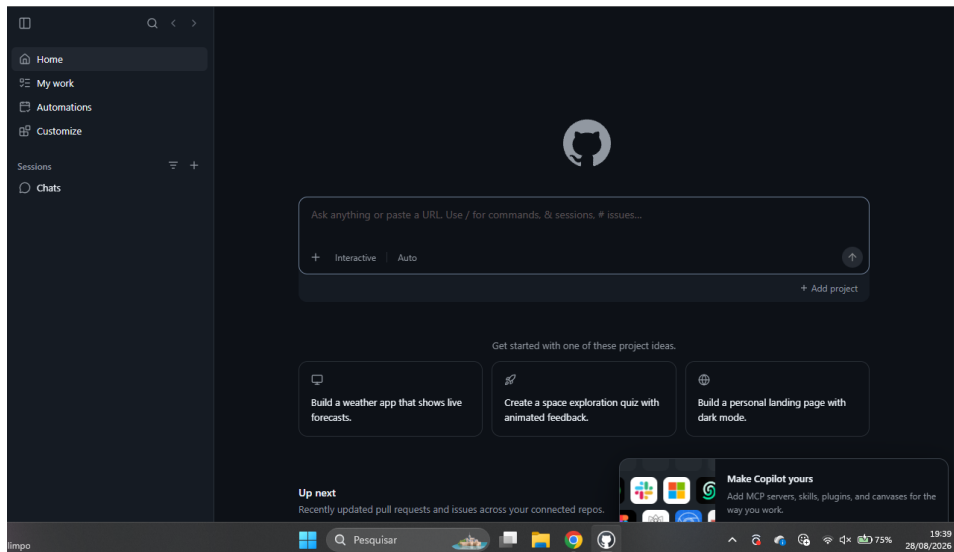

```
$ git config --show-origin rerere.autoUpdate  
file:/home/johndoe/.gitconfig false
```

Getting Help

If you ever need help while using Git, there are three equivalent ways to get the comprehensive manual page (manpage) help for any of the Git commands:

```
$ git help <verb>  
$ git <verb> --help  
$ man git-<verb>
```

For example, you can get the manpage help for the **git config** command by running this:

```
$ git help config
```

These commands are nice because you can access them anywhere, even offline. If the manpages and this book aren't enough and you need in-person help, you can try the **#git**, **#github**, or **#gitlab** channels on the Libera Chat IRC server, which can be found at <https://libera.chat/>. These channels are regularly filled with hundreds of people who are all very knowledgeable about Git and are often willing to help.


In addition, if you don't need the full-blown manpage help, but just need a quick refresher on the available options for a Git command, you can ask for the more concise "help" output with the **-h** option, as in:

30

501



Exercício 02

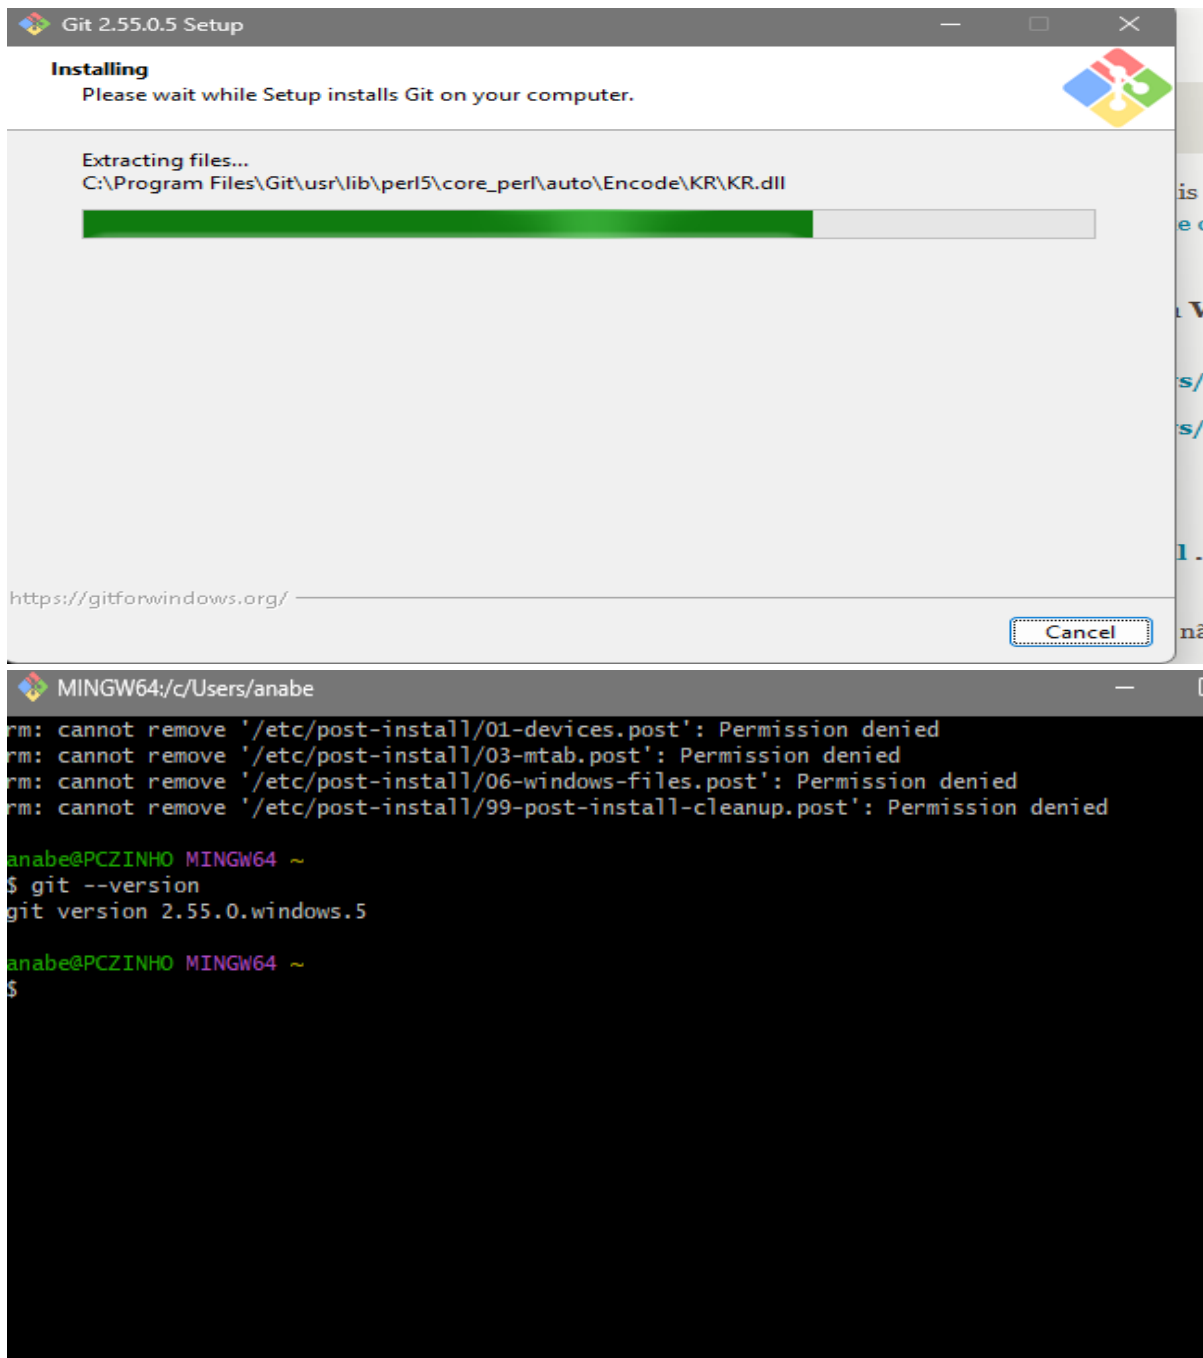

```
MINGW64:/c/Users/anabe
rm: cannot remove '/etc/post-install/01-devices.post': Permission denied
rm: cannot remove '/etc/post-install/03-mtab.post': Permission denied
rm: cannot remove '/etc/post-install/06-windows-files.post': Permission denied
rm: cannot remove '/etc/post-install/99-post-install-cleanup.post': Permission denied

anabe@PCZINHO MINGW64 ~
$ git config --global user.name "Ana Costa"
error: key does not contain a section: user

anabe@PCZINHO MINGW64 ~
$ git config --global user.name "Ana Costa"

anabe@PCZINHO MINGW64 ~
$ git config --global user.email "anabeatriz.silvac02@gmail.com"

anabe@PCZINHO MINGW64 ~
$ git config --global core.editor notepad

anabe@PCZINHO MINGW64 ~
$
```


```
MINGW64:/c/Users/anabe
Type
-t, --[no-]type <type>
                        value is given this type
--bool                  value is "true" or "false"
--int                   value is decimal number
--bool-or-int           value is --bool or --int
--bool-or-str           value is --bool or string
--path                  value is a path (file or directory name)
--expiry-date           value is an expiry date

Other
--[no-]default <value>
                        with --get, use default value when missing entry
--[no-]comment <value>
                        human-readable comment string (# will be prepended as needed)
--[no-]fixed-value      use string equality when comparing values to value pattern
--[no-]includes         respect include directives on lookup

anabe@PCZINHO MINGW64 ~
$ git config --global --list
user.name=Ana Costa
user.email=anabeatriz.silvac02@gmail.com
core.editor=code

anabe@PCZINHO MINGW64 ~
$
```

Houve um erro de escrita, mas, logo após foi corrigido.

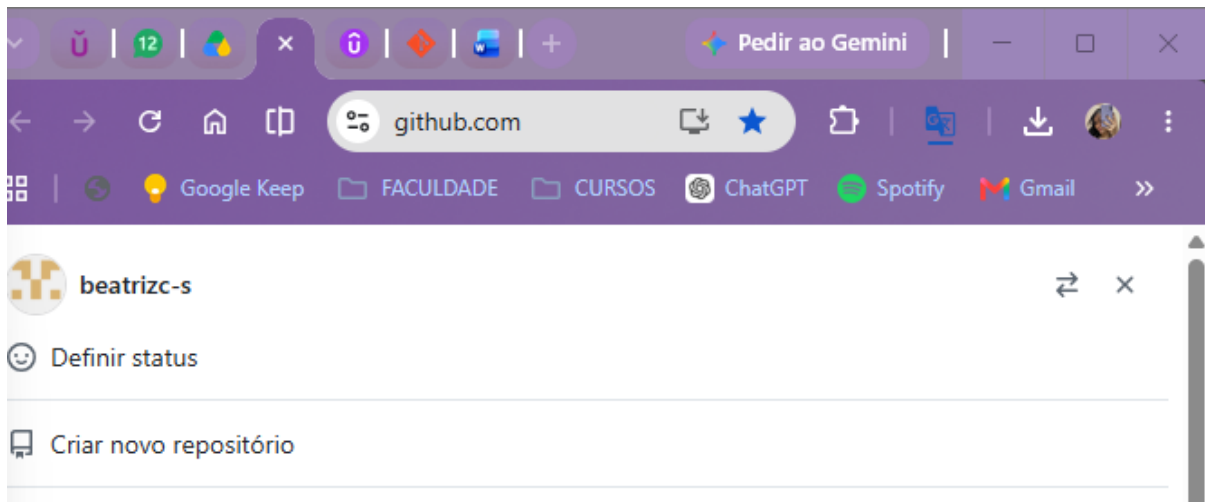

PDF 2:

1

Em geral

Proprietário *

beatrizc-s

Nome do repositório *

aula-git-github

aula-git-github está disponível.

Ótimos nomes de repositórios são curtos e fáceis de lembrar. Que tal? [invenção-curva?](#)

Descrição

0 / 350 caracteres

2

Configuração

Selecione a visibilidade *

Escolha quem pode ver e enviar alterações para este repositório.

Público

Adicionar arquivo README

Os arquivos README podem ser usados como descrições mais longas. [Sobre os arquivos README](#)

Sobre ☐

Adicione .gitignore

O arquivo .gitignore informa ao Git quais arquivos não devem ser rastreados. [Saiba mais sobre como ignorar arquivos.](#)

Java

Adicionar licença

As licenças explicam como outras pessoas podem usar seu código. [Sobre licenças.](#)

Sem licença

Criar repositório

principal



Acesse o arquivo



<> Código

beatrizc-s Confirmação inicial

6d176a2 · agora

.gitignore	Confirmação inicial	agora
README.md	Confirmação inicial	agora

LEIA-ME



adendo-git-github



```
MINGW64:/c/Users/anabe
anabe@PCZINHO MINGW64 ~
$ git config --global --list
user.name=Ana Costa
user.email=anabeatriz.silvac02@gmail.com
core.editor=code

anabe@PCZINHO MINGW64 ~
$ git clone ^[[200~https://github.com/beatrizc-s/aula-git-github.git~
Cloning into 'aula-git-github.git'...
fatal: protocol '?[200~https' is not supported

anabe@PCZINHO MINGW64 ~
$ git clone ^[[200~https://github.com/beatrizc-s/aula-git-github.git
Cloning into 'aula-git-github'...
fatal: protocol '?[200~https' is not supported

anabe@PCZINHO MINGW64 ~
$ git clone https://github.com/beatrizc-s/aula-git-github.git
Cloning into 'aula-git-github'...
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (4/4), done.

anabe@PCZINHO MINGW64 ~
$
```

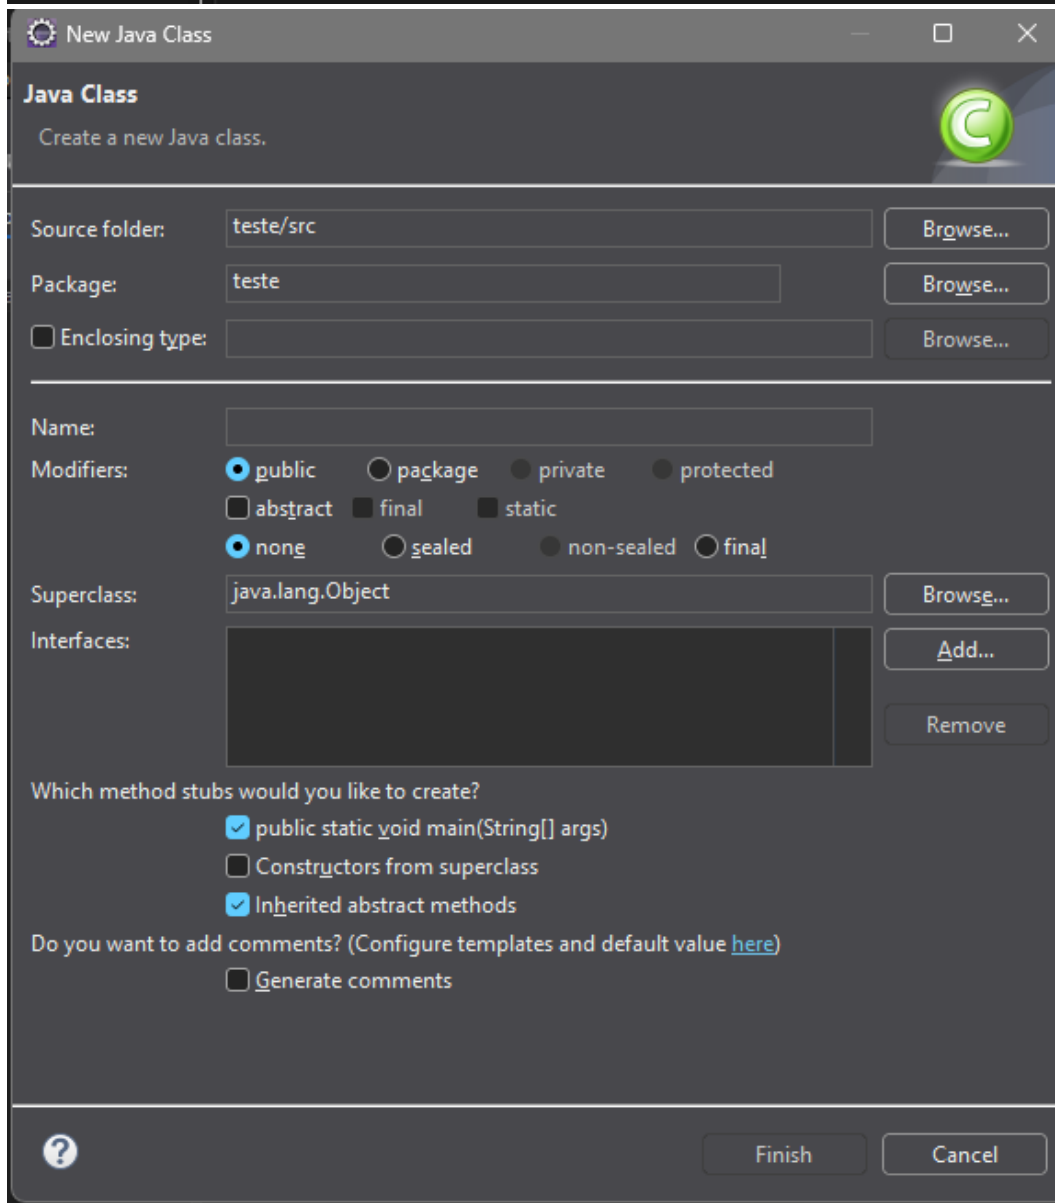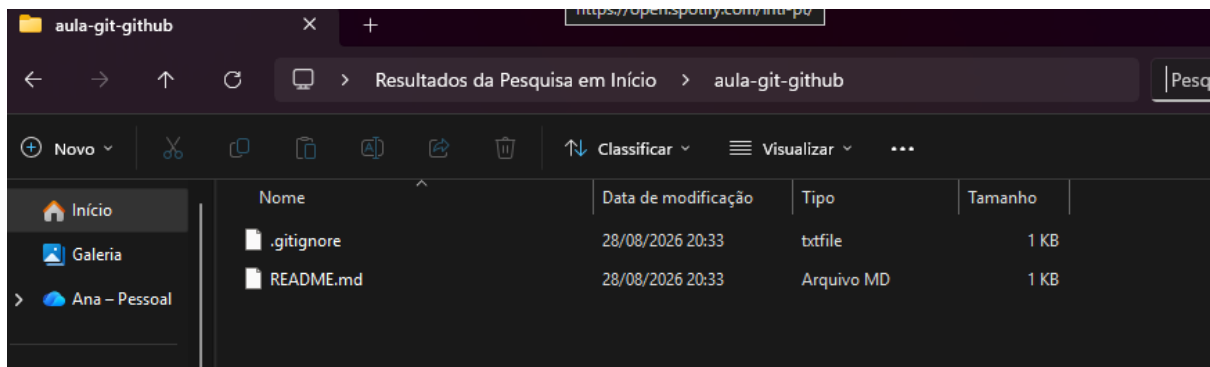

```
fatal: not a git repository (or any of the parent directories): .git

anabe@PCZINHO MINGW64 ~
$ git status
fatal: not a git repository (or any of the parent directories): .git

anabe@PCZINHO MINGW64 ~
$ cd aula-git-github

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   .gitignore

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    teste/

no changes added to commit (use "git add" and/or "git commit -a")

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$
```

```
MINGW64:/c/Users/anabe/aula-git-github

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git add .
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'teste/.gitignore', LF will be replaced by CRLF the next time Git touches it

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   .gitignore
    new file:   teste/.classpath
    new file:   teste/.gitignore
    new file:   teste/.project
    new file:   teste/.settings/org.eclipse.core.resources.prefs
    new file:   teste/.settings/org.eclipse.jdt.core.prefs
    new file:   teste/src/module-info.java
    new file:   teste/src/teste/teste.java

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$
```

```
MINGW64:/c/Users/anabe/aula-git-github
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   .gitignore
    new file:   teste/.classpath
    new file:   teste/.gitignore
    new file:   teste/.project
    new file:   teste/.settings/org.eclipse.core.resources.prefs
    new file:   teste/.settings/org.eclipse.jdt.core.prefs
    new file:   teste/src/module-info.java
    new file:   teste/src/teste/teste.java

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git commit -m "Primeiro commit do projeto: classe Java Teste vazia."
[main 277b5a8] Primeiro commit do projeto: classe Java Teste vazia.
 8 files changed, 60 insertions(+)
 create mode 100644 teste/.classpath
 create mode 100644 teste/.gitignore
 create mode 100644 teste/.project
 create mode 100644 teste/.settings/org.eclipse.core.resources.prefs
 create mode 100644 teste/.settings/org.eclipse.jdt.core.prefs
 create mode 100644 teste/src/module-info.java
 create mode 100644 teste/src/teste/teste.java

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$

MINGW64:/c/Users/anabe/aula-git-github

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git commit -m "Primeiro commit do projeto: classe Java Teste vazia."
[main 277b5a8] Primeiro commit do projeto: classe Java Teste vazia.
 8 files changed, 60 insertions(+)
 create mode 100644 teste/.classpath
 create mode 100644 teste/.gitignore
 create mode 100644 teste/.project
 create mode 100644 teste/.settings/org.eclipse.core.resources.prefs
 create mode 100644 teste/.settings/org.eclipse.jdt.core.prefs
 create mode 100644 teste/src/module-info.java
 create mode 100644 teste/src/teste/teste.java

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git push
Enumerating objects: 16, done.
Counting objects: 100% (16/16), done.
Delta compression using up to 8 threads
Compressing objects: 100% (11/11), done.
Writing objects: 100% (14/14), 1.62 KiB | 414.00 KiB/s, done.
Total 14 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/beatrizc-s/aula-git-github.git
   6d176a2..277b5a8  main -> main

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ |
```



```
MINGW64:/c/Users/anabe/aula-git-github
create mode 100644 teste/.project
create mode 100644 teste/.settings/org.eclipse.core.resources.prefs
create mode 100644 teste/.settings/org.eclipse.jdt.core.prefs
create mode 100644 teste/src/module-info.java
create mode 100644 teste/src/teste/teste.java

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git push
Enumerating objects: 16, done.
Counting objects: 100% (16/16), done.
Delta compression using up to 8 threads
Compressing objects: 100% (11/11), done.
Writing objects: 100% (14/14), 1.62 KiB | 414.00 KiB/s, done.
Total 14 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/beatrizc-s/aula-git-github.git
  6d176a2..277b5a8  main -> main

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ |
```

 beatrizc-s / adendo-git-github

[<> Código](#) [Problemas](#) [Solicitações de pull](#) [Agentes](#) [Ações](#) [P](#)

 **adendo-git-github** Público Alfinete Assistir 0

 principal

Acesse o arquivo

+

[<> Código](#)

 beatrizc-s

Primeiro commit do projeto: classe Java Teste... 277b5a8 · há 3 minutos



 teste

Primeiro commit do projeto: cl...

há 3 minutos

 principal ▾

adendo-git-github / teste / src / teste

Q Acesse o arquivo T ...

/ teste.java 

 beatrizc-s Corrigir a lógica de adição e a inicialização de variáveis. 7adb130 - agora 

Código Culpa 12 lines (7 loc) · 145 Bytes

  Cru   ▾ 

```
1 pacote teste;
2
3 ▾ público aula teste{
4
5 ▾    público estático vaziao principal(Corda[]argumentos) {
6         // int num1 = 3, num2 = , soma;}
7
8         soma=num1+num2;
9
10    }
11
12 }
```

MINGW64:/c/Users/anabe/aula-git-github

Delta compression using up to 8 threads
Compressing objects: 100% (11/11), done.
Writing objects: 100% (14/14), 1.62 KiB | 414.00 KiB/s, done.
Total 14 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/beatrizc-s/aula-git-github.git
6d176a2..277b5a8 main -> main

anabe@PCZINHO MINGW64 ~/aula-git-github (main)

\$ git status

On branch main

Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)

\$ git fetch

remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.23 KiB | 50.00 KiB/s, done.
From https://github.com/beatrizc-s/aula-git-github
277b5a8..7adb130 main -> origin/main

anabe@PCZINHO MINGW64 ~/aula-git-github (main)

\$ |

```
MINGW64/c/Users/anabe/aula-git-github
anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git fetch
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.23 KiB | 50.00 KiB/s, done.
From https://github.com/beatrizc-s/aula-git-github
 277b5a8..7adb130  main      -> origin/main

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is behind 'origin/main' by 1 commit, and can be fast-forwarded.
(use "git pull" to update your local branch)

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$
```

```
MINGW64/c/Users/anabe/aula-git-github
anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git fetch
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.23 KiB | 50.00 KiB/s, done.
From https://github.com/beatrizc-s/aula-git-github
 277b5a8..7adb130  main      -> origin/main

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is behind 'origin/main' by 1 commit, and can be fast-forwarded.
(use "git pull" to update your local branch)

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git pull
Updating 277b5a8..7adb130
Fast-forward
 teste/src/teste/teste.java | 4 +++-
 1 file changed, 3 insertions(+), 1 deletion(-)

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$
```

/ teste.java



beatrizc-s Corrigir erros de sintaxe em teste.java

651f902 - agora

Código

Culpa

13 lines (8 loc) · 173 Bytes



Cru



```
1  pacote teste;
2
3  ✓ público aula teste{
4
5  ✓    público estático vaziao principal(Corda[]argumentos) {
6      // int num1 = 3, num2 = , soma;}
7
8      soma=num1+num2;
9      Sistema.fora.imprimirEm(soma);
10
11  }
12
13  }
```



MINGW64/c/Users/anabe/aula-git-github

(use "git pull" to update your local branch)

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)

\$ git pull

Updating 277b5a8..7adb130

Fast-forward

teste/src/teste/teste.java | 4 +++-

1 file changed, 3 insertions(+), 1 deletion(-)

anabe@PCZINHO MINGW64 ~/aula-git-github (main)

\$ git pull

remote: Enumerating objects: 11, done.

remote: Counting objects: 100% (11/11), done.

remote: Compressing objects: 100% (5/5), done.

remote: Total 6 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)

Unpacking objects: 100% (6/6), 1.17 KiB | 44.00 KiB/s, done.

From https://github.com/beatrizc-s/aula-git-github

7adb130..651f902 main -> origin/main

Updating 7adb130..651f902

Fast-forward

teste/src/teste/teste.java | 1 +

1 file changed, 1 insertion(+)

anabe@PCZINHO MINGW64 ~/aula-git-github (main)

\$

```
MINGW64:/c/Users/anabe/aula-git-github
Fast-forward
 teste/src/teste/teste.java | 4 +++-
 1 file changed, 3 insertions(+), 1 deletion(-)

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git pull
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.17 KiB | 44.00 KiB/s, done.
From https://github.com/beatrizc-s/aula-git-github
 7adb130..651f902  main      -> origin/main
Updating 7adb130..651f902
Fast-forward
 teste/src/teste/teste.java | 1 +
 1 file changed, 1 insertion(+)

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

anabe@PCZINHO MINGW64 ~/aula-git-github (main)
$
```