

Test Results


The workflow was tested using Postman with both successful and failure scenarios.


1. Happy-path test

A valid referral payload was sent through the webhook using a valid partner code and a valid prospect email address.

Result: The request successfully passed the required-field validation, partner validation, and external email verification. The workflow then sent the required email notifications, stored the referral in Google Sheets, and returned:

```
{
  "success": true,
  "message": "Referral received"
}
```

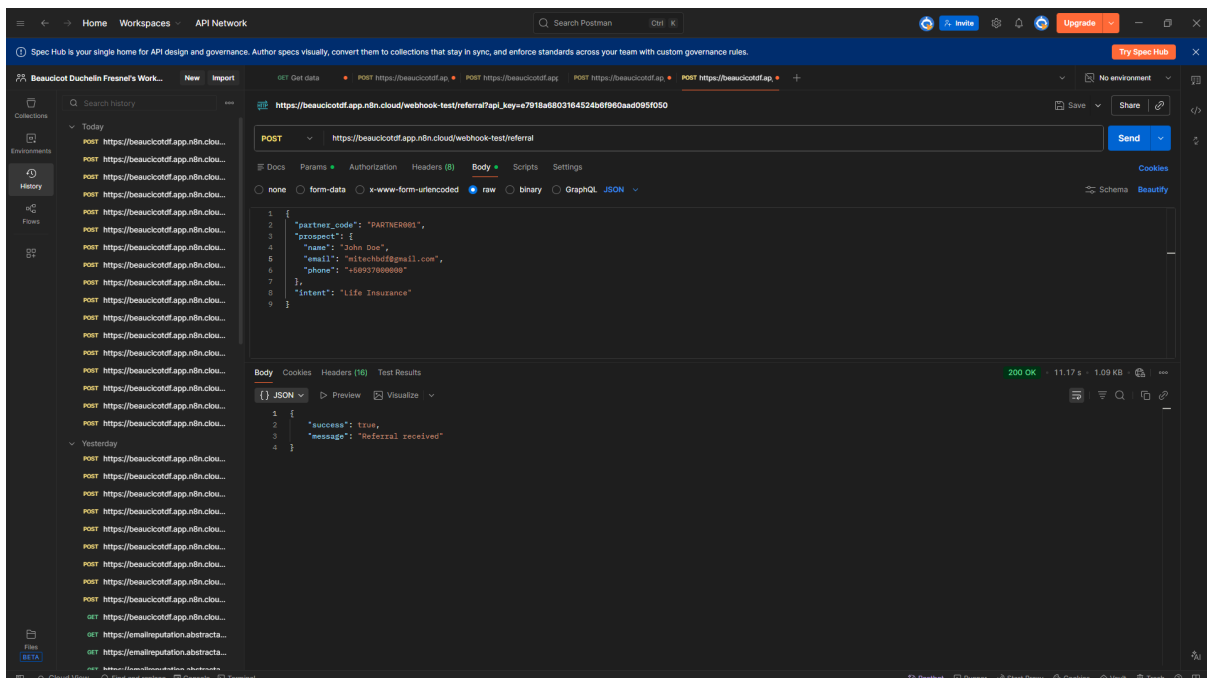


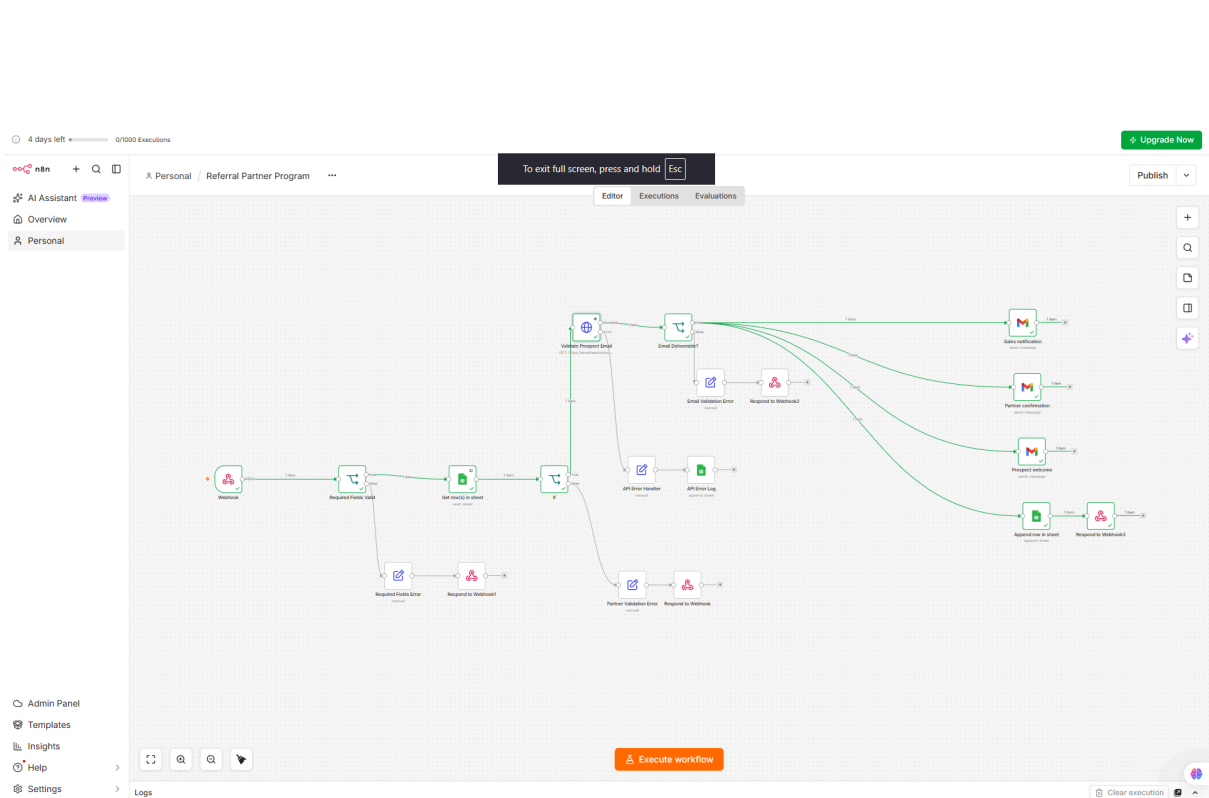


2. Required-field validation test

A request with a missing required field was tested.

Result: The workflow stopped before processing the referral and returned a **400** response with an error indicating the missing required field.

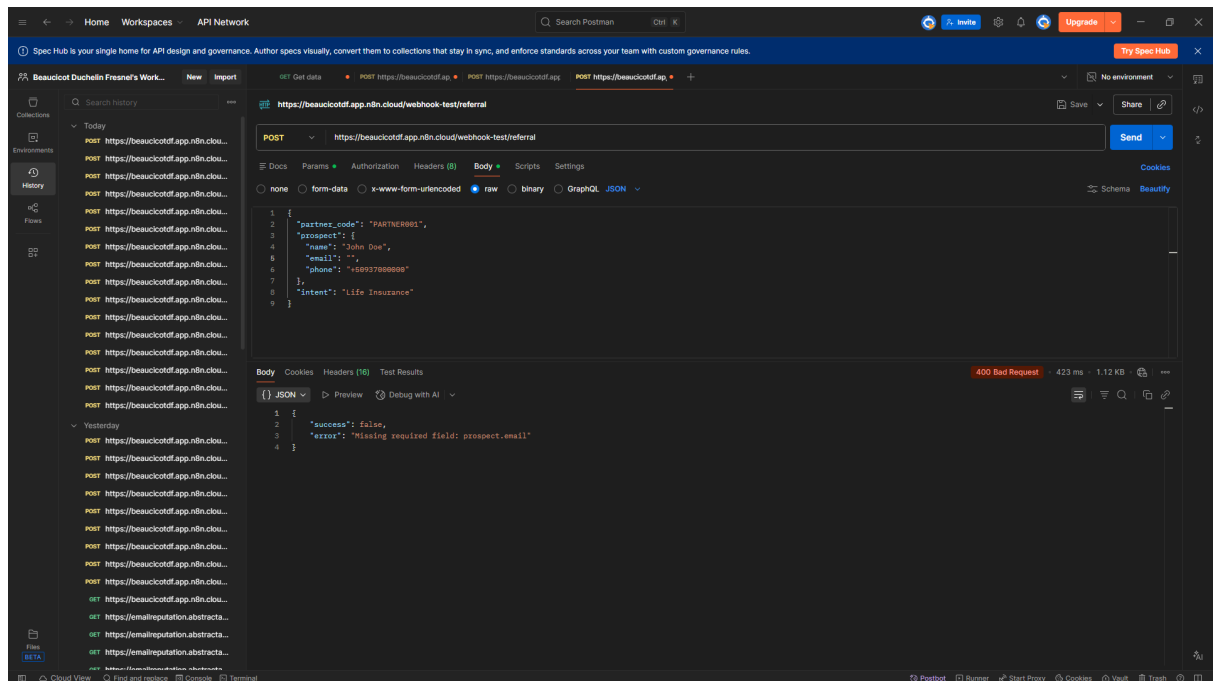


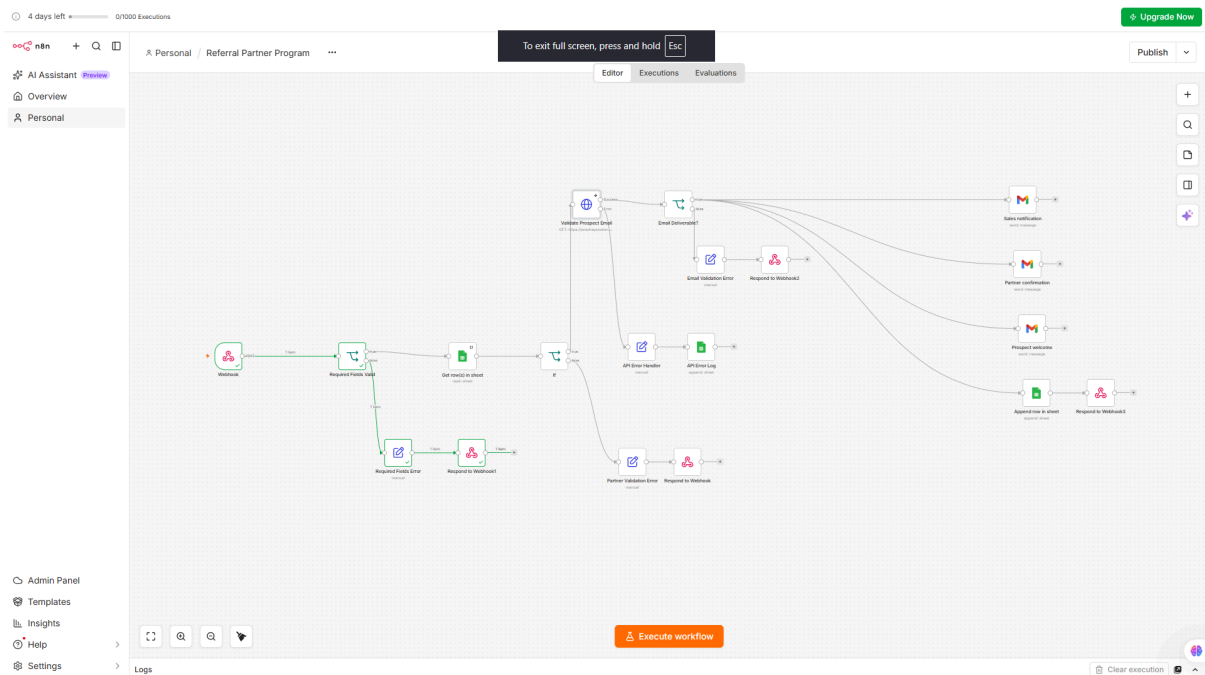


3. Invalid/inactive partner test

A referral was tested with an unknown or inactive partner code.

Result: The workflow rejected the referral before calling the external API and returned a **400** error indicating that the partner code was unknown or inactive.

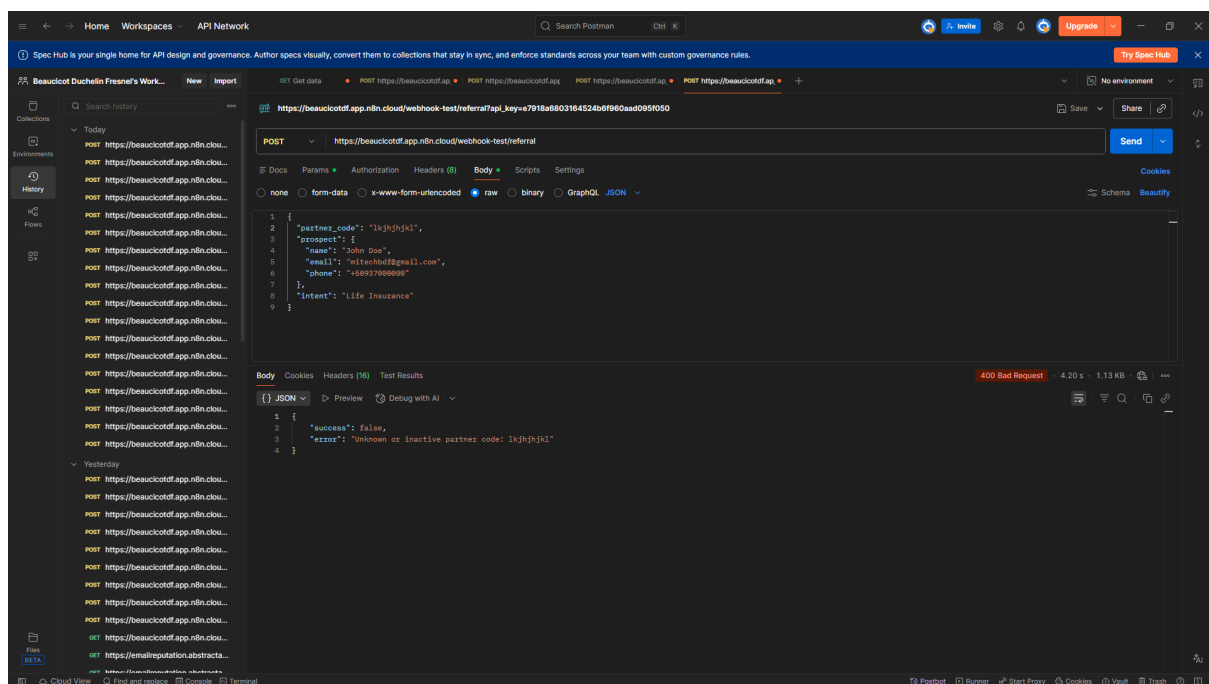

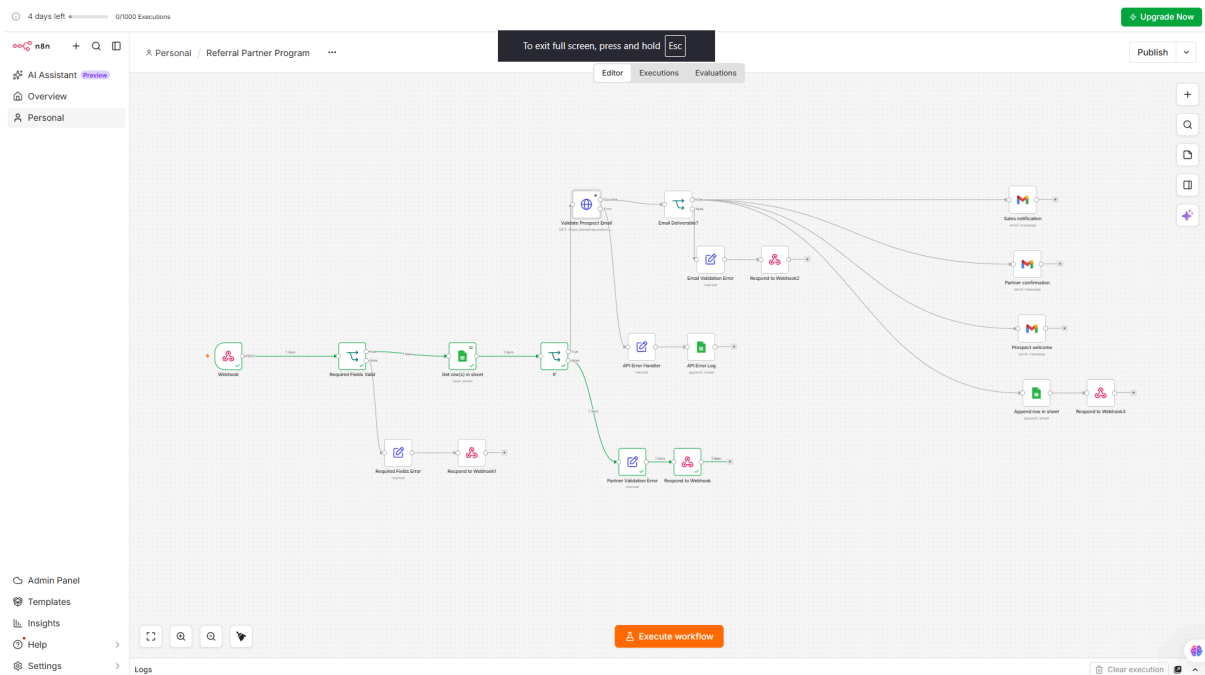

4. External API failure test

A simulated external API failure was tested by using an invalid API key.

Result: The HTTP Request node continued through its error output instead of stopping the workflow. The **API Error Handler** captured the error type, message, timestamp, and status code, and the **API Error Log** node recorded the failure in Google Sheets.

The observed failure included a **401 Unauthorized** response with the message:

Invalid API key provided.

4 days left 0/1000 Executions Upgrade Now

API Error Handler

INPUT

Validate Prospect Email

row_number: 2

partner_code: PARTNER001

partner_name: ABC Insurance

partner_email: mitechbdf@gmail.com

active: true

error

message: 401 - {"error": {"message": "Invalid API key provided", "code": "Unauthorized", "details": null}}

name: AxiosError

stack: AxiosError: Request failed with status code 401: at settle (/usr/local/lib/node_modules/mn/node_modules/pnpn/axios@1.18.0_patch_hash=149e256a2a79e3248750b53038746eef72a6c24Sub0070a85f58a57722c4_437e4fa5030e605d9a0ae72f0b0de/node_modules/axios/dist/node/axios.cjs:2199:12) at RedirectableRequest.handleResponse (/usr/local/lib/node_modules/mn/node_modules/pnpn/axios@1.18.0_patch_hash=149e256a2a79e3248750b53038746eef72a6c24Sub0070a85f58a57722c4_437e4fa5030e605d9a0ae72f0b0de/node_modules/axios/dist/node/axios.cjs:3955:9) at RedirectableRequest.emit (node:events:517:24) ...

ERR_BAD_REQUEST

status: 401

details

message: Authorization failed - please check your credentials

description: Invalid API key provided.

httpCode: 401

body

error

message: Invalid API key provided.

code: unauthorized

details: [null]

context

remIndex: 0

OUTPUT

timestamp: "2026-09-01T14:47:08.426-04:00",

error_type: "ERR_BAD_REQUEST",

error_message: "401 - {\\\"error\\\":{\\\"message\\\":\\\"Invalid API key provided\\\",\\\"code\\\":\\\"Unauthorized\\\",\\\"details\\\":null}}\\\"",

status_code: "401"

Fields to Set

timestamp

String

[[\$show]]

[DateTime: 2026-09-01T14:47:08.426-04:00]

error_type

String

[[\$json.error.code]]

ERR_BAD_REQUEST

error_message

String

[[\$json.error.message]]

401 - "{\\\"error\\\":{\\\"message\\\":\\\"Invalid API key pr-

status_code

String

[[\$json.error.status]]


401

Drag input fields here or Add Field

Include Other Input Fields

Options

+ Add option

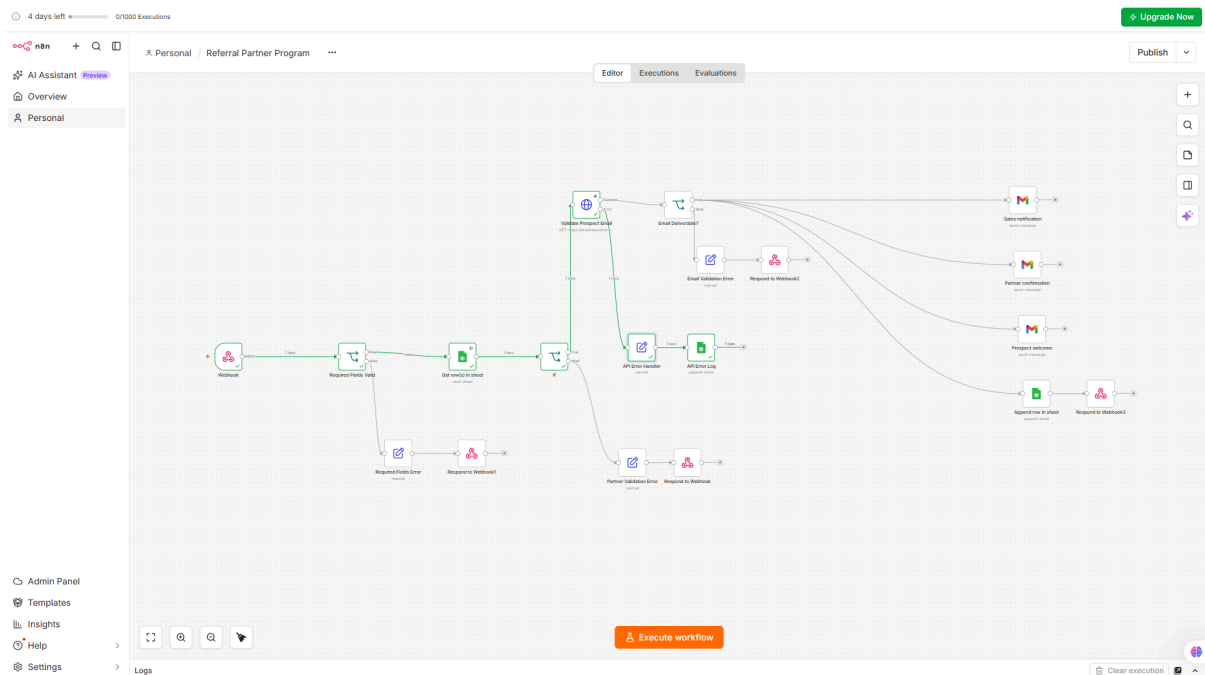

These tests confirmed that the workflow handles both normal processing and expected validation/API failures without silently losing the error information.