

White Hacker Cloud Security Fundamentals

[Date] – Day 10

[Trainer]







About our last session

WHAT
DO YOU
MEAN
?

Today's agenda



What are we going to learn today ?

Module 3 Security & Operations

- VPN
- Firewall

During the day

- Demo VPN


If I was a famous
woman...
I would like to be...





"Cloud Computing supporting Rover Curiosity on Mars"

2 min 20 sec

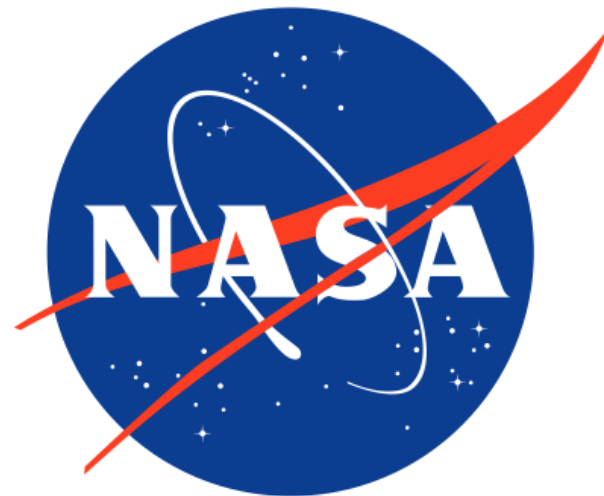

<https://www.youtube.com/watch?v=5K4p4YHK6LU>



Siham



Tien



Bilge



Jonathan




Koen



Nadia



Abdellatif

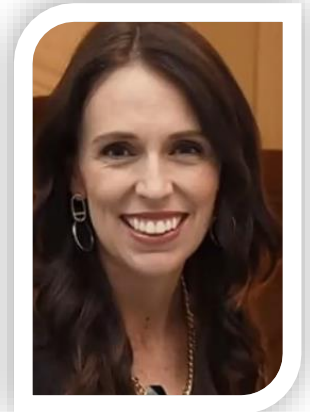


Mohammed




be The Dilbert of the day



Dilbert.com DilbertCartoonist@gmail.com

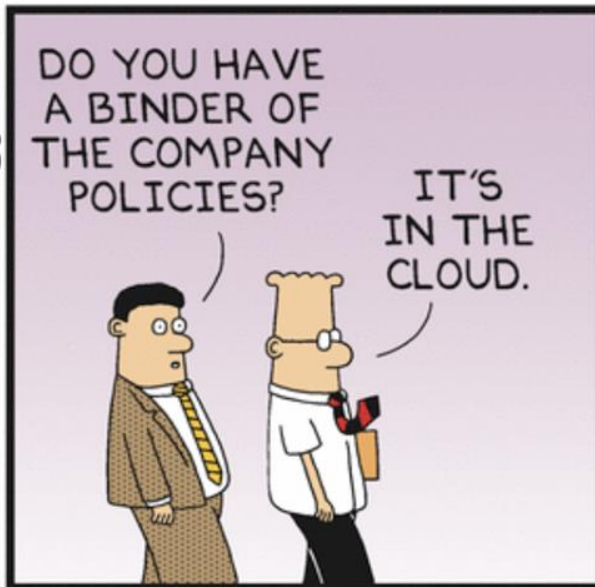

6-29-13 © 2013 Scott Adams, Inc./Dist. by Universal Uclick

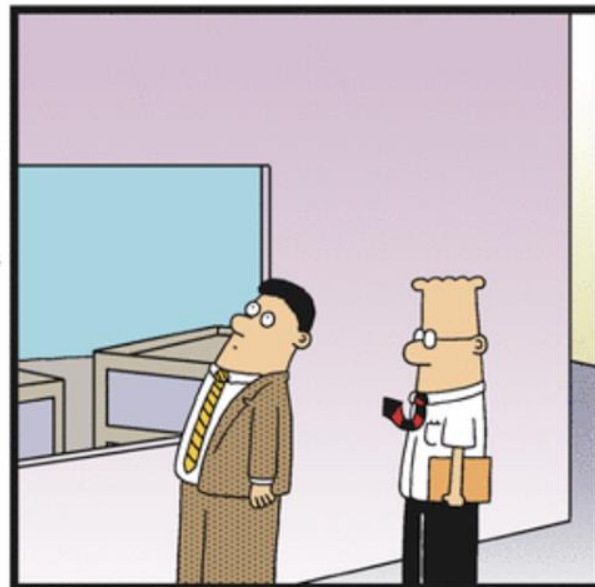

“Without Amazon,
most of the internet
disappears”

4 min 30 sec



<https://www.youtube.com/watch?v=mxCfygY1dk8>



VPN demo in video



Today,
we have taken
a new step !



The agenda of our next session

```
ay))}}, {key: "backspace", value: function(t, e) { var s = this; if (this.is.toggleBlinking(!1); var n = this.humanizer(this.backSpeed); smartBackspace) { var i = s.strings[s.arrayPos+1]; i && n === i.subs s.strings.length ? (s.arrayPos = 0, s.options.onLastStringBacksp complete", value: function() { this.options.onComplete(this), thi = s, this.pause.curString = t, this.pause.curStrPos = e }, {key: "to ng=t; var e = t ? "infinite": 0; this.cursor.style.animationIterat gsIfNeeded", value: function() { this.shuffle && (this.sequence = t this; return this.el.className += " " + this.fadeOutClass, this.c length > t.arrayPos ? t.typewrite(t.strings[t.sequence[t.arrayf attr ? this.el.setAttribute(this.attr, t) : this.isInput ? this.el e) { t.el.value && 0 !== t.el.value.length || t.start() ) }, {key: "bindFocusEvents", value: function() { var t = this; this.i ), this.cursor.className = "typed-cursor", this.cursor.innerHTML = "}); e["default"] = a, t.exports = e["default"]; function(t, e, s) { Error("Cannot call a class as a function") } Object.defineProperty(s, ts[e]; for (var n in s) Object.prototype.hasOwnProperty.call(s, n(a), l = function() { function t(i) { i(this, t) } return o(t, [{key: ".enumerable || !1, n.configurable = !0, "value" in n && (n.writable = t.options.cursorChar, t.cursorBlinking = !0, t.startDelay = t.options.startDelay, t.fadeOutClass, t.stringsElem
```

What are we
going to learn
in the next
session ?

Module 3 Security & Operations

- Firewall

CLOSED

