

BEDROCK ARCHITECTURE

Bedrock ELF ABI

ELF Object, Linking, and Loading ABI

Draft

CONTENTS

1	Scope and Conformance	1
1.1	Contract Position	1
1.2	Profile	1
2	Terminology	2
3	ELF Object Format	3
3.1	ELF Identification Bytes	3
3.2	ELF Header Sizes	3
3.3	Entry Point Semantics	3
3.4	Program Header Policy	3
3.5	Section and Symbol Policy	4
4	Program Loading	5
4.1	Loading Rules	5
4.2	Page Permissions	5
4.3	Execution Environment	5
4.4	Initial Non-Segment State	6
5	Sections and Symbols	7
5.1	Symbol Model	7
6	Relocation Set	8
6.1	Expression Model	8
6.2	Expression Terms	8
6.3	GOT and PLT Model	8
6.4	Relocations	9
6.5	Relocation Families and Additional Constraints	10
7	Dynamic Linking	11
7.1	Dynamic Linking Rules	11
7.2	GOT Reserved Entries	11
7.3	PLT Layout	11
8	Thread-Local Storage	12
8.1	TLS Base Model	12

8.2	Model Selection	12
8.3	TLSDESC Entry	13
8.4	TLSDESC Call ABI	13
8.5	TLSDESC Relocations	13
8.6	TLSDESC Local-Exec Relaxation	14
9	Code Models	15
9.1	low Model Details	15
9.2	small Model Details	15
9.3	medium Model Details	15
9.4	high Model Details	16
9.5	large Model Details	16
10	Assembler Contract	17
10.1	Strict Mode	17
10.2	Relaxation	17


LIST OF TABLES

3-1	ELF e_ident Values	3
3-2	ELF Header Size Values	3
3-3	ELF Entry Point Rules	3
4-1	ELF Segment Permission Mapping	5
6-1	Relocation Expression Terms	8
6-2	Bedrock ELF Relocation Types	9
7-1	Global Offset Table Reserved Entries	11
7-2	Procedure Linkage Table Layout	11
8-1	TLS Relocation Families	12
8-2	TLSDESC Entry Layout	13
9-1	Bedrock Code Models	15

1 SCOPE AND CONFORMANCE

This document defines the Bedrock binary-format contract for ELF objects, linking, relocation, loading, dynamic linking, TLS metadata, and code models. It depends on the Bedrock ISA Specification and the active platform/runtime environment ABI. It does not define a language calling convention or an application interface.

1.1 Contract Position

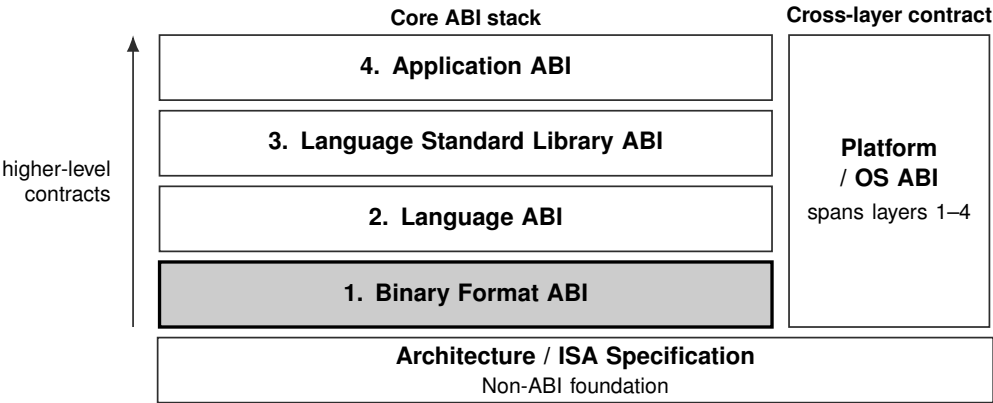

Current document: Bedrock ELF ABI. The shaded block identifies its primary contract position. The Platform / OS ABI spans and constrains the four core ABI layers; the ISA specification is their non-ABI architectural foundation.

1.2 Profile

Profile: `bedrock-elf`

2 TERMINOLOGY

These terms are used by the Bedrock ELF ABI. ISA-level address, register, and effective-address terms keep the meanings defined by the architecture manual.

ELF ABI The ELF, relocation, dynamic-linking, TLS, and code-model contract that is shared by language bindings and operating-system profiles.

platform/runtime environment ABI
The lower-layer execution-environment contract that defines process entry, system-call transitions, thread and TLS setup, loader handoff, signal or exception delivery, and platform segment policy.

pre-segment virtual address
The address value used by ELF symbols, relocations, ordinary function addresses, and ordinary data pointers before segment pre-translation. It is numerically identical to the resulting linear address in the disabled and bounds-only contexts that form the canonical interoperable Bedrock C context.

load base The runtime address bias applied to a loaded ET_DYN object before its symbol values and relative relocations are interpreted.

ABI-visible linkage domain
The region in which ordinary ELF code addresses are near-call entry points and do not carry an explicit CS value.

near-call entry address
A pre-segment code address that can be reached with ordinary CALL and returned from with ordinary RET inside the current linkage domain.

veneer A near-call entry point supplied by a linker, loader, runtime, or OS ABI to hide a more complex transfer sequence from ordinary ABI callers.

code model A set of placement and relocation assumptions used by code generation to choose direct displacement forms, GOT/PLT forms, or full-width address materialization.

3 ELF OBJECT FORMAT

Bedrock objects use the 64-bit little-endian ELF format and machine identifier `EM_BEDROCK` (0xffb0). A conforming producer may emit relocatable objects, executable images, or shared/position-independent images using `ET_REL`, `ET_EXEC`, or `ET_DYN`.

All relocation sections use `Elf64_Rela` entries with explicit addends and the `.rela` section-name stem. Ordinary symbol and string tables use `.symtab` and `.strtab`. The baseline value of `e_flags` is zero; a consumer must reject an unknown nonzero value rather than silently treating it as the baseline profile.

3.1 ELF Identification Bytes

Table 3-1. ELF `e_ident` Values

<code>e_ident</code> Field	Value
<code>EI_MAG</code>	0x7f 'E' 'L' 'F'
<code>EI_CLASS</code>	<code>ELFCLASS64</code>
<code>EI_DATA</code>	<code>ELFDATA2LSB</code>
<code>EI_VERSION</code>	<code>EV_CURRENT</code>
<code>EI_OSABI</code>	<code>ELFOSABI_NONE</code>
<code>EI_ABIVERSION</code>	0

3.2 ELF Header Sizes

Table 3-2. ELF Header Size Values

Header Field	Bytes
<code>e_ehsize</code>	64
<code>e_phentsize</code>	56
<code>e_shentsize</code>	64

3.3 Entry Point Semantics

Table 3-3. ELF Entry Point Rules

File Type	<code>e_entry</code> Meaning
<code>ET_REL</code>	0
<code>ET_EXEC</code>	absolute pre-segment virtual byte address
<code>ET_DYN</code> (executable)	load-bias-relative pre-segment virtual byte address; runtime entry is load base + <code>e_entry</code>
<code>ET_DYN</code> (shared object without entry)	0

3.4 Program Header Policy

The standard `PT_LOAD`, `PT_DYNAMIC`, `PT_INTERP`, `PT_NOTE`, and `PT_TLS` program headers retain their ordinary ELF meanings.

Program permission bits use the standard values `PF_X=1`, `PF_W=2`, and `PF_R=4`. Every `PT_LOAD` has `p_align` equal to the selected page size or a larger power-of-two alignment; the minimum supported page alignment is 4096 bytes.

3.5 Section and Symbol Policy

Standard ELF section types and the `SHF_WRITE`, `SHF_ALLOC`, `SHF_EXECINSTR`, and `SHF_TLS` flags retain their generic meanings. Symbol binding and type occupy `st_info` in the ordinary ELF encoding. Architecture-specific `st_other` bits are reserved and must be zero.

In an `ET_REL` object, `st_value` is a byte offset from the start of the defining section. After final link, it is the symbol's pre-segment virtual byte address. This transition does not convert ordinary function symbols into CS:PC pairs or ordinary object symbols into segmented descriptors.

4 PROGRAM LOADING

Bedrock ELF program loading follows the ordinary ELF segment model. The ELF ABI defines executable mapping, loader-visible object rules, and the minimum execution environment needed to begin running the image; language runtimes and OS ABIs define their own entry argument protocol above this layer.

4.1 Loading Rules

The loader may execute `ET_EXEC` and executable `ET_DYN` images. It honors `PT_INTERP`, maps each loadable segment at its declared page alignment, and rejects an alignment below 4096 bytes. For a segment whose `p_memsz` exceeds `p_filesz`, the loader fills every byte in the half-open range $[p_vaddr + p_filesz, p_vaddr + p_memsz)$ with zero. Object and section alignment requirements remain binding, but the start of this gap has no additional alignment guarantee.

4.2 Page Permissions

Every `PT_LOAD` shall set `PF_R`. A loader rejects a `PT_LOAD` whose flags are zero or contain `PF_W` or `PF_X` without `PF_R`. For an accepted segment, `PF_W` and `PF_X` map independently to PTE `W` and `X` as shown below. This restriction is required because a present Bedrock page is readable and cannot implement a write-only or execute-only ELF segment.

Table 4-1. ELF Segment Permission Mapping

ELF Flags	PTE Flags	Meaning
<code>PF_R</code>	<code>P, U</code>	readable user page
<code>PF_R PF_W</code>	<code>P, U, W</code>	readable writable user page
<code>PF_R PF_X</code>	<code>P, U, X</code>	readable executable user page
<code>PF_R PF_W PF_X</code>	<code>P, U, W, X</code>	readable writable executable user page

4.3 Execution Environment

The base ELF contract interprets `e_entry`, `p_vaddr`, symbol values, relocation places, and linked code and data addresses in its canonical pre-segment virtual-address coordinate. It is interoperable with execution contexts whose disabled or bounds-only `CS`, `DS`, and `SS` preserve those numeric values. At transfer to `e_entry`, the code context must permit fetch from the entry address, the data context must cover the mapped ordinary data regions, and the stack context must permit reads and writes to the stack provided by the platform/runtime environment ABI.

A platform that loads or executes an object under translated segment images owns the symbol and pointer coordinates, loader mappings, relocation interpretation, module entry and exit transitions, and adaptation to this canonical contract. Such an object or execution context is not compatible with the base ELF linkage contract unless that platform ABI defines the required mapping and transitions.

Executable images and ordinary shared objects form one ABI-visible near-call linkage domain. Their function symbols are pre-segment code addresses, not `CS:PC` pairs. A segment-changing call is therefore outside the ordinary dynamic linking contract; a runtime or OS ABI may expose a near-call veneer for such a transfer.

4.4 Initial Non-Segment State

Immediately before transfer to the entry point, the loader clears `FLAGS`, `FSTATUS`, and `FFLAGS`. Segment-register state is governed by the execution-environment rules above rather than by this initial-value rule.

5 SECTIONS AND SYMBOLS

Bedrock uses ordinary ELF sections with the usual ELF meanings.

5.1 Symbol Model

Bedrock supports the standard local, global, and weak bindings and the default, hidden, and protected visibility classes. The standard notype, object, function, TLS, ifunc, section, and file symbol types retain their ELF meanings.

- Function symbols name the first instruction of the callable entry point.
- Object symbols name the first byte of the object storage.
- In `ET_REL`, `ELF st_value` stores a byte offset relative to the symbol's defining section. In `ET_EXEC` and `ET_DYN` after final link, it stores the symbol's pre-segment virtual byte address as defined in Section 2.4.

6 RELOCATION SET

Bedrock ELF objects use RELA relocation entries with explicit addends. The Bedrock ABI defines how each relocation type patches instruction or data fields.

6.1 Expression Model

Every static relocation starts with the canonical expression $S+A$, where the symbol and explicit RELA addend are interpreted in the address space of the relocation family. Ordinary relocations use ABI symbol addresses, and TLS relocations use GS0-relative offsets.

Absolute and section-relative results are permitted when the selected relocation type defines them. PC-relative address materialization subtracts P , the address of the patched field. Direct branch and call payloads subtract N , the address of the instruction following the patched instruction. A result that does not fit the signedness and width stated in the relocation table is a link error; the linker must not truncate it.

For a PC-relative address-materialization relocation, let I be the address of byte zero of the containing instruction and let $\delta = P - I$ be the relocation field's byte offset. Let A_{src} be the addend in the source expression before field-offset bias. The encoded value shall equal the target plus A_{src} minus I . Because the relocation-table expressions subtract P , the assembler records the ELF addend as $A = A_{\text{src}} + \delta$ for PCREL, GOTPCREL, GOT_BASE_PCREL, and TLSDESC_GOTPCREL relocations. The linker does not infer instruction boundaries. The PLT addend described in Section 7.3 is one instance of this general rule.

6.2 Expression Terms

Table 6-1. Relocation Expression Terms

Term	Meaning
S	Runtime byte address of the symbol named by the relocation after symbol resolution.
A	Explicit addend stored in the ELF64 Rela entry.
P	Runtime byte address of the relocation field being patched.
N	Runtime byte address of the next instruction after the instruction being patched.
SB	Runtime byte address of the beginning of the symbol's defining section.
B	Runtime load base address of the loaded object that owns the relocation.
GB	Runtime byte address of the global offset table base for the loaded object.
$GOT(S)$	Runtime byte address of the GOT slot allocated for symbol S .
$PLT(S)$	Runtime byte address of the PLT entry allocated for symbol S .
$TLS(S)$	Byte offset of TLS symbol S from the ABI TLS base in GS0.
$TLSDESC(S)$	Runtime byte address of the TLSDESC entry allocated for TLS symbol S .
$Resolver(X)$	Runtime byte address returned by calling the resolver function at address X .

6.3 GOT and PLT Model

The ordinary GOT stores 64-bit addresses for position-independent code and dynamic binding. A GOT relocation allocates or references the symbol's slot in the loaded object. The PLT contains executable near-call entries; a PLT relocation names that entry rather than the final function address. Every ordinary PLT slot is resolved before application entry or constructors execute.

GOT and PLT function addresses stay inside the ABI-visible near-call linkage domain.

6.4 Relocations

Table 6-2. Bedrock ELF Relocation Types

Type	Name	Size	Calculation
0	R_BEDROCK_NONE	0	none
1	R_BEDROCK_ABS8	8-bit unsigned	$S + A$
2	R_BEDROCK_ABS16	16-bit unsigned	$S + A$
3	R_BEDROCK_ABS32S	32-bit signed	$S + A$
4	R_BEDROCK_ABS64	64-bit unsigned	$S + A$
5	R_BEDROCK_IMM8S	8-bit signed	$S + A$
6	R_BEDROCK_IMM16S	16-bit signed	$S + A$
7	R_BEDROCK_IMM32S	32-bit signed	$S + A$
8	R_BEDROCK_IMM64	64-bit unsigned	$S + A$
9	R_BEDROCK_DISP8S	8-bit signed	$S + A$
10	R_BEDROCK_DISP16S	16-bit signed	$S + A$
11	R_BEDROCK_DISP32S	32-bit signed	$S + A$
12	R_BEDROCK_DISP64	64-bit unsigned	$S + A$
13	R_BEDROCK_PCREL8S	8-bit signed	$S + A - P$
14	R_BEDROCK_PCREL16S	16-bit signed	$S + A - P$
15	R_BEDROCK_PCREL32S	32-bit signed	$S + A - P$
16	R_BEDROCK_PCREL64	64-bit signed	$S + A - P$
17	R_BEDROCK_BRDISP8S	8-bit signed	$S + A - N$
18	R_BEDROCK_BRDISP16S	16-bit signed	$S + A - N$
19	R_BEDROCK_BRDISP32S	32-bit signed	$S + A - N$
20	R_BEDROCK_CALL16S	16-bit signed	$S + A - N$
21	R_BEDROCK_CALL32S	32-bit signed	$S + A - N$
22	R_BEDROCK_SECTION_REL32	32-bit unsigned	$S + A - SB$
23	R_BEDROCK_SECTION_REL64	64-bit unsigned	$S + A - SB$
24	R_BEDROCK_GOT64	64-bit unsigned	$GOT(S) + A$
25	R_BEDROCK_GOTPCREL32S	32-bit signed	$GOT(S) + A - P$
26	R_BEDROCK_GOTPCREL64	64-bit signed	$GOT(S) + A - P$
27	R_BEDROCK_GOTOFF32S	32-bit signed	$S + A - GB$
28	R_BEDROCK_GOTOFF64	64-bit signed	$S + A - GB$
29	R_BEDROCK_GOT_BASE_PCREL32S	32-bit signed	$GB + A - P$
30	R_BEDROCK_GOT_BASE_PCREL64	64-bit signed	$GB + A - P$
31	R_BEDROCK_PLT16S	16-bit signed	$PLT(S) + A - N$
32	R_BEDROCK_PLT32S	32-bit signed	$PLT(S) + A - N$
33	R_BEDROCK_PLT64	64-bit unsigned	$PLT(S) + A$
34	R_BEDROCK_RELATIVE	64-bit unsigned	$B + A$

Type	Name	Size	Calculation
35	R_BEDROCK_GLOB_DAT	64-bit unsigned	$S + A$
36	R_BEDROCK_JUMP_SLOT	64-bit unsigned	$S + A$
37	R_BEDROCK_COPY	variable-size	copy symbol size bytes
38	R_BEDROCK_IRELATIVE	64-bit unsigned	Resolver($B + A$)
39	R_BEDROCK_TLS_OFFSET32S	32-bit signed	$TLS(S) + A$
40	R_BEDROCK_TLS_OFFSET64	64-bit signed	$TLS(S) + A$
41	R_BEDROCK_TLSDESC_GOTPCREL32S	32-bit signed	$TLSDESC(S) + A - P$
42	R_BEDROCK_TLSDESC_GOTPCREL64	64-bit signed	$TLSDESC(S) + A - P$
43	R_BEDROCK_TLSDESC_CALL	0	none
44	R_BEDROCK_TLSDESC	2 x u64	write {function, argument} for S

6.5 Relocation Families and Additional Constraints

Relocations 1–12 write absolute data, immediate, or effective-address payloads. Relocations 13–23 write PC-relative, next-instruction-relative, or section-relative results. Relocations 24–33 address GOT slots, the GOT base, symbols relative to that base, and PLT entries. Relocations 34–38 are ordinary dynamic-loader operations. Relocations 39–44 implement GS0 local-exec and TLSDESC TLS. The table defines widths and calculations; the dynamic-linking and TLS sections supply additional rules.

7 DYNAMIC LINKING

Dynamic objects use a fixed eager-binding Bedrock GOT and PLT contract.

7.1 Dynamic Linking Rules

Ordinary dynamic linking supports standard and indirect functions, copy relocations, and `R_BEDROCK_IRELATIVE`. The loader resolves every ordinary `R_BEDROCK_JUMP_SLOT` and `R_BEDROCK_IRELATIVE` relocation before transferring control to the program entry point or any constructor. Shared-object calls use near `CALL/RET` within the ABI-visible linkage domain. The GOT base symbol is `_GLOBAL_OFFSET_TABLE_`.

Every ordinary PLT entry occupies 32 bytes and has 16-byte alignment.

7.2 GOT Reserved Entries

Table 7-1. Global Offset Table Reserved Entries

Index	Name	Meaning
0	<code>_DYNAMIC</code>	dynamic section address
1	reserved	zero
2	reserved	zero

7.3 PLT Layout

Table 7-2. Procedure Linkage Table Layout

Offset	Bytes or field	Effect
+0x00	<code>e7 c9 80 67</code>	<code>JMP.Q [PC + disp64]</code>
+0x04	<code>disp64</code>	little-endian <code>R_BEDROCK_GOTPCREL64</code> relocation field
+0x0c	twenty 01 bytes	canonical NOP padding through offset +0x1f

A PLT relocation uses explicit addend +4. Architectural PC names byte zero of the current instruction, whereas relocation place P is the field at entry offset four; therefore `GOT(S)+A-P` evaluates to `GOT(S)-PLTentry`, the displacement consumed by the PC-relative EA. The referenced `.got.plt` slot is 8-byte aligned and contains the eagerly resolved 64-bit near target. Both the PLT entry and its slot must be reachable under the active CS bounds used by that PC-relative EA.

A PLT transfer preserves `R0` through `R7`, `F0` through `F7`, `GS1` through `GS5`, `FLAGS`, and all segment state. The loader writes each final `.got.plt` value before publication. Published slots are immutable and may be covered by `PT_GNU_RELRO`.

8 THREAD-LOCAL STORAGE

Thread-local storage is addressed through the GS0 segment register. TLS references that remain inside the program and have a link-time constant offset use the local-exec model. TLS references that cross dynamic object boundaries, may be interposed, or otherwise require runtime resolution use the TLSDESC model.

8.1 TLS Base Model

GS0 is the TLS base register. A TLS offset is translated by GS0 segment pre-translation before page-table translation. The local-exec model encodes a link-time constant byte offset from the GS0 base; TLSDESC supplies runtime resolution when the reference crosses a dynamic-object boundary or remains interposable.

Table 8-1. TLS Relocation Families

Model	Relocations
local-exec	R_BEDROCK_TLS_OFFSET32S
	R_BEDROCK_TLS_OFFSET64
TLSDESC	R_BEDROCK_TLSDESC_GOTPCREL32S
	R_BEDROCK_TLSDESC_GOTPCREL64
	R_BEDROCK_TLSDESC_CALL
	R_BEDROCK_TLSDESC

In the canonical interoperable context, taking the address of a TLS object linearizes its GS0-relative address at runtime and returns an ordinary pre-segment pointer to that thread instance. If C code executes in a translated context, the active platform ABI defines how that materialized address is converted into its ordinary-pointer coordinate. Copying a TLS pointer to another thread does not retarget it; the pointer becomes invalid when its originating thread terminates or the defining shared object is unloaded.

8.2 Model Selection

- A TLS symbol defined in the same program image may use local-exec addressing when its byte offset from GS0 is link-time constant.
- A TLS reference from a shared object or to an interposable TLS symbol uses TLSDESC.
- The linker may relax a TLSDESC sequence to local-exec when symbol binding and final placement make the GS0-relative offset constant.
- A source expression $S+k$ uses the descriptor for S ; after resolution, the caller adds k to the returned offset. The descriptor relocations never encode the subobject addend k .

8.3 TLSDESC Entry

Table 8-2. TLSDESC Entry Layout

Offset	Field	Type	Meaning
+0x00	function	u64	near-call address of the resolver or fast function
+0x08	argument	u64	signed direct GS0-relative offset or resolver-specific opaque token

Each entry occupies 16 bytes in `.got` and has 16-byte alignment. The loader resolves the symbol binding, writes both words, and completes any memory ordering required to publish the pair before application code can observe it. Both words are immutable after publication and may subsequently be protected by `PT_GNU_RELRO`. The ABI requires no public name for either the resolver or fast function; their near-call addresses may be loader-private.

The argument word belongs to the implementation of the selected function. A fast function may load `[R0+8]` and return it directly. An opaque token is not application data and remains valid only while the object that defines the TLS symbol is loaded. A resolver may perform dynamic per-thread lookup or allocation, but neither it nor the fast function may rewrite or self-patch the published descriptor.

8.4 TLSDESC Call ABI

The canonical sequence is exactly:

```
LEA.Q [PC + descriptor@TLSDESC_GOTPCREL], R0
CALL [R0]
```

The `LEA.Q` places the descriptor address in `R0`. `CALL [R0]` reads the 64-bit near-call target from descriptor offset zero and does not replace `R0`, so the called function receives the descriptor address in `R0`. No intervening move is part of the canonical sequence.

The function returns a valid signed byte offset from the GS0 TLS base in `R0`. It preserves GS0 and every register and state item that the normal C ABI designates callee-saved, and it may clobber normal caller-saved state. There is no recoverable failure return or reserved offset: zero is a valid TLS offset. A resolver that cannot produce an offset follows a platform-defined fatal path and does not return.

8.5 TLSDESC Relocations

Descriptor address. `R_BEDROCK_TLSDESC_GOTPCREL32S` and `R_BEDROCK_TLSDESC_GOTPCREL64` apply to the PC-relative displacement field of the canonical `LEA.Q` and compute the address of the descriptor for `STT_TLS` symbol `S`. The source expression has semantic TLS addend zero. Under the PC-relative field-bias rule in Section 6.1, the `RELA` addend is exactly $A = \delta$; it contains the instruction-field offset and no TLS subobject addend.

Call marker. `R_BEDROCK_TLSDESC_CALL` has size zero, changes no byte, and names the same TLS symbol as the paired `TLSDESC GOTPCREL` relocation on the immediately preceding `LEA.Q`. Its addend is zero and its place is byte zero of the exact immediately following `CALL [R0]`. It is a static-link relaxation marker, is consumed by the static linker, and is never emitted as a dynamic relocation. A producer shall not place a label or control-flow target between the two instructions or at a nonzero byte of either instruction when emitting a relaxable sequence.

Descriptor initialization. `R_BEDROCK_TLSDESC` applies only to `STT_TLS` symbols, has addend zero, and is placed at offset zero of an aligned descriptor. It directs the loader to initialize two adjacent 64-bit words with the selected `{function, argument}` pair for `S`. It is not an integer calculation. The link or load that would leave a weak TLS symbol unresolved shall reject the object: GS0-relative offset zero is valid and cannot also encode absent weak binding. A weak symbol that resolves to a definition is handled normally.

The linker may merge descriptors only when they name the same resolved binding `S` and have the required zero semantic addend. If any unrelaxed use remains, a final dynamic link emits one aligned pair in `.got` and the corresponding dynamic `R_BEDROCK_TLSDESC`. The loader initializes the pair eagerly before publication. A final executable with no runtime loader shall relax every `TLSDESC` use; otherwise the static link fails. If all uses are relaxed, the final link discards the descriptor and its initialization relocation.

8.6 TLSDESC Local-Exec Relaxation

Relaxation is permitted only after final binding proves that `S` is non-preemptible and `TLS(S)` is a link-time constant. It replaces the entire canonical pair without changing the section size or the address of any following instruction:

- With `R_BEDROCK_TLSDESC_GOTPCREL32S`, the original 7-byte `LEA.Q` and 4-byte `CALL [R0]` occupy 11 bytes. If `TLS(S)` fits signed 32 bits, the linker emits `LEN 11, MOV.Q TLS(S), R0`, applies `R_BEDROCK_TLS_OFFSET32S` with addend zero to its 32-bit immediate payload, and writes four zero padding bytes after the natural 7-byte form.
- With `R_BEDROCK_TLSDESC_GOTPCREL64`, the original 11-byte `LEA.Q` and 4-byte `CALL [R0]` occupy 15 bytes. The linker emits `LEN 15, MOV.Q TLS(S), R0`, applies `R_BEDROCK_TLS_OFFSET64` with addend zero to its 64-bit immediate payload, and writes four zero padding bytes after the natural 11-byte form.

The linker consumes both code relocations. The removed call may eliminate normal caller-saved clobbers and unobservable resolver stack activity; code may not depend on either. If no unrelaxed reference remains, no descriptor is allocated.

9 CODE MODELS

Code models define placement and locality assumptions that assemblers, linkers, and compilers may use when selecting address materialization, displacement, GOT, PLT, and relocation forms. Bedrock 32-bit displacement and direct control-transfer forms are signed, so direct 32-bit relative references cover a -2 GiB to +2 GiB - 1 window.

Table 9-1. Bedrock Code Models

Model	Placement contract	Default access strategy
low	static addresses in 0x00000000..0x7fffffff	signed 32-bit absolute data and direct transfers
small	referenced code, data, GOT, and PLT fit one signed 32-bit relative window	PC-relative access; GOT/PLT for interposable symbols
medium	code, GOT, and PLT fit one signed 32-bit window; data placement is unrestricted	direct code; GOT-resolved 64-bit data addresses
high	static high image with internal references in a signed 32-bit displacement window	image-base or PC-relative access with full-width fallback
large	unrestricted 64-bit address space	full-width materialization and indirect transfer

9.1 low Model Details

The `low` model is a static image model whose named code and data lie between 0x00000000 and 0x7fffffff. Code uses direct signed 32-bit branch or call payloads; data uses absolute or base-relative signed 32-bit payloads. A GOT or PLT is not required by the model.

Its default relocation set is `R_BEDROCK_ABS32S`, `R_BEDROCK_IMM32S`, `R_BEDROCK_DISP32S`, `R_BEDROCK_BRDISP32S`, and `R_BEDROCK_CALL32S`. The linker may shrink a direct transfer or address materialization after final placement proves that the result fits a shorter encoding.

9.2 small Model Details

The `small` model is position-independent and assumes that local code, nearby data, the GOT, and the PLT fit the signed 32-bit relative window of the use site or selected base. Code uses direct signed 32-bit transfers; data uses PC-relative or GOTPCREL signed 32-bit materialization.

Its default relocations are `R_BEDROCK_BRDISP32S`, `R_BEDROCK_CALL32S`, `R_BEDROCK_GOTPCREL32S`, `R_BEDROCK_PLT32S`, and `R_BEDROCK_TLSDESC_GOTPCREL32S`. The linker may shrink a relative form or replace GOT/TLSDESC access with a direct form when the resolved symbol is local and in range.

9.3 medium Model Details

The `medium` model keeps code, GOT, and PLT within a signed 32-bit relative window but permits data objects anywhere in the 64-bit address space. Code uses direct signed 32-bit transfers. Data normally uses a GOT-resolved 64-bit address reached through a signed 32-bit GOT reference.

Its default relocations are `R_BEDROCK_BRDISP32S`, `R_BEDROCK_CALL32S`, `R_BEDROCK_GOTPCREL32S`, `R_BEDROCK_GOT64`, `R_BEDROCK_PLT32S`, and `R_BEDROCK_TLSDESC_GOTPCREL32S`. A linker may replace a GOT data reference with a direct relative reference when final placement puts the object in range.

9.4 high Model Details

The `high` model is a static high-address image. Internal code may use direct signed 32-bit transfers or image-base-relative addressing. Data uses a PC-relative GOT or an image-base-relative form when in range; the GOT and PLT are image-local or base-relative.

Its default relocations are `R_BEDROCK_BRDISP32S`, `R_BEDROCK_CALL32S`, `R_BEDROCK_GOTPCREL32S`, `R_BEDROCK_ABS64`, and `R_BEDROCK_DISP64`. Compact internal references are permitted when final placement proves the signed 32-bit range; full-width and base-relative sequences remain conforming.

9.5 large Model Details

The `large` model makes no placement assumption. Code uses full-width address materialization followed by an indirect transfer when necessary; data, GOT, and PLT addresses are full width.

Its default relocations are `R_BEDROCK_ABS64`, `R_BEDROCK_PCREL64`, `R_BEDROCK_GOTPCREL64`, `R_BEDROCK_PLT64`, and `R_BEDROCK_TLSDESC_GOTPCREL64`. Final placement may justify relaxing any full-width form to a shorter encoding.

10 ASSEMBLER CONTRACT

Default ABI: bedrock-elf

10.1 Strict Mode

- Pure ISA syntax is accepted.
- Ambiguous symbolic operands require an explicit relocation annotation.
- Noncanonical encodings are rejected.

10.2 Relaxation

- Branch and call payload widths may be selected automatically when the target is known.
- Address materialization may shrink from 64-bit to 32-bit, 16-bit, or 8-bit payloads when the relocation result fits.
- Overlong encodings are emitted only when explicitly requested.