


SY, GERALD D.

DIT 2-4

RESEARCH ASSIGNMENT: SQL Statements and Operators

1. SQL INSERT INTO Statement

- Syntax

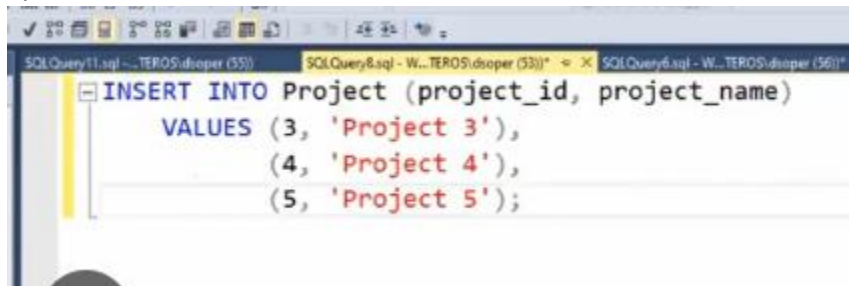


```
INSERT INTO Project (project_id, project_name)
VALUES (3, 'Project 3'),
       (4, 'Project 4'),
       (5, 'Project 5');
```

Project : Name of the table to insert data into.

project_id, project_name, ... : Columns where values will be inserted.

(3, 'Project 3'), (4, 'Project 4'), (5, 'Project 5') : Values corresponding to the columns.


- Purpose
// To add new rows of data into a database table.
- Example



```
INSERT INTO employees (id, name, position, salary)
VALUES (1, 'John Doe', 'Developer', 60000);
```

2. SQL UPDATE Statement

- Syntax

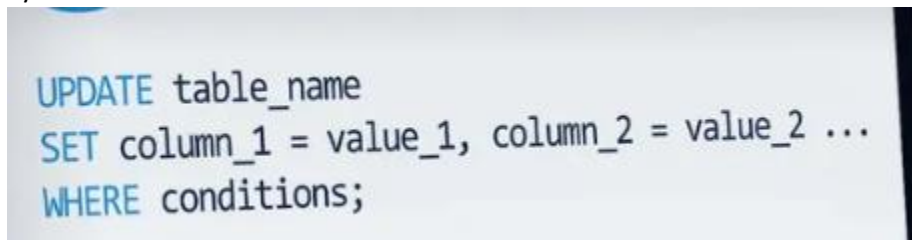

```
UPDATE table_name
SET column_1 = value_1, column_2 = value_2 ...
WHERE conditions;
```

table_name : The table where data is updated.

column_1, column_2, ... : Columns to modify.

value_1, value_2, ... : New values for the columns

condition: Specifies which rows to update (optional but recommended to avoid updating all rows).

- Purpose
To modify existing data in a table.

- Example: Update Employee Salary

```
UPDATE employees
SET salary = 65000
WHERE id = 1;
```

3. SQL DELETE Statement

- Syntax

```
DELETE FROM table_name
WHERE condition;
```

table_name: The table from which rows will be deleted.

condition: Specifies which rows to delete (if omitted, all rows are deleted).

- Purpose
To delete specific rows or all rows from a table.
- Example (Delete Specific Row)

```
DELETE FROM employees
WHERE id = 1;
```

4. SQL LIKE Operator

- Syntax

```
SELECT column1, column2, ...
FROM table_name
WHERE columnN LIKE pattern;
```

column_name: The column where the search is performed.

pattern: The search pattern using wildcards.

 % (percent sign): Represents zero, one, or multiple characters.

 _ (underscore): Represents a single character.

- Purpose
To filter rows based on a pattern match, often used for flexible or partial string searches.
- Example (Search for Names Starting with 'A')

```
SELECT *  
FROM employees  
WHERE name LIKE 'A%';
```