Cisco 200-901

DevNet Associate (DEVASC) · 631 questions

QUESTION 1

Issued to kamjunhao@gmail.com · October 17, 2026

Which two concepts describe test-driven development? (Choose two.)

A User acceptance testers develop the test requirements.

B It enables code refactoring.

C Tests are created when code is ready for release.

D Implementation is driven by incremental testing of release candidates.

E Write a test before writing code.

QUESTION 2

Issued to kamjunhao@gmail.com · October 17, 2026

Which task is performed because the test-driven development approach is being used?

A creating test scenarios based on continuous development

B writing code without committing any coding violations

C refactoring code that is covered by existing tests

D testing existing software before developing new code

Personal copy · kamjunhao@gmail.com

QUESTION 3

Issued to kamjunhao@gmail.com · October 17, 2026

What is the **FIRST** development task in test-driven development?

A Write code that implements a desired function.

B Write a failing test case for a desired function.

C Reverse engineer the code for a desired function.

D Write a passing test case for existing code.

Personal copy · kamjunhao@gmail.com

QUESTION 4

Issued to kamjunhao@gmail.com · October 17, 2026

In test-driven development, what are two of the green bar patterns? (Choose two.)

A another test

B break

C triangulate

D starter test

E fake it

Personal copy · kamjunhao@gmail.com

QUESTION 5

Issued to kamjunhao@gmail.com · October 17, 2026

In the test-driven development model, what is changed after a test fails?

A schedule

B project requirements

C code

D test

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of test-driven development?

A strict adherence to product requirements

B faster releases that have minimal features

C early customer involvement

D increased code quality

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which two statements describe the advantages of using a version control system? (Choose two.)

A It allows for branching and merging so that different tasks are worked on in isolation before they are merged into a feature or master branch.

B It provides tooling to automate application builds and infrastructure provisioning.

C It allows multiple engineers to work against the same code and configuration files and manage differences and conflicts.

D It provides a system to track User Stories and allocate to backlogs.

E It allows developers to write effective unit tests.

Personal copy · kamjunhao@gmail.com

QUESTION 8

Issued to kamjunhao@gmail.com · October 17, 2026

What are two advantages of version control software? (Choose two.)

A It supports tracking and comparison of changes in binary format files.

B It allows new team members to access the current code and history.

C It supports comparisons between revisions of source code files.

D It provides wiki collaboration software for documentation.

E It allows old versions of packaged applications to be hosted on the Internet.

Personal copy · kamjunhao@gmail.com

QUESTION 9

Issued to kamjunhao@gmail.com · October 17, 2026

Before which process is `code` review performed when `version` control is used?

A checkout of code

B merge of code

C committing code

D branching code

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is an advantage of a version control system?

A facilitates resolving conflicts when merging code

B ensures that unit tests are written

C prevents over-writing code or configuration files

D forces the practice of trunk-based development

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
json_string = """
{
        "researcher": {
            "name": "Ford Perfect",
            "species": "Betelgeusian",
            "relatives": [
                {
                    "name": "Zaphod Beeblebrox",
                    "species": "Betelgeusian"
                }
            ]
        }
}
"""

my_json = json.loads(json_string)
```

Which Python data structure does my_json contain?

A map

B list

C json

D dict

Issued to kamjunhao@gmail.com · October 17, 2026

When a Cisco IOS XE networking device is configured using RESTCONF, what is the default data-encoding method?

A JSON

B YAML

C XML

D x-form-encoding

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
<books>
 <science>
  <biology>10.00</biology>
  <geology>9.00</geology>
 </science>
 <math>
  <calculus>20.00</calculus>
 </math>
</books>
```

Which JSON is equivalent to the XML-encoded data?

- A.

```
[ {
  "books": {
    "science": {
      "biology": "10.00",
      "geology": "9.00",
    },
    "math": {
      "calculus": "20.00",
    }
  }
} ]
```

- B.

```
{
   "books": {
      "science": {
         "biology": "10.00",
         "geology": "9.00",
      },
      "math": {
         "calculus": "20.00",
      }
   }
}
```

- C.

```
{
    "books": [
      "science": {
         "biology": "10.00",
         "geology": "9.00",
      },
      "math": {
         "calculus": "20.00",
      }
   ]
}
```

- D.

```
{
    "books": [
      "science", {
         "biology": "10.00",
         "geology": "9.00",
      },
      "math", {
         "calculus": "20.00",
      }
   ]
}
```

QUESTION 14

FILL BLANK -

Fill in the blanks to complete the Python script to request a service ticket using the APIC-EM REST API for the user `devnetuser`. import requests import json controller = 'devnetapi.cisco.com/sandbox/apic_em' url = `https://` + controller + `api/va/ticket` payload = {'username': '_____', 'password': '370940885'} header = {'Content-type': 'application.json'} response = _____.post(url, data=json.dumps(payload), \ headers= _____, verify=False) r_json = response.json() print(r_json) ticket = r_json[`response`][`serviceTicket`] print(ticket)

QUESTION 15

Which two statements about JSON and XML are

true? (Choose two.)

A The syntax of JSON contains tags, elements, and attributes.

B XML objects are collections of key-value pairs.

C JSON objects are collections of key-value pairs.

D JSON arrays are an unordered set of key-value pairs.

E The syntax of XML contains tags, elements, and attributes.

Issued to kamjunhao@gmail.com · October 17, 2026

Which statement describes the benefit of using functions in programming?

A Functions ensure that a developer understands the inner logic contained before using them as part of a script or application.

B Functions create the implementation of secret and encrypted algorithms.

C Functions allow problems to be split into simpler, smaller groups, and reduce code repetition, which makes the code easier to read.

D Functions store mutable values within a script or application.

Refer to the exhibit.

```
$ diff -u5 fish.py cat.py
--- fish.py     2020-01-02 09:41:02.840000000 +0100
+++ cat.py      2020-01-02 09:41:06.8859999800 +0100
@@ -160,11 +160,12 @@

     @single_request_timeout.setter
     def single_request_timeout(self, value):
         """The timeout (seconds) for a single HTTP REST API request."""
         check_type(value, int, optional=True)
-        assert value is None or value > 0
+        if value is not None and value <= 0:
+            raise ValueError("single_request_timeout must be positive integer")
         self._single_request_timeout = value


     @property
     def wait_on_rate_limit(self)
         """Automatic rate-limit handling.
```

The output of a unified diff when comparing two versions of a Python script is shown. Which two `single_request_timeout()` functions are defined in fish.py and cat.py? (Choose two.)

- A.

file: cat.py

```
160
161     @single_request_timeout.setter
162     def single_request_timeout(self, value):
163         """The timeout (seconds) for a single HTTP REST API request."""
164         check_type(value, int, optional=True)
165         assert value is None or value > 0
166         if value is not None and value <= 0:
167             raise ValueError("single_request_timeout must be positive integer")
168         self._single_request_timeout = value
169
```

- B.

file: fish.py

```
160
161     @single_request_timeout.setter
162     def single_request_timeout(self, value):
163         """The timeout (seconds) for a single HTTP REST API request."""
164         check_type(value, int, optional=True)
165         assert value is None or value > 0
166         self._single_request_timeout = value
167
```

- C.

file: cat.py

```
160
161     @single_request_timeout.setter
162     def single_request_timeout(self, value):
163         """The timeout (seconds) for a single HTTP REST API request."""
164         check_type(value, int, optional=True)
165         if value is not None and value <= 0:
166             raise ValueError("single_request_timeout must be positive integer")
167         self._single_request_timeout = value
168
169
```

- D.

file: fish.py

```
160
161     @single_request_timeout.setter
162     def single_request_timeout(self, value):
163         """The timeout (seconds) for a single HTTP REST API request."""
164         check_type(value, int, optional=True)
165         self._single_request_timeout = value
```

- E.

file: cat.py

```
172
173     @single_request_timeout.setter
174     def single_request_timeout(self, value):
175         """The timeout (seconds) for a single HTTP REST API request."""
176         check_type(value, int, optional=True)
177         if value is not None and value <= 0:
178             raise ValueError("single_request_timeout must be positive integer")
179         self._single_request_timeout = value
180
```

Personal copy · kamjunhao@gmail.com

QUESTION 18

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of organizing code into modules?

A reduces the length of code

B enables code to be multifunctional

C enables the reuse of code

D improves overall performance

Personal copy · kamjunhao@gmail.com

QUESTION 19

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of organizing code into modules?

A enables the code to be broken down into layers

B improves collaboration of the development team

C makes it easier to deal with large and complex systems

D enables the inclusion of more programming languages in the code

Personal copy · kamjunhao@gmail.com

QUESTION 20

Issued to kamjunhao@gmail.com · October 17, 2026

What is the Git command to delete a local branch named `experiment` without a warning?

A git branch ɹ€"rm experiment

B git branch ɹ€"n experiment

C git branch ɹ€"f experiment

D git branch ɹ€"D experiment

Personal copy · kamjunhao@gmail.com

QUESTION 21

Issued to kamjunhao@gmail.com · October 17, 2026

What is the outcome of executing this command?

`git clone ssh:/john@example.com/path/to/my-project.git`

A creates a local copy of a repository called ɹ€my-projectɹ€

B initiates a new Git repository called ɹ€my-projectɹ€

C creates a copy of a branch called ɹ€my-projectɹ€

D creates a new branch called ɹ€my-projectɹ€

Personal copy · kamjunhao@gmail.com

QUESTION 22

Issued to kamjunhao@gmail.com · October 17, 2026

Which action does the Git command git merge allow the developer to perform?

A Combine multiple sequences of commits into one unified history

B Push changes to the remote repository

C Create, list, rename, and delete branches

D Switch between branches

QUESTION 23

Issued to kamjunhao@gmail.com · October 17, 2026

How does a developer create and switch to a new branch called `my-bug-fix` to develop a product fix?

A git checkout -b my-bug-fix

B git branch -b my-bug-fix

C git branch my-bug-fix

D git checkout my-bug-fix

DRAG DROP

Drag and drop the Git commands from the left onto the right that add modified local files to a remote repository. Not all options are used.

Select and Place:

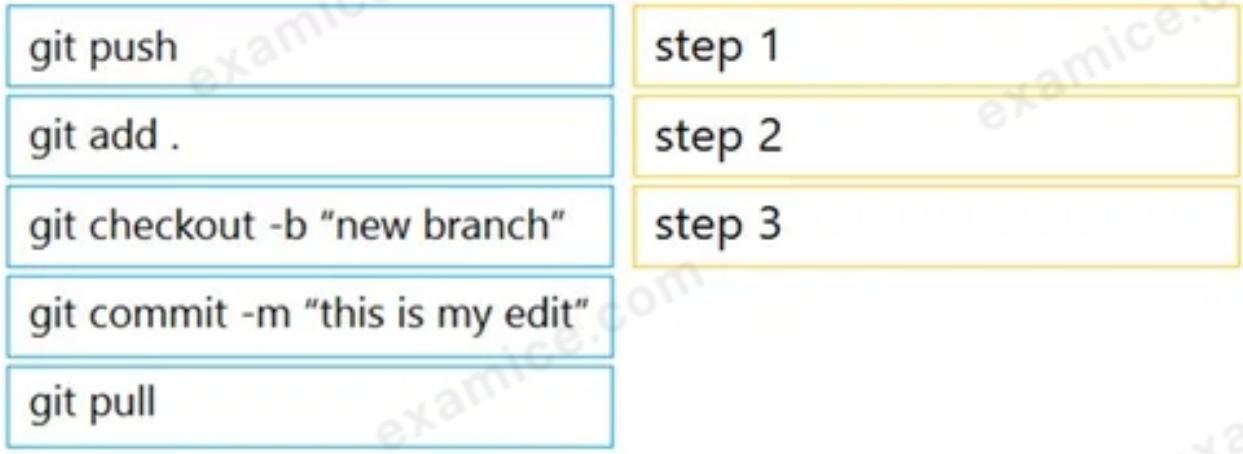

A developer needs to prepare the file README.md in the working tree for the next commit operation using Git. Which command needs to be used to accomplish this?

A git -a README.md

B git add README.md

C git add README.md staging

D git commit README.md

QUESTION 26

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is reviewing a code that was written by a colleague. It runs fine, but there are many lines of code to do a seemingly simple task repeatedly. Which action organizes the code?

A Refactor the code by removing any unnecessary tests.

B Reverse engineer and rewrite the code logic.

C Using functions, rewrite any pieces of code that are repeated.

D Modify the code to use loops.

Personal copy · kamjunhao@gmail.com

QUESTION 27

Issued to kamjunhao@gmail.com · October 17, 2026

Which principle is a value from the manifesto for Agile software development?

A processes and tools over teams and interactions

B detailed documentation over working software

C adhering to a plan over responding to requirements

D customer collaboration over contract negotiation

Personal copy · kamjunhao@gmail.com

QUESTION 28

Issued to kamjunhao@gmail.com · October 17, 2026

Which advantage does the agile process offer compared to waterfall software development?

A to add or update features with incremental delivery

B to view the full scope of end-to-end work

C to have each phase end before the next begins

D to fix any issues at the end of the development cycle

Personal copy · kamjunhao@gmail.com

QUESTION 29

Issued to kamjunhao@gmail.com · October 17, 2026

How do XML and JSON compare regarding functionality?

A XML provides more support for mapping data structures into host languages than JSON.

B XML provides more human readability than JSON.

C JSON provides less support for data types than XML.

D JSON natively supports arrays and XML does not natively support arrays.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two principles of an infrastructure as code environment? (Choose two.)

A Components are coupled, and definitions must be deployed for the environment to function.

B Redeployments cause varying environment definitions.

C Environments must be provisioned consistently using the same inputs.

D Service overlap is encouraged to cater for unique environment needs.

E Complete complex systems must be able to be built from reusable infrastructure definitions.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two encoding formats do YANG interfaces support? (Choose two.)

A XML

B JSON

C XHTML

D BER

E plain text

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.


```
{
  "items": [{
     "kind": "object#NetworkObj",
     "selfLink": "https://10.201.230.5/api/objects/networkobjects/db01",
     "name": "db01",
     "host": {
        "kind": "IPv4address",
        "value": "172.16.0.11"
     },
     "objectId": "db01"
  }]
}
```


The JSON data in the exhibit has been parsed and stored into a variable `data`. What returns the value `172.16.0.11`?

A data['items']['host']['value']

B data['items'][1]['host']['value']

C data['items'][0]['host']['value']

D data['items']['host'][1]

Issued to kamjunhao@gmail.com · October 17, 2026

Refer to the exhibit.

```
def get_result()
        url = "https://sandboxdnac.cisco.com/dna/system/api/v1/auth/token"
        resp = requests.post(url, auth=HTTPBasicAuth(DNAC_USER, DNAC_PASSWORD))
        result = resp.json()['Token']
        return result
```

What does the Python function do?

A It returns HTTP Basic Authentication.

B It returns DNAC user and password.

C It reads a token from a local JSON file and posts the token to the DNAC URL.

D It returns an authorization token.

Issued to kamjunhao@gmail.com · October 17, 2026

Package updates from a local server fail to download. However, the same updates work when a much slower external repository is used. Why are local updates failing?

A The server is running out of disk space.

B The Internet connection is too slow.

C The Internet is down at the moment, which causes the local server to not be able to respond.

D The update utility is trying to use a proxy to access the internal resource.

Personal copy · kamjunhao@gmail.com

QUESTION 35

Issued to kamjunhao@gmail.com · October 17, 2026

What is a functionality of the Waterfall method as compared to the Agile method for software development?

A Waterfall increases agility to implement faster while Agile promotes reliability.

B A phase begins after the previous phase has ended in Waterfall while Agile phases run in parallel.

C Customers get feedback during the process in Waterfall while they can see the result at the end in Agile.

D Requirements can be updated in Waterfall while in Agile it should be gathered in the beginning.

Personal copy · kamjunhao@gmail.com

QUESTION 36

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using functions in the code for the development process?

A better user experience in the end product

B improves code performance

C easier to compile the code

D faster code development

Personal copy · kamjunhao@gmail.com

QUESTION 37

Issued to kamjunhao@gmail.com · October 17, 2026

What is the difference between YAML and JSON data structure?

A YAML uses spaces; JSON uses parentheses

B YAML uses indentation; JSON uses brackets and braces

C YAML uses brackets and braces; JSON uses indentation

D YAML uses parentheses; JSON uses spaces

Personal copy · kamjunhao@gmail.com

QUESTION 38

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a feature for a new application. The changes in the existing branch named **'feat00304'** must be integrated into a single commit with the current working primary branch named **'prodapp411926287'**. Which git command must be used?

A git rebase --merge feat00304

B git merge --squash feat00304

C git push --rebase feat00304

D git checkout --squash feat00304

Personal copy · kamjunhao@gmail.com

QUESTION 39

Issued to kamjunhao@gmail.com · October 17, 2026

A file that already exists in a local repository is updated. Which command MUST be executed to ensure that the changes in the file are included in the next Git commit?

A git update

B git merge

C git add

D git rebase

Personal copy · kamjunhao@gmail.com

QUESTION 40

Issued to kamjunhao@gmail.com · October 17, 2026

Into which type of Python data structure should common data formats be parsed?

A sequence

B set

C dictionary

D list

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Several teams at a company are developing a new CRM solution to track customer interactions with a goal of improving customer satisfaction and driving higher revenue. The proposed solution contains these components:

- MySQL database that stores data about customers
- HTML5 and JavaScript UI that runs on Apache
- REST API written in Python

What are two advantages of applying the MVC design pattern to the development of the solution? (Choose two.)

A to enable multiple views of the same data to be presented to different groups of users

B to provide separation between the view and the model by ensuring that all logic is separated out into the controller

C to ensure data consistency, which requires that changes to the view are also made to the model

D to ensure that only one instance of the data model can be created

E to provide only a single view of the data to ensure consistency

Personal copy · kamjunhao@gmail.com

```
module ietf-interface {
  namespace "urn:ietf:params:xml:ns:yang:ietf-interfaces";
  prefix if;
  import ietf-yang-types {
    prefix yang;
  }
  container interfaces-state {
    list interface {
      key "name";
      leaf name {
        type string;
      }
      leaf admin-status {
        type enumeration {
          enum up {
            value 1;
          }
          enum down {
            value 2;
          }
          enum testing {
            value 3;
          }
        }
      }
      leaf if-index {
        type int32 {
          range "1..2147483647"
        }
      }
      container statistics {
        leaf in-octets {
          type yang:counter64;
        }
        leaf in-unicast-pkts {
          type yang:counter64;
        }
      }
    }
  }
}
```

Refer to the exhibit. Which XML snippet has interface information that conforms to the YANG model?

- A.

```
<interfaces-state
xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces"
xmlns:if="urn:ietf:params:xml:ns:yang:ietf-interfaces">
    <interface name="GigabitEthernet1">
        <admin-status>1</admin-status>
        <if-index>1</if-index>
        <statistics>
            <in-octets>408164820</in-octets>
            <in-unicast-pkts>728061</in-unicast-pkts>
        </statistics>
    </interface>
</interfaces-state>
```

- B.

```
<interfaces-state
xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces"
xmlns:if="urn:ietf:params:xml:ns:yang:ietf-interfaces">
    <interface>
        <name>GigabitEthernet1</name>
        <admin-status>up</admin-status>
        <if-index>1</if-index>
        <in-octets>408164820</in-octets>
        <in-unicast-pkts>728061</in-unicast-pkts>
    </interface>
</interfaces-state>
```

- C.

```
<interfaces-state
xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces"
xmlns:if="urn:ietf:params:xml:ns:yang:ietf-interfaces">
    <interface>
        <name>GigabitEthernet1</name>
        <admin-status>up</admin-status>
        <if-index>1</if-index>
        <statistics>
            <in-octets>408164820</in-octets>
            <in-unicast-pkts>728061</in-unicast-pkts>
        </statistics>
    </interface>
</interfaces-state>
```

- D.

```
<interfaces-state
xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces"
xmlns:if="urn:ietf:params:xml:ns:yang:ietf-interfaces">
    <interface>
        <name>GigabitEthernet1</name>
        <admin-status>1</admin-status>>
        <if-index>1</if-index>
        <statistics>
            <in-octets>408164820</in-octets>
            <in-unicast-pkts>728061</in-unicast-pkts>
        </statistics>
    </interface>
</interfaces-state>
```

Personal copy · kamjunhao@gmail.com

QUESTION 43

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of version control?

A prevents two users from working on the same file

B keeps track of all changes to the files

C prevents the sharing of files

D keeps the list of data types used in the files

Personal copy · kamjunhao@gmail.com

```
git clone git://git.kernel.org/.../git.git my.git
cd my.git
git branch -d -r origin/todo origin/html origin/man    (1)
git branch -D test                                     (2)
```

Refer to the exhibit. What does the command marked (2) do when it is run?

A It duplicates the ɹ€testɹ€ branch.

B It deletes the ɹ€testɹ€ branch only if a new branch is created.

C It deletes the ɹ€testɹ€ branch.

D It does not delete the branch until it is merged.

QUESTION 45

Issued to kamjunhao@gmail.com · October 17, 2026

What is a comparison of YAML and JSON?

A YAML has a more consistent approach to representing data compared to JSON.

B JSON does not support comments and YAML does.

C YAML is a more verbose data structure compared to JSON.

D JSON has more common usage in configuration management tools compared to YAML.

Personal copy · kamjunhao@gmail.com

QUESTION 46

Issued to kamjunhao@gmail.com · October 17, 2026

Which status code is used by a REST API to indicate that the submitted payload is incorrect?

A 400

B 403

C 405

D 429

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Refer to the exhibits.

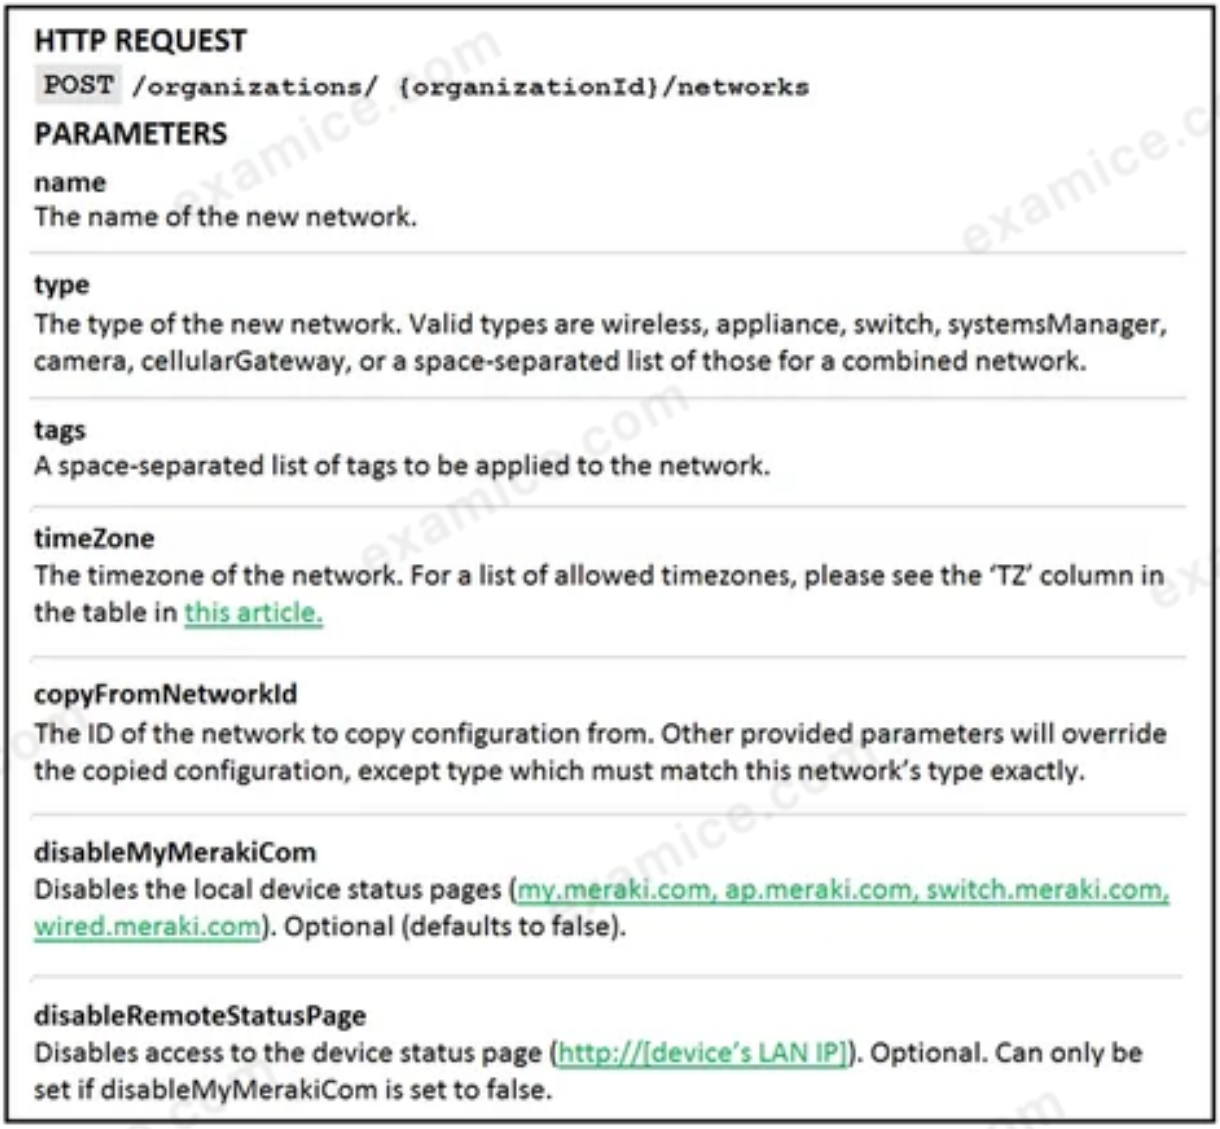

HTTP REQUEST

`POST /organizations/ {organizationId}/networks`

PARAMETERS

name
The name of the new network.

type
The type of the new network. Valid types are wireless, appliance, switch, systemsManager, camera, cellularGateway, or a space-separated list of those for a combined network.

tags
A space-separated list of tags to be applied to the network.

timeZone
The timezone of the network. For a list of allowed timezones, please see the 'TZ' column in the table in this article.

copyFromNetworkId
The ID of the network to copy configuration from. Other provided parameters will override the copied configuration, except type which must match this network's type exactly.

disableMyMerakiCom
Disables the local device status pages (my.meraki.com, ap.meraki.com, switch.meraki.com, wired.meraki.com). Optional (defaults to false).

disableRemoteStatusPage
Disables access to the device status page (http://[device's LAN IP]). Optional. Can only be set if disableMyMerakiCom is set to false.

```
base_url = https://api.meraki.com/api/v0
org_id = 123456789
api_key = 1098hadpfsiapsf8ahf8ohp
network_name = "New Network"
requests.<item 1> (
    <item 2> + "/<item 3>/" + org_id + "/<item 4>",
    headers = {
        "X-Cisco-Meraki-API-Key": "<item 5>",
        "Content-Type": "<item 6>"
    },
    <item 7>=json.dumps ({ "name": <item 8>,
                           "type": "wireless switch"
                         }))
```

Drag and drop the code from the left onto the item numbers on the right to complete the Meraki Python script shown in the exhibit.

Select and Place:

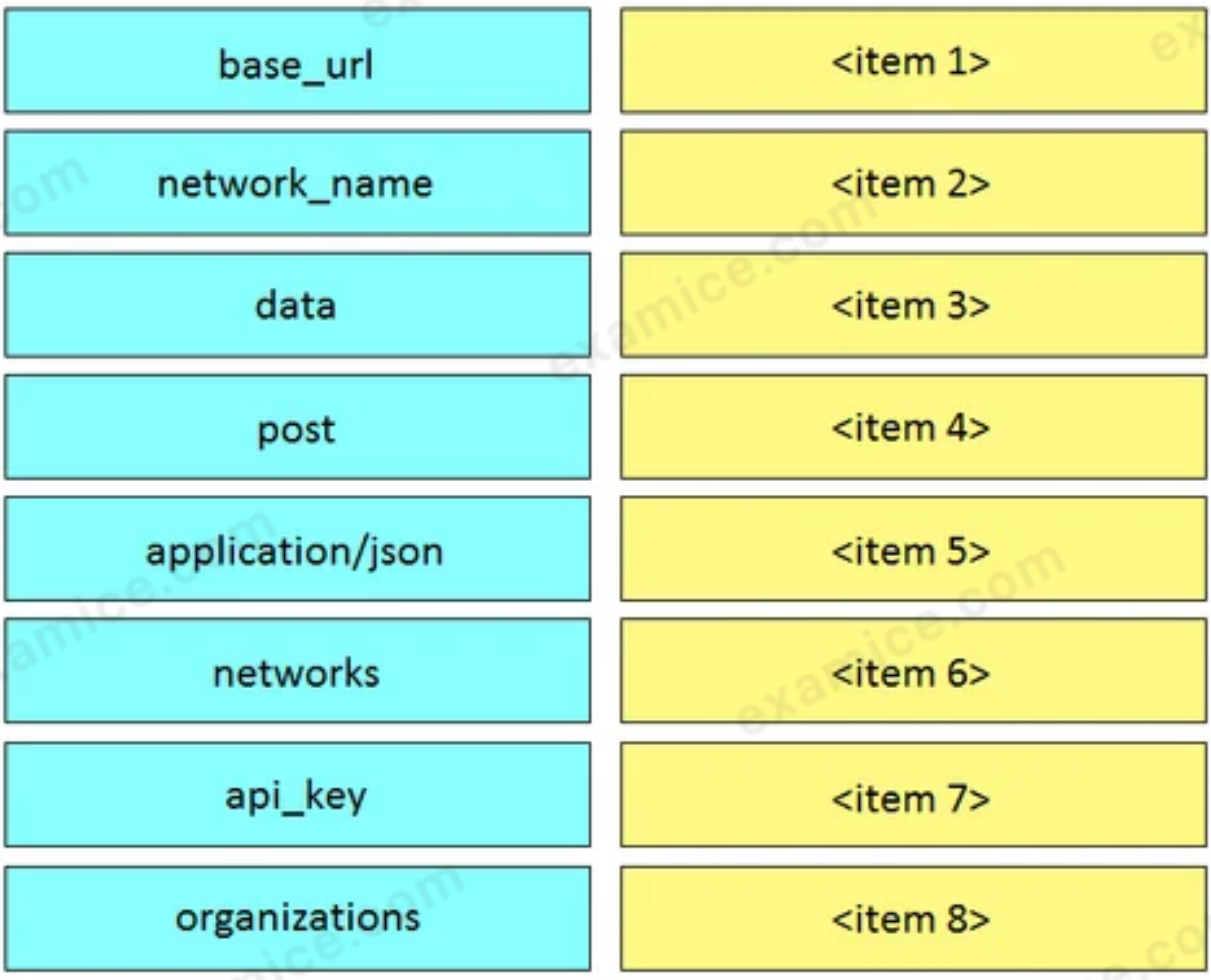

Issued to kamjunhao@gmail.com · October 17, 2026

An application calls a REST API and expects a result set of more than 550 records, but each time the call is made, only 25 are returned. Which feature limits the amount of data that is returned by the API?

A pagination

B payload limit

C service timeouts

D rate limiting

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is writing an application that uses a REST API and the application requires a valid response from the API. Which element of the response is used in the conditional check?

A body

B headers

C link

D URL

E status code

Refer to the exhibit.

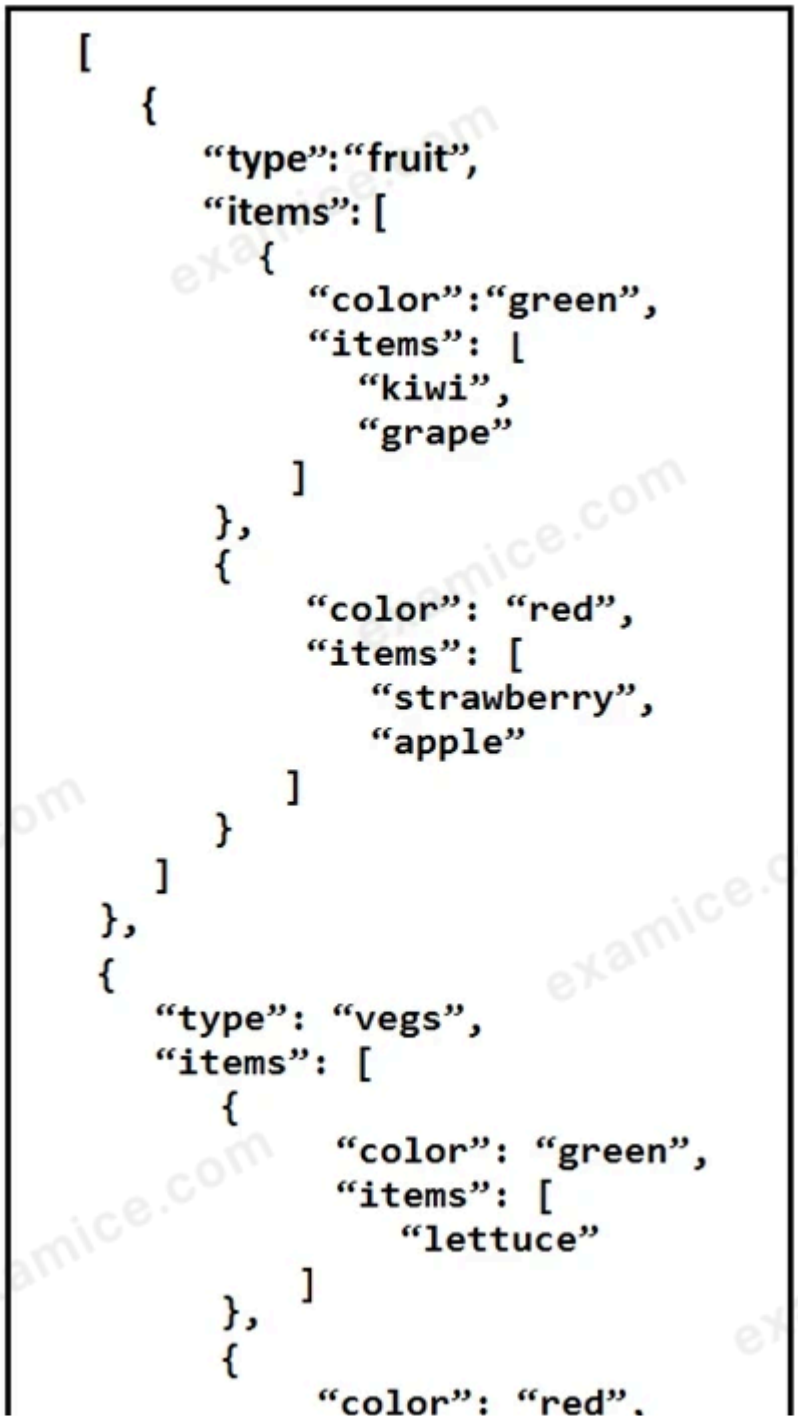

```
[
   {
      "type":"fruit",
      "items": [
         {
            "color":"green",
            "items": [
              "kiwi",
              "grape"
            ]
         },
         {
            "color": "red",
            "items": [
               "strawberry",
               "apple"
            ]
         }
   ]
},
{
   "type": "vegs",
   "items": [
      {
         "color": "green",
         "items": [
            "lettuce"
         ]
      },
      {
         "color": "red",
```

A REST API returns this JSON output for a GET HTTP request, which has been assigned to a variable called `vegetables`. Using Python, which output is the result of this command?
`print(filter(lambda 1: 1['type'] == 'fruit', vegetables) [0]['items'][0]['items'][0])`

A {'color': 'green', 'items': ['kiwi', 'grape']}

B ['kiwi', 'grape']

C lettuce

D kiwi

QUESTION 51

DRAG DROP -

Drag and drop the Python code from the left onto the correct step on the right to call a REST API.

Select and Place:

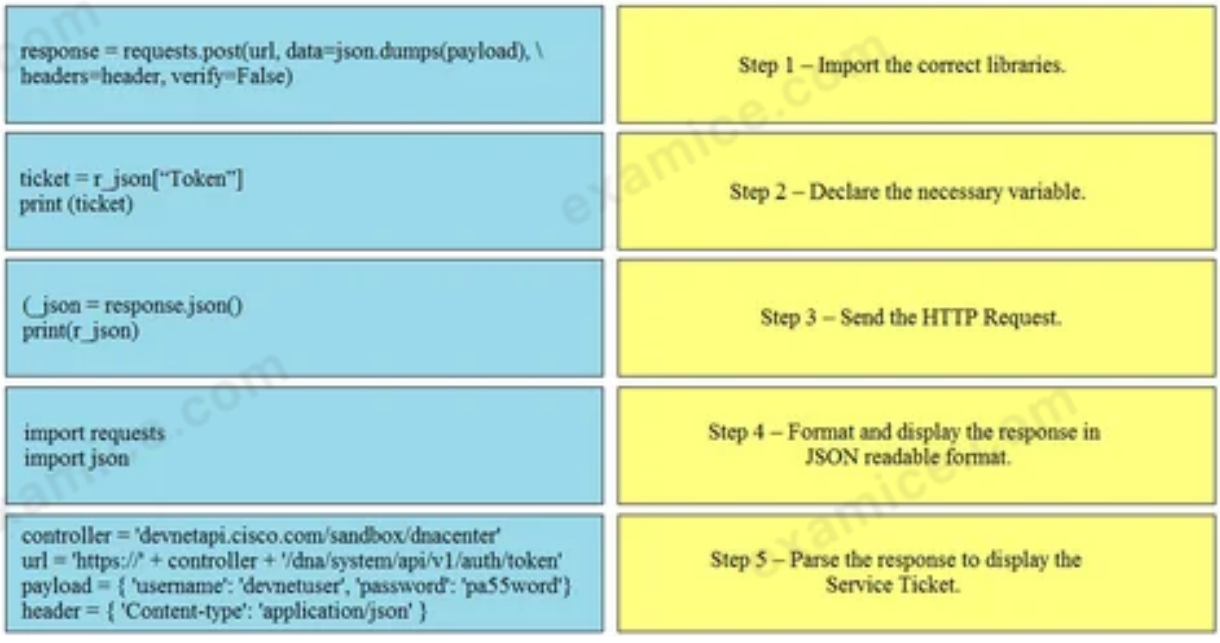

Issued to kamjunhao@gmail.com · October 17, 2026

A 401 HTTP response code is returned when calling a REST API. What is the error state identified by this response code?

A The server cannot process the request as it has detected an issue in the request syntax or body.

B The request has not been accepted because it requires authentication.

C The sever accepted the request but the client is not authorized for this content.

D The server cannot find the requested resource because the path specified is incorrect.

Personal copy · kamjunhao@gmail.com

A developer is creating a script to interact with a REST API service which requires basic authentication. The credentials are "devnet:391665405" and the Base64 encoding of the credentials is "GV2bmV0dXNlcjpDaXNj=". Which payload and header combination must be used for authentication?

A.

```
payload = {
    'Authorization' : 'Basic GV2bmV0dXNlcjpDaXNj=',
    'Content-Type' : 'application/json'
}
headers= {}
```

B.

```
payload = {}
headers= {
    'Authorization' : 'Basic GV2bmV0dXNlcjpDaXNj=',
    'Content-Type' : 'application/json'
}
```

C.

```
payload = {
    'Authorization' : 'Bearer GV2bmV0dXNlcjpDaXNj=',
    'Content-Type' : 'application/json'
}
headers= {}
```

D.

```
payload = {}
headers= {
    'Authorization' : 'Bearer GV2bmV0dXNlcjpDaXNj=',
    'Content-Type' : 'application/json'
}
```

Personal copy · kamjunhao@gmail.com

QUESTION 54

Issued to kamjunhao@gmail.com · October 17, 2026

A developer needs a list of clients connected to a specific device in a Meraki network. After making a REST API call, the developer receives an unfamiliar response code. Which Cisco DevNet resource should be used to identify the meaning of the response code?

A API documentation

B Code Exchange

C Learning Labs

D Sandbox

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is trying to retrieve data over a REST API. The API server responds with an HTTP client error response code. After investigating the response, the developer realizes the response has a **Retry-After** header. What is the root cause of this error?

A An appliance limited the rate of requests to the transport layer.

B The REST service is unreachable at the time of the REST request.

C Too many requests were sent to the REST service in a given amount of time.

D An appliance limited the rate of requests to the application layer.

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

Local File Attachments

To send local file attachments, simply post a message by including your access token in the Authorization header and the path to your local file with the files parameter. Optionally, you can also include a plain-text message with the attachment by using the text parameter. When uploading files directly from your local filesystem, your request will need to be a multipart/form-data request rather than JSON

```
curl --request POST \
  --form "files=@/home/desktop/example.png;type=image/png" \
  --form "roomId=Y21zY2....." \
  --form "text=example attached" \
https://webexapis.com/v1/messages
```

A developer needs to upload a local file by using the REST API. The developer gathers information according to the documentation and sends the request by using the cURL command in the exhibit but gets an error code. Which action should be followed to get a valid response?

A change content-type as JSON

B add the authorization header with the access token

C and a username-password combination to request command

D change request method as GET

DRAG DROP -

Refer to the exhibit.

Drag and drop the descriptors from the left onto the corresponding parts of the API request and response on the right.

Select and Place:

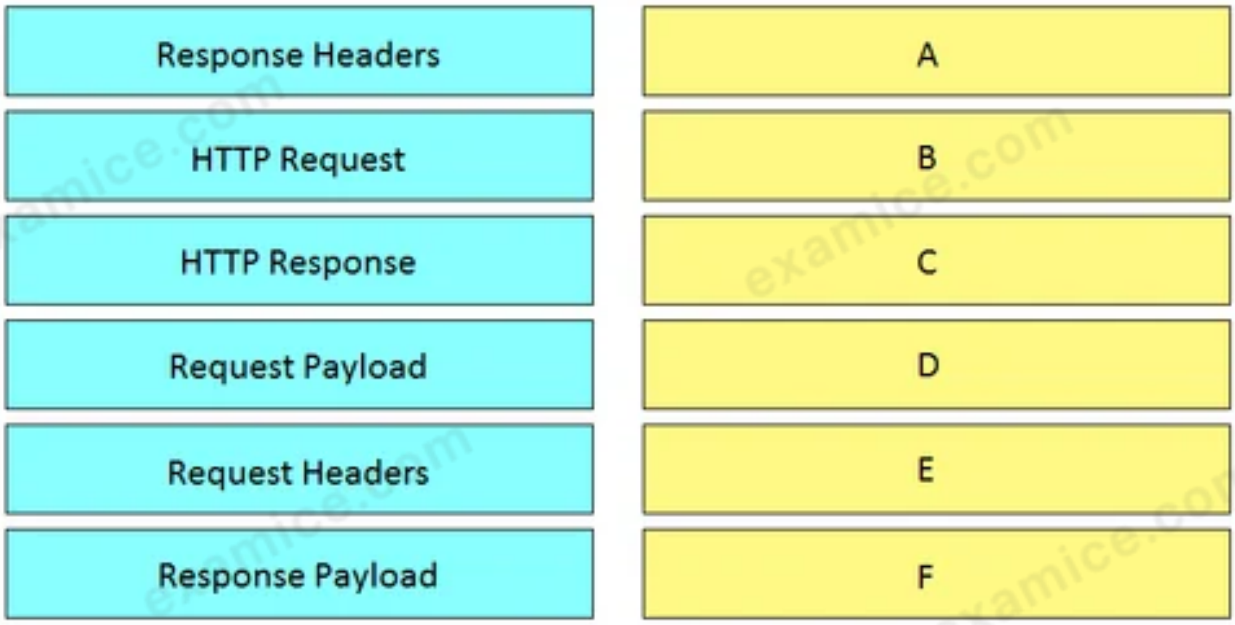

QUESTION 58

Which action resolves a 401 error in response to an HTTP GET that is issued to retrieve a configuration statement using RESTCONF on a CSR 1000V?

A Change the HTTP method to PUT.

B Check the MIME types in the HTTP headers.

C Change the transport protocol to HTTPS.

D Check the authentication credentials.

Issued to kamjunhao@gmail.com · October 17, 2026

Refer to the exhibit.

An API call is constructed to retrieve the inventory in XML format by using the API. The response to the call is 401 Unauthorized. Which two headers must be added to the API call? (Choose two.)

A Bearer-Token: dXNlcm5hbWU6cGFzc3dvcmQ=

B Content-Type: application/xml

C Authentication: Bearer dXNlcm5hbWU6cGFzc3dvcmQ=

D Accept: application/xml

E Authorization: Bearer dXNlcm5hbWU6cGFzc3dvcmQ=

QUESTION 60

Which HTTP response status code means `Forbidden`?

A 500

B 401

C 403

D 502

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP response code should be returned when the request is completed, but there is no content to send for the request?

A 100

B 204

C 302

D 402

Personal copy · kamjunhao@gmail.com

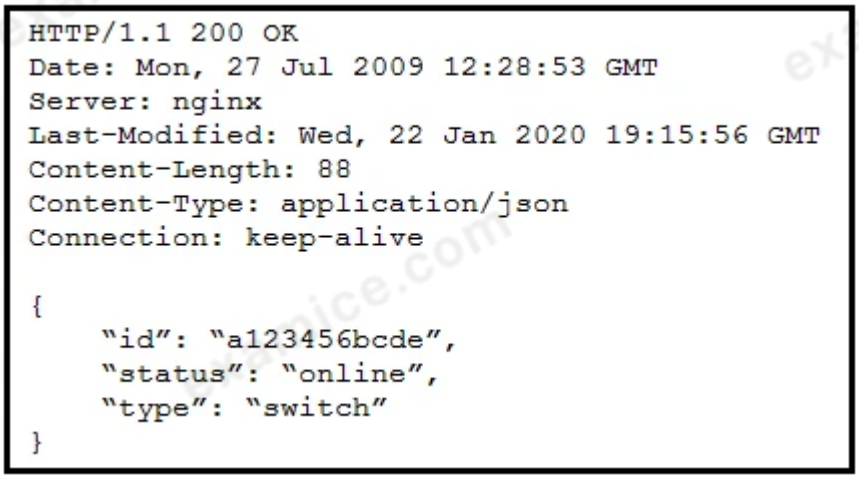

```
HTTP/1.1 200 OK
Date: Mon, 27 Jul 2009 12:28:53 GMT
Server: nginx
Last-Modified: Wed, 22 Jan 2020 19:15:56 GMT
Content-Length: 88
Content-Type: application/json
Connection: keep-alive

{
    "id": "a123456bcde",
    "status": "online",
    "type": "switch"
}
```

Refer to the exhibit. Which data is specified in the response header?

A Content-Type

B HTTP/1.1 200 OK

C ג€typeג :€ג€switchג€

D { ג€idג :€ג€a123456bcdeג€, HTTP/1.1 200 OK ג€statusג :€ג€onlineג ,€ג€type:€ג ג€switchג€ }

Issued to kamjunhao@gmail.com · October 17, 2026

What are two use cases where webhooks are effective? (Choose two.)

A Filter out information from a response to an API call.

B Close a session with a web server after a specific amount of time.

C Inform a previously defined chat channel after a deployment fails.

D Send an email to a customer of an online store after payment is complete.

E Change the response format or content type of an API call.

Personal copy · kamjunhao@gmail.com

In which two ways is an application characterized when interacting with a webhook? (Choose two.)

A receiver

B transaction monitor

C codec

D processor

E listener

How does requesting a synchronous API operation differ from requesting an asynchronous API operation?

A clients receive responses with a task ID for further processing

B clients subscribe to a webhook for operation results

C clients poll for the status of the execution of operations

D clients can access the results immediately

DRAG DROP -

Drag and drop the HTTP status codes from the left onto the correct descriptions on the right.

Select and Place:

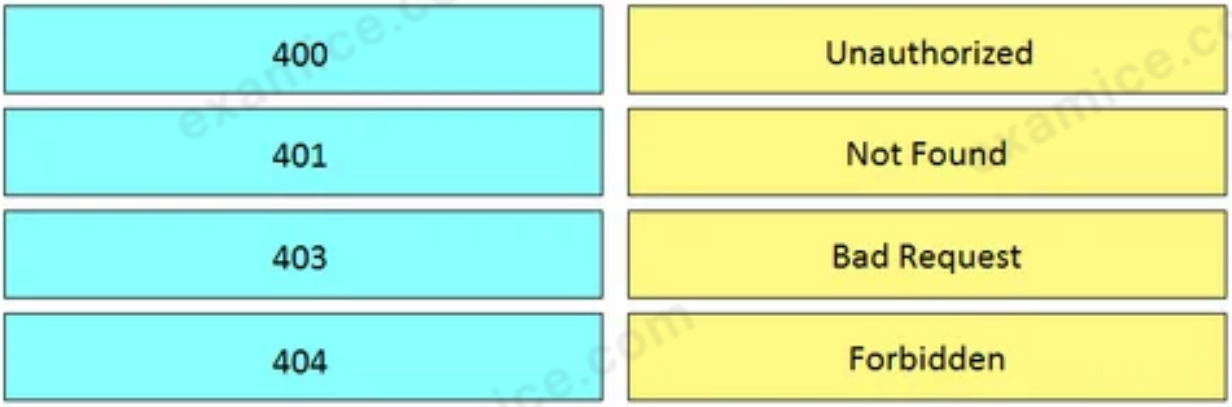

Which method should be used to safely store the API keys?

A in an environment variable unique to the system database

B encrypted in a configuration file that is separate from the code

C plain text in the code as a constant

D encrypted in the code in a function

Issued to kamjunhao@gmail.com · October 17, 2026

FILL BLANK -

Fill in the blanks to complete the statement.

Given a username of `devnet` and a password of `cisco123`, applications must create a base64 encoding of the string `_____` when sending HTTP requests to an API that uses `_____` authentication.

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

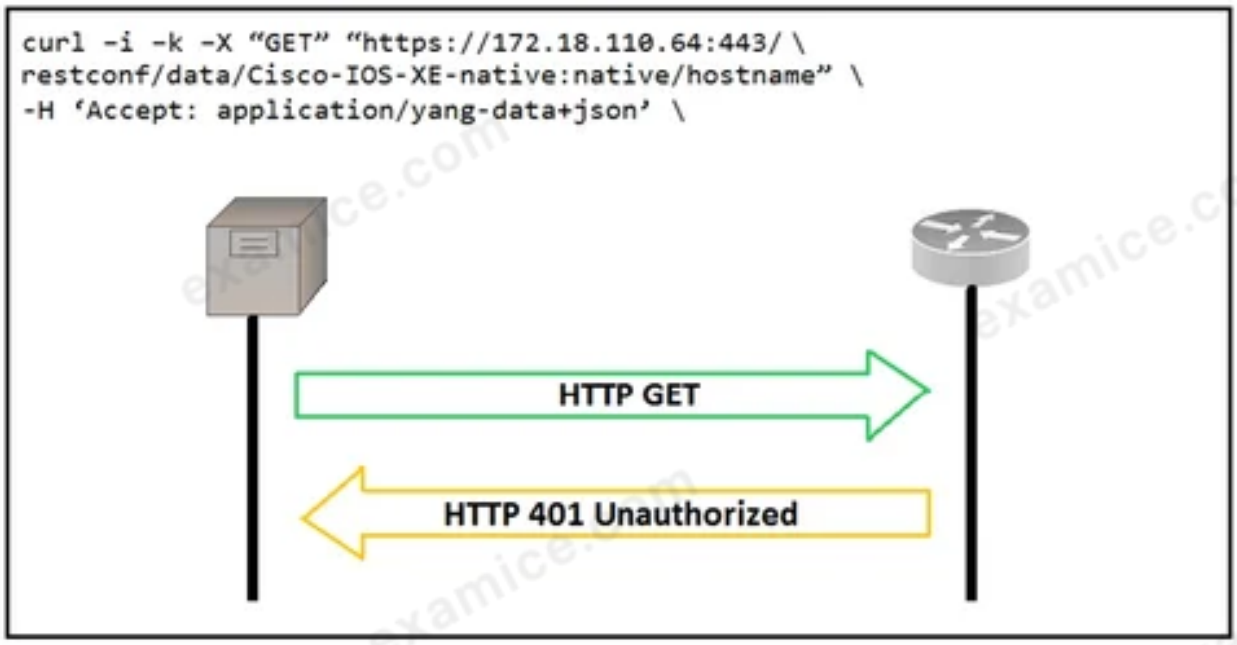

An administrator attempts to perform a GET using the Cisco IOS XE RESTCONF API to return the hostname of a device. The sequence diagram illustrates theHTTP messages observed. Which change to the API request resolves the issue?

A Remove the ג€"H 'Accept: application/yang-data+json' HTTP header because it is not required.

B Add ג€"'u cisco:cisco' in the end of the cURL command

C Change the request method from ג€"X ג€GETג€ to ג€"X ג€POSTג€

D Add Content-Type HTTP header with 'application/yang-data+json' using ג€"H 'Content-Type: application/yang-data+json'

QUESTION 70

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of managing network configuration via APIs? (Choose two.)

A more security due to locking out manual device configuration

B configuration on devices becomes less complex

C eliminates the need of legacy management protocols like SNMP

D reduction in network changes performed manually

E increased scalability and consistency of network changes

Personal copy · kamjunhao@gmail.com

QUESTION 71

Issued to kamjunhao@gmail.com · October 17, 2026

FILL BLANK -

Fill in the blanks to complete the cURL command that invokes a RESTful API to retrieve a resource in JSON format using OAuth. curl "X _____ -H ` _____: application/json` \

-H ` _____: Bearer AbCdEf123456` https://localhost/api/myresource

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco DevNet resource allows access to products in a development lab to explore, learn, and build applications that use Cisco APIs?

A DevNet Code Exchange

B DevNet Sandbox

C DevNet Communities

D DevNet Automation Exchange

Personal copy · kamjunhao@gmail.com

Refer to the exhibits.

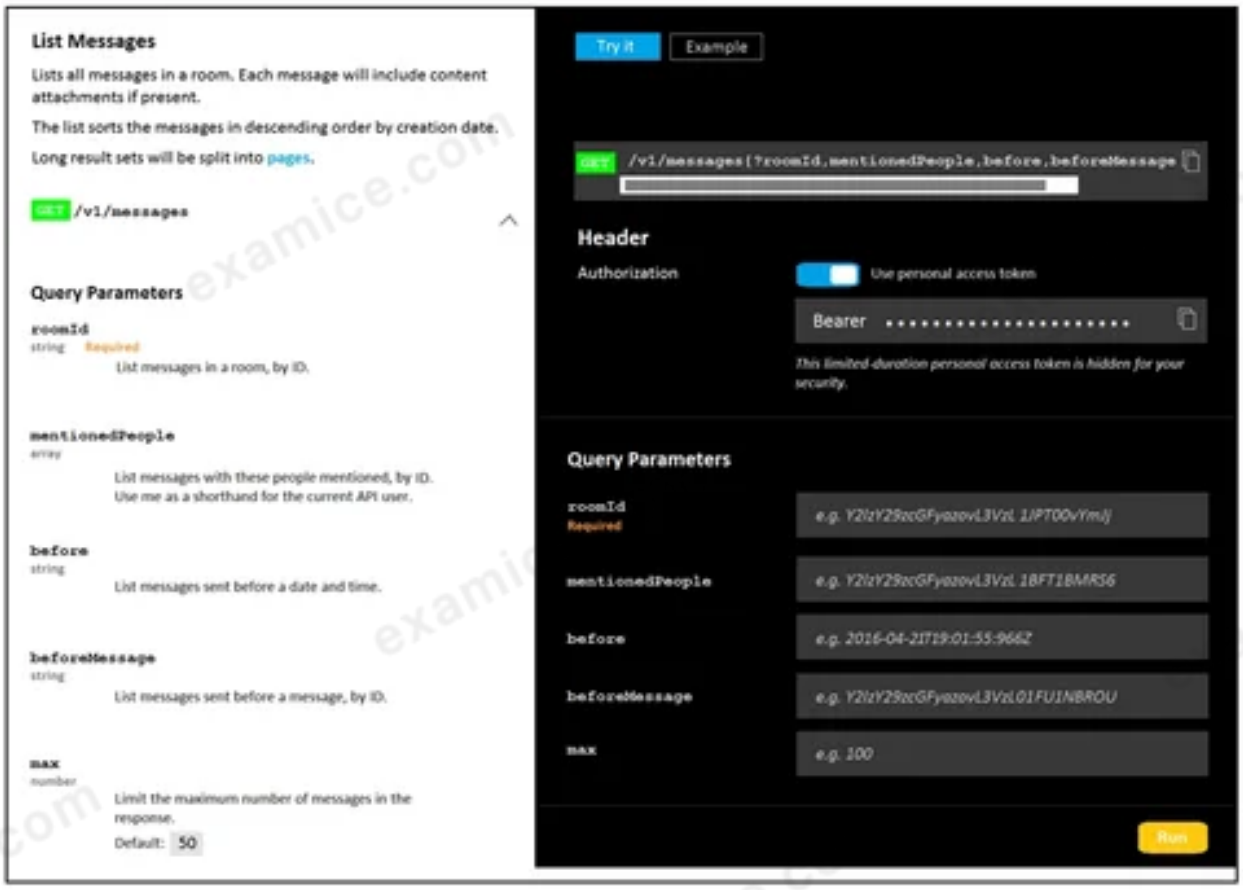


```
bash-3.2$ curl -H "Content-Type: application/json" -H "Authorization:
Fj2zzykEa091ic9GK2j8LtElHklH6oRHPQdwlpAT60I7NDThhNwZl2B5pqMg14kK_b9ei59ISAClY7-
NarA-2n9H-tGgt-SxQ39iDejgcs" -i -X POST -d "{ \"roomId\":
\"Y2geK53sjEknosrC7SwQ5ZGL99pHgiuScB7DfNvUsr8Xx4wDKLiPORcEkryAnM3QmK9LQZsP0G4\"
, \"text\": \"test2\" }" https://api.ciscospark.com/v1/messages

HTTP/1.1 401 Unauthorized
Via: 1.1 linkerd
TrackingID: ROUTER_5E0FDC8C-EB6F-01BB-00EF-806BF1BD00EF
Date: Sat, 04 Jan 2020 00:30:04 GMT
Server: Redacted
Content-Length: 267
Content-Type: application/json
Strict-Transport-Security: max-age=63072000; includeSubDomains; preload

{"message":"The request requires a valid access token set in the Authorization request
header.","errors":[{"description":"The request requires a valid access token set in the
Authorization request
header."}],"trackingId":"ROUTER_5E0FDC8C-EB6F-01BB-00EF-806BF1BD00EF"}

bash-3.2$
```

A developer is troubleshooting an API with the given API documentation and cURL command. What is the cause of this problem?

A The authorization header is missing or incomplete.

B The request body is missing or incomplete.

C The API token specified is expired.

D The user is not allowed to post messages from their account.

Personal copy · kamjunhao@gmail.com

QUESTION 74

Issued to kamjunhao@gmail.com · October 17, 2026

Which two statements describe the traits of an asynchronous API call? (Choose two.)

A Code execution blocks or waits for the call to an API to return.

B A callback function typically is used to process the response from an API call.

C A call to an API does not block the code, but rather it allows application processing to continue.

D The end user can experience latency or performance lag while waiting for the API call to return.

E The order in which API calls return can be guaranteed.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which mechanism is used to consume a RESTful API design when large amounts of data are returned?

A data sets

B scrolling

C pagination

D blobs

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

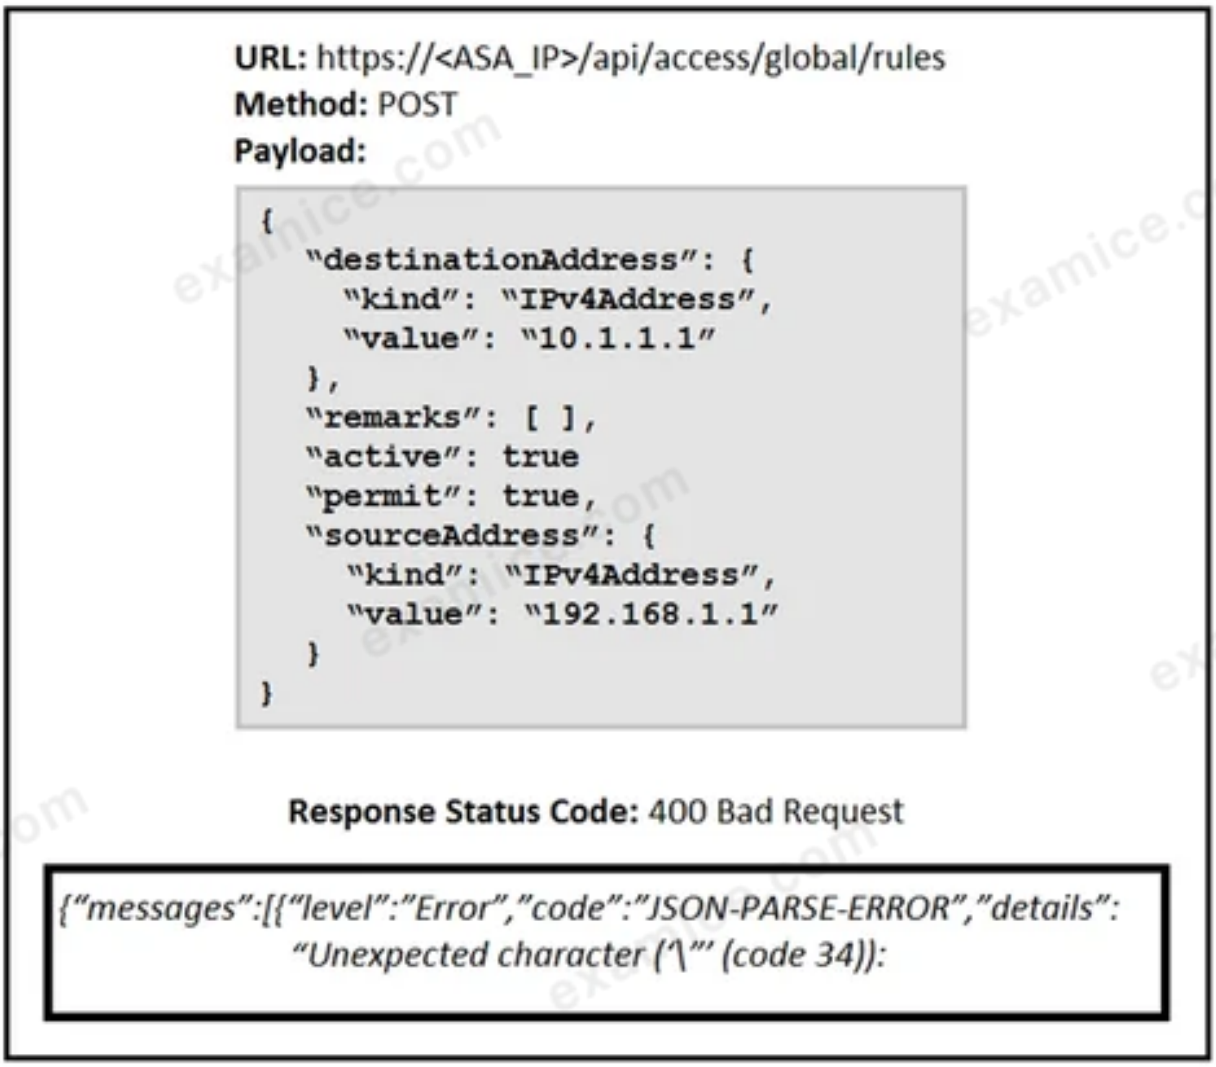

What caused the error in this API request?

A The API resource does not support the POST operation.

B The submitted JSON payload has a formatting issue.

C The API resource does not support JSON format payloads.

D The submitted JSON payload includes a field that is not supported by the API resource.

QUESTION 77

Which two use cases are supported by Meraki APIs? (Choose two.)

A Build location-aware apps from Wi-Fi and LoRaWAN devices.

B Build a custom Captive Portal for Mobile Apps.

C Configure network devices via the Dashboard API.

D Deploy applications onto the devices.

E Retrieve live streams from a Meraki Camera.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which API is used to obtain data about voicemail ports?

A Webex Teams

B Cisco Unified Communications Manager

C Finesse Gadgets

D Webex Devices

Personal copy · kamjunhao@gmail.com

DRAG DROP -

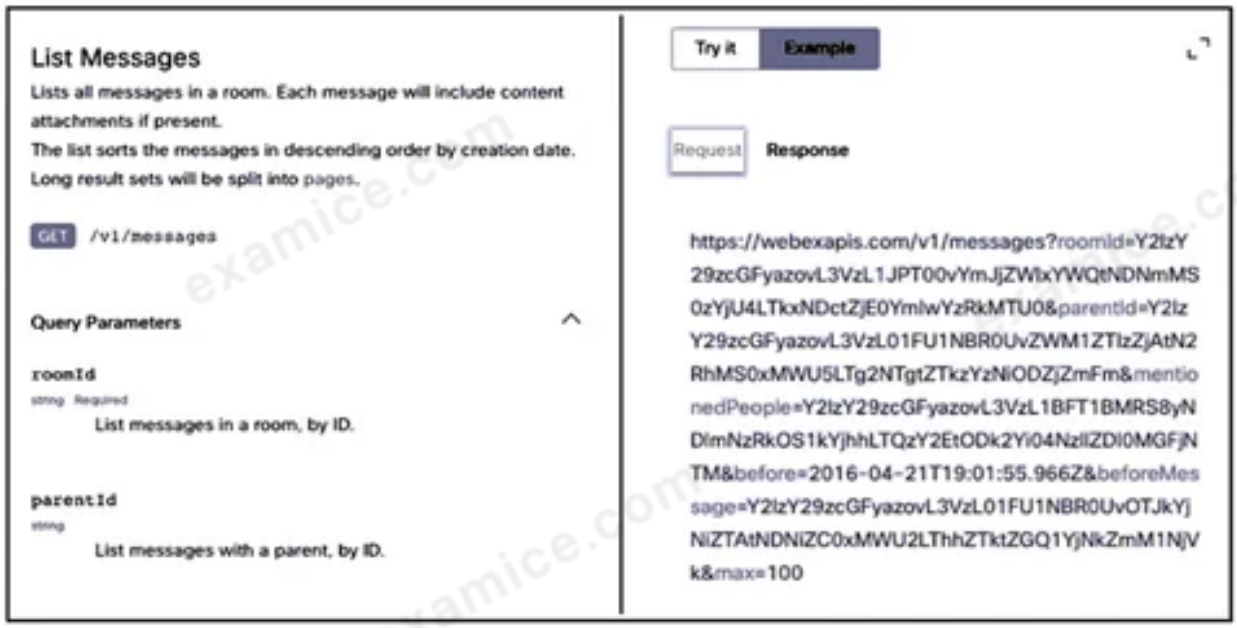

Refer to the exhibit. A developer needs to automatically retrieve all of the messages of a Webex room with the roomId of`Y2lzY29zcGFyazovL3Vz397468502YjU5NjAtNTk0Zi0xMWVhLTk0Mj`. Using the Webex API documentation shown, drag and drop the code snippets from below onto the code to complete the Python script to list all of the messages in the room. Not all options are used.Select and Place:

QUESTION 80

What is a difference between a synchronous API and an asynchronous API?

A Synchronous API calls require an authentication header to be sent while asynchronous calls do not require authentication.

B Synchronous API calls are returned immediately while asynchronous calls do not guarantee an immediate response.

C An asynchronous API can make offline calls while synchronous APIs do not have this capability.

D An asynchronous API can make a larger number of calls in a specified time period than a synchronous API.

DRAG DROP -

Returns the wireless lan controller info with given device ID:


```
{
    "response": {
        "adminEnabledPorts": [ 0 ],
        "apGroupName": "string",
        "deviceId": "string",
        "ethMacAddress": "string",
        "flexGroupName": "string",
        "id": "string",
        "instanceTenantId": "string",
        "instanceUuid": "string",
        "lagModeEnabled": true,
        "netconfEnabled": true,
        "wirelessLicenseInfo": "ADVANTAGE",
        "wirelessPackageInstalled": true
    },
    "version": "string"
}
```


Refer to the exhibit. Drag and drop the code from the bottom onto the blanks in the code to construct a cURL command using the Cisco DNA Center API, which will provide the details of a WLAN controller with Id ab123456789. Not all options are used.

Select and Place:

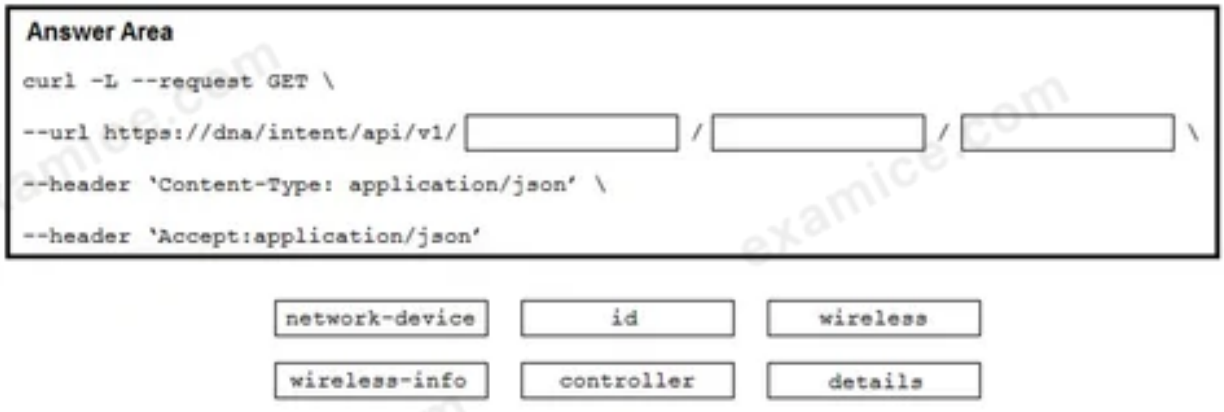

Issued to kamjunhao@gmail.com · October 17, 2026

```
import requests
from requests.auth import HTTPBasicAuth
headers = {'Content-Type': 'application/json'}
base_url = 'https://10.1.2.3'
auth_url = '/dna/system/api/v1/auth/token'
devices_url = '/dna/intent/api/v1/network-device'

token = requests.post(
   base_url + auth_url, headers=headers,
   auth=HTTPBasicAuth(username="admin", password="DevNet123"))
data = token.json()

query_string_params = {'platformId": "A1234-12B'}
response = requests.get(
    base_url + devices_url, headers=headers,
    params=query_string_params)
print(f'{response.code}')
```

Refer to the exhibit. A network engineer must manage the network devices. The engineer prepares a Python script to authenticate to the Cisco DNA Center API and request a device list. The device request fails and returns error code 401. Which action solves the problem?

A Update the credentials that are already supplied and retry the request.

B Send the request to another network in case there are reachability issues.

C Send the Authentication header in the request with a valid configuration.

D Update the API URL, which matched the API endpoint for device list.

Code:

```
import requests

url = 'https://en.wikipedia.org/api/rest_v1/page/title/Cisco_Systems'
s = requests.Session()

def get_json(session=None, url="https://example.com"):
    try:
        if not session or type(session) is not requests.sessions.Session:
            raise Exception("Invalid session type")

        r = session.get(url)

        if r.status_code < 200 or r.status_code > 307:
            raise Exception("Status Code not within 2xx and 3xx")

        return r.json()

    except requests.exceptions.RequestException as e:
        raise e("Request failed")
    finally:
        session.close()

if __name__ == "__main__":
    items = get_json(session=s,url=url)
    [redacted]
```

payload:

```
{'items': [{'title': 'Cisco_Systems', 'page_id': 51746, 'rev': 930604297,
'tid': '58b40b30-20e7-11ea-a7a9-f1850c7cfe85', 'namespace': 0, 'user_id':
19450869, 'user_text': 'Dhruvh
', 'timestamp':'2019-12-13T16:47:52Z', 'comment': '/* 1984-1995: Origins
and initial growth */', 'tags': [], 'restrictions': [], 'page_language':
'en', 'redirect': False}]}
```

Refer to the exhibit. Which command needs to be placed on the box where the code is missing to output the value of page_id in the Python 3.7 script?

A print(items.get('items')[0].get('page_id'))

B print(items.get('items').get('page_id'))

C print(items['items']['page_id'].keys())

D print(items['items']['page_id'])

Refer to the exhibit.

Generating Client ID and API Key:

- Log in to your AMP for Endpoints Console.
- Go to Accounts > Business Settings.
- Click Configure API Credentials under Features to generate the Client ID and secure API Key.

Once you have the API client ID and API key, you can make the API calls as follows:

```
https://<your_client_id>:<your_api_key>@<api_endpoint>
```

Alternatively you can use Basic HTTP Authentication. Base 64 encode the string ":", and send that prefixed with the string "Basic" as the authorization header. For instance, if your client_id was 1234, and your api_key was "atest", then it would be base64 encoded to "MTIzNDphdGVzdA==", and your header would be:

```
Authorization: Basic MTIzNDphdGVzdA==
```

The documentation outlines how to use credentials for the AMP API. Which script successfully performs an API call using basic authentication?

1. A.

```
import requests
amp_auth_token = 'a1b2c3d4e5f6g7h8i9j0 k1l2m3n4o5p6'
url = 'https://api.amp.cisco.com/v1/version'
request = requests.get(url,
   auth=(amp_auth_token))
print(request.json())
```

1. B.

```
import requests
amp_client_id = 'a1b2c3d4e5f6g7h8i9j0'
amp_api_key = 'a1b2c3d4-e5f6-g7h8-i9j0-k1l2m3n4o5p6'
url = 'https://api.amp.cisco.com/v1/version'
request = requests.get(url,
   auth=(amp_client_id, amp_api_key))
print(request.json())
```

1. C.

```
import requests
amp_client_id = 'a1b2c3d4e5f6g7h8i9j0'
amp_api_key = 'a1b2c3d4-e5f6-g7h8-i9j0-k1l2m3n4o5p6'
url = 'https://api.amp.cisco.com/v1/version'
request = requests.get(url))
print(request.json())
```

1. D.

```
import requests
amp_client_id = 'a1b2c3d4e5f6g7h8i9j0'
amp_login_password = '10g1n_p@ssw0rd'
url = 'https://api.amp.cisco.com/v1/version'
request = requests.get(url,
   auth=(amp_client_id, amp_login_password))
print(request.json())
```

Personal copy · kamjunhao@gmail.com

API Documentation:

Integrations are how you request permission to invoke the Webex REST API on behalf of another Webex Teams user. To do this in a secure way the API supports the OAuth 2 standard which allows third-party integrations to get a temporary access token for authenticating API calls instead of asking users for their password.

Script:

```
01   import requests
02
03   base_url = "https://webexapis.com/v1"
04   header = {"Key": "Value"}
05
06   url = "{}/{}".format(base_url, "/teams")
07   print(requests.get(url, headers=header).status_code)
```

Refer to the exhibit. A developer creates a Python script that queries Cisco Webex. When the script is executed, a 401 code is returned. After troubleshooting, the developer discovers that the service is missing privileges. Which change to the header in line 4 of the script results in the code 200?

A header = {ג€Authenticationג :€ג€Bearer YOUR_TOKENג€}

B header = {ג€Authentication Bearerג : €ג€YOUR_TOKENג€

C header = {ג€Authorization Bearerג : €ג€YOUR_TOKENג€}

D header = {ג€Authorizationג : €ג€Bearer YOUR_TOKENג€}

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP -

Drag and drop the HTTP methods from the left onto their generally accepted corresponding create, read, update, and delete operations on the right.

Select and Place:

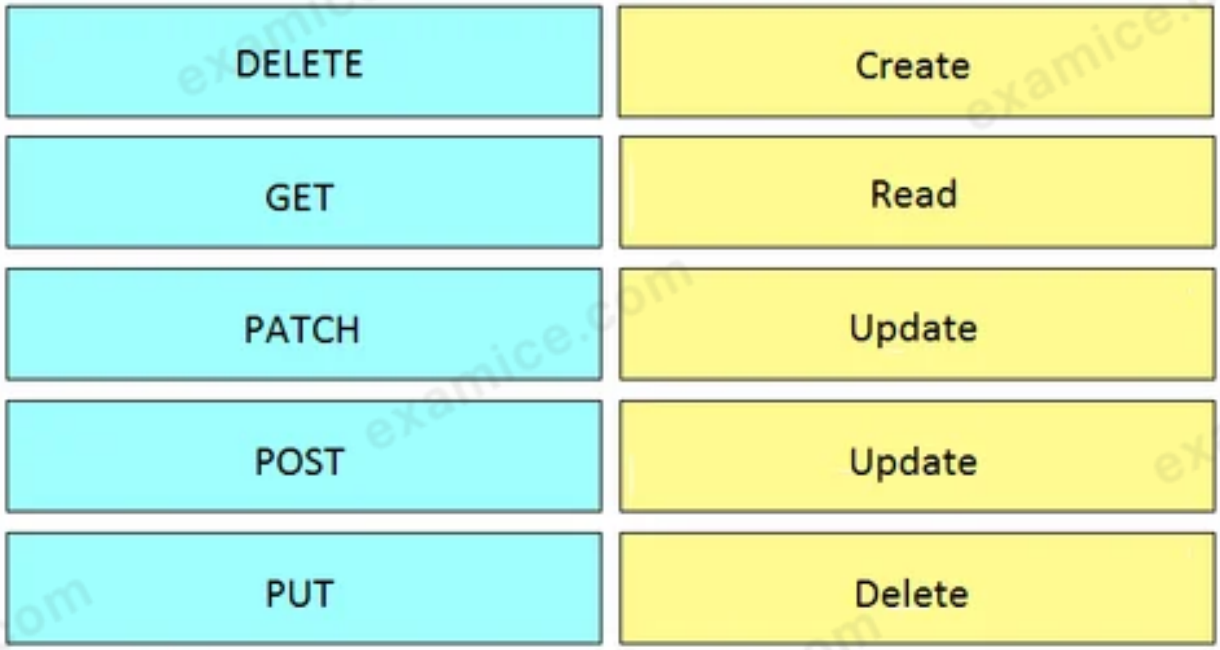

DRAG DROP -

Refer to the exhibit.

List the clients that have used this network in the timespan

HTTP REQUEST

`GET /networks/ {networkId}/clients`

PARAMETERS

t0

The beginning of the timespan for the data. The maximum lookback period is 31 days from today.

timespan

The timespan for which the information will be fetched. If specifying timespan, do not specify parameter t0. The value must be in seconds and be less than or equal to 31 days. The default is 1 day.

perPage

The number of entries per page returned. Acceptable range is 3 – 1000. Default is 10.

startingAfter

A token used by the server to indicate the start of the page. Often this is a timestamp or an ID but it is not limited to those. This parameter should not be defined by client applications. The link for the first, last, prev, or next page in the HTTP Link header should define it.

endingBefore

A token used by the server to indicate the end of the page. Often this is a timestamp or an ID but it is not limited to those. This parameter should not be defined by client applications. The link for the first, last, prev, or next page in the HTTP Link header should define it.

```
base_url = "https://api.meraki.com/api/v0"
network_id = "L_12345678910"
api_key = "1098hadpfsiapsf8ahf8ohp"
requests.<item 1> (
    <item 2> + "/<item 3>/" + <item 4>, "/<item 5>",
    headers = {
        "X-Cisco-Meraki-API-Key": <item 6> ,
        "Content-Type": "<item 7>"
    },
    <item 8>={"<item 9>":<item 10>})
```

Drag and drop the code from the left onto the item numbers on the right to complete the Meraki code to obtain a list of clients which have used this network.

Select and Place:

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

In Python, which expression checks whether the script returns a success status code when the Requests library is used?

A response.status_code == requests.codes.ok

B response.code == requests.codes.ok

C response.status_code == requests.ok

D response.status_code != requests.codes.ok

Personal copy · kamjunhao@gmail.com

```
import requests
from requests.auth import HTTPBasicAuth
from config import url, username, password
response = requests.login(url, auth=HTTPBasicAuth (username, password), verify=False)
print response.status_code
```

Refer to the exhibit. The script returns an output of 401. To use the supplied URL, an HTTP GET request must be sent with an Authorization header. The header value is a base64 encoded concatenation of the username and password. Which action must be taken to return an output of 200?

A Change the verify=False setting in the request to verify=True to enable HTTP Basic authentication.

B Verify that the username and password values imported from the configuration file are still valid.

C Insert an Authorization header with the values username:password from the supplied configuration file.

D Modify the method from LOGIN to GET and supply the username:password value as JSON payload.

Issued to kamjunhao@gmail.com · October 17, 2026

```
>>> response_data = requests.get(base_url + request_url, cookies=cookies)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
NameError: name 'requests' is not defined
>>>
```

Refer to the exhibit. A Python code has been written to query a device. The executed code results in the error shown. Which action resolves the problem?

A import json

B requests(ג€GETג€, base_url + request_url, cookies=cookies)

C pip install requests

D import requests

Personal copy · kamjunhao@gmail.com

QUESTION 91

Issued to kamjunhao@gmail.com · October 17, 2026

Which REST architectural constraint indicates that no client context should be stored on the server between requests?

A cacheable

B stateless

C uniform interface

D client-server

Personal copy · kamjunhao@gmail.com

QUESTION 92

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP code group is issued when a request is received successfully, understood, and processed?

A 2xx

B 3xx

C 4xx

D 5xx

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a web application that receives a username and password and uses them to sync the credentials to other services through HTTPS. API keys to services are part of the configuration files of the application, but the credentials to the database that stores the synchronization logs are obtained through an external vault service. What is the security issue in this scenario?

A Communication between the application and the services is not encrypted.

B The database credentials should be stored in the configuration files so that they are secured on the same server.

C The API keys are stored in the configuration files but should be stored in the vault service.

D The synchronization logs should be encrypted and not stored in a relational database.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

```
#import dnac sdk
from dnacentersdk import DNACenterAPI
#connection to dnac

username = 'user1'
password = 'secret'
base_url = 'https://192.168.1.1'

dnac = DNACenterAPI(username=username, password=password, base_url=base_url,
version='1.3.3', verify=False)

# Get list of ports on device using get all interfaces API call
port_list_1 = [item['portName'] for item in
dnac.devices.get_all_interfaces()['response']
                                if 'da4606c3-63ad-4ed4-8f35-6bfec7c2df04' in
                                item['deviceId']]

# Sort list items
port_list_1.sort()
# Check the number of ports on the device
print(f'The list of interfaces contains {len(port_list_1)} items.')

# Output
# The list of interfaces contains 38 items.


# Get list of interfaces using the get interface info by device id api call
port_list_2 = [item['portName'] for item in
    dnac.devices.get_interface_info_by_id('da4606c3-63ad-4ed4-8f35-
    6bfec7c2df04')['response']]

# Sort list items
port_list_2.sort()
# Check the number of ports on the device
print(f'The list of interfaces contains {len(port_list_2)} items.')

# Output
# The list of interfaces contains 54 items.
```

Refer to the exhibit. An engineer writes a Python script that uses two different API calls to query Cisco DNA Center for the number of interfaces on a device. The engineer notices that the two API calls produce different results. Why are fewer interfaces returned for the same device when the 'get_all_interfaces' API call is used?

A times out

B rate limit

C pagination

D invalid password

QUESTION 95

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP -

Drag and drop the code snippets from the bottom into the Python script to write API output to a csv file. Not all options are used.

Select and Place:

response	requests	request
get	status_code	status

DRAG DROP -

Drag and drop the code snippets from the bottom to the blanks in the code to test the API response through the Python unittest library. Not all options are used.

Select and Place:

```
import unittest
import json
from apidogs import app

class TestsAPIDogs(unittest.TestCase):

    def setUp(self):
        self.app = app.test client()

    # Check status response of API
    def test status(self):
        resp =self.app.get('/dogs/all')
        status_code = response. [          ]
        self.assertEqual(status_code, [          ] )

    # Check for content type is in application/json
    def test content type(self):
        resp =self.app.get('/dogs/all')
        self.assertEqual(resp. [          ] ,'application/json')

    def test item not exist(self):
        resp =self.app.get('/dogs?id= [          ] ')
        self.assertEqual(response.status code,404)

    if name == '  main  ':
        unittest.main()
```

403	content	status_code
200	none	content_type
	status	

DRAG DROP -

```
GET getNetworkHttpServers
https://api.meraki.com/api/v0/networks/:networkId/httpServers
List the HTTP servers for a network

AUTHORIZATION
API Key

This request is using an authorization helper from collection Meraki Dashboard
API
HEADERS
Accept
*/*
```

Refer to the exhibit. A developer is creating a Python script to obtain a list of HTTP servers on a network named office_east by using the Cisco Meraki API. The request has these requirements:

- MUST time out if the response is not received within 2 seconds.
- MUST utilize client certificates and SSL certificate verification.
- MUST utilize basic authentication that uses a username of admin and a password of cisco.
- MUST save the response to an object named response.

Drag and drop the code snippets from the bottom onto the blanks in the code to meet the requirements. Not all options are used.

Select and Place:

```
import requests
from requests.auth import HTTPBasicAuth
network = 'office east'
url = 'https://api.meraki.com/api/v0/networks/{}/httpServers'.format (network)
[          ] = requests.get(url=url, headers={ 'Accept': '*/*'},
verify='/etc/pki/tls/certs/ca.pem',
timeout= [          ] ,
[          ] =('/etc/pki/tls/certs/client.pem',
'/etc/pki/tls/certs/client.key'),
auth= [          ] ('admin', 'cisco'))
response.status_code
```

token	response	2
HTTPTokenAuth	HTTPBasicAuth	cert

DRAG DROP -

Drag and drop the code snippets from the bottom to the blanks in the code to complete the HTTP response. Not all options are used.

Select and Place:

Request Type | Request Control
Status Code | Content-Type
Request Method | Content Code
Content-Encoding

```
import requests

base url = f"https://webexapis.com/v1/people"

headers = {
        "Accept": "application/json"
}

person email = 'customer@company.com'
url = f"{base url}?email={person email}"

response = requests.request("GET", url, headers=headers)

if response.status code == 200 :
        print(f"OK - Added {person email}")
else:
        print(f"ERROR CODE {response.status code}")
```

Refer to the exhibit. A collaboration engineer has developed a script to automate the gathering of information by providing the email address of the individual.

When the engineer tests the script, a 401 error is received. Which `command` fixes the script?

A Add ɹ€Authorizationɹ :€ɹ€Bearer <WEBEX_TOKEN>ɹ€ to the headers.

B Add ɹ€Authenticationɹ :€ɹ€Basic <WEBEX_TOKEN>ɹ€ in the base_url after ɹ€https://ɹ€.

C Add ɹ€<Authorization>:<password>@ɹ€ in the base_url after ɹ€https://ɹ€.

D Add ɹ€Authenticationɹ :€ɹ€Bearer <WEBEX_TOKEN>ɹ€ to the headers.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is attempting to retrieve all the messages from a Cisco Webex space. The server responds by sending the first 1,000 messages. The developer must make additional requests to retrieve the rest of the messages. Which API constraint is described in this scenario?

A payload limiting

B throttling

C pagination

D rate limiting

Personal copy · kamjunhao@gmail.com

```
cd ~/development/project01
mkdir info
cd info
[redacted]
cp ./requirements.txt ~/Documents/backup/requirements.txt
```

Refer to the exhibit. A developer just finished testing a Python script and wants to save the list of packages and versions installed on the current machine. The developer must make sure that it will not cause any issues if tested on another device due to different library versions. Which line of code needs to be placed on the snippet where the code is missing?

A pip freeze 2> requirements.txt

B pip freeze > requirements.txt

C pip freeze => requirements.txt

D pip freeze | requirements.txt

Issued to kamjunhao@gmail.com · October 17, 2026

A developer pushes an application to production. The application receives a webhook over HTTPS without a secret. The webhook information contains credentials to service in cleartext. When the information is received, it is stored in the database with an SHA-256 hash. Credentials to the database are accessed at runtime through the use of a vault service. While troubleshooting, the developer sets the logging to **debug** to view the message from the webhook. What is the security issue in this scenario?

A Database credentials should be accessed by using environment variables defined at runtime.

B During the transport of webhook messages, the credentials could be unencrypted and leaked.

C During logging, debugging should be disabled for the webhook message.

D Hashing the credentials in the database is not secure enough; the credentials should be encrypted.

Personal copy · kamjunhao@gmail.com

HTTP Request

```
curl http://hello-api.info -v
```

HTTP Response

```
*   Trying hello-app.info...
* TCP_NODELAY set
* Connected to hello-app.info (hello-app.info) port 80 (#0)
> GET / HTTP/1.1
> Host:hello-app.info
> User-Agent: curl/7.64.1
> Accept: */*
>

< HTTP/1.1 502 Bad Gateway
< Server: nginx/1.14.0 (Ubuntu)
< Date: Sat, 21 Nov 2020 11:09:54 GMT
< Content-Type: text/html
< Content-Length: 182
< Connection: keep-alive
```

Refer to the exhibit. A developer cannot reach the web application behind an NGINX load balancer. The developer sends a request to an application FQDN with cURL but gets an HTTP 502 response. Which action solves the problem?

A Fix errors in the server configuration, which is behind the load balancer.

B Bring up the load balancer to the active state.

C Fix errors in the cURL request sent by the client.

D Change the default gateway on the load balancer to an active one.

```
import requests, sys
from config import user, password

url = "http://restconf.devnet.com:9443/api/running/interfaces"
headers = [redacted]
response = requests.put(url, auth=(user, password), headers=headers, verify=False)
print(response.text)
```

Refer to the exhibit. A network engineer wants use API update information about device interfaces. The network devices are deployed in a Cisco DevNet Sandbox and have running interfaces. Which value is suitable as the headers variable?

A {'Content-Type': 'application/yang.data+yaml', 'Accept': 'application/yang.data+yaml'}

B {'Content-Type': 'application/yang.data+json', 'Accept': 'application/yang.data+json'}

C {'Content-Type': 'application/yang.data+utf8l', 'Accept': 'application/yang.data+utf8'}

D {'Content-Type': 'application/restconf.data+txt', 'Accept': 'application/restconf.data+txt'}

Issued to kamjunhao@gmail.com · October 17, 2026

Which action do webhooks enable an application to perform?

A Increase the request rate limit.

B Populate the application with restricted data.

C Receive real-time data.

D Implement a push model.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

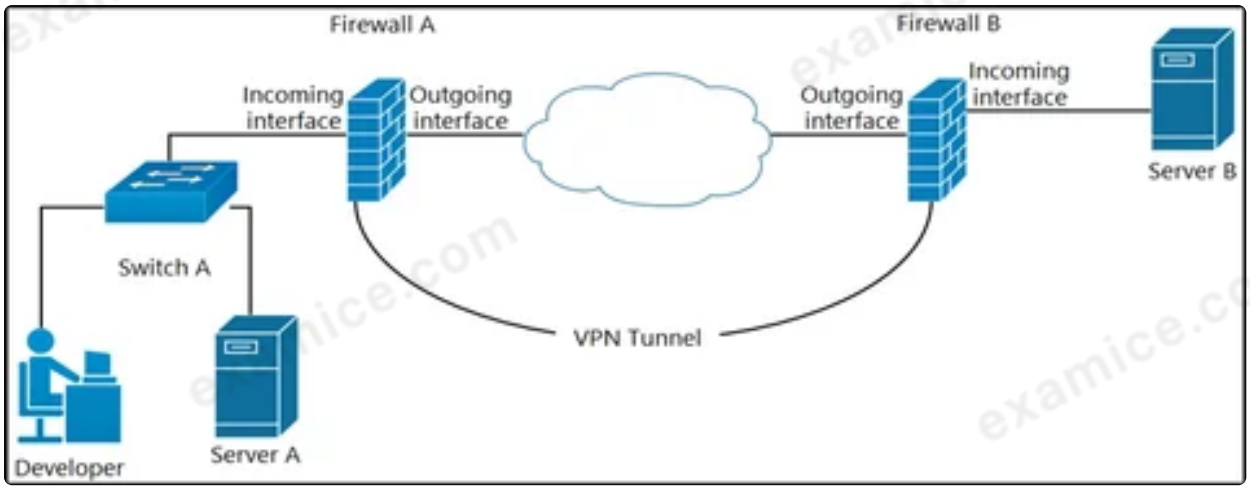

Refer to the exhibit. A developer can access the TLS REST API on server A, but cannot access the API on server B. The developer can ping server B. When the developer performs a packet capture on the TLS REST API port on server B, the capture shows that the packet arrived and the server responded. What causes the issue?

A Port 80 is blocked on the outgoing interface of firewall B.

B Port 443 is blocked on the outgoing interface of firewall A.

C Port 443 is blocked on the incoming interface of firewall B.

D Port 80 is blocked on the incoming interface of firewall A.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

/api/access/global/rules API operations on global access rules. GET PUT PATCH POST DELETE

Implementation Notes

Add a new global access rule.

Parameters

Parameter	Required	Description	Type	Data Type
body	true	Definition of the global access rule to be added.	body	ExtendedACE

Response

Response Content Type application/json

Response Object ExtendedACE

ExtendedACE Model

Field	Value	Description	Constraints
sourceAddress*	object	source address in the ace	None
destinationAddress*	object	destination address in the ace	None
kind*	string	The kind of this resource object.	None
dstSecurity	object	destination security group in the ace	None
dstSecurity. Value	string		None
active*	boolean	shows if the rule is active or inactive, default is active	None
destinationService*	object	destination service in the ace	None
permit*	boolean	shows if the action is permit or deny	None

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to complete the function that adds a new global access rule that denies traffic using the Cisco ASA REST API. Not all options are used.

Select and Place:

```
import requests as req
def add rule(token, asa IP, dest v4Address):
    data = {
        "destinationAddress": {
            "kind": "IPv4Address",
            "value": dest v4Address
        },
        "destinationService": {
            "kind": "NetworkProtocol",
            "value": "ip"
        },
        [                                   ]
        "active": True,
        "sourceAddress": {
            "kind": "AnyIPAddress",
            "value": "any4"
        }
    }
    objectRequestUrl='https://'[                                   ]
    res = req.request([                                   ]
                json=data,verify=False)
[                                   ]
   print("Success.")
else:
   print("Failed")
```

```
if res.status_code == 201:
if res.status_code == 203:
+ asa_IP + "/api/access/global/rules"
'POST', objectRequestUrl,
"permit": False,
+ asa_IP = "/access/global/rules"
```

DRAG DROP -

Drag and drop the API characteristics from the left onto the categories on the right.

Select and Place:

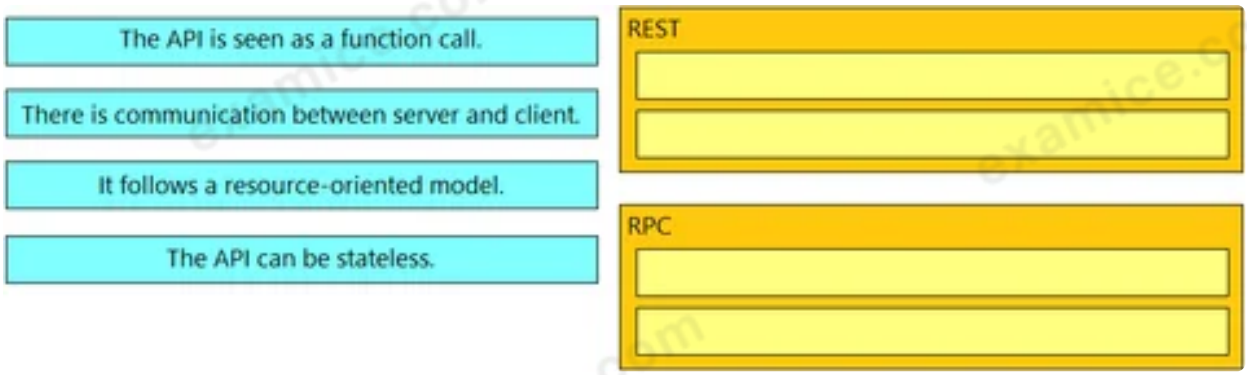

How are operations on REST APIs performed as compared to RPC APIs?

A In a REST API, operations are performed on an object (node) that is identified by a URL, but RPC APIs are operation-oriented.

B In a REST API, operations are performed on an external resource that is defined on the API, but the RCP APIs are resource-oriented.

C In a REST API, operations are performed on a platform that is identified by the URL, but RPC APIs are platform-oriented.

D In a REST API, operations are performed on an internal resource that is defined on the API, but RPC APIs are resource-oriented.

QUESTION 110

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP error code series relates to redirection?

A 400

B 500

C 200

D 300

Personal copy · kamjunhao@gmail.com

QUESTION 111

Issued to kamjunhao@gmail.com · October 17, 2026

Which platform has an API that can be used to obtain a list of vulnerable software on user devices?

A Cisco Umbrella

B Cisco Firepower

C Cisco Identity Services Engine

D Cisco Advanced Malware Protection

Personal copy · kamjunhao@gmail.com

QUESTION 112

Issued to kamjunhao@gmail.com · October 17, 2026

Which two items are Cisco DevNet resources? (Choose two.)

A TAC Support

B Software Research

C API Documentation

D Bitbucket

E Sandbox

Personal copy · kamjunhao@gmail.com

QUESTION 113

Issued to kamjunhao@gmail.com · October 17, 2026

FILL BLANK -

Fill in the blanks to complete the Python script to update the Webex Teams membership of a room using the Python requests library. import requests url = `https://api.ciscospark.com/v1/memberships/Y2lzY29zcGFyazov379971079INISVAvOTJiM2RkOWEtN = `AbCdEf123456`payload = `{ \n \`isModerator\`: true\n}`headers = {'Authorization': 'Bearer' + my_token,'Content-Type': 'application/json'}response = requests. _____ (`PATCH`, url, headers= _____, data = _____) print(response.text.encode('utf8'))

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

While developing a real-time VoIP application on a Cisco Webex platform, users report that their voice gets chopped or parts of the conversation drop out. Which network constraint is impacting the application?

A jitter

B capacity

C delay

D latency

Personal copy · kamjunhao@gmail.com

FILL BLANK -

Refer to the exhibit.

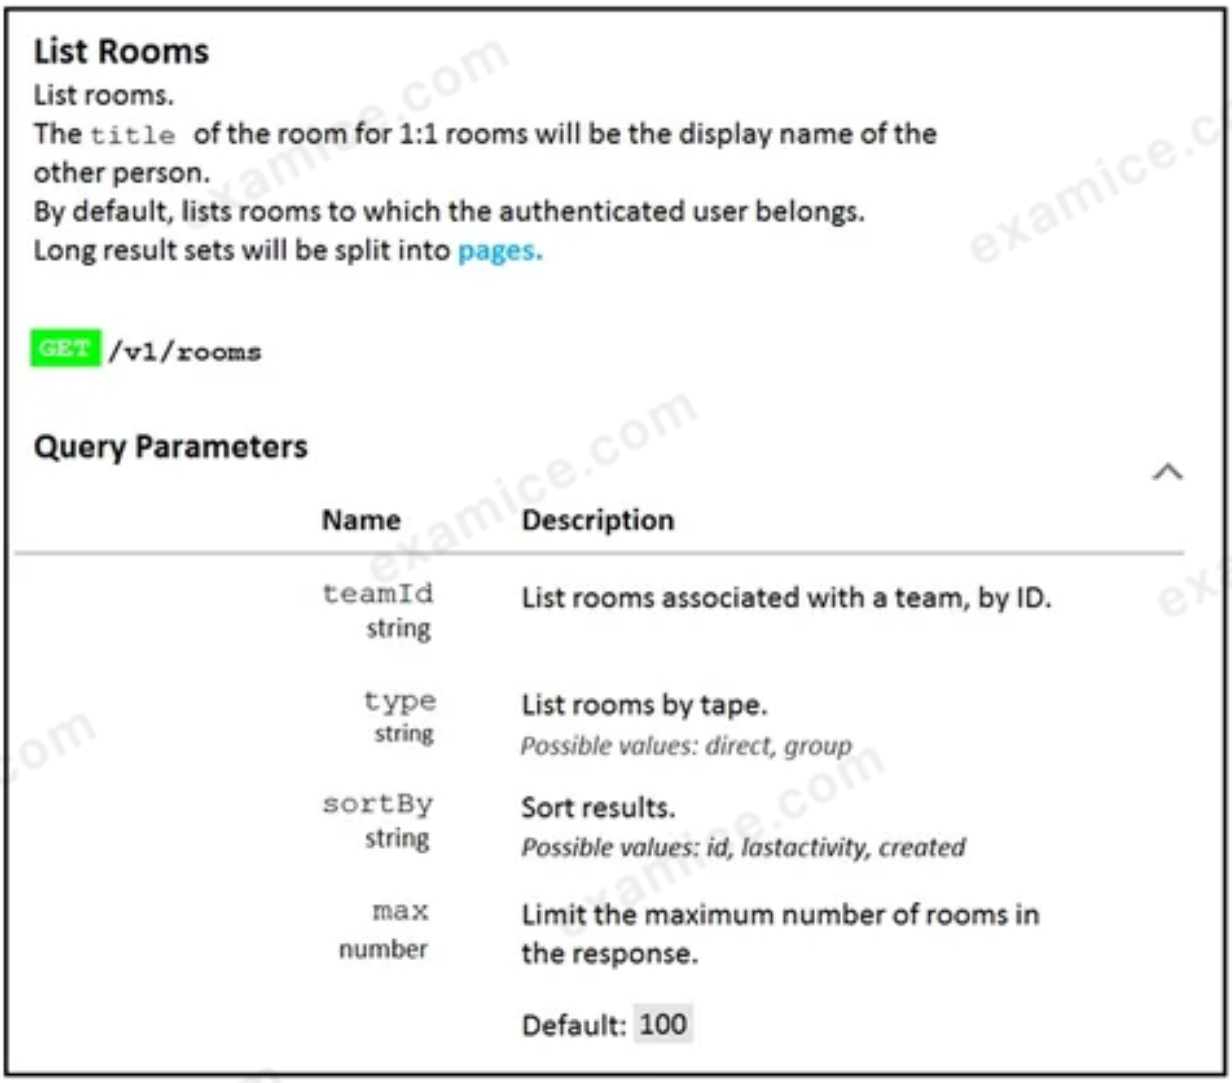

List Rooms

List rooms.
The `title` of the room for 1:1 rooms will be the display name of the other person.
By default, lists rooms to which the authenticated user belongs.
Long result sets will be split into pages.

`GET` `/v1/rooms`

Query Parameters

Name	Description
`teamId` string	List rooms associated with a team, by ID.
`type` string	List rooms by tape. *Possible values: direct, group*
`sortBy` string	Sort results. *Possible values: id, lastactivity, created*
`max` number	Limit the maximum number of rooms in the response. Default: 100

Fill in the blank to complete the query parameter and value so that the result set is returned in reverse chronological order (most recent first) based on when messages were posted to those rooms.

HTTP GET /v1/rooms _____

QUESTION 116

Issued to kamjunhao@gmail.com · October 17, 2026

A company has written a script that creates a log bundle from the Cisco DNA Center every day. The script runs without error and the log bundles are produced.

However, when the script is run during business hours, people report poor voice quality of phone calls. What explains this behavior?

A The script is written in a low-level programming language where there is no memory safety. This causes a buffer overflow and disruption on the network.

B The speed and duplex settings in Cisco DNA Center are set incorrectly, which causes the transfer to be too slow.

C The script is running in the Voice VLAN and causes delays and jitter in the subnet.

D Generating the logs causes the CPU on the network controller to spike, which causes delays in forwarding the voice IP packets.

Personal copy · kamjunhao@gmail.com

QUESTION 117

Issued to kamjunhao@gmail.com · October 17, 2026

FILL BLANK -

Fill in the blanks to complete the statement.

Cisco DNA Center provides the capability to send an HTTP _____ request to the API endpoint https://DNA-C_API_ADDRESS/api/v1/ network-device/and receive a list of network _____ in _____ format.

Personal copy · kamjunhao@gmail.com

FILL BLANK-

Fill in the blanks to complete the Python script to retrieve a list of network devices using the Cisco DNA Center API. my_token=

'eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.ey.JzdWIiOiI1ZDE0OWZkMjhlZTY2MmQ3NGM5YzE5ZTliL

import requestsurl = `https://myDNAserver/dna/intent/api/v1/network-device`payload = {}headers = {'x-auth-token': my_token}response = requests.request(_____ , url,headers = _____, data = _____) print(response.text.encode('utf8'))

DRAG DROP -

Drag and drop the requests from the left into the order on the right to create and check the path trace between two devices using Cisco DNA center API.

Select and Place:

DRAG DROP -

```
SDK Documentation:

Class: Devices

Device List: get_device_list()
Get device: get_device_by_id(id)
Delete device: delete_device_by_id(id)
Device status: inventoryStatusDetail
Device Parameters:
  id
  upTime
  type
```

Refer to the exhibit. A Python script must delete all Cisco Catalyst 9300 Series switches that have an uptime that is greater than 90 days. The script must also query for the status of all the other devices. Drag and drop the code from the bottom onto the box where the code is missing to complete the script. Not all options are used.

Select and Place:

Answer Area

```
from dnacentersdk import DNACenterAPI

device_type = "Cisco Catalyst 9300 Switch"
api_session = DNACenterAPI(
    base_url="https://sandboxdnac.cisco.com",
    username="user",password="password"
    )

devices = [                                                    ]

for device in devices:
    if int(device.upTime.split()[0]) > 90:
        if device.type == device type:
            output = [                                         ]
            print(output)

    else:
        selected device = [                                    ]
        output = [                                             ]
        print (output)
```

- `selected_device.response.inventoryStatusDetail(device)`
- `api_session.devices.delete_device_by_id(device.id)`
- `api_session.devices.get_device_by_id(device.id)`
- `selected_device.response.inventoryStatusDetail`
- `api_session.devices.get_device_list().response`

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

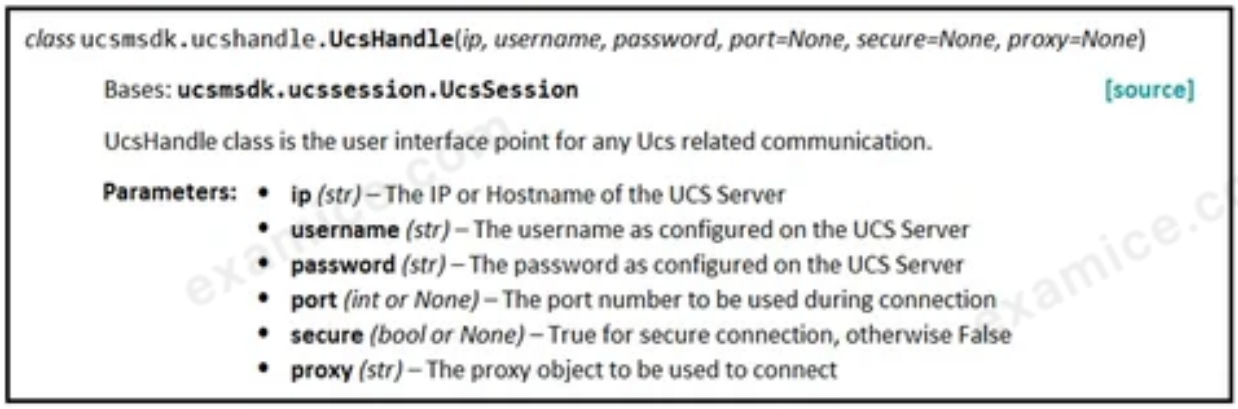

class ucsmsdk.ucshandle.**UcsHandle**(*ip, username, password, port=None, secure=None, proxy=None*)

Bases: **ucsmsdk.ucssession.UcsSession** [source]

UcsHandle class is the user interface point for any Ucs related communication.

Parameters:
- **ip** *(str)* – The IP or Hostname of the UCS Server
- **username** *(str)* – The username as configured on the UCS Server
- **password** *(str)* – The password as configured on the UCS Server
- **port** *(int or None)* – The port number to be used during connection
- **secure** *(bool or None)* – True for secure connection, otherwise False
- **proxy** *(str)* – The proxy object to be used to connect

Given the API documentation for the UCS SDK Python class, UcsHandle, which code snippet creates a handle instance?

- A.

```
#!/usr/bin/env python3
from ucsmsdk.ucshandle import UcsHandle
handle = UcsHandle("10.1.2.254", "admin", "password",
   port="443", secure=True)
```

- B.

```
#!/usr/bin/env python3
from ucsmsdk.ucshandle import UcsHandle
handle = UcsHandle(ip="10.1.2.254", username="admin",
   password="password", port=443, secure=True)
```

- C.

```
#!/usr/bin/env python3
from ucsmsdk.ucshandle import UcsHandle
handle = UcsHandle("10.1.2.254", "admin", "password",
   port="443", secure=1)
```

- D.

```
#!/usr/bin/env python3
import ucsmsdk.ucshandle.UcsHandle
handle = UcsHandle("10.1.2.254", "admin", "password",
   port="443", secure=1)
```

Personal copy · kamjunhao@gmail.com

Refer to the exhibits.

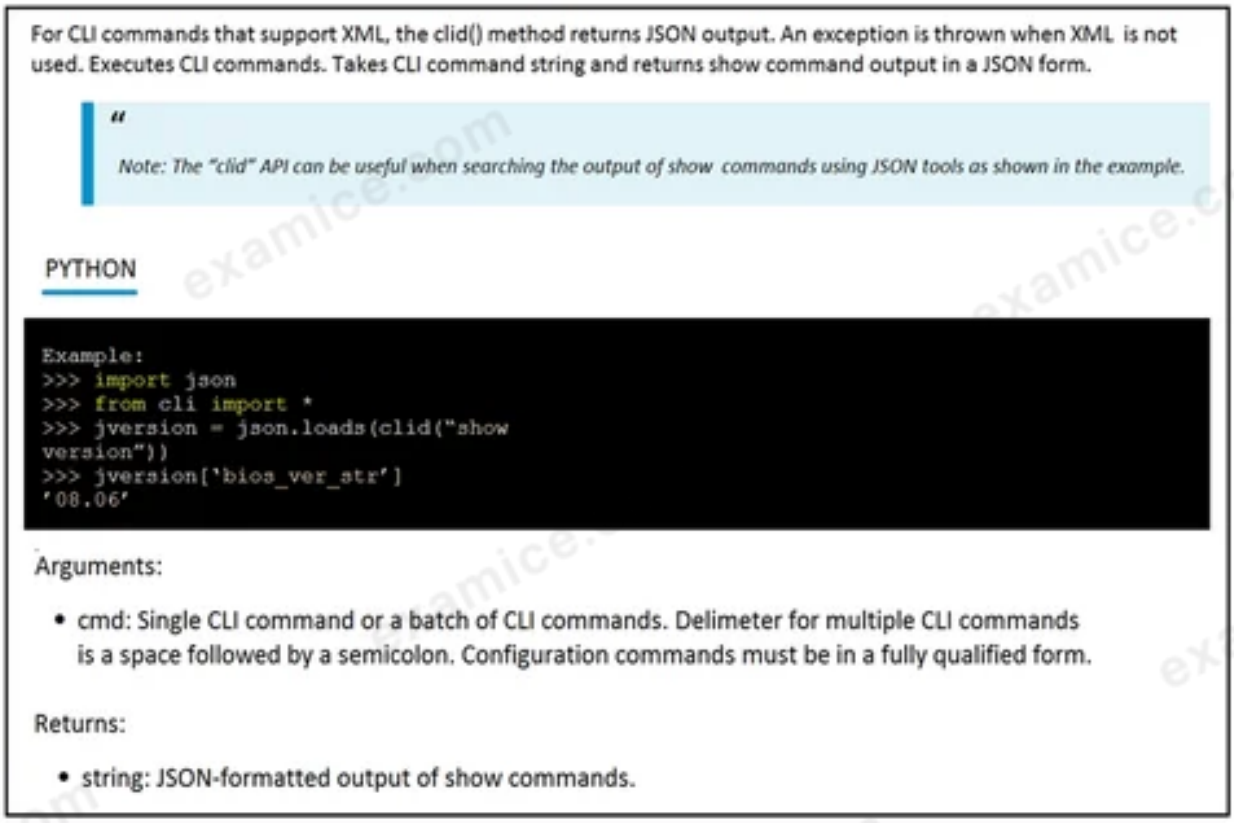

For CLI commands that support XML, the clid() method returns JSON output. An exception is thrown when XML is not used. Executes CLI commands. Takes CLI command string and returns show command output in a JSON form.

> "
>
> *Note: The "clid" API can be useful when searching the output of show commands using JSON tools as shown in the example.*

PYTHON

```
Example:
>>> import json
>>> from cli import *
>>> jversion = json.loads(clid("show
version"))
>>> jversion['bios_ver_str']
'08.06'
```

Arguments:

- cmd: Single CLI command or a batch of CLI commands. Delimeter for multiple CLI commands is a space followed by a semicolon. Configuration commands must be in a fully qualified form.

Returns:

- string: JSON-formatted output of show commands.

```
>>> from cli import *
>>> import json

>>>
>>> cli('configure terminal ; interface loopback 5 ; no shut')
''
>>> intflist=json.loads(clid('show interface brief'))
>>> i=0
>>> while i < len (intflist['TABLE_interface']['ROW_interface']):
...     intf=intflist['TABLE_interface']['ROW_interface'][i]
...     i=i+1
...     if intf['state'] == 'up':
            print intf['interface']
```

The Python interpreter and the Cisco Python SDK are available by default in the Cisco NX-OS Software. The SDK documentation shows how the clid() API can be used when working with JSON and XML. What are two effects of running the script? (Choose two.)

A configure interface loopback 5

B show details for the TABLE interface

C issue shutdown on interface loopback 5

D show only the interfaces in the up status

E show only the interfaces in admin shut status

QUESTION 123

DRAG DROP -

Drag and drop the element of the Finesse API on the left onto its functionality on the right.

Select and Place:

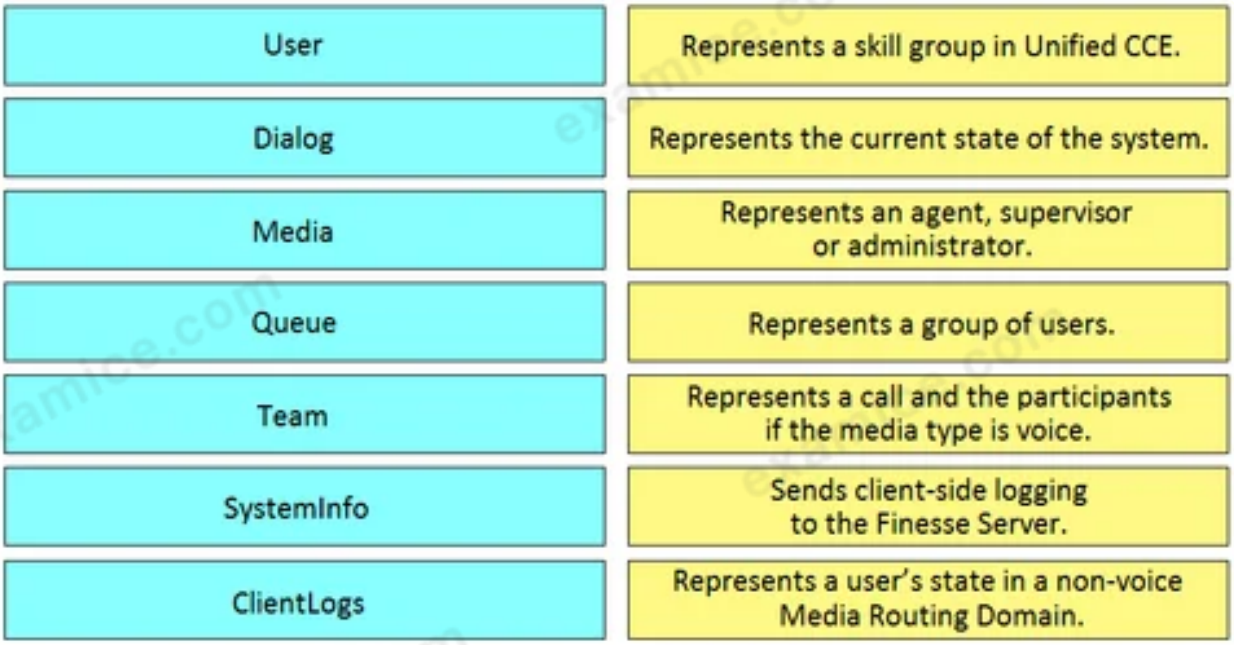

Issued to kamjunhao@gmail.com · October 17, 2026

What are two key capabilities of Cisco Finesse? (Choose two.)

A Agents access Finesse from a browser without needing to install or configure anything on the client machine.

B An OpenDNS utility is preconfigured and ready to use on Finesse.

C Gadget containers provide a seamless experience in a single user interface.

D Finesse automatically collects telemetry data.

E Finesse includes an RPC API that enables the development of custom gadgets.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which two statements are

true about Cisco UCS Manager, Cisco UCS Director, or Cisco Intersight APIs? (Choose two.)

A UCS Manager uses JSON to encode API interactions and utilizes Base64-encoded credentials in the HTTP header for authentication.

B UCS Director API interactions can be XML- or JSON-encoded and require an API key in the HTTP header for authentication.

C Cisco Intersight uses XML to encode API interactions and requires an API key pair for authentication.

D UCS Manager API interactions are XML-encoded and require a cookie in the method for authentication.

E Cisco Intersight API interactions can be encoded in XML or JSON and require an API key in the HTTP header for authentication.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the capability on the left onto the Cisco compute management platform that supports the capability on the right.

Select and Place:

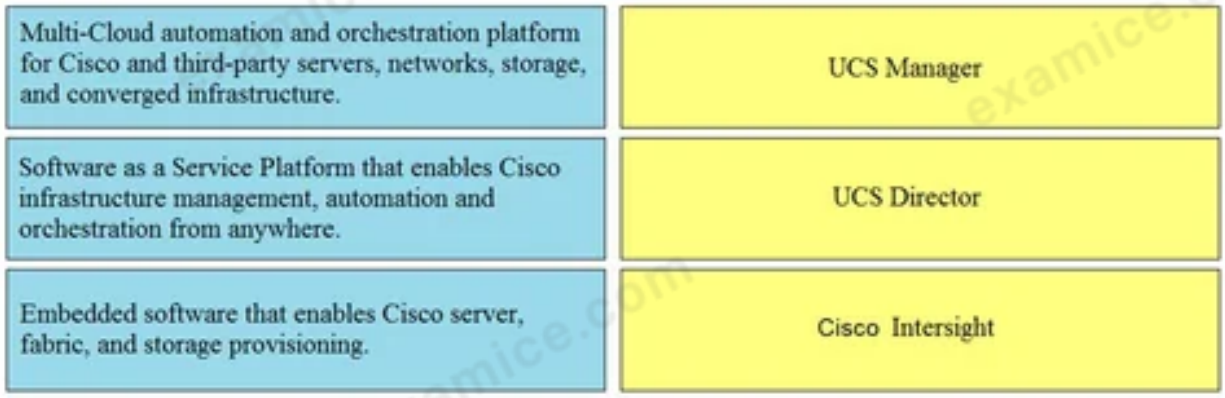

Which model-driven programmability protocol does Cisco IOS XE Software support?

A gNMI

B SOAP

C SSH

D CORBA

QUESTION 128

Issued to kamjunhao@gmail.com · October 17, 2026

Which operation is performed with YANG model-driven programmability in NX-OS?

A configure a device with native and OpenConfig-based models

B bootstrap a device that has a factory-default configuration

C send CLI commands to a device and retrieve output in JSON format

D run Linux commands natively on the device

Personal copy · kamjunhao@gmail.com

QUESTION 129

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of model-driven programmability? (Choose two.)

A easier to design, deploy, and manage APIs

B single choice of transport, protocol, and encoding

C models decoupled from transport, protocol, and encoding

D model-based, structured, and human friendly

E model-driven APIs for abstraction and simplification

Personal copy · kamjunhao@gmail.com

QUESTION 130

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of model-driven programmability?

A It provides a programmatic and standards-based way of writing configurations to any network device.

B By modeling data, it ensures that vast quantities of data are usable for monitoring.

C It simplifies management and operations by decoupling the networking hardware from its control mechanism.

D It addresses the static architecture of traditional networks being decentralized and complex.

Personal copy · kamjunhao@gmail.com

QUESTION 131

Issued to kamjunhao@gmail.com · October 17, 2026

Which type of HTTP method is used by the Meraki and Webex Teams APIs to send webhook notifications?

A HTTP POST

B HTTP GET

C HTTP HEAD

D HTTP PUT

Personal copy · kamjunhao@gmail.com

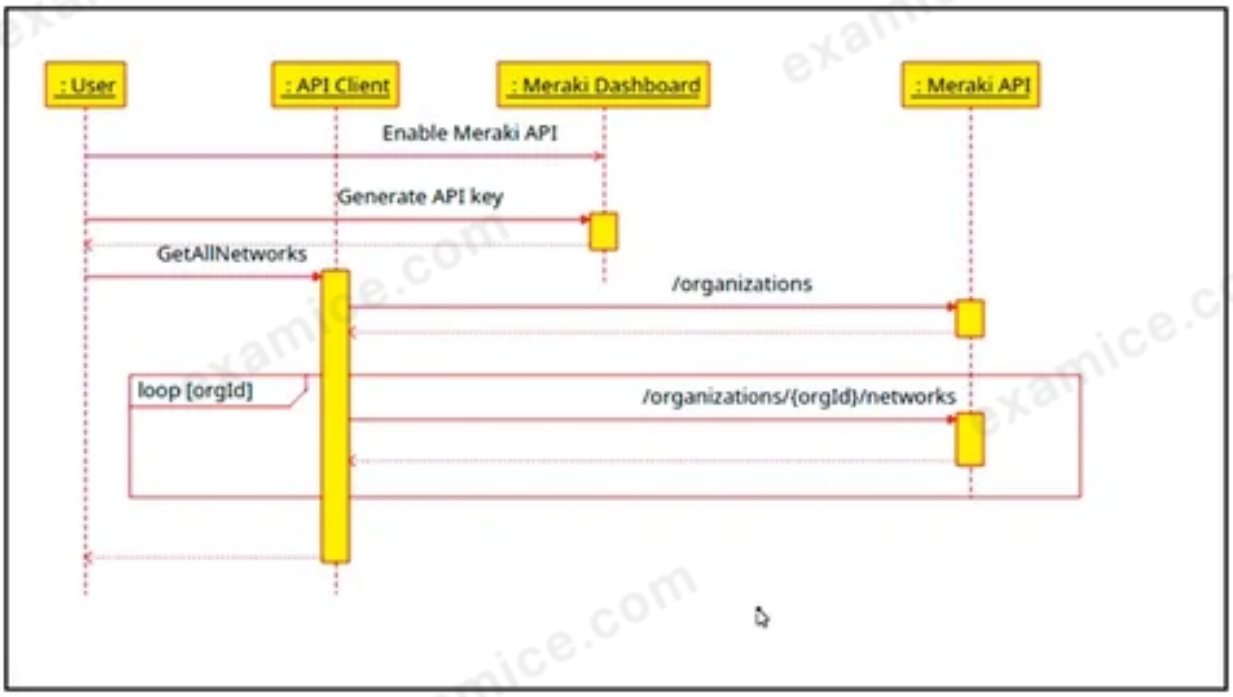

Refer to the exhibit. The Cisco Meraki API manages two organizations. In each organization, two independent networks are defined. How many calls to the / organizations/{orgId}/networks endpoint will be run parallel by the GetAllNetworks function of the API client?

A 0

B 1

C 2

D 4

Refer to the exhibit.

```
$ pyang -f tree Cisco-IOS-XE-native.yang
module: Cisco-IOS-XE-native
  +--rw native
     +--rw logging
        +--rw monitor!
           +--rw severity?  logging-level-type

$ curl --insecure -v -X PATCH \
     "https://ios-xe-mgmt-latest.cisco.com:9443/restconf/data/Cisco-IOS-XE-native:native" \
     -H 'Authorization: Basic ZGV27HKvCGVyOkMXc2NVMTIzNOU=' -H 'Accept: application/yang-data+json' \
     -H 'Content-Type: application/yang-data+json' \
     -d '{ "Cisco-IOS-XE-native:native" : { "logging" : { "monitor" : { "severity" : "alerts" }} } }'
> ...
< ...
< HTTP/1.1 204 No Content
```

The definition of the YANG module and a RESTCONF query sent to a Cisco IOS XE device is shown. Why does the RESTCONF interface respond with a **204** status code?

A The query retrieved the logging severity level.

B The query updated the logging severity level or created it if not present on the device.

C The query failed at retrieving the logging severity level.

D The query failed to set the logging severity level due to an invalid path.

QUESTION 134

Issued to kamjunhao@gmail.com · October 17, 2026

What is a requirement when authenticating a RESTCONF API session with a router that runs Cisco IOS XE Software?

A No authentication is required.

B OAuth must be used.

C A token must be retrieved and the associated string must be embedded in the X-Auth-Token header.

D Basic authentication must be used.

Personal copy · kamjunhao@gmail.com

QUESTION 135

Issued to kamjunhao@gmail.com · October 17, 2026

Which API **must** an engineer use to change a netmask on a Cisco IOS XE device?

A Meraki

B SD-WAN

C RESTCONF/YANG

D DNAC

Personal copy · kamjunhao@gmail.com

QUESTION 136

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a script that configured multiple Cisco IOS XE devices in a corporate infrastructure. The internal test environment is unavailable, and no maintenance window is available to test on a low-priority production environment. Which resource is used to test the code before it is applied to the production environment?

A Code Exchange

B Cisco Support

C Cisco DevNet Learning Labs

D Cisco DevNet Sandbox

Personal copy · kamjunhao@gmail.com

QUESTION 137

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool is used to block all traffic to the domain by using a single API call?

A Cisco Firepower

B Cisco AMP

C Cisco Umbrella

D Cisco ISE

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Why is refactoring done during test-driven development?

A to enable larger objects and longer methods

B to improve maintainability and readability

C to ensure that the previous uses of the objects are explained

D to ensure the duplication of essential code

Personal copy · kamjunhao@gmail.com

```
from requests import request
from requests.auth import HTTPBasicAuth
from sys import argv
url = "https://"+ argv[1] +":443/restconf/data/native/ip/route"
auth = HTTPBasicAuth('developer', 'Cisco12345')
payload = {
    "Cisco-IOS-XE-native:route": {
        "ip-route-interface-forwarding-list": [
            {
              "prefix": argv[2],
              "mask": argv[3],
              "fwd-list": [
                  {
                      "fwd": "GigabitEthernet2",
                      "interface-next-hop": [
                          {
                              "ip-address": argv[4]
                          }
                      ]
                  }
              ]
          }
      ]
    }
  }
headers = {
    'Content-Type': 'application/yang-data+json',
    'Accept': 'application/yang-data+json',
}
response = request("PATCH", url, auth=auth, headers=headers, json = payload,
verify=False)
```

Refer to the exhibit. A network engineer must change the configuration on devices daily. The `Python` script must collect CLI arguments from the user, organize data according to the `Cisco-IOS-XE-native` YANG model, and utilize Cisco REST APIs to make the configuration. Which workflow is being automated by the

A updating an existing route on the device

B adding a new route to a device

C including a route on the device and overwriting the current routes

D deleting the route that is passed through the command-line variables