Issued to kamjunhao@gmail.com · October 17, 2026

Which platform is used to programmatically create a space and invite users for collaboration?

A Cisco Intersight

B Cisco Finesse

C Cisco Webex

D Cisco UCM

Personal copy · kamjunhao@gmail.com

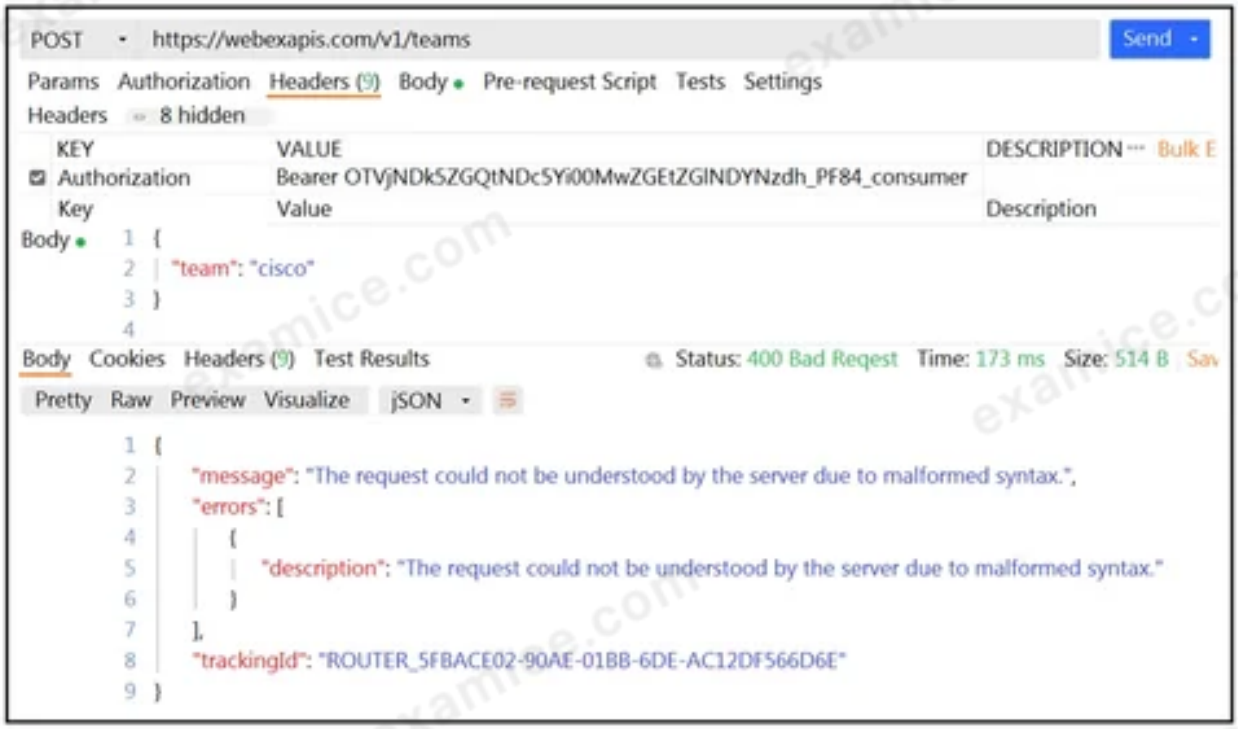

Refer to the exhibit. A developer wants to create a room named cisco through Webex API. The developer prepares the request by putting an API token inside the authorization header; however, the given HTTP call returns error code 400. How must the call parameters be changed to ensure a valid response?

A Replace the team body parameter with the name body parameter.

B Replace cisco with a valid name for a team.

C Change the token in the header with the authorization token.

D Change the HTTP method of the call to PUT.

```
$ sh script.sh
Traceback (most recent call last):
  File "script.py", line 2, in <module>
    api = WebexTeamsAPI()
  File "/opt/.venv/pyvenv35/lib/python3.5/site-packages/webexteamssdk/api/__init__.py", line 112,
in __init__
    "You must provide a Webex Teams access token to interact with "
webexteamssdk.exceptions.AccessTokenError: You must provide a Webex Teams access token to interact
with the Webex Teams APIs, either via a WEBEX_TEAMS_ACCESS_TOKEN environment variable or via the
access_token argument.
$
$
$ cat script.sh
#!/bin/bash

python script.py
$
```

Refer to the exhibit. Which line **must** be included in the Bash script for the Python code to succeed?

A define WEBEX_TEAMS_ACCESS_TOKEN=your_access_token_here

B export WEBEX_TEAMS_ACCESS_TOKEN=your_access_token_here

C set WEBEX_TEAMS_ACCESS_TOKEN=your_access_token_here

D WEBEX_TEAMS_ACCESS_TOKEN=your_access_token_here

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of the NETCONF protocol?

A allows Python scripts to be executed externally from a network device

B uses JSON to encode data in its content layer

C allows XML messages to be exchanged via the SSH protocol

D exposes a web-based interface

Personal copy · kamjunhao@gmail.com

```
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:Netconf:base:1.0">
  <get-conflg>
    <source>
      <running/>
    </source>
    <filter>
      <interfaces xmlns=" urn:ietf:params:xml:ns:yang:ietf-interfaces">
        <interface>
          <name/>
        </interface>
      </interfaces>
    </filter>
  </get-config>
</rpc>
```

Refer to the exhibit. A network engineer uses model-driven programmability to monitor and perform changes on the network. The network engineer decides to use the NETCONF RPC message to complete one of their tasks. What is accomplished by sending the RPC message?

A The running-config of the device is returned.

B The name of each interface is reset to a default name.

C All the YANG capabilities supported by the device are returned.

D A list of interface names is returned.

DRAG DROP -

Drag and drop the code from the bottom onto the box where the code is missing in the Python script to complete a function to return all the clients on a network by using the Cisco Meraki Dashboard API. Not all options are used.

Select and Place:

```
import requests
from requests.auth import HTTPBasicAuth
from dnac_config import DNAC, DNAC_PORT, DNAC_USER, DNAC_PASSWORD

def get_auth_token():
    url = 'https://sandboxdnac.cisco.com/dna/system/api/v1/auth/token'
    # API Endpoint: requires POST method
    [                                                    ]

def get_device_list():
    """
    Building out function to retrieve list of devices. Using requests.get to make a call
    to the network de-vice Endpoint
    """
    token = get_auth_token() # Get Token
    url = 'https://sandboxdnac.cisco.com/api/v1/network-device'
    hdr = {'x-auth-token': token, 'content-type' : 'application/json'}
    resp = requests.get(url, headers=hdr)
    device_list = resp.json()
    print_device_list(device_list)

if __name__ == "__main__":
    get_device_list()
```

Refer to the exhibit. A developer creates a script to obtain a list of devices by using the Cisco DNA Center API. The remote server authorizes the request only if an authentication token is supplied in the headers. A function named get_auth_token() must retrieve a valid token by using HTTP Basic Authentication. Which code must be added to complete the get_auth_token() function?

A resp = requests.post(url, auth=HTTPBasicAuth(DNAC_USER, DNAC_PASSWORD)) token = resp.json()['Token'] return token

B resp = requests.post(url, auth=(DNAC_USER, DNAC_PASSWORD)) token = resp.json () ['Token'] return token

C resp = http.post(url, auth=HTTPBasicAuth(DNAC_USER, DNAC_PASSWORD)) token = resp.json()['Token'] return token

D resp = http.post(url, auth=(DNAC_USER, DNAC_PASSWORD)) token = resp.json() ['Token'] return token

DRAG DROP -

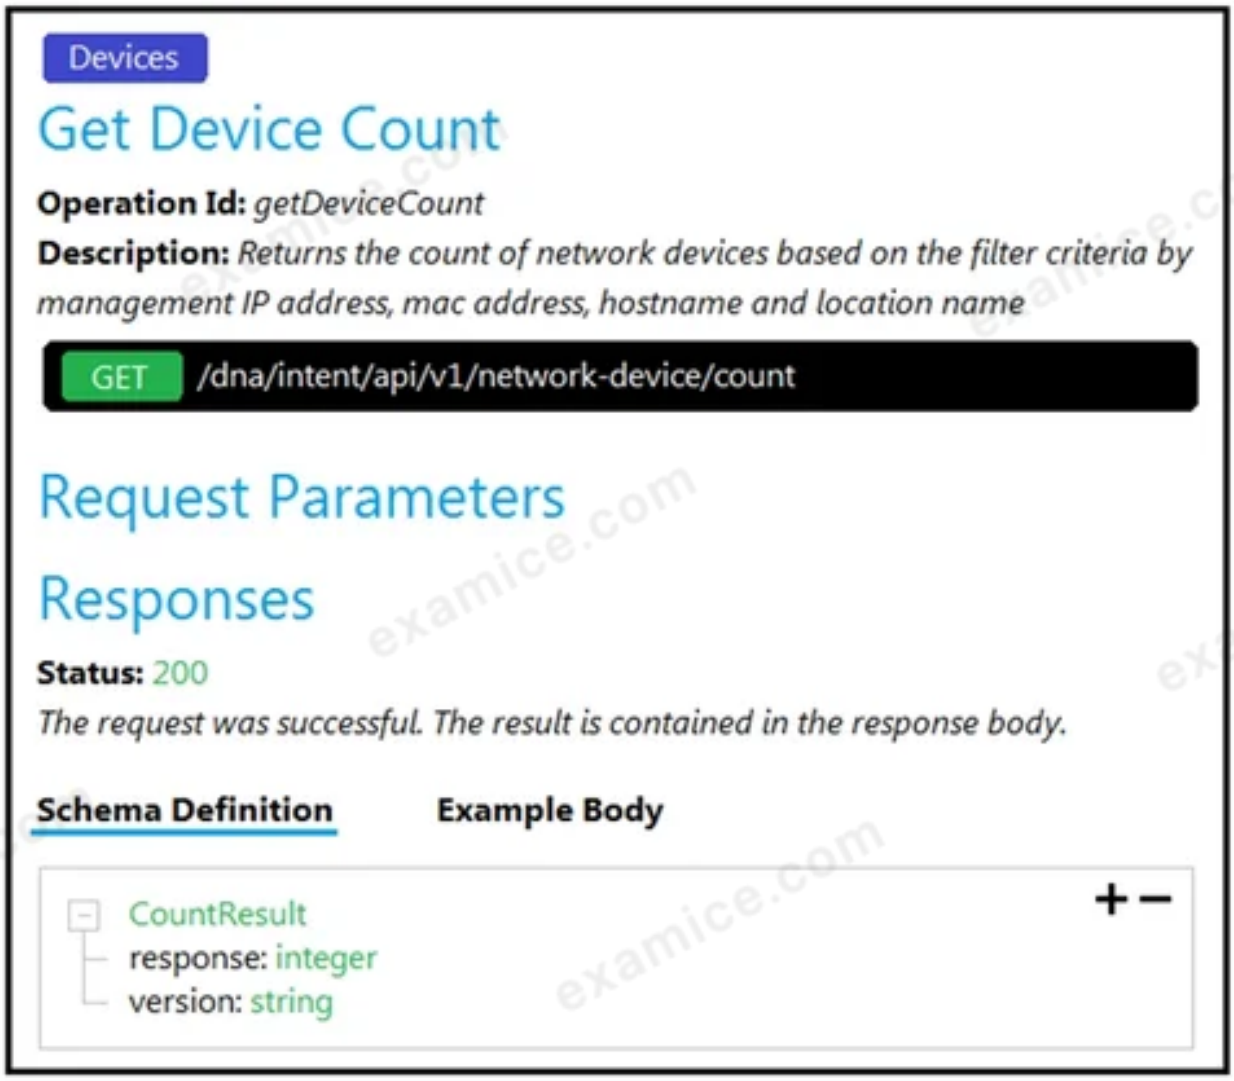

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the code to construct a request to find the Cisco DNA Center switch count. Not all options are used.

Select and Place:

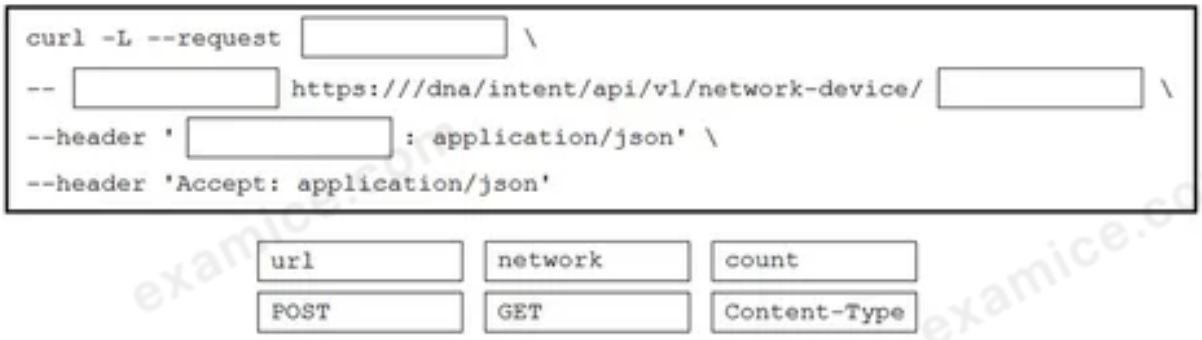

QUESTION 148


```
import requests, sys
from config import user, password

url = "http://restconf.devnet.com:9443/api/running/interfaces"
headers = 
response = requests.put(url, auth=(user, password), headers=headers,
verify=False)
print(response.text)
```

Refer to the exhibit. A network engineer wants to use an API to update information about device interfaces. The network devices are deployed in a Cisco DevNet Sandbox and have running interfaces. Which line of code needs to be placed in the snippet where the code is missing?

A {'Content-Type': 'application/yang.data+xml', 'Accept': 'application/yang.data+xml'}

B {'Content-Type': 'application/yang.data+yaml', 'Accept': 'application/yang.data+yaml'}

C {'Content-Type': 'application/restconf.data+json', 'Accept': 'application/restconf.data+json'}

D {'Content-Type': 'application/yang.data+utf8', 'Accept': 'application/restconf.data+utf8'}

```
#/bin/bash

curl https://ciscodevnet.com/devnet-0.13.tar.gz -o /tmp/devnet.tar.gz
tar -zxf /tmp/devnet.tar.gz
mkdir /tmp/devnet && pushd /tmp/devnet

./configure && make && make install

systemctl enable devnet
systemctl start devnet
```

Refer to the exhibit. A network engineer works on a Cisco DevNet application that is available for download on the Cisco DevNet website. The engineer prepares a bash script to automate operations that relate to the application. Which workflow is being automated in the bash script?

A compilation and configuration of the Cisco DevNet application so that it must be started manually

B compilation, installation, and configuration of the Cisco DevNet application so that it starts automatically

C compilation and installation of the Cisco DevNet application for an autonomous deployment model

D installation and configuration of the Cisco DevNet application so that it starts manually

A company wants to accelerate the adoption of technologies that will simplify its operations. Staff have different skill levels and are looking for a single site to find easy-to-consume beginner, intermediate, and advanced multidomain use cases. Which site should be used?

A DevNet Ecosystem Exchange

B DevNet Automation Exchange

C DevNet Creations

D DevNet Support Forum

Which Cisco product provides malware and content filtering through DNS?

A Cisco ASA Firepower module

B Cisco AMP

C Cisco ISE

D Cisco Umbrella

QUESTION 152

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco platform provides organization-wide automation, security, policy enforcement, and agility across wired and wireless networks?

A Cisco SD-WAN

B Cisco DNA Center

C Cisco ACI

D Cisco Umbrella

Personal copy · kamjunhao@gmail.com

QUESTION 153

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of the Cisco Finesse platform?

A Applications allow services to be invoked on a network triggered event.

B The platform provides a ready-to-go platform for HD video and audio conferencing.

C Applications are added to the platform from the desktop remotely.

D The platform includes an enterprise-class IM engine.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer needs to retrieve a list of locally available Firepower Threat Defense upgrade packages by using the Firepower Management Center REST API. The engineer uses a GET request with the URL:

/api/fmc_platform/v1/updates/upgradepackages/f413afeb-e6f6-75f4-9169-6d9bd49s625eWhat does `f413afeb-e6f6-75f4-9169-6d9bd49s625e` represent?

A container UUID

B package UUID

C domain UUID

D object UUID

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
docker run -p 3000:5000 f877cbf2ff33
```

A process running on the host wants to access the service running inside this Docker container. Which port or ports are used to make a connection?

A only outbound connections between 3000 and 5000 are possible

B port 3000

C any port between 3000 and 5000

D port 5000

DRAG DROP -

Drag and drop the Dockerfile instructions from the left onto the descriptions on the right. Not all options are used.

Select and Place:

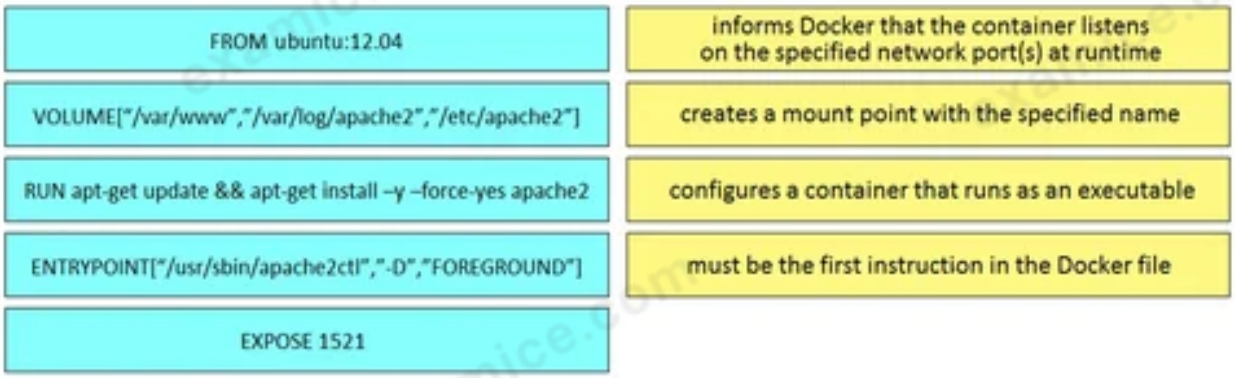

Issued to kamjunhao@gmail.com · October 17, 2026

What are two security benefits of a Docker-based application? (Choose two.)

A natively secures access to secrets that are used by the running application

B guarantees container images are secured and free of vulnerabilities

C easier to patch because Docker containers include only dependencies that the application requires

D prevents information leakage occurring when unhandled exceptions are returned in HTTP responses

E allows for separation of applications that traditionally run on the same host

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A local Docker alpine image has been created with an image ID of a391665405fe and tagged as `latest`. Which command creates a running container based on the tagged image, with the container port 8080 bound to port 80 on the host?

A docker build -p 8080:80 alpine:latest

B docker exec -p 8080:80 alpine:latest

C docker start -p 8080:80 alpine:latest

D docker run -p 8080:80 alpine:latest

Refer to the exhibit.

```
# base image
FROM alpine

# Install python and pip
RUN apk add --update py2-pip

# Install python modules needed by the python app
COPY requirements.txt /usr/src/app/
RUN pip install --no-cache-dir -r /usr/src/app/requirements.txt

#copy local files for the app to run
COPY app.py /usr/src/app/
COPY templates/index.html /usr/src/app/templates/

EXPOSE 8080

#run the application
CMD ["python", "/usr/src/app/app.py"]
```

Which function does the **EXPOSE** line perform when building an image from this Dockerfile?

A Local port 8080 of the container that launched with this docker image is accessible from co-hosted containers and external clients.

B Local port 8080 is not reachable at all because no IP address is specified along with the EXPOSE command of the Dockerfile.

C Local port 8080 is accessible from other containers running on the same docker host as the container that launched with this docker image.

D Local port 8080 of the container that launched with this docker image is accessible to external clients.

QUESTION 160

Issued to kamjunhao@gmail.com · October 17, 2026

Which two elements are foundational principles of DevOps? (Choose two.)

A organizing cross-functional teams over organizational silos

B designing applications as microservices

C encouraging containers for the deployment of applications

D automating over documenting

E optimizing the cost of infrastructures

Personal copy · kamjunhao@gmail.com

QUESTION 161

Issued to kamjunhao@gmail.com · October 17, 2026

Which platform is run directly on top of a hypervisor?

A bare metal systems

B virtual machines

C containers

D applications

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two characteristics of Bare Metal environments that are related to application deployment? (Choose two.)

A specifically designed for container-based workloads

B suitable for legacy applications that do not support virtualization

C provides workloads with access to hardware features

D not compatible with other cloud services such as PaaS or SaaS offerings

E provides the hypervisor to host virtual servers

Issued to kamjunhao@gmail.com · October 17, 2026

A new application is being developed that must be hardware independent. The application includes an administrative component which is accessed using a Windows desktop GUI. Installation and management of the environment must be fully automated. Which application deployment type meets the requirements?

A virtual machine

B virtual Python environment

C container

D bare metal

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the code from the bottom onto the box where the code is missing in the Bash script to complete the missing assignments.

Select and Place:

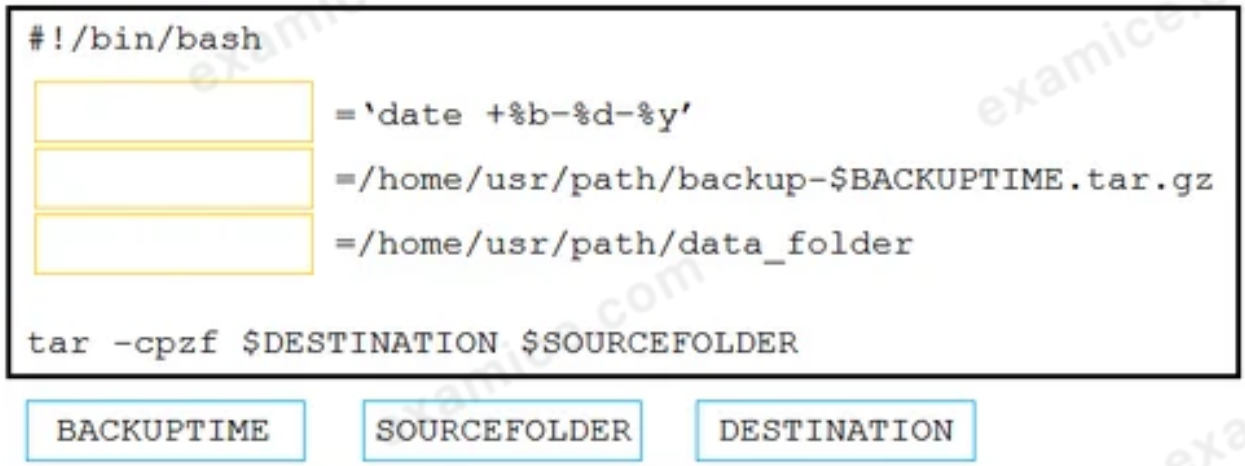

Refer to the exhibit.

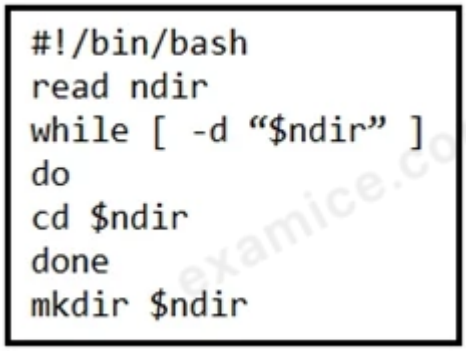

```
#!/bin/bash
read ndir
while [ -d “$ndir” ]
do
cd $ndir
done
mkdir $ndir
```

What is the action of the Bash script that is shown?

A For all directories in the current folder, the script goes into the directory and makes a new directory.

B The script waits until input is entered. If the directory exists, the script goes into it until there is no directory with the same name, then it creates a new directory.

C The script waits until input is entered, then it goes into the directory entered and creates a new directory with the same name.

D The script goes into the directory called ɹ€$ndirɹ€ and makes a new directory called ɹ€$ndirɹ€.

Issued to kamjunhao@gmail.com · October 17, 2026

When using the Bash shell, how is the output of the devnet command saved to a file named `output.txt`?

A devnet > output.txt

B devnet | output.txt

C devnet < output.txt

D devnet & output.txt

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the Bash commands from the left onto the related actions on the right.

Select and Place:

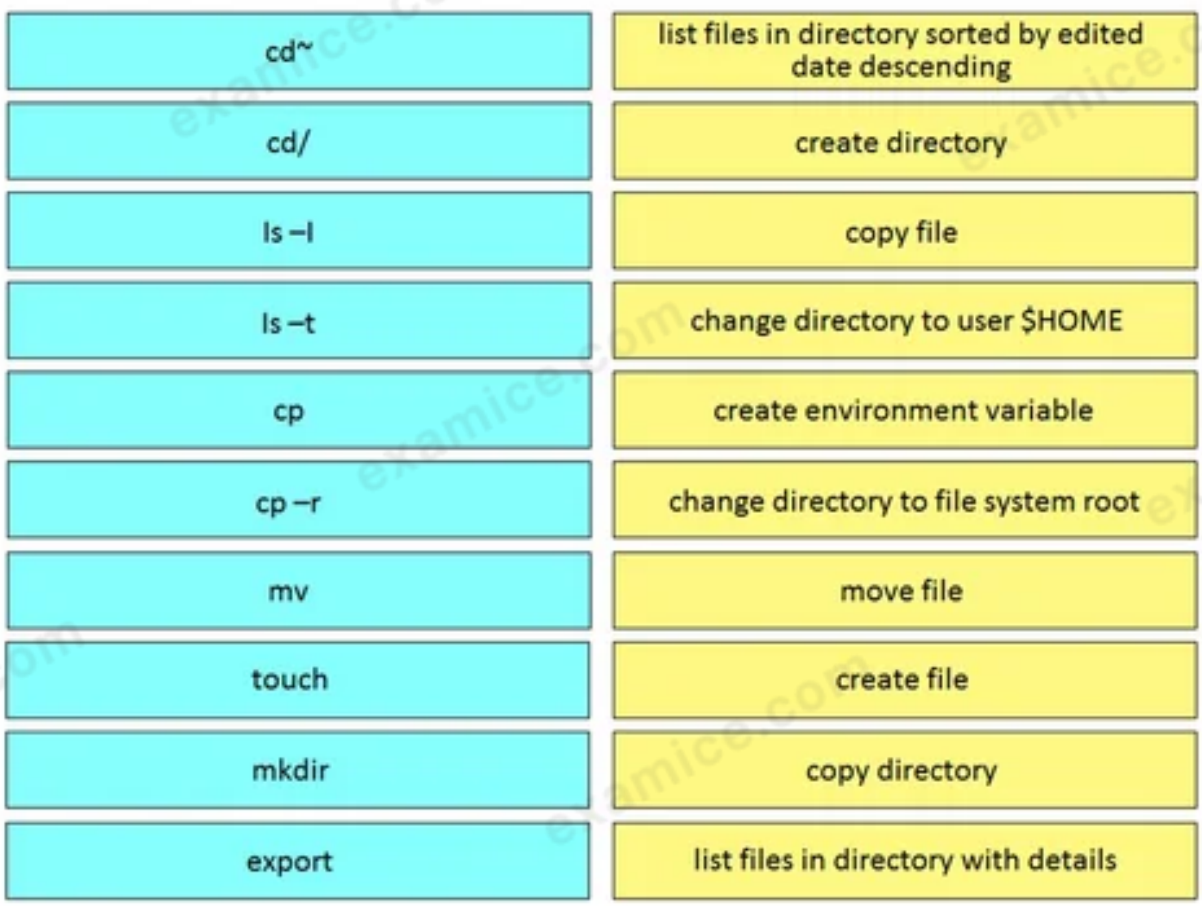

QUESTION 168

Issued to kamjunhao@gmail.com · October 17, 2026

FILL BLANK -Fill in the blanks to complete the Bash script in which each file in a directory is renamed to its SHA256 hash?

TARGET_DIR=/usr/local/certs -for f in '_____ _____'; do_____ $f' openssl sha -sha256 -r < $f | cut -f1 -cl' ''

Personal copy · kamjunhao@gmail.com

QUESTION 169

Issued to kamjunhao@gmail.com · October 17, 2026

After a project is migrated to a new codebase, the `old_project` directory must be deleted. This directory has multiple read-only flies, and it must be deleted recursively without prompting for confirmation. Which Bash command must be used?

A rmdir -p old_project

B rm -rf old_project

C rm -r old_project

D rmdir old_project

Personal copy · kamjunhao@gmail.com

QUESTION 170

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using edge computing in an IoT implementation?

A high speed in data processing

B low network design complexity

C low cost in network design

D high availability for network components

Personal copy · kamjunhao@gmail.com

QUESTION 171

Issued to kamjunhao@gmail.com · October 17, 2026

What is the benefit of edge computing?

A It reduces network latency by moving processing closer to the data source.

B It reduces data velocity from devices or other data sources.

C It simplifies security as devices and processing are brought closer together.

D It removes the need for centralized data processing.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Refer to the exhibit.

```
#!/bin/bash
<item 1>='date +%b-%d-%y'

<item 2>=/home/usr/path/backup-$BACKUPTIME.tar.gz

<item 3>=/home/usr/path/data_folder

tar -cpzf $DESTINATION $SOURCEFOLDER
```

Drag and drop the variables from the left onto the item numbers on the right that match the missing assignments in the exhibit.

Select and Place:

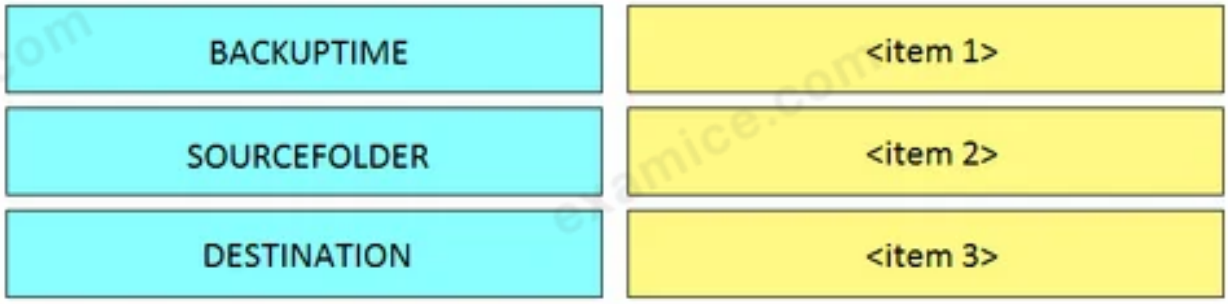

DRAG DROP -

Drag and drop the descriptions from the left onto the correct application deployment models on the right.

Select and Place:

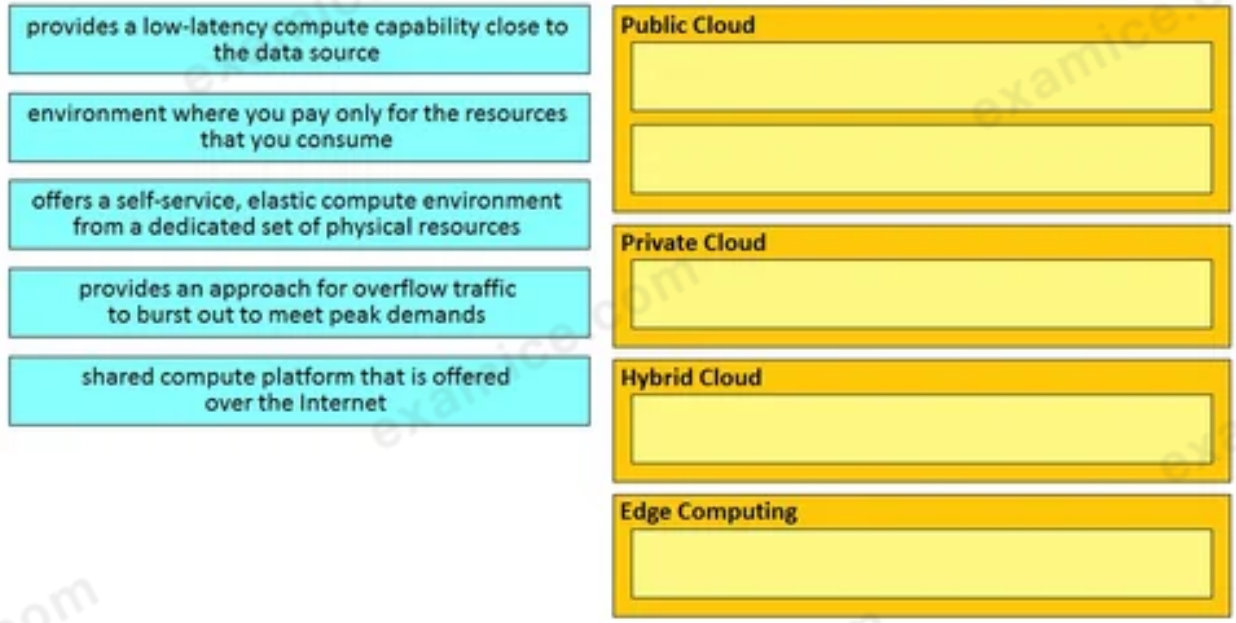

QUESTION 174

Issued to kamjunhao@gmail.com · October 17, 2026

Which type of threat occurs when an attacker can send hostile data to an interpreter within an application?

A sensitive data exposure

B broken authentication

C cross-site scripting

D injection

Personal copy · kamjunhao@gmail.com

QUESTION 175

Issued to kamjunhao@gmail.com · October 17, 2026

A company is looking for a cloud deployment which will only use the on-premise infrastructure, is user self-service, and is **easy** to scale. Which cloud solution should be selected for these requirements?

A multi

B private

C hybrid

D public

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

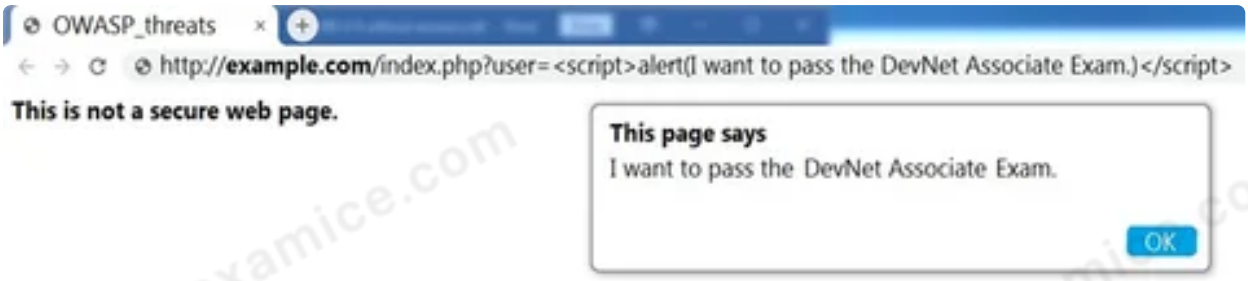

Which OWASP threat does this example demonstrate?

A broken access control

B cross-site scripting

C SQL injection

D man-in-the-middle

Issued to kamjunhao@gmail.com · October 17, 2026

What should a CI/CD pipeline aim to achieve?

A to require minimal manual interaction

B to allow manual testing before deployment

C to support new deployments on a fixed monthly schedule

D to provide a documented process for feedback

Personal copy · kamjunhao@gmail.com

A function my_func() returns True when it executes normally. Which Python snippet tests my_func()?

A.

```
def test_func(self):
    self.assertTrue(my_func())
```

B.

```
def test_func(self):
    self.assertFalse(my_func())
```

C.

```
def test_func(self):
    self.assertEqual(my_func(),'{true}')
```

D.

```
def test_func(self):
    self.assertRaises(my_func())
```

Issued to kamjunhao@gmail.com · October 17, 2026

What are two roles of an artifact repository in a CI/CD pipeline? (Choose two.)

A stores files needed and generated during the build process

B provides traceable, searchable, and manageable binary files

C is required for CI/CD pipelines executed on a public cloud infrastructure

D allows for comparing and merging changes in the source code

E is required for managing open source software

Issued to kamjunhao@gmail.com · October 17, 2026

A company is adopting DevOps as part of an internal transformation, and is reviewing the success of the first deployments. Developers and engineers are working together to resolve any resulting issues. However, this new way of working has increased overhead, and the team is finding it difficult to complete releases in time.

Which area of the CALMS framework must the company target for improvement?

A Collaboration

B Lean

C Sharing

D Measurement

Personal copy · kamjunhao@gmail.com

```
FROM nginx

ARG DELAY="30"
ENV INITIAL_DELAY=${DELAY}

ENTRYPOINT ["/bin/sh"]

CMD ["-c", "/bin/sleep ${INITIAL_DELAY} && nginx -g
'daemon off;'"]
```

Refer to the exhibit. Which command, including arguments, is executed when the container starts?

A /bin/sh -c "/bin/sleep 30 && nginx -g 'daemon off;'"

B /bin/sh -c "/bin/sleep 10 && nginx -g 'daemon off;'"

C /bin/bash -c "/bin/sleep 30 && nginx -g 'daemon off;'"

D /bin/sh -c "/bin/sleep 30" && nginx -g 'daemon off;'

Issued to kamjunhao@gmail.com · October 17, 2026

A developer created a new secure API and is testing the functionality locally. The API was added to a container for further testing, and other team members and applications need to connect to the API. Which command exposes the API in the container as port 8443 and allows connections external to the host?

A docker run -p 127.0.0.1:80:8443/tcp myapiservice

B docker run -p 0.0.0.0:443:8443/tcp myapiservice

C docker run -p 0.0.0.0:8443:443/tcp myapiservice

D docker run -p 127.0.0.1:443:8443/tcp myapiservice

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer has created a new image to use in a Docker build and has added a tag for the image by using the command:

```
$ docker tag 84fe411926287 local/app:0.4
```

Which command must be executed next to build the Docker image using the tag?

A $ docker build -p local/app:0.4

B $ docker run -t local/app:0.4

C $ docker run -p local/app:0.4

D $ docker build -t local/app:0.4

Access to the management interface of devices must be restricted by using SSH and HTTPS. Which two ports must be included in the ACLs for the protocols to work? (Choose two.)

A 22

B 23

C 80

D 443

E 880

What is a benefit of using a code review process in application development?

A accelerates the deployment of new features in an existing application

B provides version control during code development

C enables the quick deployment of new code

D eliminates common mistakes during development

Issued to kamjunhao@gmail.com · October 17, 2026

Which OWASP threat takes advantage of a web application that the user has already authenticated to execute an attack?

A phishing

B DoS

C brute force attack

D CSRF

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

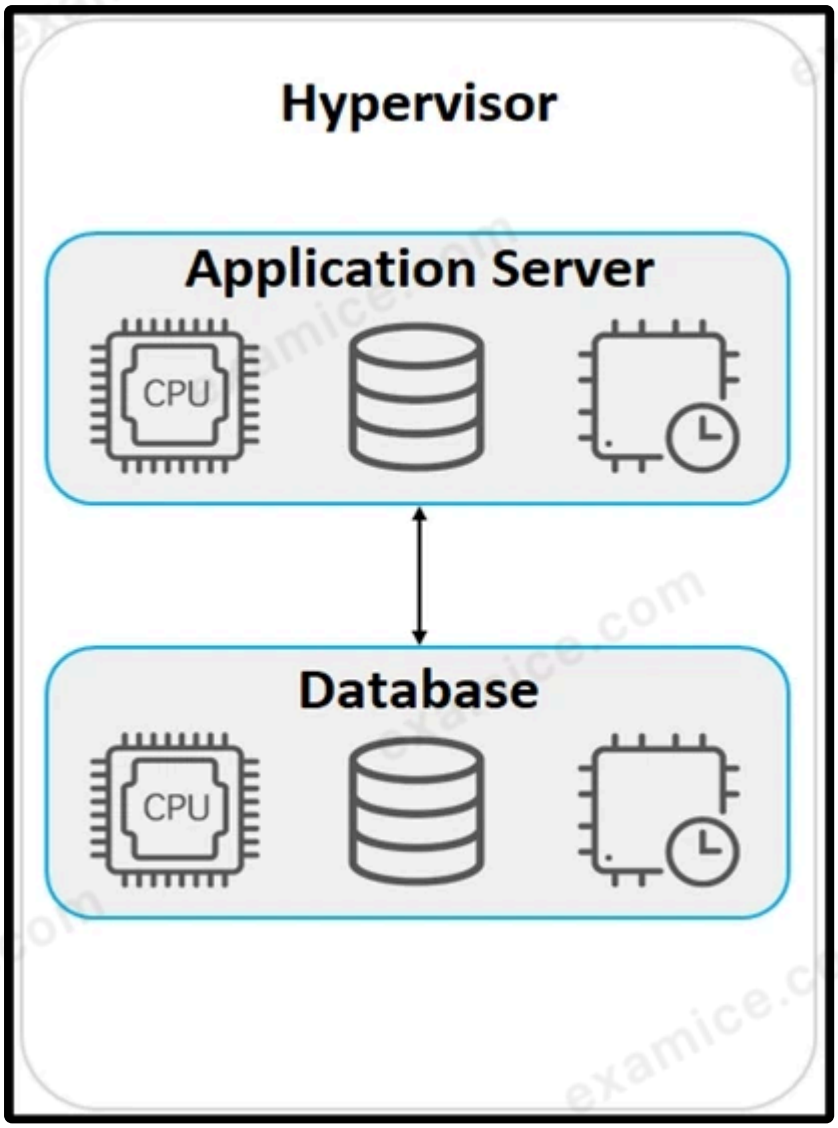

Refer to the exhibit. An application must be deployed on a server that has other applications installed. The server resources are to be allocated based on the deployment requirements. The OS for each application must be independent. Which type of deployment is used?

A hybrid

B virtual machines

C containers

D bare metal

QUESTION 188

What is a benefit of a distributed version control system?

A encourages users to commit small places of work to the system more frequently

B ensures that all code meets minimum standards before being committed to the system

C allows users to work on the codebase even when not connected to the Internet

D ensures that all code is tested before being committed to the system

QUESTION 189

Issued to kamjunhao@gmail.com · October 17, 2026

A company requires a new platform to store large volumes of log data that is generated in their assembly plant. The platform must be scalable, so the underlying technology must provide a path for fast deployment of new nodes for data and indexing? The data contains sensitive information, so specialist encryption tools must be used to secure the data. Which application deployment model meets the requirements?

A edge

B private cloud

C public cloud

D hybrid cloud

Personal copy · kamjunhao@gmail.com

QUESTION 190

Issued to kamjunhao@gmail.com · October 17, 2026

What is a procedural component of CI/CD pipelines?

A Bundled artifacts must be generated.

B Every test must pass for the pipeline to continue its execution.

C Some tests fall without stopping the pipeline execution.

D The release label that identifies the build is optional.

Personal copy · kamjunhao@gmail.com

QUESTION 191

Issued to kamjunhao@gmail.com · October 17, 2026

Which OWASP threat occurs when untrusted data is supplied as input to an interpreter as part of a command or query?

A broken authentication

B data exposure

C injection

D cross-site scripting

Personal copy · kamjunhao@gmail.com

QUESTION 192

Issued to kamjunhao@gmail.com · October 17, 2026

Which product provides network controller-level management features?

A Cisco ISE

B Cisco DNA Center

C Cisco UCS Manager

D Cisco NX-OS

Personal copy · kamjunhao@gmail.com

QUESTION 193

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of the Cisco VIRL software tool?

A to verify configurations against compliance standards

B to automate API workflows

C to simulate and model networks

D to test performance of an application

Personal copy · kamjunhao@gmail.com

QUESTION 194

Issued to kamjunhao@gmail.com · October 17, 2026

What are two advantages of the Model-View-Controller software design pattern? (Choose two.)

A allows for multiple views of the same model

B separates responsibilities of the code, which makes future modifications easier

C simplifies network automation

D makes code easier to deploy using CI/CD pipelines

E reduces the need for error handling

Personal copy · kamjunhao@gmail.com

```
module ietf-ip {
 namespace "urn:ietf:params:xml:ns:yang:ietf-ip";
 prefix ip;
 import ietf-interfaces {
   prefix if;
 }
 augment "/if:interfaces/if:interface" {
   container ipv4 {
     leaf enabled {
       type boolean;
       default true;
     }
     list address {
       key "ip";
       leaf ip {
         type inet:ipv4-address-no-zone;
       }
       choice subnet {
         mandatory true;
         leaf prefix-length {
           type uint8 {
             range "0..32";
           }
         }
         leaf netmask {
           type yang:dotted-quad;
         }
       }
     }
   }
 }
}
```

```
module ietf-interfaces {
  namespace "urn:ietf:params:xml:ns:yang:ietf-
  interfaces";
  prefix if;
  typedef interface-ref {
    type leafref {
      path "/if:interfaces/if:interface/if:name";
    }
  }
  container interfaces {
    list interface {
      key "name";
     leaf name {
        type string;
      }
      leaf description {
        type string;
      }
      leaf type {
        type identityref {
          base interface-type;
        }
        mandatory true;
      }
      leaf enabled {
        type boolean;
        default "true";
      }
    }
  }
}
```

Refer to the exhibit. Which JSON snippet configures a new interface according to YANG model?

- A.

```
"ietf-interfaces": {
  interface": {
    "name": "Loopback100",
    "enabled": true,
    "ietf-ip": {
      ipv4": {
       "address": [
       {
         "ip": "10.255.254.1",
         "netmask": "255.255.255.0"
       } ] } }
}
```

- B.

```
" interface"  {
  "name": "Loopback100",
  "enabled": true,
  "ipv4": {
    "address": [
    {
      "ip": "10.255.254.1",
      "netmask": "255.255.255.0"
     } ] }
}
```

- C.

```
"ietf-interfaces:interface": {
  "name": "Loopback100",
  "enabled": true,
  "ietf-ip:ipv4:address": [
    {
      "ip": "10.255.254.1",
      "netmask": "255.255.255.0"
     } ]
}
```

- D.

```
"ietf-interfaces:interface": {
  "name": "Loopback100",
  "enabled": true,
  "ietf-ip:ipv4": {
    "address": [
    {
      "ip": "10.255.254.1",
      "netmask": "255.255.255.0"
     } ] }
}
```

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
module ex-ethernet {
     namespace "http://example.com/ethernet";
     prefix "eth";
     import ietf-interfaces {
       prefix if;
     }
     augment "/if:interfaces/if:interface" {
       when "if:type = 'ethernetCsmacd'";
       container ethernet {
         must "../if:location" {
           description
             "An ethernet interface must specify the physical location of the ethernet hardware.";
         }
         choice transmission-params {
           case auto {
             leaf auto-negotiate {
               type empty;
             }
           }
           case manual {
             leaf duplex {
               type enumeration {
                 enum "half";
                 enum "full";
               }
             }
             leaf speed {
               type enumeration {
                 enum "10Mb";
                 enum "100Mb";
                 enum "1Gb";
                 enum "10Gb";
               }
             }
           }
         } // other ethernet specific params...
       }
     }
```

What is represented in this YANG module?

A interface management

B BGP

C OpenFlow

D topology

QUESTION 197

Issued to kamjunhao@gmail.com · October 17, 2026

Which CI/CD tool is an automation tool used to build, test, and deploy software?

A Git

B Gradle

C Nagios

D Jenkins

Personal copy · kamjunhao@gmail.com

QUESTION 198

Issued to kamjunhao@gmail.com · October 17, 2026

An automation script fails to connect to an internal server exactly 1 out of 2 times it is executed. This behavior is seen from different clients. Which networking device must be at fault?

A load balancer

B laptop on which the script is running

C switch

D router

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two advantages of YANG-based approaches for infrastructure automation? (Choose two.)

A multi-platform vendor abstraction

B compiles to executables that run on network devices

C designed to reflect networking concepts

D directly maps to JavaScript

E command line driven interface

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Refer to the exhibit.

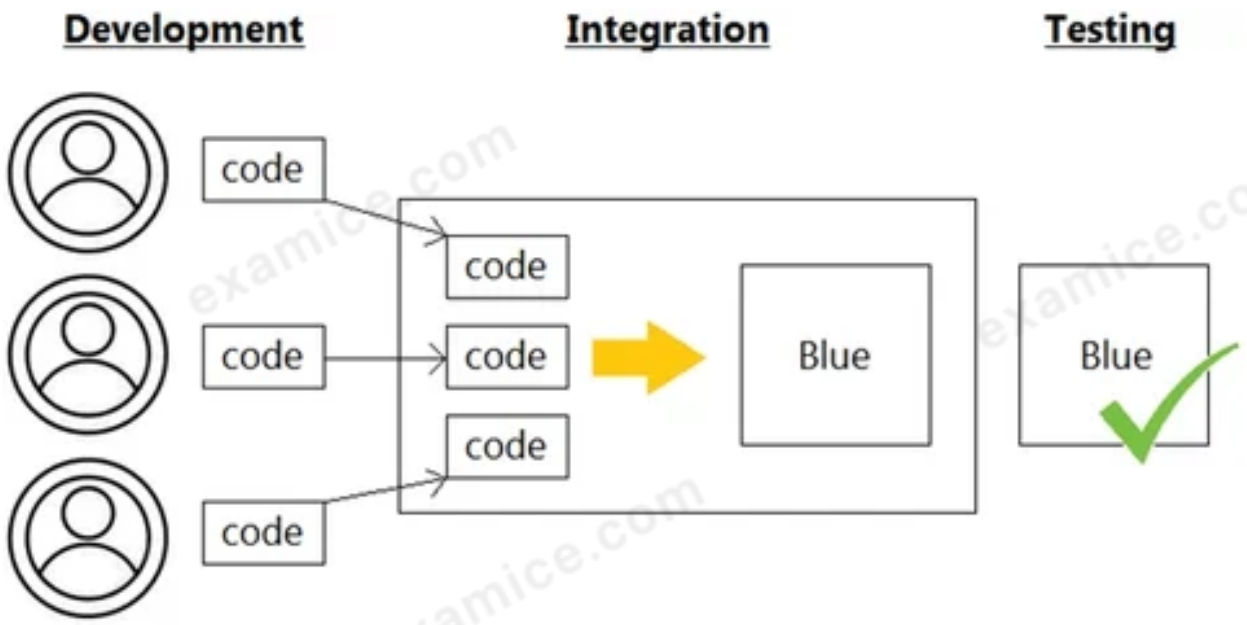

Which infrastructure automation method is shown?

A CI/CD pipeline

B Lean

C Agile

D Waterfall

```
#!/bin/bash
apt install nginx
export AVAILABLE_SITES_DIR = '/etc/nginx/sites-available'
export ENABLED_SITES_DIR = '/etc/nginx/sites_enabled'
cd /opt/nginx
cat sites.txt | while read site;
    do
        cp template.conf "$AVAILABLE_SITES_DIR/$site";
        ln -s "$AVAILABLE_SITES_DIR/$site"" $ENABLED_SITES_DIR';
        chown www-data:www-data "$AVAILABLE_SITES_DIR/$site";
    done
```

Refer to the exhibit. An engineer must configure a load balancer server. The engineer prepares a script to automate workflow by using Bash. The script installs the nginx package, moves to the /opt/nginx directory, and reads the sites.txt file for further processing. Based on the script workflow, which process is being automated within the loop by using the information in sites.txt?

A creating a file per each line in sites.txt with the information in template.conf, creating a link for the previously created file, and then changing the ownership of the created files

B using the content of the file to create the template.conf file, creating a link from the created file to the /etc/nginx/sites_enabled, and then changing the file execution permissions

C creating a new file based on template.conf in the /etc/nginx/sites_enabled directory for each line in the sites.txt file, and then changing the file execution permissions

D using the information in the file to create a set of empty files in the /etc/nginx/sites_enabled directory, and then assigning the owner of the file

```
import requests

headers = {"X-Cisco-Meraki-API-Key": "KEY1234"}
BASE_URL = "https://api-mp.meraki.com/api/v1"
FIRST_URL = "/organizations"
SECOND_URL = "/networks"
THIRD_URL = "clients"

def first_loop(info):
    for item in info:
        if item["name"] == "ACME":
            URL = BASE_URL + FIRST_URL + "/" + item["id"] + "/" + SECOND_URL
            response = requests.request("GET", URL, headers=headers)
            return second_loop(response.json())

def second_loop(info):
    for item in info:
        if item["name"] == "BLDG21":
            URL = BASE_URL + SECOND_URL + "/" + item["id"] + "/" + THIRD_URL
            response = requests.request("GET", URL, headers=headers)
            return third_loop(response.json())

def third_loop(info):
    for item in info:
        return item

response = requests.request("GET", BASE_URL + FIRST_URL, headers=headers)
info = first_loop(response.json())
for item in info:
    print (item["id"])
```

Refer to the exhibit. A network engineer must collect information from the network. The engineer prepares a script to automate workflow by using Cisco MerakiAPI. The script must run over nested loops to collect organization and network information and uses the collected data for final collection. Which process is being automated by using the Python script?

A Collect the IDs of the clients on the BLDG21 network.

B List the IDs from the ACME organization.

C Provide the BLDG21 network information if it is part of the ACME organization.

D Gather the IDs of the ACME organization, the BLDG21 network, and the clients on the network.

Refer to the exhibit.

```
def process_devices(dnac, token):
    url = "https://{}/api/v1/network-device".format(dnac['host'])
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = response.json()
    for item in data['response']:
        print(item["hostname"]," ", item["managementIpAddress"])
```

What is the function of the Python script?

A Loop through the returned list of network devices and, for each device, print the device name and management IP address.

B Count and print the total number of available devices.

C For each device that is returned, display the device type and associated management IP address.

D Iterate over a list of network devices and write all device names and management IP addresses to an output file.

```
--- README.md-repo  2019-10-06 21:15:59.000000000 +0100
+++ README.md       2019-10-06 21:07:35.000000000 +0100
@@ -88,8 +88,6 @@
 ```


-
-
 ## Troubleshooting

 ### CMake
@@ -162,4 +160,13 @@

 ## References

+### Mosquitto
+
+* [github](https://github.com/eclipse/mosquitto)
+* [homepage](https://mosquitto.org)
+
+### MQTT
+
+* [organisation](http://mqtt.org)
+
```

Refer to the exhibit. The output of the diff -u README.md-repo README.md command is shown. The original file was 165 lines long. How many lines are in the edited copy of the file?

A 162

B 165

C 172

D 173
```

Issued to kamjunhao@gmail.com · October 17, 2026

Which line is an example of the start of a chunk from a unified diff?

A @@ -20191007T1200 +88,90 @@

B @@ -88,10 +88,6 @@

C @@ -90,88 +20191008T1349 @@

D @@ -20191007T1200 +20191008T1349 @@

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP -

Drag and drop elements of the RESTCONF Protocol stack from the left onto the correct descriptors on the right. Not all elements on the left are used.

Select and Place:

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which two **NETCONF** operations cover the RESTCONF GET operation? (Choose two.)

A <get>

B <get-config>

C <get-update>

D <modify-config>

E <edit>

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
---
- hosts: CISCO_ROUTER_01
  gather_facts: true
  connection: network_cli

  tasks:
    - name: show conf
      ios_command:
        commands:
          - show running-config
      register: config

- name: save output to /etc/ansible/configs
  copy:
    content: "{{ config.stdout[0] }}"
    dest: "/etc/ansible/configs/show_conf_{{ inventory_hostname }}.txt"
```

What is the result of executing this Ansible playbook?

A The playbook copies a new start-up configuration to CISCO_ROUTER_01

B The playbook copies a new running configuration to CISCO_ROUTER_01

C The playbook backs up the running configuration of CISCO_ROUTER_01

D The playbook backs up the start-up configuration of CISCO_ROUTER_01

Refer to the exhibit.

```
---
- hosts: switch2960cx
  gather_facts: no

  tasks:
    - ios_l2_interface:
        name: GigabitEthernet0/1
        state: unconfigured

    - ios_l2_interface:
        name: GigabitEthernet0/1
        mode: trunk
        native_vlan: 1
        trunk_allowed_vlans: 6-8
        state: present

    - ios_vlan:
        vlan_id: 6
        name: guest-vlan
        interfaces:
          - GigabitEthernet0/2
          - GigabitEthernet0/3

    - ios_vlan:
        vlan_id: 7
        name: corporate-vlan
        interfaces:
          - GigabitEthernet0/4
```

Which two statements describe the configuration of the switch after the Ansible script is run? (Choose two.)

A Traffic from ports 0/2 to 0/5 is able to flow on port 0/1 due to the trunk.

B GigabitEthernet0/1 is left unconfigured.

C GigabitEthernet0/2 and GigabitEthernet0/3 are access ports for VLAN 6.

D Traffic is able to flow between ports 0/2 to 0/5 due to the trunk on port 0/1.

E Traffic on ports 0/2 and 0/3 is connected to port 0/6.

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
---
- hosts: {{ router }}
  gather_facts: true
  connection: local

  tasks:
    - ios_command
      commands:
       - show run
      provider: "{{ router_credentials }}"
    register: config

    - copy:
      content: "{{ config.stdout[0] }}"
      dest: "etc/ansible/configs/command_{{ router_hostname }}.txt
...
```

What is the effect of this Ansible playbook on an IOS router?

A A new running configuration is pushed to the IOS router.

B The start-up configuration of the IOS router is copied to a local folder.

C The current running configuration of the IOS router is backed up.

D A new start-up configuration is copied to the IOS router.

QUESTION 211

Issued to kamjunhao@gmail.com · October 17, 2026

Which configuration management tool has an agentless capability?

A Puppet

B CFEngine

C Ansible

D Chef

Personal copy · kamjunhao@gmail.com

QUESTION 212

Issued to kamjunhao@gmail.com · October 17, 2026

Which toot allows changes to the configuration management toolset to be tested?

A pyATS

B NAPALM

C Cisco VIRL

D Ansible

Personal copy · kamjunhao@gmail.com

```
- hosts: servers
  tasks:

    - name: task1
      systemd:
        name: webexbot
        state: stopped

    - name: task2
      apt:
        name: teamsbot

    - name: task3
      apt:
        name: webexbot
        state: absent
        purge: yes
```

Refer to the exhibit. A developer must integrate a bot with an internal communication app. The developer wants to replace the webexbot package with the teamsbot package by using Ansible and prepares a playbook. In the first two tasks, the playbook stops the webexbot and verifies that the teamsbot is installed.

What is accomplished in the last task of the workflow when the developer runs the Ansible playbook?

A uninstalls the webexbot package and removes its configuration files

B installs the webexbot and retains the configuration files

C stops the webexbot service and uninstall it and retains its configuration files

D searches whether the purge package is available in the repository and uninstalls the webexbot package

QUESTION 214

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP -

Drag and drop the types of management from the left onto the levels at which they are performed on the right.

Select and Place:

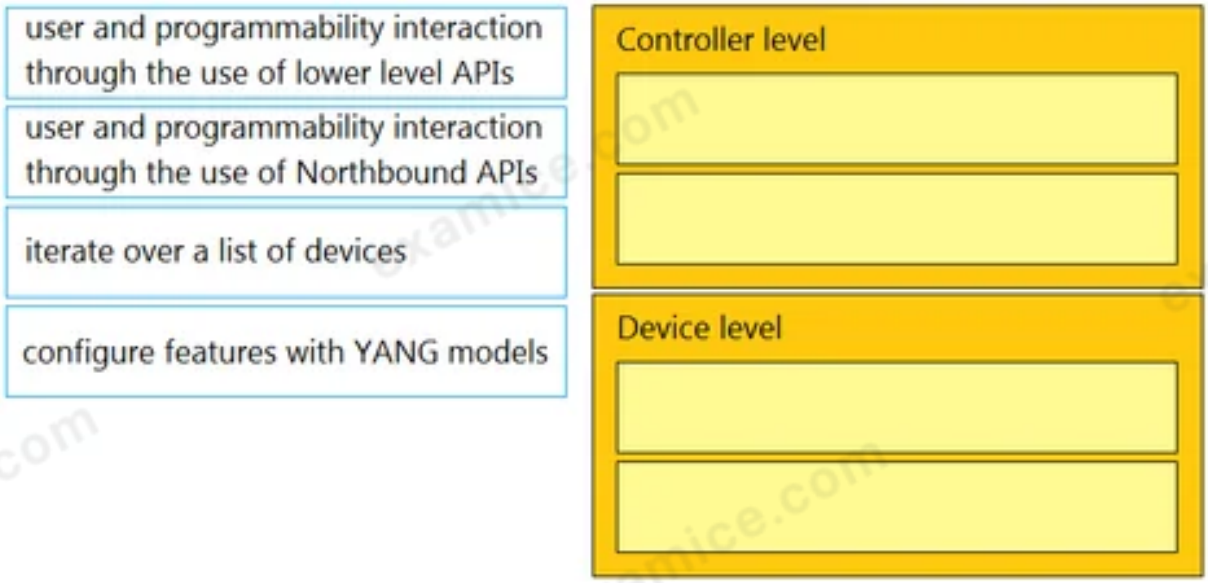

Refer to the exhibit.

```
leaf IPPeer {
  type union {
    type inet:ipv4-address;
    type inet:ipv6-address;
  }
}
```

What is the value of the node defined by this YANG structure?

A.

```
{
 "IPPeer": [
   "10.1.1.1"
 ]
}
```

B.

```
{
 "IPPeer": "10.1.1.1 2001:db::1"
}
```

C.

```
{
 "IPPeer": "10.1.1.1"
}
```

D.

```
{
 "IPPeer": [
   "10.1.1.1",
   "2001:db::1"
 ]
}
```


QUESTION 216

What is an advantage of using network programmability?

A Manual configuration is faster.

B No cloud abstraction occurs.

C It removes CLI access for devices.

D It provides for more scalable and replicable network provisioning.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of an agentless configuration management system?

A It requires managed hosts to have an interpreter for a high-level language such as Python or Ruby.

B It requires managed hosts to connect to a centralized host to receive updated configurations.

C It uses compiled languages as the basis of the domain-specific language to interface with managed hosts.

D It uses existing protocols to interface with the managed host.

Personal copy · kamjunhao@gmail.com

```
def enable_function(if_name, if_status, if_type):
    headers = {'Accept': 'application/yang-data+json',
               'Content-Type': 'application/yang-data+json'}
    payload = {
            "ietf-interfaces:interface": {
                "name": if_name,
                "enabled": if_status,
                "type": if_type,
                }
            }
    base_url = 'https://192.168.1.1:8443'
    restconf_url = '/restconf/data/ietf-interfaces:interfaces/interface'

    res = requests.put(f'{base_url}{restconf}={if_name}',
                               headers=headers, json=payload,
                                   auth=('cisco', 'secret'), verify=False)
```

Refer to the exhibit. A network engineer wants to automate the port enable/disable process on specific Cisco switches. The engineer creates a script to send a request through RESTCONF and uses ietf as the YANG model and JSON as payload. Which command enables an interface named Loopback1?

A enable_function(Loopback1, true, 'iana-if-type:softwareLoopback')

B enable_function('iana-if-type:softwareLoopback', Loopback1, true,)

C def enable_function('iana-if-type:softwareLoopback', Loopback1, false,)

D def enable_function(Loopback1, true, 'iana-if-type:softwareLoopback')

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must configure Cisco Nexus devices and wants to automate this workflow. The engineer enables the Cisco NX-OS REST API to configure the devices by using an Ansible playbook. Before running the code, which resource must be used to verify that the code works correctly?

A Cisco NX-OS SDK

B Cisco Learning Labs

C Cisco Code Exchange

D Cisco Modeling Labs

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A new application is being developed with specific platform requirements. The platform and application deployment and the ongoing platform management must be fully automated. The application includes a large database component that has significant disk I/O requirements. Which application deployment type meets the requirements?

A Python virtual environment

B virtual machine

C bare metal

D container

Personal copy · kamjunhao@gmail.com

```
- hosts: servers
  tasks:

  - name: task1
    apt:
      name: apache2
      state: absent

  - name: task2
    apt:
      name: nginx
      state: present

  - name: task3
    apt:
      name: "*"
      state: latest
```

Refer to the exhibit. A developer must check packages on web load balancers that use nginx packages. The developer updates the servers as required in Ansible inventory and prepares an Ansible playbook to automate this workflow on related servers. Which process is being automated by the Ansible playbook?

A verifying that nginx is installed only if apache2 is unavailable on the system, and then updating all the other packages

B verifying, without installing, that apache2 is unavailable and that nginx is installed, and then updating the repository to the latest version

C uninstalling the apache2 server, installing the nginx server, and then updating all the packages to the latest version

D installing nginx, uninstalling apache2, and then verifying that the package repository is at the latest version

user_manager.py

```
import psycopg2
import json, sys

# Load config file
config = None
with open('config.json') as config_file:
    config = json.load(config_file)
if not config:
    print("Error loading configuration file.")
    sys.exit(1)

connection = psycopg2.connect(
    database="users",
    host=config["DB_USER"], user=config["DB_USER"], password=config["DB_PWD"]
)
connection.set_session()

def has_admin_role(username):
    with connection.cursor() as cursor:
        query = 'SELECT admin_role FROM users WHERE username = {0}'
        cursor.execute(query.format(username))
        result = cursor.fetchone()
    return result

 has_admin_role("ops.shared")
```

config.json

```
{
    "DB_USER": "pguser",
    "DB_PWD": "@123Qwer%4",
    "DB_HOST": "devnetdb.example.com"
}
```

Refer to the exhibit. An engineer must check the admin rights of users on a database regularly and prepares the Python script to automate the process. The script connects to the database and runs a query. What is a security issue about the secrets in the code that relates to secret protection?

A They must be stored in configuration files if there is a possibility of leakage.

B They must be Base64-encoded if stored in the user database.

C They must be encrypted if stored in the user database.

D They must be stored in configuration files if no authentication will be used.

```
import requests
import json

BASE_URL = "https://<IP Address>"
FIRST_URL = "/dna/intent/api/v1/network-device"
SECOND_URL = "/dna/intent/api/v1/network-device-poller/cli/read-request"
THIRD_URL = "/dna/intent/api/v1/task/{task_id}"
FOURTH_URL = "/dna/intent/api/v1/file/{file_id}"

headers = {"X-Auth-Token": "TOKEN", "Content-Type": "application/json"}

params = {"platformId": "C9500-40X"}
response = requests.get(BASE_URL + FIRST_URL, headers=headers, params=params)
devices = []
for device in response.json()["response"]:
    devices.append(device["id"])

    payload = {
        "commands": ["show version", "show ip int brief"],
        "deviceUuids": devices,
        "timeout": 0,
    }
response = requests.post(BASE_URL + SECOND_URL, data=json.dumps(payload),
headers=headers)
task_id = response.json()["response"]["taskId"]

response = requests.get(BASE_URL + THIRD_URL.format(task_id=task_id),
headers=headers)
progress_json = json.loads(response.json()["response"]["progress"])
file_id = progress_json("fileId")

response = requests.get(BASE_URL + FOURTH_URL.format(file_id=file_id),
headers=headers)
file_json = response.json()

for cmd in file_json:
  print(file_json[cmd]["commandResponses"]["SUCCESS"]["show ip int brief"])
```

Refer to the exhibit. A network engineer must collect information from the network using Cisco DNA Center APIs. The script must query for the devices with

'platformId' 'C9540-x' and then send commands to be executed. Which process is automated by the Python script?

A results gathering of the show version and show ip int brief commands

B output of show ip int brief command on devices of type C9500-40X

C execution information of the show version and show ip int brief commands

D list of executed commands on C9500-40X and the information of show ip int brief command

```
diff --git a/ciscoaxl/axl.py b/ciscoaxl/axl.py
index bc7727e..d66ef4d 100644
--- a/ciscoaxl/axl.py
+++ b/ciscoaxl/axl.py
@@ -99,7 +99,7 @@ class axl(object):
          :return: result dictionary
          """
          try:
-             return self.client.executeSQLUpdate(query)
+             return self.client.executeSQLUpdate(query)['return']
          except Fault as e:
              return e

diff --git a/setup.py b/setup.py
index df79ef4..1470b05 100644
--- a/setup. py
+++ b/setup. py
@@ -5,7 +5,7 @@ with open("README.md", "r") as fh:

 setup(
     name="ciscoaxl",
-    version="0.14",
+    version"0.141",
     author="User 1",
     author_email= "user1@example.com",
     description="Cisco CUCM AXL Library. Simple to use.",
```

Refer to the exhibit. Which two files are being edited in the unified diff? (Choose two.)

A README.md

B setup.py

C axl.py

D ciscoaxl.py

E index.py

DRAG DROP -

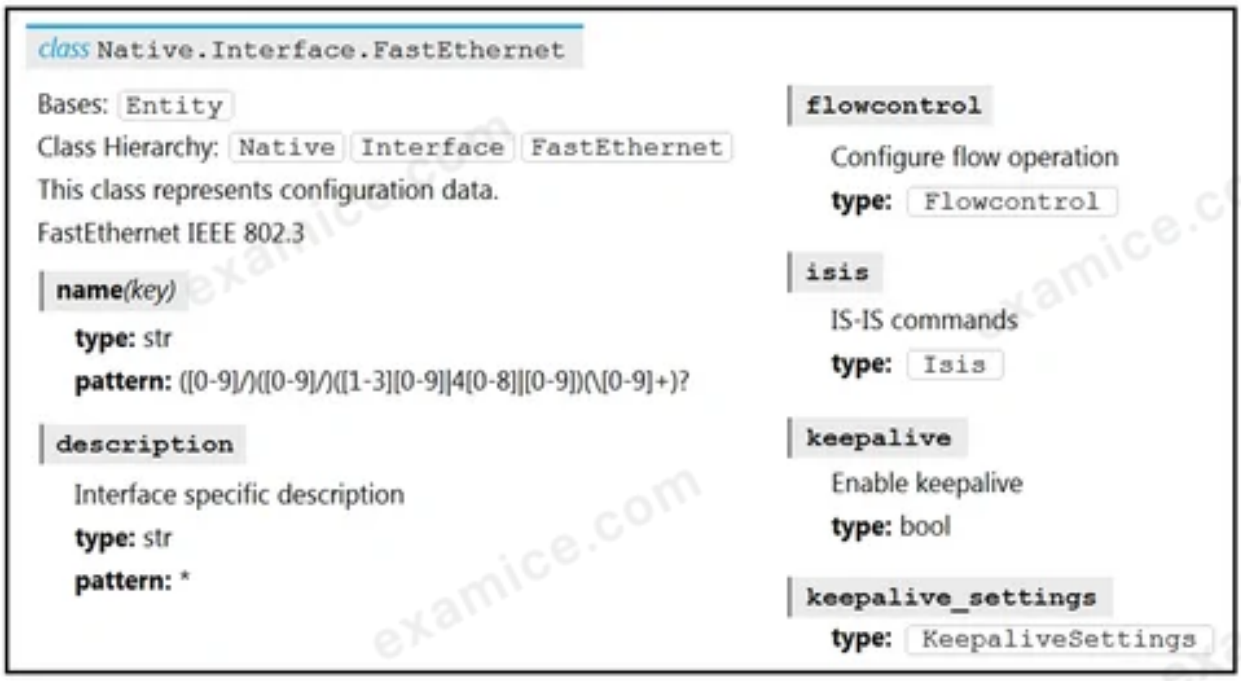

Refer to the exhibit. Drag and drop the code snippets from the bottom to the blanks in the code to enable keepalive for the FastEthernet 2/0 interface. Not all options are used.

Select and Place:

```
from ydk.services import CRUDService
from ydk.providers import NetconfServiceProvider as nc
from ydk.models.cisco_ios_xe import Cisco_IOS_XE_native as model
ip = '10.10.20.48'
prtcl = 'ssh'
user = 'developer'
psw = 'P@s$W0rD'
port = 830
provider = nc(address=ip, port=port, username=user, password=psw, protocol=prtcl)
crud = CRUDService()
[                                                    ]
interface.name = '2/0'
[                                                    ]
[                                                    ]
if interface_data:
    print('Keepalive is enabled.')
else:
    print('Keepalive is not enabled.')
```

```
interface_data = crud.update(provider, interface)
interface.keepalive = True
interface_data = crud.read(provider, interface)
interface = model.Native.Interface.FastEthernet()
interface.FastEthernet.keepalive_settings.keepalive = True
interface = model.Native.Interface()
```

Personal copy · kamjunhao@gmail.com

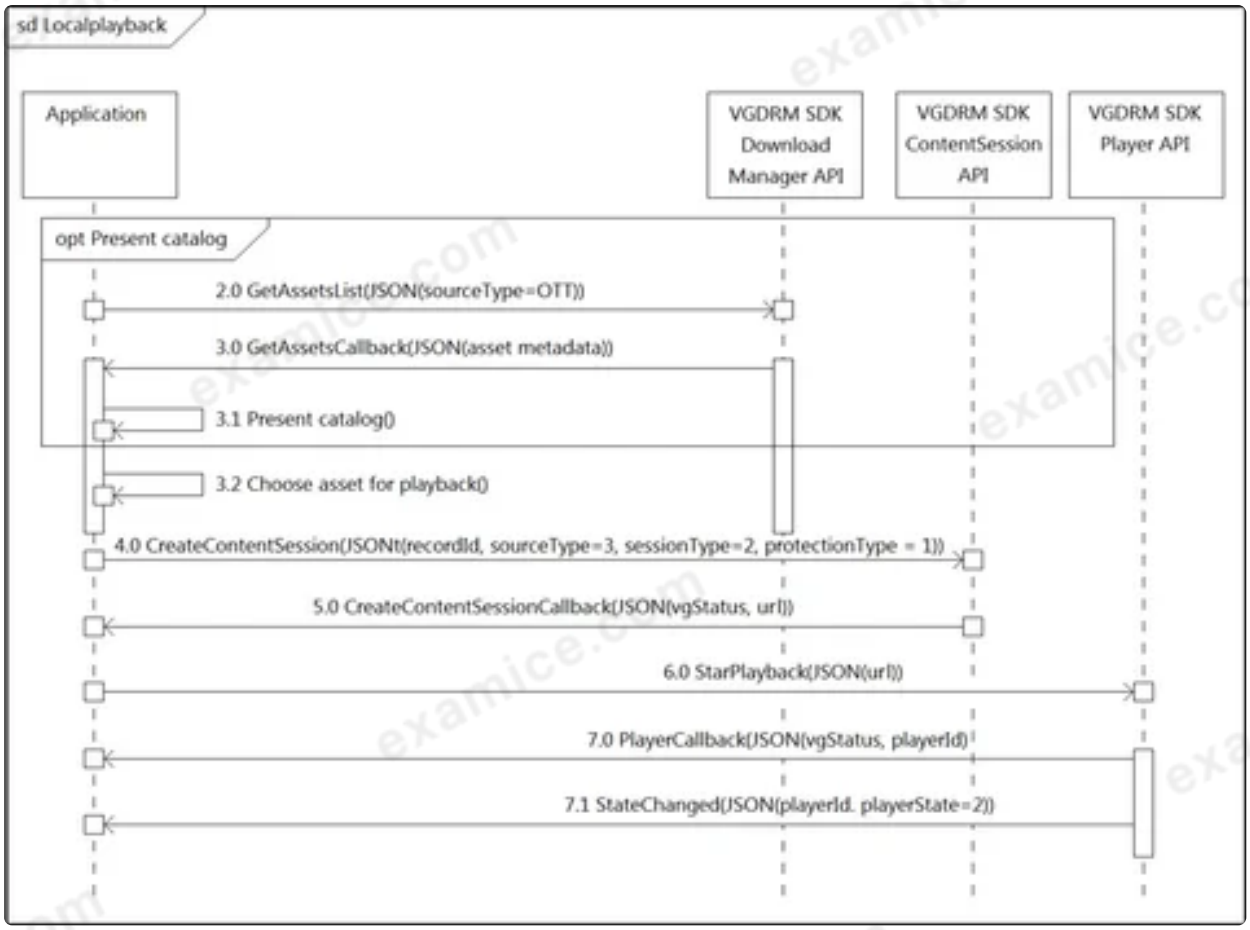

Refer to the exhibit. What do all the calls shown in the sequence diagram have in common?

A All the calls are optional.

B All the calls are asynchronous.

C All the calls are synchronous.

D All the calls depend on the catalog.

```
<routing xmlns="urn:ietf:params:xml:ns:yang:ietf-routing">
    <routing-instance>
        <name>default</name>
        <description>default-vrf [read-only]</description>
        <routing-protocols>
            <routing-protocol>
                <type xmlns:ospf="urn:ietf:params:xml:ns:yang:ietf-
                ospf">ospf:ospfv2</type>
                <name>100</name>
                <ospf xmlns="urn:ietf:params:xml:ns:yang:ietf-ospf">
                    <instance>
                        <af xmlns:rt="urn:ietf:params:xml:ns:yang:ietf-
                        routing">rt:ipv4</af>
                        <router-id>1.1.1.1</router-id>
                        <nsr>
                            <enable>false</enable>
                        </nsr>
                        <auto-cost>
                            <enable>false</enable>
                        </auto-cost>
                        <redistribution
                        xmlns="urn:ietf:params:xml:ns:yang:cisco-ospf">
                            <rip/>
                        </redistribution>
                    </instance>
                </ospf>
            </routing-protocol>
        </routing-protocols>
    </routing-instance>
</routing>
```

Refer to the exhibit. What are two characteristics of the NETCONF response? (Choose two.)

A ospf is defined by the ietf-ospf module.

B ietf-ospf imports ietf-routing.

C redistribution is a module of type cisco-ospf.

D routing protocols is a list.

E The main module is routing.

QUESTION 228

Issued to kamjunhao@gmail.com · October 17, 2026

A business needs to create a simulated environment that mimics a production infrastructure to make changes to the OSPF process and analyze the impact. What should be used?

A Cisco VIRL / Cisco CML

B Cisco DevNet Sandbox labs

C pyATS

D Puppet

Personal copy · kamjunhao@gmail.com

QUESTION 229

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of a CI/CD pipeline for infrastructure?

A removes manual errors

B enables manual steps

C removes the need for operations

D provides variety for deployments

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

During which step of the CI/CD pipeline for infrastructure automation is code from multiple developers combined to compile and test different components?

A integration

B deployment

C development

D testing

Personal copy · kamjunhao@gmail.com

```
import requests

url = "https://api.meraki.com/api/v0/organizations/{{organizationId}}/insight/
monitoredMediaServers"

payload = {
    "name": "Sample VoIP Provider",
    "address": "123.123.123.1"
}
headers = {
  'Accept': '*/*',
  'Content-Type': 'application/json'
}

response = requests.request("POST", url, headers=headers, data=payload)

print(response.text.encode('utf8'))
```

Refer to the exhibit. Which workflow does the script automate?

A retrieves a media server that is being monitored

B updates a media server that is being monitored

C adds a media server to be monitored

D deletes a media server that is being monitored

QUESTION 232

Issued to kamjunhao@gmail.com · October 17, 2026

Which description of a default gateway is true?

A It is a security feature that denies certain traffic.

B It is a device that receives IP packets that have no explicit next-hop in the routing table.

C It is a feature that translates between public and private addresses.

D It is a device that receives Layer 2 frames with an unknown destination address.

Personal copy · kamjunhao@gmail.com

QUESTION 233

Issued to kamjunhao@gmail.com · October 17, 2026

On which port does **NETCONF** operate by default?

A 23

B 443

C 822

D 830

Personal copy · kamjunhao@gmail.com

QUESTION 234

Issued to kamjunhao@gmail.com · October 17, 2026

Which device is a system that monitors and controls incoming and outgoing network traffic based on predetermined security roles?

A router

B switch

C load balancer

D firewall

Personal copy · kamjunhao@gmail.com

QUESTION 235

Issued to kamjunhao@gmail.com · October 17, 2026

In DNS, which record specifies an alias that refers to another name that ultimately resolves to an IP address?

A CNAME

B NS

C AAA

D SOA

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the network component names from the left onto the correct descriptions on the right. Not all options are used.

Select and Place:

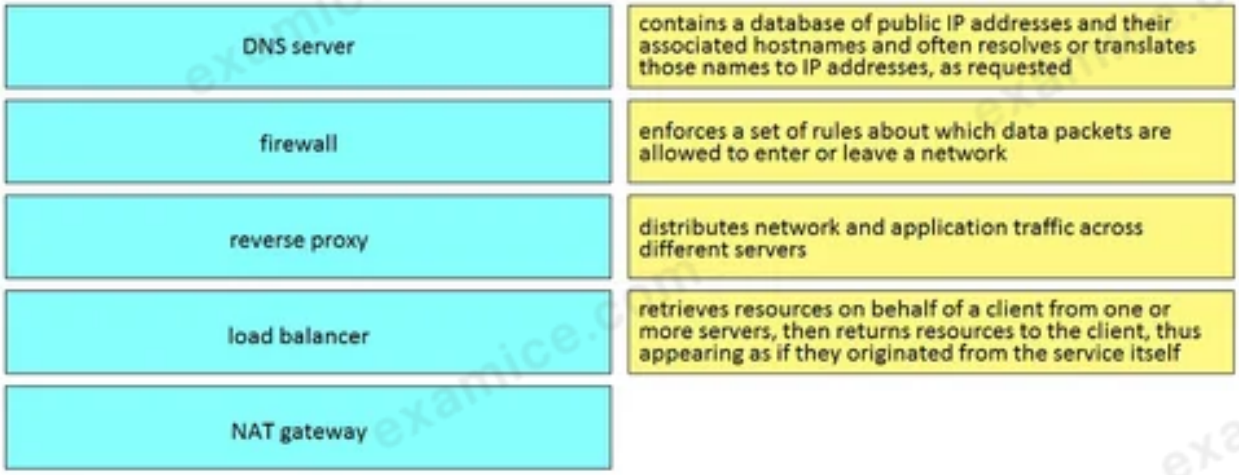

Which two types of NAT are used in a network? (Choose two.)

A routed NAT

B static NAT

C multicast NAT

D normal NAT

E dynamic NAT

What is the purpose of a MAC address?

A to uniquely identify a switch in a LAN

B to uniquely identify a router in a LAN

C to uniquely identify a network interface in a LAN

D to uniquely identify a device on the Internet

Refer to the exhibit.

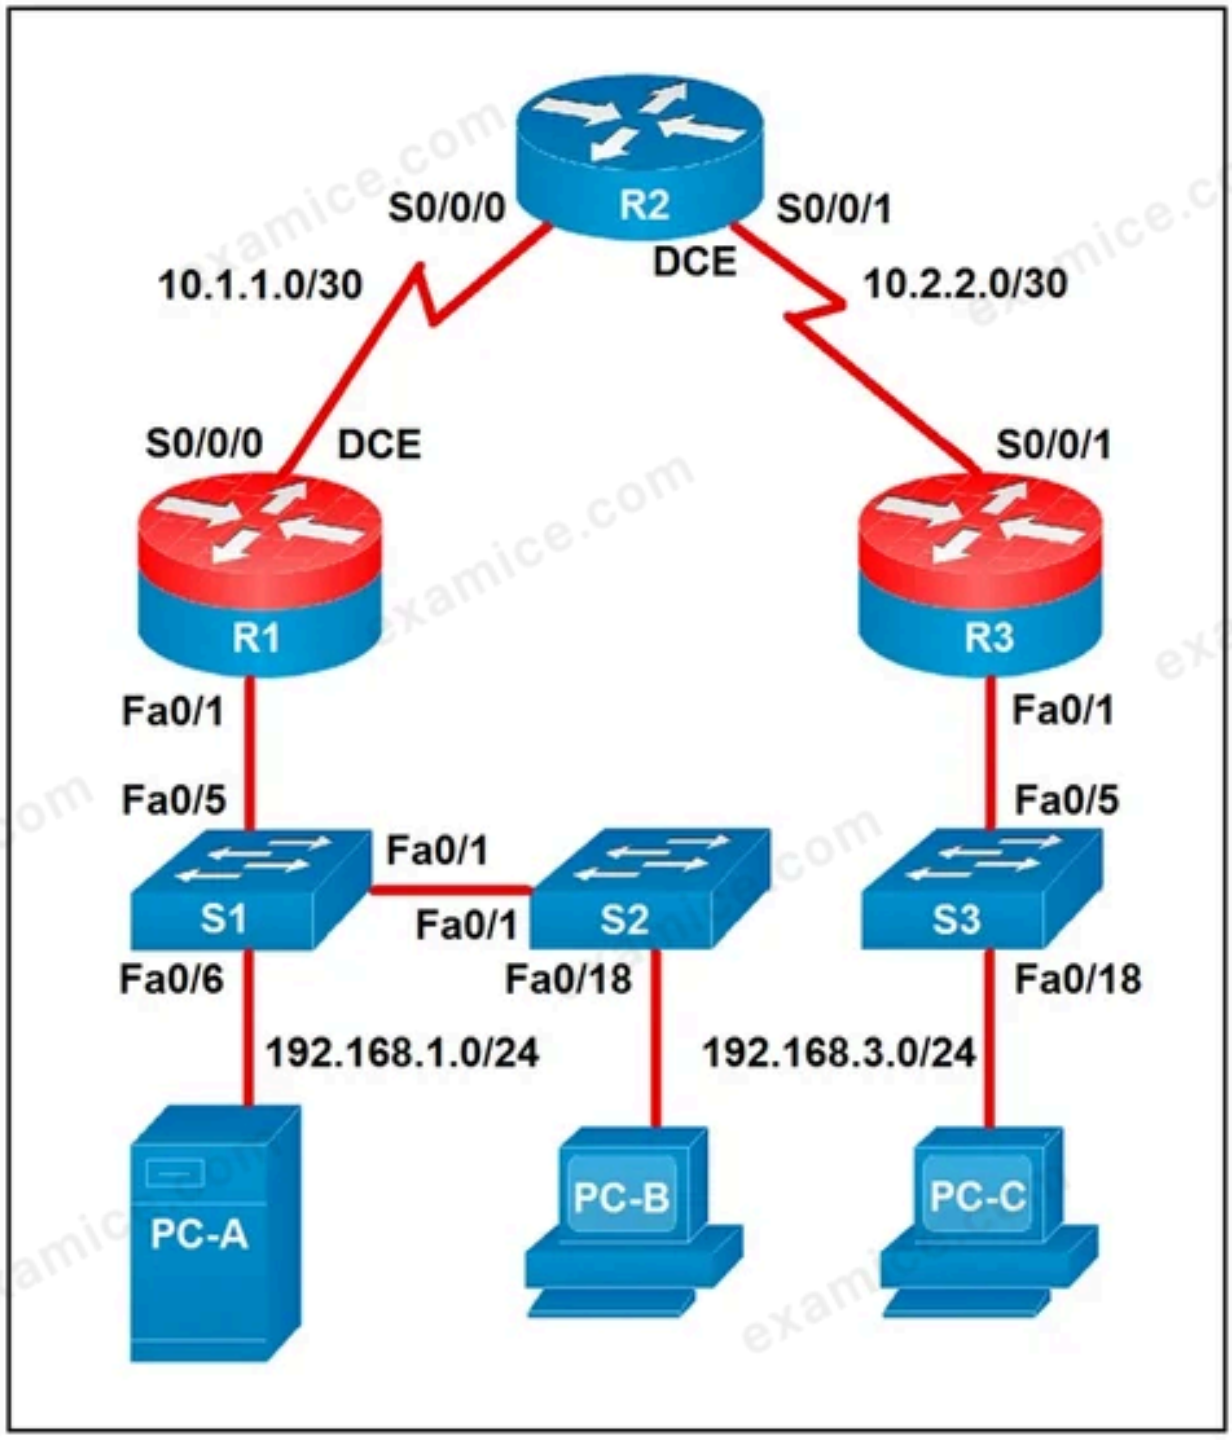

Which two statements about the network diagram are **true?** (Choose two.)

A The subnet address of PC-B has 18 bits dedicated to the network portion.

B One of the routers has two connected serial interfaces.

C R1 and R3 are in the same subnet.

D PC-A and PC-B are in the same subnet.

E The subnet of PC-C can contain 256 hosts.

Personal copy · kamjunhao@gmail.com

QUESTION 240

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP -

Drag and drop the network automation interfaces from the left onto the transport protocols that they support on the right. Not all options are used.

Select and Place:

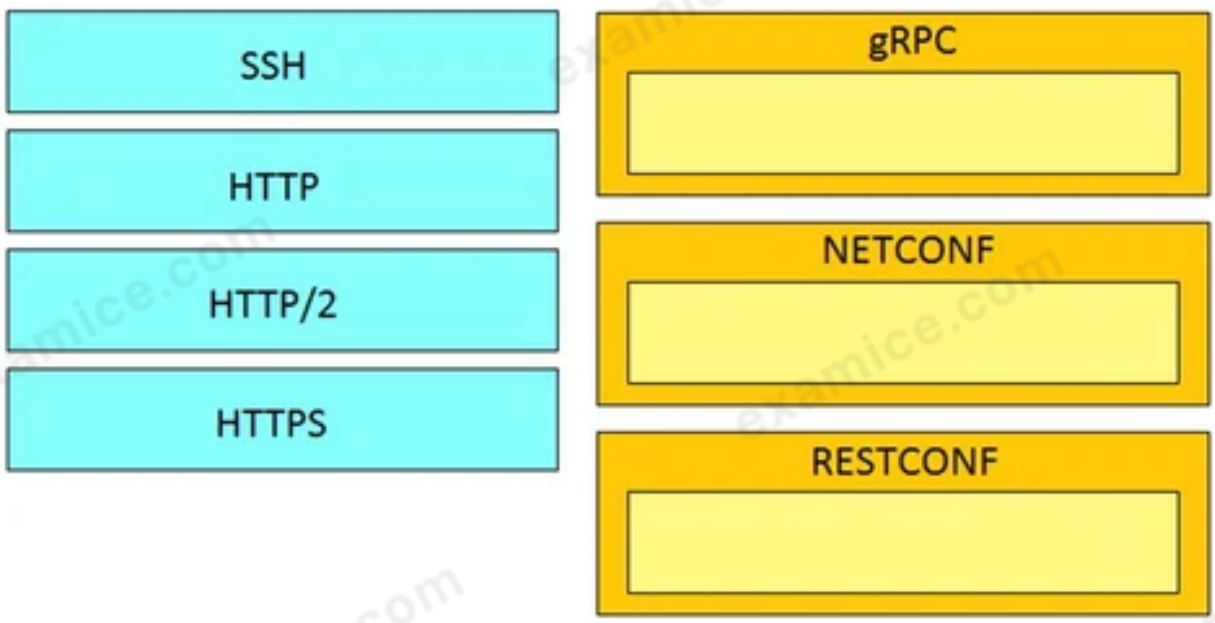

Personal copy · kamjunhao@gmail.com

QUESTION 241

Issued to kamjunhao@gmail.com · October 17, 2026

Which detail is included in a routing table?

A broadcast address

B TCP or UDP port number

C IP protocol

D destination next hop or outgoing interface

Personal copy · kamjunhao@gmail.com

QUESTION 242

Issued to kamjunhao@gmail.com · October 17, 2026

What is an example of a network interface hardware address?

A workstation name

B IP address

C domain name

D MAC address

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the functionalities from the left onto the correct networking devices on the right.

Select and Place:

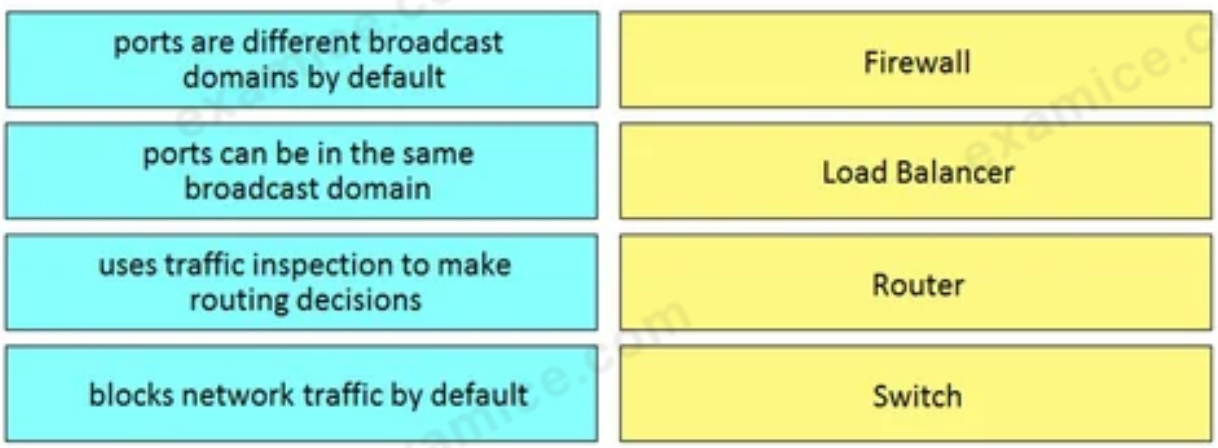

On which network plane is routing protocol traffic handled?

A management plane

B data plane

C authentication plane

D control plane

QUESTION 245

Issued to kamjunhao@gmail.com · October 17, 2026

Which device is used to transport traffic from one broadcast domain to another broadcast domain?

A layer 2 switch

B proxy server

C router

D load balancer

Personal copy · kamjunhao@gmail.com

QUESTION 246

Issued to kamjunhao@gmail.com · October 17, 2026

Which service provides a directory lookup for IP addresses and host names?

A DNS

B NAT

C SNMP

D DHCP

Personal copy · kamjunhao@gmail.com

QUESTION 247

Issued to kamjunhao@gmail.com · October 17, 2026

Users cannot access a webserver and after the traffic is captured, the capture tool shows an ICMP packet that reports "time exceeded in-transit". What is the cause of this webserver access issue?

A A router along the path has the wrong time.

B A router along the path is misrouting the packets in a wrong direction.

C The server is too loaded and the connection could not be handled in time.

D The server is too far away and the packets require too much time to reach it.

Personal copy · kamjunhao@gmail.com

QUESTION 248

Issued to kamjunhao@gmail.com · October 17, 2026

What is used in Layer 2 switches to direct packet transmission to the intended recipient?

A MAC address

B IPv6 address

C spanning tree

D IPv4 address

Personal copy · kamjunhao@gmail.com

QUESTION 249

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of a firewall in application deployment?

A adds TLS support to an application that does not support it natively

B limits traffic to only ports required by the application

C provides translation for an application's hostname to its IP address

D forwards traffic to a pool of instances of the application

Personal copy · kamjunhao@gmail.com

QUESTION 250

Issued to kamjunhao@gmail.com · October 17, 2026

A small company has 5 servers and 50 clients. What are two reasons an engineer should split this network into separate client and server subnets? (Choose two.)

A Subnets will split domains to limit failures.

B A router will limit the traffic types between the clients and servers.

C Subnets provide more IP address space for clients and servers.

D A router will bridge the traffic between clients and servers.

E Internet access to the servers will be denied on the router.

Personal copy · kamjunhao@gmail.com

QUESTION 251

Issued to kamjunhao@gmail.com · October 17, 2026

What is the function of an `IP` address in networking?

A represents a network connection on specific devices

B specifies the type of traffic that is allowed to roam on a network

C specifies resource's location and the mechanism to retrieve it

D represents the unique ID that is assigned to one host on a network

Personal copy · kamjunhao@gmail.com

QUESTION 252

Issued to kamjunhao@gmail.com · October 17, 2026

Where is an IP packet routed if the packet does not match any routes in the routing table?

A firewall

B load balancer

C central switch

D default gateway

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which two query types does a client make to a DNS server? (Choose two.)

A Inverse

B PTR

C AAAA

D ACK

E DISCOVER

Personal copy · kamjunhao@gmail.com

QUESTION 254

Issued to kamjunhao@gmail.com · October 17, 2026

What are two functions of a routing table on a network device? (Choose two.)

A It lists the routes to drop traffic.

B It lists the routes to a particular destination.

C It lists the static and dynamic entries.

D It lists hosts that are one hop away.

E It lists entries more than two hops away.

Personal copy · kamjunhao@gmail.com

QUESTION 255

Issued to kamjunhao@gmail.com · October 17, 2026

What does a load balancer distribute in a network environment?

A different TCP connections to the routers

B incoming traffic across multiple servers

C traffic in the network by leveraging the switch architecture

D outgoing connections to the network

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

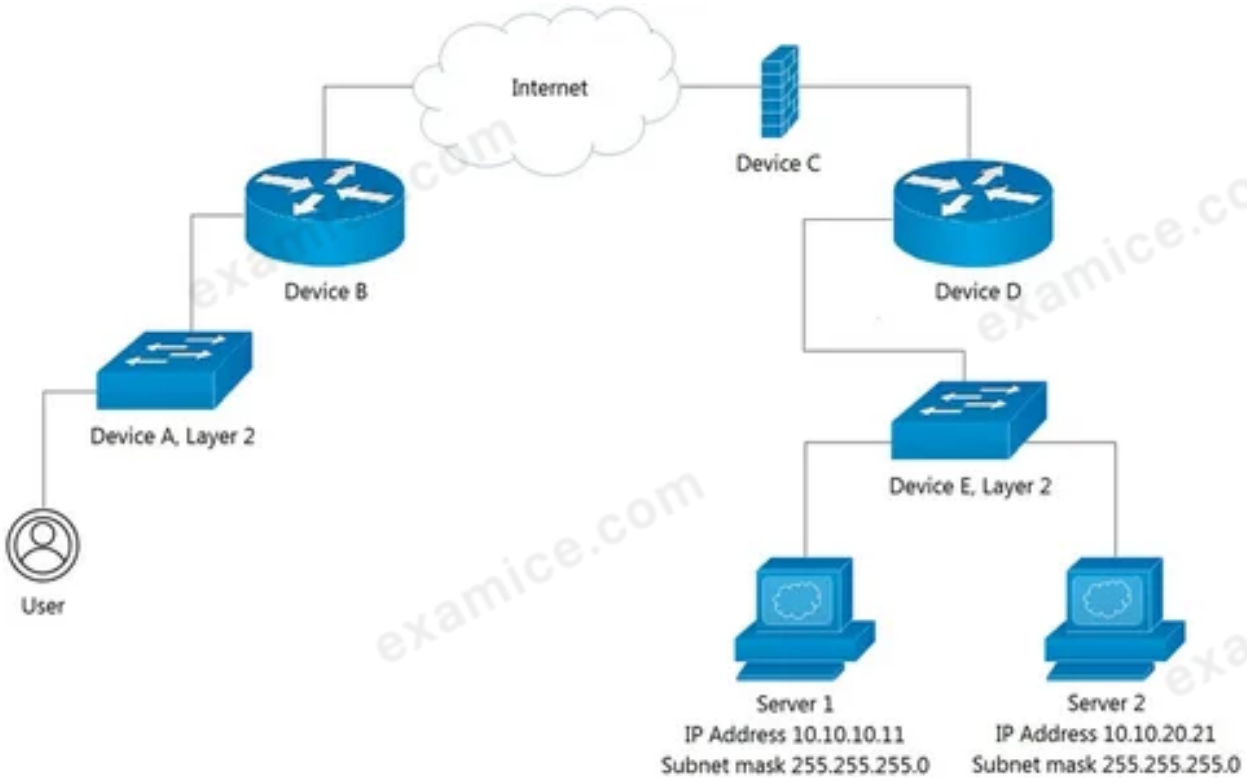

Which Device limits traffic between **Server 1** and **Server 2**?

A Device B

B Device C

C Device D

D Device E

QUESTION 257

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of a MAC address on a network device?

A unique network address that identifies the network interface of a device

B unique network interlace address that is provided by the DHCP server

C unique hardware address that identifies the network interface of a device

D unique hardware interface address that is provided by the central switch

Personal copy · kamjunhao@gmail.com

QUESTION 258

Issued to kamjunhao@gmail.com · October 17, 2026

How are load balancers used in modern application deployments?

A Turn off traffic and take down compute units, then update and bring the compute units back up.

B Allow traffic to continue as new compute units are brought up and old compute units are taken down.

C Allow HTTP and HTTPS traffic to continue as old compute units are discontinued before new units are brought up.

D Bring up new compute units, test the compute units, and switch the traffic from old units to new units.

Personal copy · kamjunhao@gmail.com

QUESTION 259

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol **must** be allowed on the firewall so that NTP services work properly?

A TCP

B ICMP

C BGP

D UDP

Personal copy · kamjunhao@gmail.com

QUESTION 260

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol runs over TCP port 22?

A SSH

B NETCONF

C HTTP

D Telnet

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of the first three pairs of digits in a MAC address?

A defines packet forwarding priority sent or received by the adapter

B defines a routing identifier for the client

C indicates vendor of the network card or adapter

D indicates the IP address of the client in Hex

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

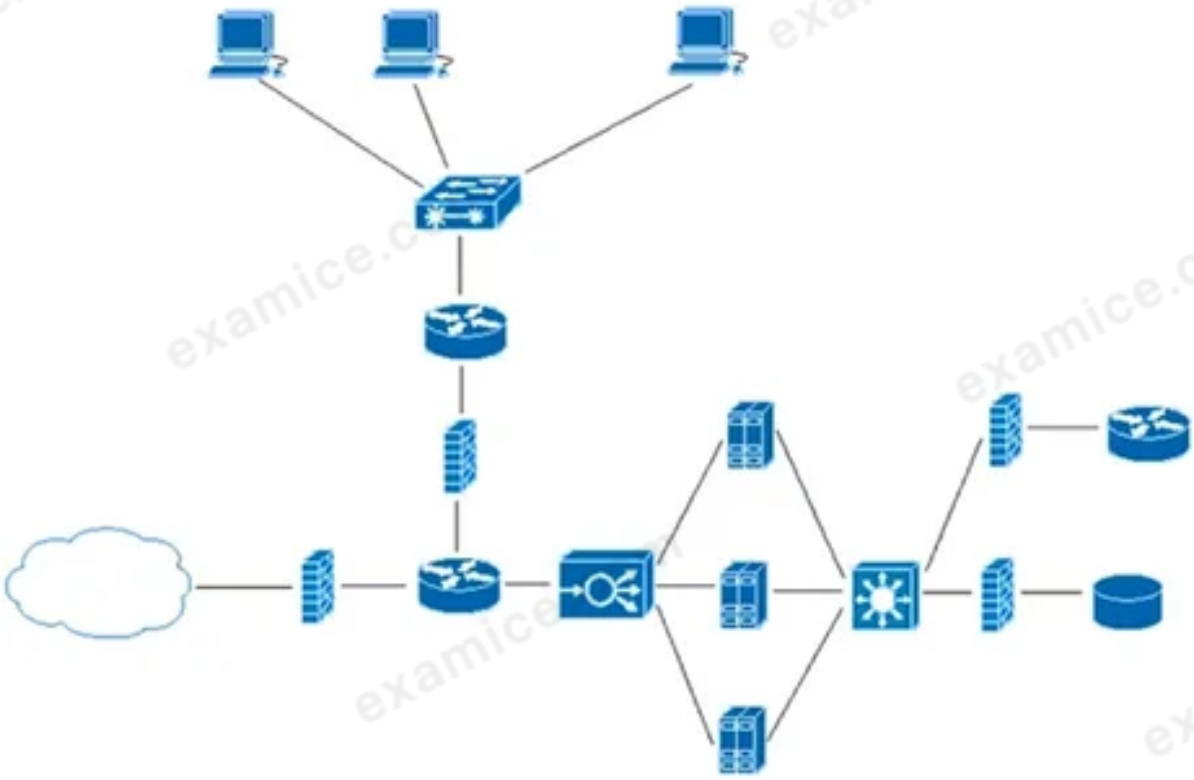

Refer to the exhibit. What does the load balancer enable in the network topology?

A hosted application to access Internet services

B external requests to be routed to the application servers

C application to access the database server

D workstations to access the Internet

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of using VLANs? (Choose two.)

A limits the devices that can join the network

B enables the logical grouping of devices that belong to different Layer 2 devices

C segments the broadcast domain

D allows all network devices to be accessible from any host on the network

E extends the broadcast domain

Issued to kamjunhao@gmail.com · October 17, 2026

What are two considerations when selecting the `best route` for a network device to reach its destination? (Choose two.)

A MAC address

B IP address

C metrics

D administrative distance

E subnet mask

DRAG DROP -

Drag and drop the function on the left onto the type of plane that handles the function on the right.

Select and Place:

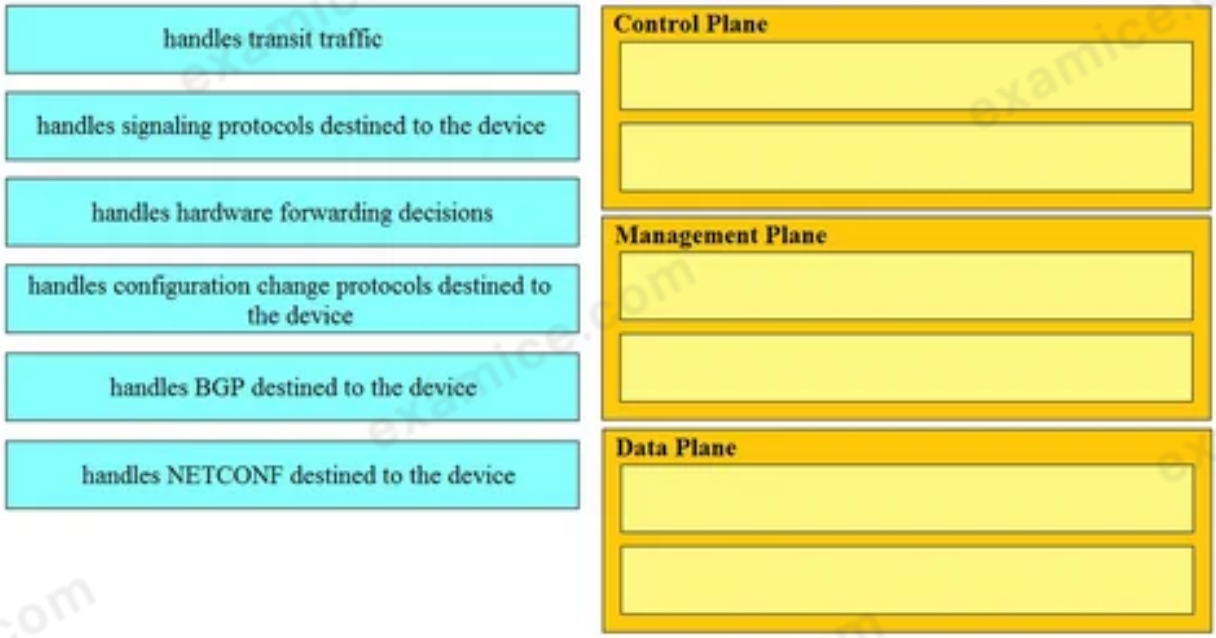

QUESTION 266

Issued to kamjunhao@gmail.com · October 17, 2026

Users cannot access a webserver and after the traffic is captured, the capture tool shows an ICMP packet that reports "communication administratively prohibited". What is the cause of this webserver access issue?

A An access list along the path is blocking the traffic.

B Users must authenticate on the webserver to access it.

C A router along the path is overloaded and thus dropping traffic.

D The traffic is not allowed to be translated with NAT and dropped.

Personal copy · kamjunhao@gmail.com

QUESTION 267

Issued to kamjunhao@gmail.com · October 17, 2026

Which application should be used to externally access all applications deployed in the same host machine with a single public IP address and port, when each application listens on different local ports?

A reverse proxy

B load balancer

C DNS

D firewall

Personal copy · kamjunhao@gmail.com

QUESTION 268

Issued to kamjunhao@gmail.com · October 17, 2026

Which implementation creates a group of devices on one or more LANs that are configured to communicate as if they were attached to the same wire?

A WLAN

B VLAN

C IPsec

D HSRP

Personal copy · kamjunhao@gmail.com

QUESTION 269

Issued to kamjunhao@gmail.com · October 17, 2026

What are two properties of private IP addresses? (Choose two.)

A They can be used to access the Internet directly.

B They are more secure than public IP addresses.

C They are not globally unique.

D They can be repeated within the same local network.

E They are controlled globally by an IP address registry.

Personal copy · kamjunhao@gmail.com

QUESTION 270

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol runs over TCP port 23?

A SSH

B NETCONF

C HTTP

D Telnet

Personal copy · kamjunhao@gmail.com

QUESTION 271

Issued to kamjunhao@gmail.com · October 17, 2026

Which two details are captured from the subnet mask? (Choose two.)

A portion of an IP address that refers to the subnet

B default gateway of the host

C unique number ID assigned to the host

D part of an IP address that refers to the host

E network connection of a host or interface

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

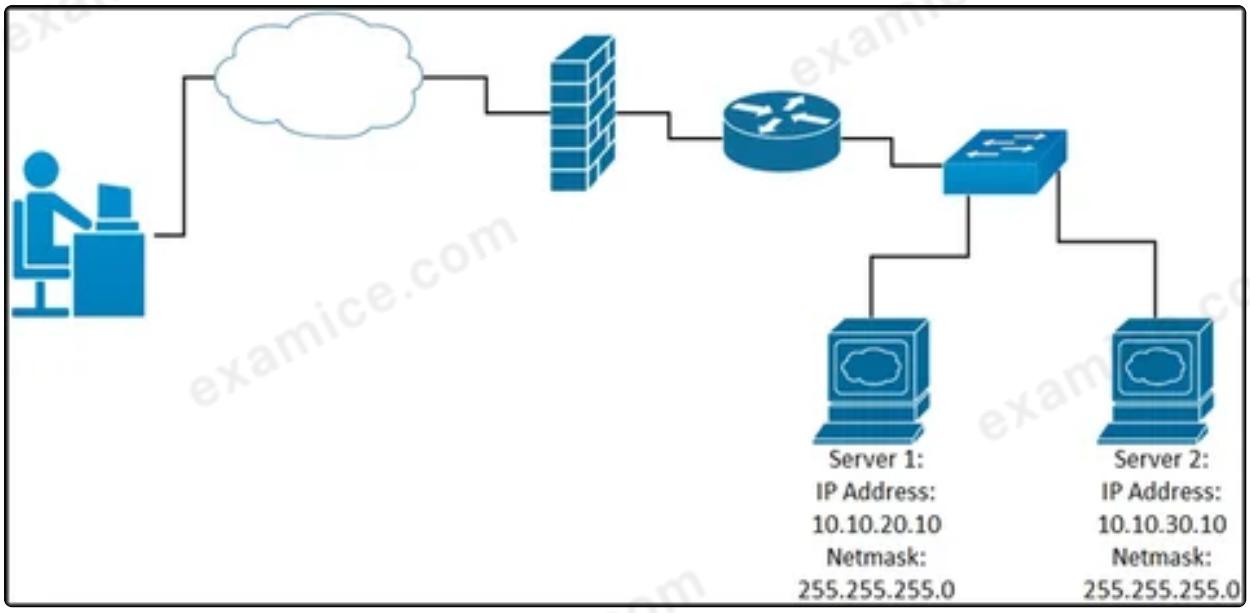

Refer to the exhibit. While developing a Cisco Webex bot, an application reaches the public IP address of the firewall, but traffic is forwarded to the IP address of **server 1** instead of the IP address of **server 2**. What causes this issue?

A The proxy server that rewrites traffic is misconfigured.

B The router is sending the traffic to server 1 instead of server 2.

C The switch is forwarding IP traffic to the wrong VLAN.

D NAT is misconfigured on the firewall.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Developer is working on a new feature and made changes on a branch named **branch-413667549a-new**. When merging the branch to production, conflicts occurred. Which Git command must the developer use to recreate the pre-merge state?

A git merge λ€"no-edit

B git merge λ€"commit

C git merge λ€"revert

D git merge λ€"abort

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A company wants to automate the orders processed on its website using API. The network device that supports the solution must:

- support XML encoding
- support distributed transactions
- support YANG data models
- be support software redundancy

Which requirement prevents the use of RESTCONF for the solution?

A software redundancy

B YANG data models

C distributed transactions

D XML encoding

Personal copy · kamjunhao@gmail.com

DRAG DROP

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script by using the Cisco SDK. Not all options are used.

```
import sys, json, argparse
from intersight.intersight_api_client import IntersightApiClient
from intersight.apis import asset_device_registration_api, asset_device_claim_api

result = dict(changed=False)

parser = argparse.ArgumentParser()
parser.add_argument('-a', '--api_params', default='intersight_api_params.json')
parser.add_argument('-t', '--target_host', dest='hostname', required=True)
args = parser.parse_args()
with open(args.api_params, 'r') as api_file:
    intersight_api_params = json.load(  [          ]  )
api_instance = IntersightApiClient(
    host=intersight_api_params['  [          ]  '],
    private_key=intersight_api_params['api_private_key_file'],
    api_key_id=intersight_api_params['api_key_id'],
)
api_handle = asset_device_registration_api.AssetDeviceRegistrationApi(api_instance)

kwargs = dict(filter="ConnectionStatus eq 'Connected'")
[          ]  = api_handle.asset_device_registrations_get(** [          ]  )
for device in api_result.results:
    if device.device_ip_address[0] == args.hostname:
        api_handle = asset_device_claim_api.AssetDeviceClaimApi(api_instance)
        api_handle.asset_device_claims_moid_delete(moid=device.device_claim.moid)
        result['changed'] = True
        break
```

kwargs	args	api_file	api_key	api_base_uri	result
api_result					

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the functions from the left onto the networking devices on the right.

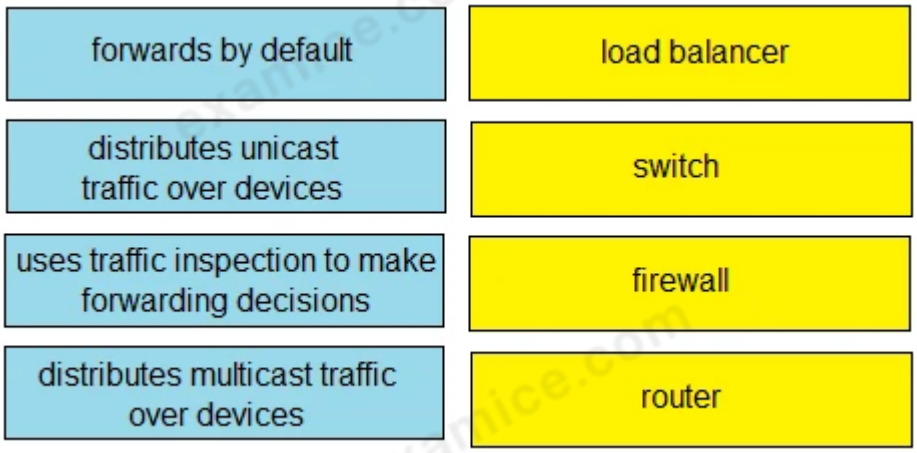

Which technology is responsible for resolving a host name to an IP address?

A DNS

B SNMP

C DHCP

D NTP

Issued to kamjunhao@gmail.com · October 17, 2026

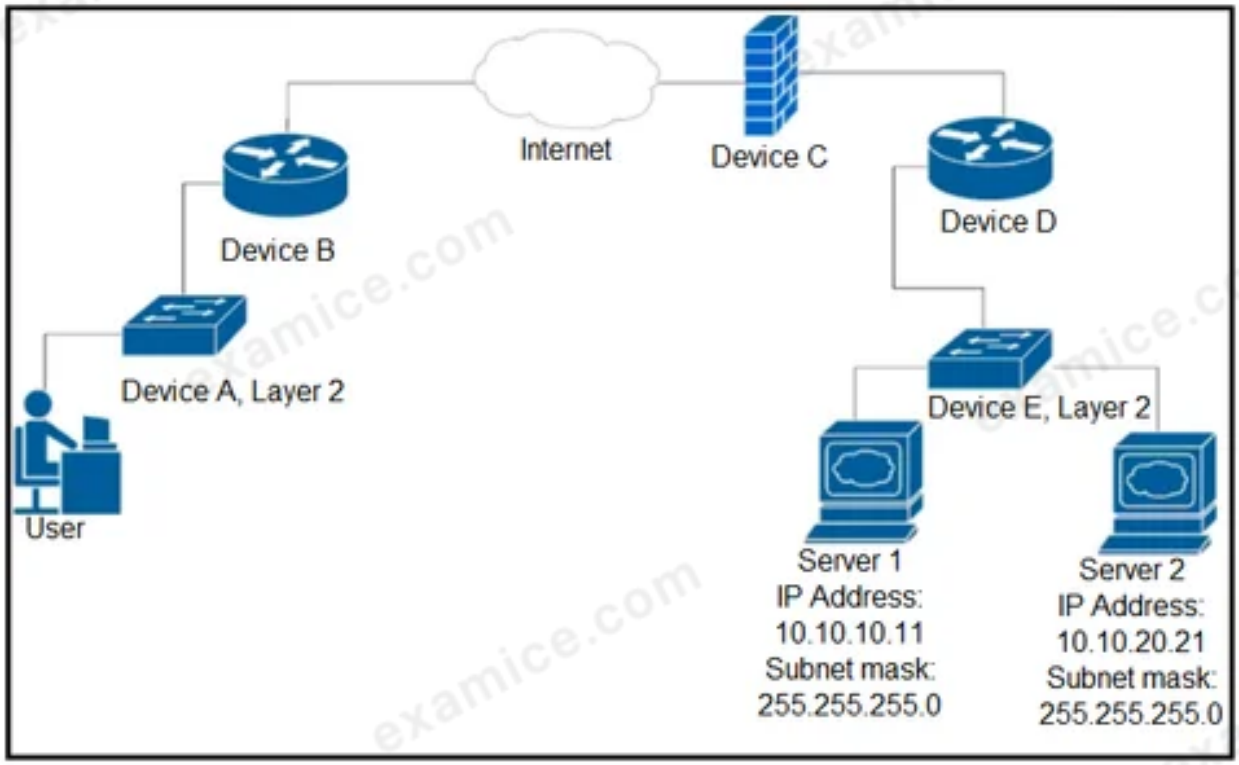

Refer to the exhibit. Up to which device does the communication server 1 and server 2 go?

A device B

B device C

C device D

D device E

Personal copy · kamjunhao@gmail.com

```
url = 'https://api.amp.cisco.com/v1/computers'
response = session.get (url)
response_json = response.json ()

for item in response_json ['data'] :
     print (item['connector_guid'], item['hostname'])

while 'next' in response_json['metadata'] ['links']:
    [                                                ]
    response = session.get (next_url)
    response_json = response.json()
    for item in response_json['data']:
         print(item['connector_guid'], item['hostname'])
```

Refer to the exhibit. An engineer sends the request to collect data over Cisco AMP for Endpoints API. The Engineer must list guide and hostname data for all computers, but the first request returns only 500 items out of 2,000. Then, the engineer adds the loop to collect all the data. What must be added to the script where the code is missing to complete the requests?

A `next_url = response_json ['metadata'] ['links'] ['next']`

B `next_url = response_json ['metadata'] ['next']`

C `next_url = response_json ['next']`

D `next_url = response_json ['metadata'] ['links']`

QUESTION 280

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol is used for clock synchronization between network devices?

A FTP

B NNTP

C BGP

D NTP

QUESTION 281

Issued to kamjunhao@gmail.com · October 17, 2026

What is the meaning of the HTTP status code 204?

A request completed; new resource created

B server successfully processed request; no content returned

C standard response for successful requests

D invalid query parameters

Issued to kamjunhao@gmail.com · October 17, 2026

Which two commands download and execute an Apache web server container in Docker with a port binding 8080 in the container to 80 on the host? (Choose two.)

A docker pull apache

B docker run –p 8080:80 httpd

C docker run –p 80:8080 httpd

D docker pull httpd

E docker pull https

Issued to kamjunhao@gmail.com · October 17, 2026

A group of software developers wants to improve its collaboration with the operations team. The group wants to deliver release-ready code that merges code changes back to the main branch and runs the automated testing as often as possible. Which DevOps concept does this scenario represent?

A continuous delivery

B version control

C continuous integration

D continuous deployment

Personal copy · kamjunhao@gmail.com