Issued to kamjunhao@gmail.com · October 17, 2026

A developer is running an application that connects to the Cisco website and collects data. The application will be hosted in a local data center and the data will need to be collected on a frequent basis. The application client requires certain environmental variables to be set before the run. Which Bash command sets the environmental variables for a Linux system?

A `"cisco.com"=WEBSITE`

B `export lvar=23`

C `WEBSITE="cisco.com"`

D `export website="cisco.com"`

DRAG DROP

- -

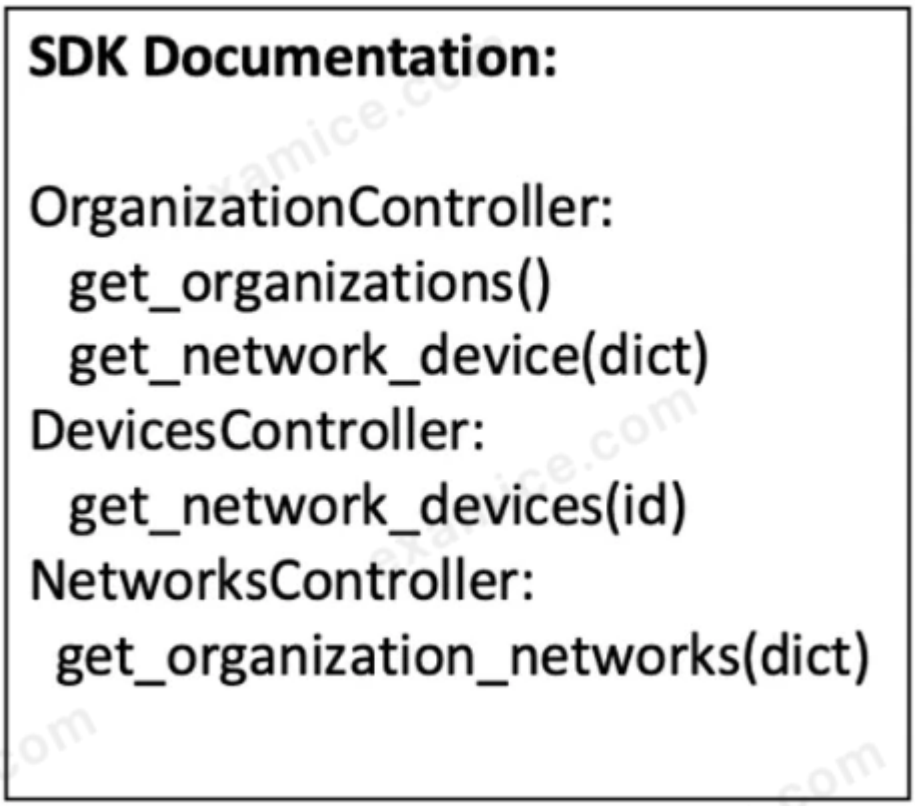

Refer to the exhibit. A script must output details of all the Cisco Meraki MS220-BP switches across all organizations and networks. Drag and drop the code snippets from the bottom onto the boxes in the code to complete the script. Not all options are used.

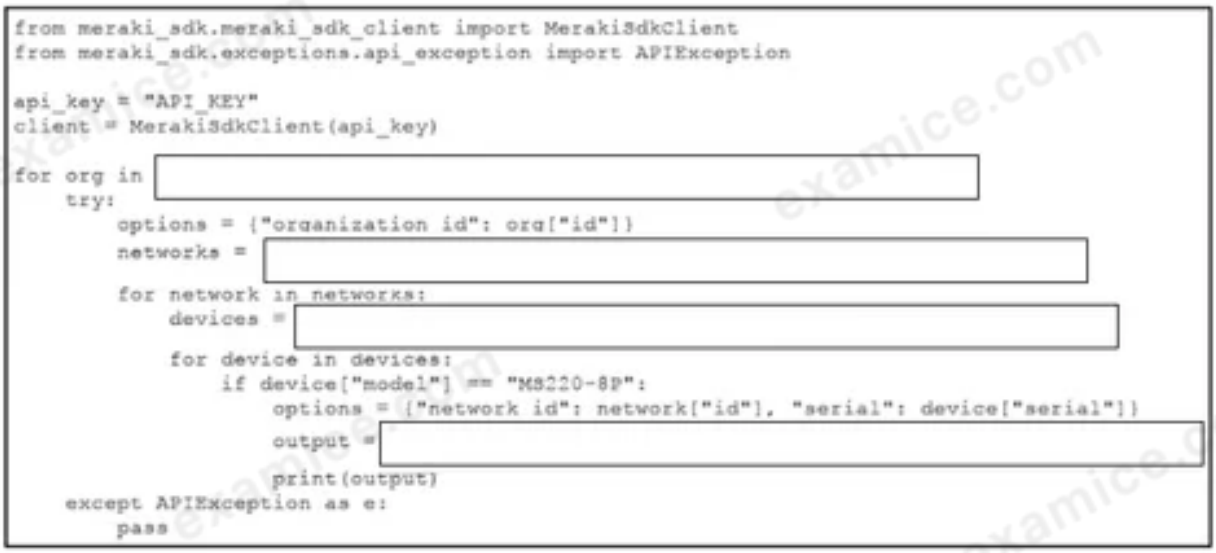

```
from meraki_sdk.meraki_sdk_client import MerakiSdkClient
from meraki_sdk.exceptions.api_exception import APIException

api_key = "API_KEY"
client = MerakiSdkClient(api_key)

for org in [                                                    ]
    try:
        options = {"organization_id": org["id"]}
        networks = [                                                    ]
        for network in networks:
            devices = [                                                    ]
            for device in devices:
                if device["model"] == "MS220-8P":
                    options = {"network_id": network["id"], "serial": device["serial"]}
                    output = [                                                    ]
                    print(output)
    except APIException as e:
        pass
```

client.organizations.get_organizations():

client.networks.get_organization_networks(api_key)

client.networks.get_organization_networks(options)

client.devices.get_network_devices(network ["id"])

client.devices.get_network_device(options=options)

client_devices.get_network_device(device ["model"])

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

```
URL: https://example.com/restconf/data/Cisco-IOS-XE-native:native/logging/monitor
Method: POST

Headers: {'Content-type': 'application/yang-data+json', 'Accept': 'application/yang-data+json,
* application/yang-data.errors+json'}

Body:

{
   "severity": "alerts"
}
```

Refer to the exhibit. Which HTTP code is returned after the RESTCONF query is executed?

A 201

B 204

C 302

D 304

Personal copy · kamjunhao@gmail.com

DRAG DROP

-

Drag and drop the code snippets from the bottom onto the blanks in the code to complete the happy path scenario. Not all options are used.

```
import member as m
import pytest
class Team:
    def __init__(self, name):
        self.name = name
        self.members = []
    def add_member(self, member):
        if member:
            if member not in self.members:
                [          ]
                    return True
            else:
                [          ]
        else: [          ]
@pytest.fixture
def team():
    team = Team('Reds')
    yield team
    del team
@pytest.fixture
def member():
    member = m.Member('Chris George')
    yield member
    del member
@pytest.mark.usefixtures('team', 'member')
class TestHappyPathAddMemberToTeam:
    def test_add_member_to_team(self, team, member):
     assert [          ] is True
```

return True
team.add_member(member)
self.members.append(member)
yield member
return False
member.add_member()

Issued to kamjunhao@gmail.com · October 17, 2026

Which traffic is handled on the control plane?

A BGP

B SMB

C NTP

D NETCONF

Personal copy · kamjunhao@gmail.com

```
- name: Configure Interfaces
  with_items: "{{interfaces}}"
  netconf_config:
  <<: *host_info
  xml: |
    <config>
      <interfaces xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces">
        <interface>
          <name>{{item.interface_type}}{{item.interface_id}}</name>
          <description>{{item.description}}</description>
          <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
          type">ianaift:ethernetCsmacd</type>
          <enabled>true</enabled>
          <ipv4 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip">
            <address>
              <ip>{{item.ip_address}}</ip>
             <netmask>{{item.subnet_mask}}</netmask>
            </address>
          </ipv4>
        </interface>
      </interfaces>
    </config>
```

Refer to the exhibit. A network engineer must configure new interfaces on a set of devices and is planning to use an Ansible playbook for the task. All devices support SSH and NETCONF protocol, and the interface variables are unique per device. In which directory are the YAML files including variables hosted to automate the task with the netconf_config module?

A current working directory

B host_vars directory

C group_vars directory

D home directory

QUESTION 290

Issued to kamjunhao@gmail.com · October 17, 2026

Which standard supported by Cisco IOS XE and Cisco NX-OS is used for automating the configuration of multiple devices across a network?

A SNMP – YANG

B SYSLOG – YANG

C CLI – YANG

D NETCONF – YANG

Personal copy · kamjunhao@gmail.com

QUESTION 291

Issued to kamjunhao@gmail.com · October 17, 2026

A developer has addressed a bug that was found in the production code of an application. A separate file named 'bug427896191v_fix" has been created with the changes to the code. Which Git command must be used to incorporate the bug fix into the production code?

A git rebase

B git cat-file

C git merge-file

D git bisert

Personal copy · kamjunhao@gmail.com

QUESTION 292

Issued to kamjunhao@gmail.com · October 17, 2026

What is a principle of a code review process?

A Changes are made after the code is submitted to source control.

B It must not prevent code from getting into production as quickly as possible.

C Naming standards must be consistent.

D A technical lead must sign off on the review.

Personal copy · kamjunhao@gmail.com

QUESTION 293

Issued to kamjunhao@gmail.com · October 17, 2026

Why would a developer compare a current version of code to a previous version?

A to provide the single source of truth

B to troubleshoot code failures

C to track who made a change

D to aid in collaboration

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco platform is used to manage data center infrastructure through third-party tools and system integrations?

A Cisco DNA Center

B Cisco UCS Manager

C Cisco Intersight

D Cisco UCS Director

Personal copy · kamjunhao@gmail.com

```
HTTPS/1.1 201 Created
 Date: Tue, 08 Nov 2020 09:37:27 GMT
 Server: example-server
 Location: https://example.com/restconf/data\
           example-jukebox/library/dogbreed=Australian%20Cattle%20Dog
 Last Modified: Tue 08 Nov 2020 09:37:27 GMT
 ETag: "s1878124t4c"
```

Refer to the exhibit. Which RESTCONF request results in this response?

A

```
GET /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example-jukebox:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
      ]
   }
```

B

```
CONFIG /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example-jukebox:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
     ]
  }
```

C

```
PUT /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example-jukebox:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
     ]
  }
```

D

```
POST /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
     ]
  }
```

Personal copy · kamjunhao@gmail.com

```
$ find /home/user/backup -mtime +30 -type f -print
$ find /home/user/backup -mtime +30 -type f -delete
```

Refer to the exhibit. An engineer is managing the network of an enterprise. The network is using a distributed deployment model. The enterprise uses database to store logs. The current policy requires logs to be stored if changes are made to the infrastructure in any of the devices on the data centers. Which workflow is being automated by the Bash script?

A returning backup files that are older than 30 days

B deleting backup files that are older than 30 days

C configuring the directory to delete files automatically

D automating deletion of all backup files every 30 days

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the Python script to retrieve a list of network devices from Cisco DNA Center. Not all options are used.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of RPC APIs compared to REST APIs?

A Authentication is done over provisions for the service caller and vice versa for RPC API, and REST API uses HTTP headers for authentication.

B All communications between the client and server must be stateless for RPC API, and REST API is stateful.

C The architecture model for RPC API is resource-focused, and REST API is procedure-focused.

D The data payload must be in JSON format for RPC API, and REST API allows JSON and XML formats.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which two situations align with infrastructure as code principles? (Choose two.)

A nonreplicable snowflake servers

B release versions to specific hardware

C maximized configuration drift

D easily reproducible systems

E repeatable processes

Personal copy · kamjunhao@gmail.com

```
import requests, json
url = https://sandboxdnac.cisco.com:443/dna/intent/api/v1/3daa70bdcd5b
headers = {
    'x-auth-token': 'eyJhbGc  ...  yJbN8',
    'Content-Type': 'application/json',
}
payload = {
    "settings": {
        "dhcpServer": ["172.30.200.5"],
        "dnsServer": {
            "domainName": "devnet.local",
            "primaryIpAddress": "172.30.200.6",
            "secondaryIpAddress": "172.30.200.7"},
        "syslogServer": {"ipAddresses": ["10.255.0.1"], "configureDnacIP": True}
    }
}
response = requests.request('POST', url, headers=headers, data=payload)
print(response.status_code)
```

Refer to the exhibit. A developer writes a script to create a new network by using the Cisco DNA Center API. After running the script for the first time, the developer observes that HTTP code 404 is printed to the console. Which action resolves the problem?

A The x-auth-token value must be changed to a valid token.

B The API URL must be changed with a valid URL.

C The requested payload must be fixed to include missing parts.

D Internal errors on the code of API server must be fixed.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer plans to deploy a new application that will use an API to implement automated data collection from Webex with these requirements:

- The application was created by using the request library.
- Requires HTTP basic authentication.
- Provides data in JSON or XML formats.

Which Cisco DevNet resource helps the developer with how to use the API?

A DevNet sandbox

B API documentation

C forums

D DevNet code exchange

QUESTION 302

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer deploys a Cisco CSR 1000 V instance to a virtual machine. The engineer must output the device configuration in JSON format. Which protocol is used for this task?

A YANG

B NETCONF

C SNMP

D RESTCONF

Personal copy · kamjunhao@gmail.com

Q302 · October 17, 2026

QUESTION 303

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of implementing common data structures when working with APIs in remote systems? (Choose two.)

A ensures that developers are limited to using one data schema type

B prevents multivendor interoperability

C improves security in RESTful web services

D enforces standardized data structures

E leverages code that is easily managed and reused

Personal copy · kamjunhao@gmail.com

Q303 · October 17, 2026

Issued to kamjunhao@gmail.com · October 17, 2026

A development team is creating an application used for contactless payments. The application must:

- Be web-based
- Capture and process the credit card information for a purchase.

Which security action must the web application use to gather and process the private customer data?

A Enable RATs to monitor the web application remotely.

B Disable botnets to eliminate risks.

C Disable TLS to increase the connection speed.

D Enable the encryption of network traffic.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer needs to collect information about 20,000 Bluetooth clients using the Cisco Meraki API. The API returns only 1,000 results. One of the HTTP response headers has the data:

Link: https://api.meraki.com.info/api/v0/networks/ABC/bluetoothClients?perPage=1000&startingAfter=1000>;rel="next"

Which RFC is implemented by the API to apply the restriction?

A RFC 5988 – Web Linking

B RFC 5890 – Response Constraints

C RFC 5005 – Feed Paging and Archiving

D RFC 5446 – Content Limits

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of using classes over functions when writing applications? (Choose two.)

A improved readability

B increased compatibility

C variable reusability

D increased performance

E code organization

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the steps from the left into order on the right to create a common CI/CD pipeline process. Not all options are used.

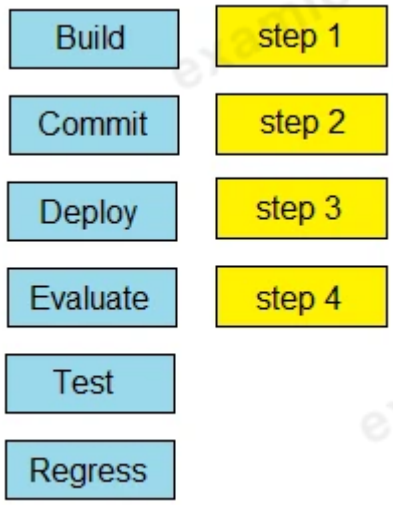

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to obtain a list of network devices by using the Cisco Meraki API. Not all options are used.

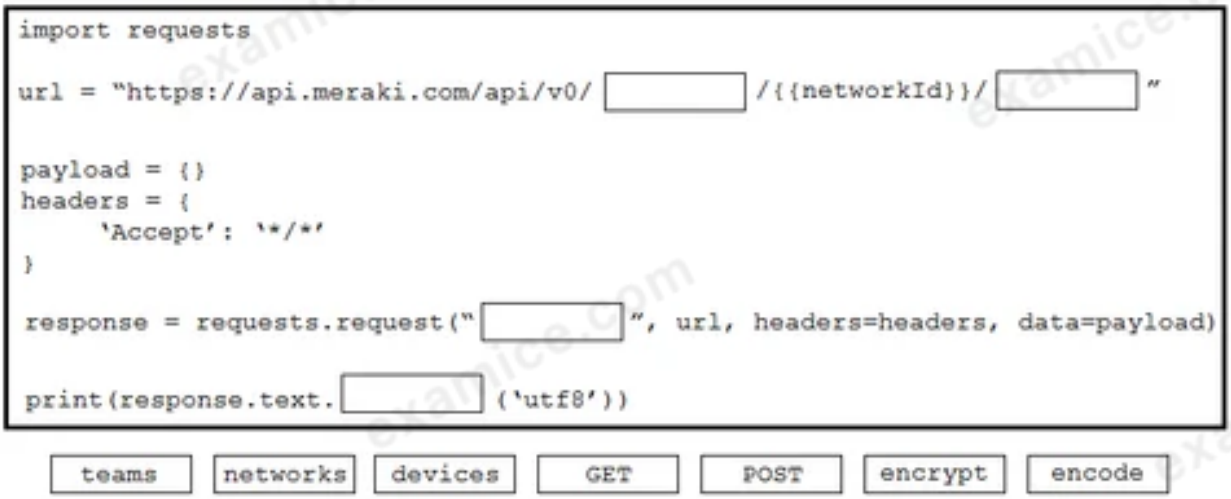

A developer creates a new application, but the application must be tested before being released to a customer. When a mobile phone that uses 4G is used to access the application, the request fails. Why does the connection to the application fail?

A The application is hosted on premises and VPN connectivity is required

B The application must be added to the production server before testing.

C The application must be moved to the cloud before testing is possible.

D The application connectivity is limited to HTTPS protocol.

Which platform has an API that has the capability to obtain a list of vulnerable software on user devices?

A Cisco Advanced Malware Protection

B Cisco Umbrella

C Cisco Identity Services Engine

D Cisco Firepower

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates an application that must provide an encrypted connection or API keys. The keys will be used to communicate with a REST API. Which command must be used for the secure connection?

A curl –X PUSH 'http://username.app.com/endpoint/?api_key=12345abcdef'

B curl –v 'ftp://username.app.com/endpoint/?api_key=12345abcdef'

C curl –X GET 'https://username.app.com/endpoint/?api_key=12345abcdef'

D curl –X GET 'http://username.app.com/endpoint/?api_key=12345abcdef'

Personal copy · kamjunhao@gmail.com

QUESTION 312

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is developing a web application that uses username and password to authenticate to the next service. The user credentials must be available at any time in the application. The developer must choose and implement a **secure** method of storing the authentication credentials that are used in the automation code. Which password handling method must be used to minimize the security risk?

A Store the username and password in a separate configuration file.

B Store the username and password in a vault.

C Store the passwords in a dictionary.

D Store the username and password in code.

Personal copy · kamjunhao@gmail.com

Q312 · October 17, 2026

QUESTION 313

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of the AXL API?

A It signs a user in to a phone that is configured for extension mobility.

B It pulls logs for the Cisco Tomcat service.

C It authenticates users who exist in Cisco Unified Communications Manager.

D It provides support for HTTP and HTTPS communications.

Personal copy · kamjunhao@gmail.com

Q313 · October 17, 2026

QUESTION 314

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a program in which an object maintains a list of classes based on the observer pattern. The classes are dependent on the object. Whenever the state of the object changes, it notifies the dependent classes directly through callbacks. Which advantage of the observer pattern offers **minimum** dependencies and maximum flexibility between dependent objects or classes?

A tight coupling

B cohesion

C mediation

D loose coupling

Personal copy · kamjunhao@gmail.com

QUESTION 315

Issued to kamjunhao@gmail.com · October 17, 2026

What is a feature of XML compared to other data formats?

A It uses tags to define the structure.

B It uses parenthesis for key-value pairs.

C It uses indentation to define the structure.

D It uses namespaces for list representation.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

```
FROM myImage
VOLUME ["/data"]
ENRYPOINT ["/bin/sh"]
```

Refer to the exhibit. Drag and drop the actions from the left that the contents of this Dockerfile accomplish onto the right. Not all options are used.

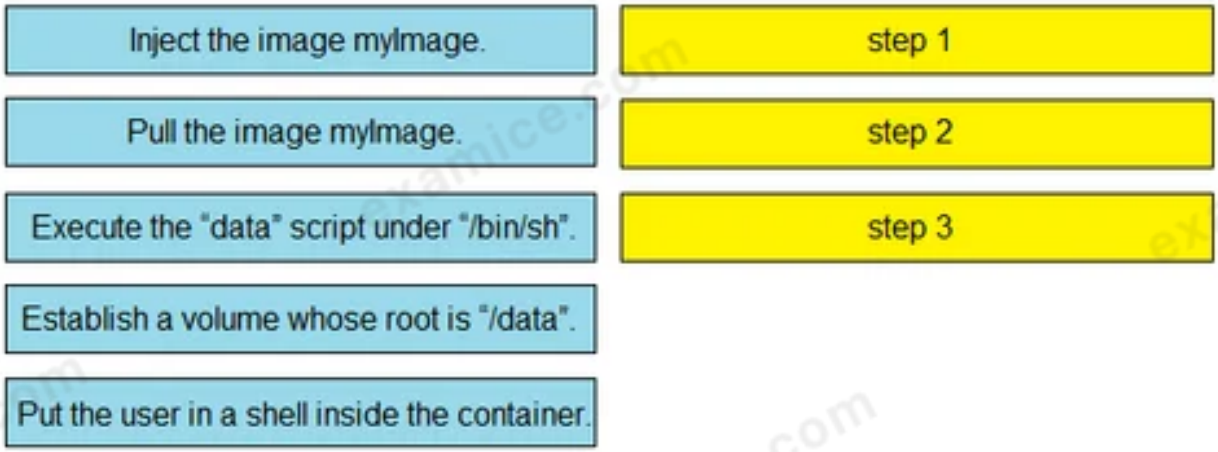

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of Ansible playbooks?

A They execute scheduled tasks regularly.

B They define the state for a device configuration.

C They collect SNMP logs from networking devices.

D They utilize the target device agent to execute.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

get_interface_info_by_id(*device_id, headers=None, **request_parameters*) [source]

Returns list of interfaces by specified device.

Parameters

- **device_id** (*basestring*) – Device ID.
- **headers** (*dict*) – Dictionary of HTTP Headers to send with the Request .
- ****request_parameters** – Additional request parameters (provides support for parameters that may be added in the future).

Returns

JSON response. Access the object's properties by using the dot notation or the bracket notation.

Return type

MyDict

Raises

- TypeError – If the parameter types are incorrect.
- MalformedRequest – If the request body created is invalid.
- ApiError – If the DNA Center cloud returns an error.

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to return the number of interfaces on a network device by using the Cisco DNA Center SDK. Not all options are used.

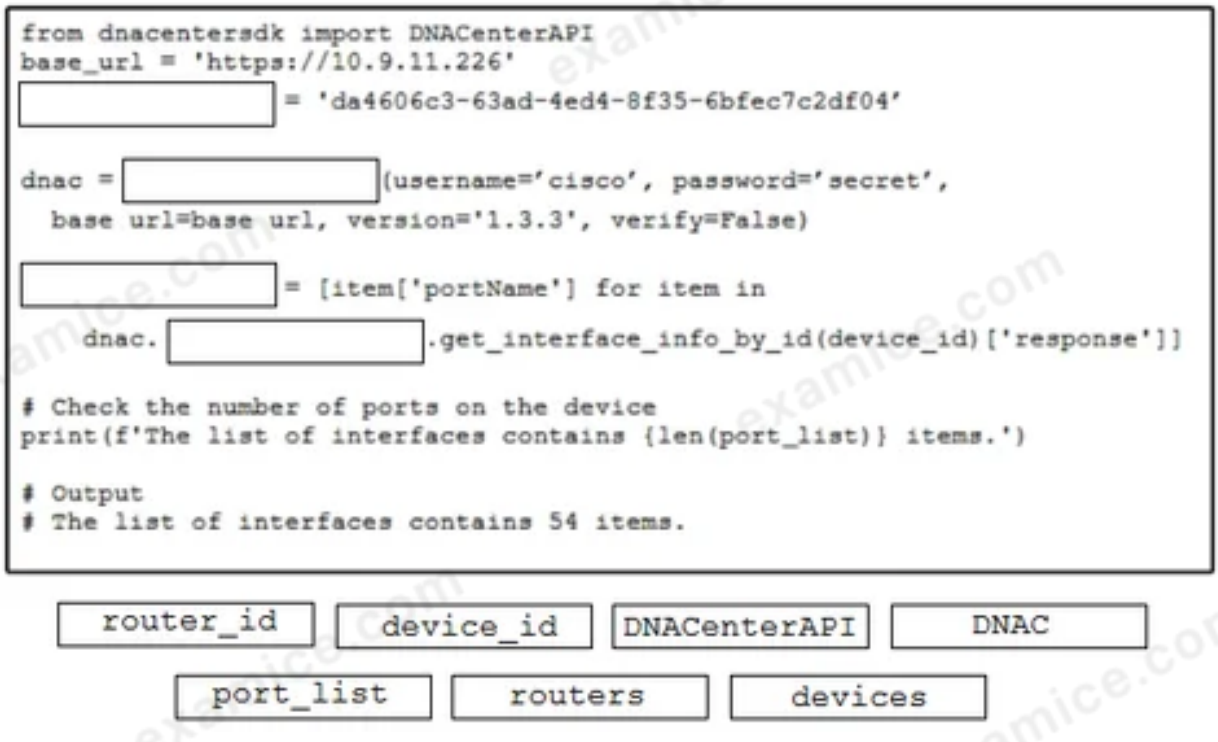

```
from dnacentersdk import DNACenterAPI
base_url = 'https://10.9.11.226'
[          ] = 'da4606c3-63ad-4ed4-8f35-6bfec7c2df04'

dnac = [          ](username='cisco', password='secret',
  base_url=base_url, version='1.3.3', verify=False)

[          ] = [item['portName'] for item in
    dnac.[          ].get_interface_info_by_id(device_id)['response']]

# Check the number of ports on the device
print(f'The list of interfaces contains {len(port_list)} items.')

# Output
# The list of interfaces contains 54 items.
```

router_id | device_id | DNACenterAPI | DNAC

port_list | routers | devices

QUESTION 319

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of running tests before writing code in test-driven development?

A to find unexpected failures in the tests

B to demonstrate that the tests fail for expected reasons

C to ensure that the tests pass

D to provide proof of the work carried out

Personal copy · kamjunhao@gmail.com

QUESTION 320

Issued to kamjunhao@gmail.com · October 17, 2026

Which port does HTTPS use by default?

A 433

B 443

C 803

D 883

Personal copy · kamjunhao@gmail.com

QUESTION 321

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP method is used by webhooks and notifies a listener about an event change?

A PUT

B POST

C PATCH

D GET

Personal copy · kamjunhao@gmail.com

QUESTION 322

Issued to kamjunhao@gmail.com · October 17, 2026

A developer completed the creation of a script using Git. Before delivering it to the customer, the developer wants to be sure about all untracked files, without losing any information. Which command gathers this information?

A git clean –n

B git rm –f

C git clean –r

D git rm *

Personal copy · kamjunhao@gmail.com

QUESTION 323

Issued to kamjunhao@gmail.com · October 17, 2026

A company deploys an application via containers in its local data center. As soon as the application goes into production, it starts to crash at specific hours of the day. After investigation, it is concluded that the crashes are due to too many users accessing the application simultaneously. The spikes must be addressed and allow for future growth without discarding the investment already made. Which deployment model must be used?

A hybrid cloud

B edge

C private cloud

D public cloud

Personal copy · kamjunhao@gmail.com

QUESTION 324

Issued to kamjunhao@gmail.com · October 17, 2026

Which TCP port is used to connect to a network device by using Telnet?

A 23

B 69

C 400

D 830

Personal copy · kamjunhao@gmail.com

```
Import requests
def main():
    def getCreds():
        user = input('User: ')
        pwd = Getpass('Pass: ')
        return (user,pwd)

    def login(ipaddr,user,pwd):
        url = "https://{ipaddr}/api/aaaLogin.json".format(ipaddr=ipaddr)
        data = '{"aaaUser":{"attributes":{"name":"%(user)s","pwd":"%(pwd)s"}}}'
        % {"pwd":pwd,"user":user}
        response = requests.post(url,data=data,verify=False)
        cookie = response.headers['Set-Cookie']
        return cookie

    def getstuff(ipaddr,cookie):
        headers = {"Cookie":cookie}
        url = "https://{ipaddr}/api/node/class/
        fvTenant.json".format(ipaddr=ipaddr)
        response = requests.get(url,headers=headers,verify=False)
        grouplist = []
        for x in response.json()["imdata"]:
            grouplist.append(x["fvTenant"]["attributes"]["name"])
        return ','.join(grouplist)

    ipaddr = "192.168.255.2"
    user,pwd = getCreds()
    token = login(ipaddr,user,pwd)
    return getstuff(ipaddr,cookie)

if __name__ == '__main__':
    result = main()
    print(result)
```

Refer to the exhibit. Which action does the script perform?

A It queries user credentials from Cisco IOS XE devices.

B It retrieves device identification from Cisco DNA Center.

C It exports SSID information from Meraki dashboard.

D It collects group information from ACI.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of grouping devices in a VLAN?

A Devices communicate as if they are connected on the same wire.

B Multicast network traffic is limited to the VLAN connected devices.

C Unicast messages are limited to the clients connected on the same VLAN.

D Network traffic is load balanced between the devices connected to the VLAN.

Personal copy · kamjunhao@gmail.com

```
---
param0: Workflow1
param1:
  list:
  - name: VLAN_ID
    value: '198'
param2: 0
```

Refer to the exhibit. The YAML shown contains an object "param0" that is equal to "Workflow1", a second object "param1" that contains an object called "list" which contains an array of two objects, "name" (equal to "VLAN_ID") and "value" (equal to a text value "198"), and finally a third object "param2" that is equal to "0". What is the equivalent message in JSON data format?

A
```
[
"param0"="Workflow1";
 "param1"=
   "list"=
          ["name"="VLAN_ID";
           "value"="198"]
"param2"=0
]
```

B
```
{
"param0":"Workflow1";
 "param1": {
   "list":
      [
         {"name":"VLAN_ID";
          "value":"198"}
      ]
   },
"param2":0
}
```

C

```
[
"param0":"Workflow1",
 "param1": [
   "list":
      {
         ["name":"VLAN_ID",
          "value":"198"]
      }
   ],
"param2":0
]
```

D

```
[
"param0":"Workflow1",
 "param1": {
   "list":
      [
         {"name":"VLAN_ID",
          "value":"198"}
      ]
   },
"param2":0
}
```

Personal copy · kamjunhao@gmail.com

QUESTION 328

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer prepares a set of Python scripts to interact with network devices. To avoid network performance issues, the engineer wants to run them in a test environment. Which resource must be used to monitor the live execution of code in an always-available environment?

A packet tracer

B learning labs

C sandbox

D code exchange

Personal copy · kamjunhao@gmail.com

QUESTION 329

Issued to kamjunhao@gmail.com · October 17, 2026

When a Cisco IOS XE networking device is configured by using RESTCONF, what is the default data encoding method?

A application/yaml-data+json

B application/yang-data+json

C application/xml-data+json

D application/json-data+xml

Personal copy · kamjunhao@gmail.com

```
api_endpoint = f"https://veryusefulapi/v2/authenticate"

headers = {
    "Authorization": "Basic YWRtaW46c3VwZXJzZWNyZXQ="
    "Accept": "application/json"
}

req = requests.get(api_endpoint, headers=headers)
```

Refer to the exhibit. A developer is part of a team that is working on an open-source project in which source code is hosted in a public GitHub repository. While the application was built, security concerns were addressed by encrypting the credentials on the server. After a few months, the developer realized that a hacker managed to gain access to the account. The exhibit contains part of the source code for the login process. Why was the attacker able to access the developer's account?

A The encoded credentials were available in the source code.

B The application was not encrypting the communication with the server.

C The credentials were encrypted in the source code.

D An SSL certificate was used instead of the TLS protocol to authenticate.

QUESTION 331

Issued to kamjunhao@gmail.com · October 17, 2026

Which technology is responsible for matching a name to an IP address of an application running on a host?

A firewall

B proxy

C load balancer

D DNS

Personal copy · kamjunhao@gmail.com

QUESTION 332

Issued to kamjunhao@gmail.com · October 17, 2026

Which network constraint causes the performance of the application to decrease as the number of users accessing the application increases?

A latency

B loss

C bandwidth

D jitter

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

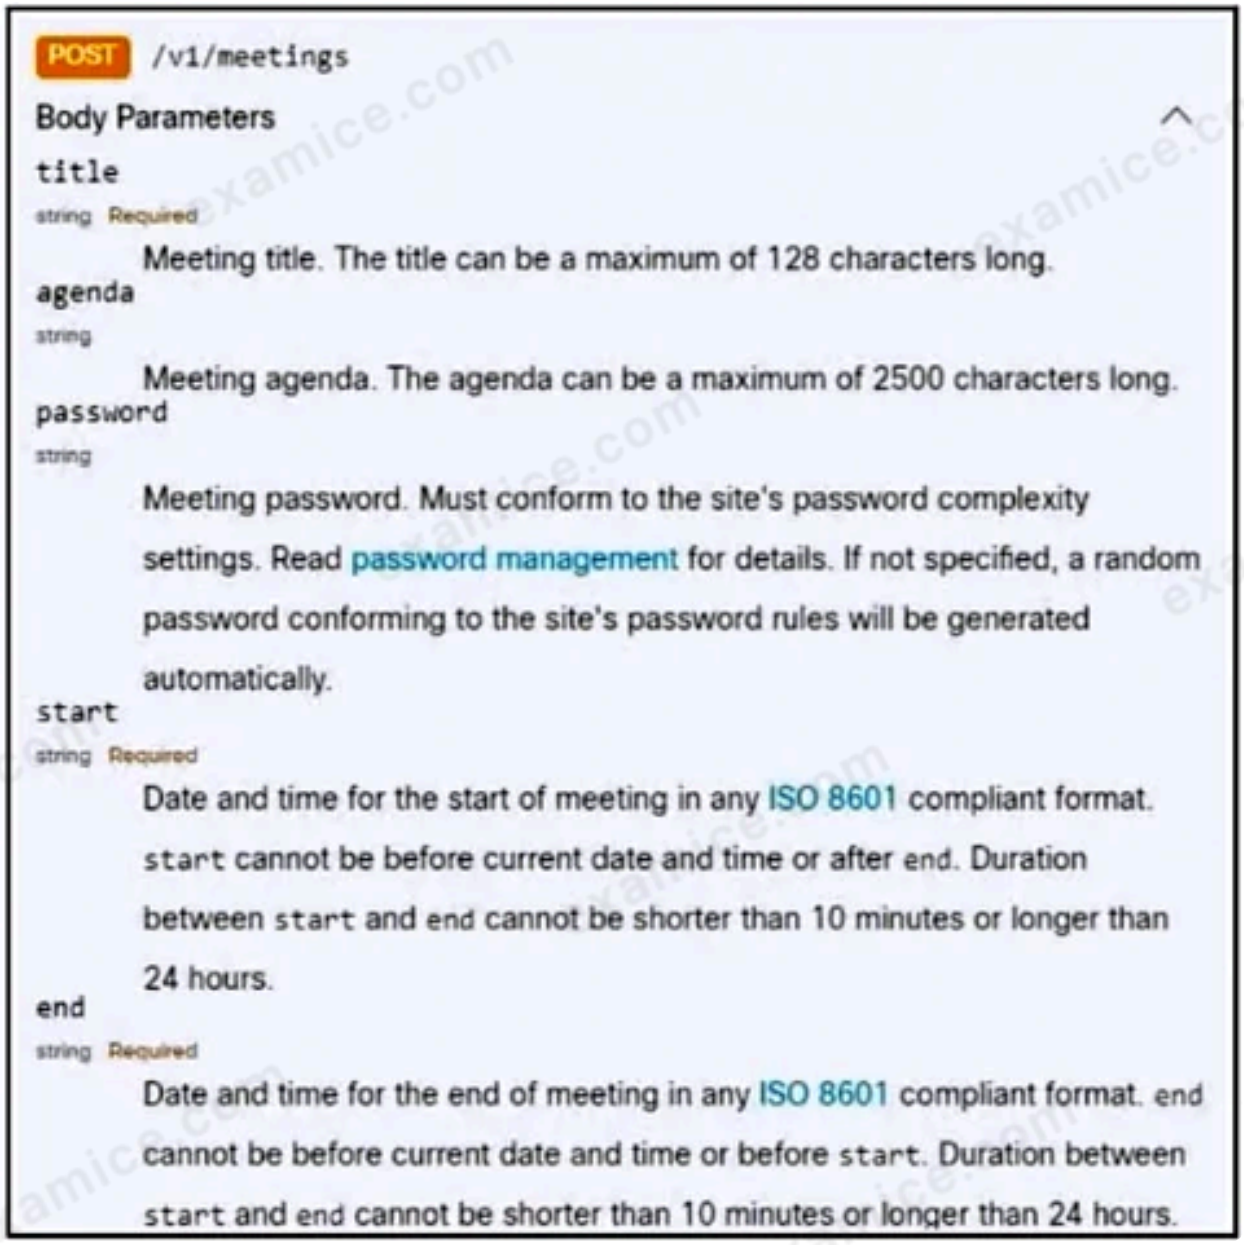

Refer to the exhibit. A bespoke meeting booking system must be integrated with Cisco Webex so that meetings are created automatically. Drag and drop the code from the bottom onto the box where the code is missing to create a sample meeting. Not all options are used.

Answer Area

```
import requests, json

[          ] = 'eyJhbGc  ...  yJbN8'

headers = {
  'Authorization': f'Bearer {token}',
  'Content-Type': 'application/json'
}

payload = {
    "title": "DevNet Webex Discussion",
    "password": "AGrtg1234",
    "start": "2020-11-10T15:00:00Z",
    "end": "2020-11-10T17:00:00Z",
    "enabledAutoRecordMeeting": False,
    "allowAnyUserToBeCoHost": False
}

response = requests.request(" [          ] ", f'{BASE_URL}/ [          ] ',
  headers=headers, data=json.dumps( [          ] ))
print(response.text.encode('utf8'))
```

payload	PUT	token
v1/meeting	v1/meetings	POST

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of Waterfall compared to Agile software development method?

A Waterfall focuses on continuous improvement, and Agile focuses on the design phase.

B Waterfall separates the project development lifecycle into sprints, and Agile does not use cycles.

C Waterfall specifies requirements before development begins, and Agile responds flexibly to changes in requirements.

D Waterfall uses reviews with step by step approach, and Agile uses a serially phased approach.

Issued to kamjunhao@gmail.com · October 17, 2026

Users cannot access a webserver and after the traffic is captured, the capture tool snows an ICMP packet that reports "time exceeded in-transit". What is the cause of this webserver access issue?

A The large distance between the server and the users means that the packets require too much time to reach the destination.

B A router along the path is misrouting the packets in a wrong direction.

C A router along the path has the wrong time.

D The server is overloaded and the connection was not able to be processed in time.

```
--- functions.py   2020-09-26 14:26:25.000000000 -0600
+++ new.py 2020-09-26 14:26:10.000000000 -0600
@@ -21,7 +21,7 @@
 def print_devices_info(devices):
     # Print id, hostname and management IP
     for item in devices:
-        print(item['id'], item['hostname'], item['managementIpAddress'])
+        print(item['id'], item['hostname'])

 # Get Authentication token
 def get_dnac_jwt_token():
@@ -66,9 +66,15 @@
     response = get_devices_list(headers, {})
     print_devices_info(response)

+    # print devices list filtered by hostname
+    print('\nPrinting device list filtered by hostname ...')
+    query_string_params = {'hostname': 'CSR1Kv-01.devnet.local'}
+    response = get_devices_list(headers, query_string_params)
+    print_devices_info(response)
+
     # print devices list filtered by platform Id
     print('\nPrinting device list filtered by platform id...')
-    query_string_params = {'platformId': 'C9500-40X'}
+    query_string_params = {'platformId': 'AIR-AP1141N-A-K9'}
     response = get_devices_list(headers, query_string_params)
     print_devices_info(response)
```

Refer to the exhibit. An engineer is comparing two files by using the unified diff format. Which cade snippet belongs to the new.py file?

A
```
77 query_string_params = {'platformId':
'AIR-AP1141N-A-K9'}
```

B
```
21 print(item['id'], item['hostname']
```

C

```
24 print(item['id'], item['hostname'],
item['managementIpAddress'])
```

D

```
66 # print devices list filtered by
hostname
67 print('\nPrinting device list
filtered by hostname ...')
68 query_string_params = {'hostname':
'CSR1Kv-01.devnet.local'}
69 response = get_devices_list
(headers, query_string_params)
70 print_devices_info(response)
```

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

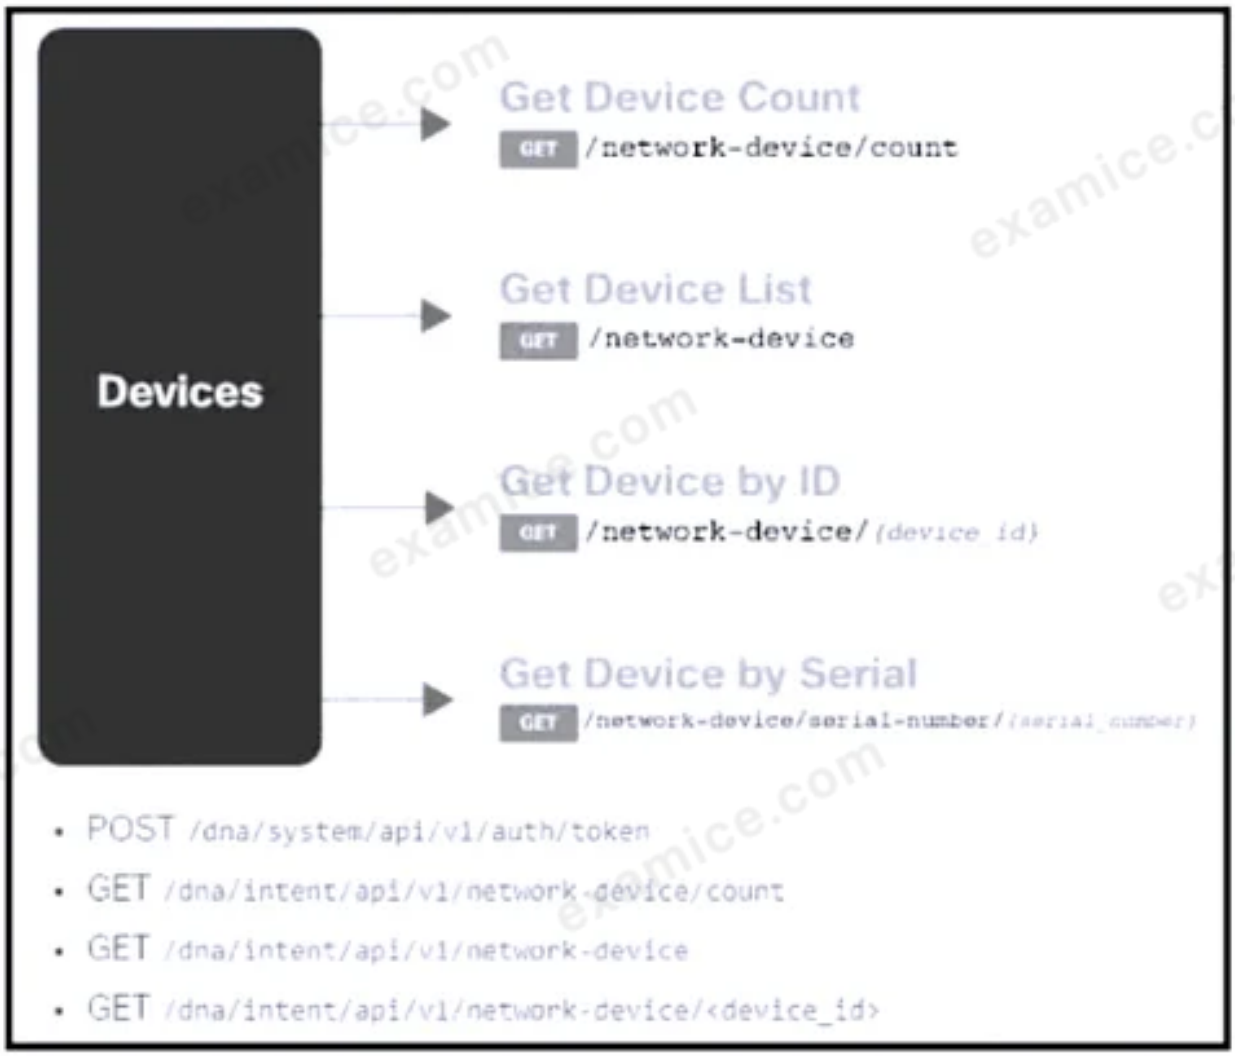

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a request that generates a security token and gets a list of network devices. Not all options are used.

Answer Area

```
import json, requests, urllib3
from requests.auth import HTTPBasicAuth
from config import host, username, password

headers = { 'content-type': "application/json", 'x-auth-token': "" }
def dna_api_auth(host, username, password):
    url = "https://{}/api/system/v1/auth/token".format(host)
    response = [          ] .post(url, auth=HTTPBasicAuth(username, password),
       headers=headers, verify=False)
    return response.json()["Token"]

def list_dna_devices(token):
    url = "https://{}/api/v1/network-device".format(host)
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = [          ] .json()
    for item in data['response']:
        print(item["hostname"])

token = [          ] (host, username, password)
[          ] (token)
```

response	reply	dna_api_auth	requests
json	list_dna_devices	list_devices	

Personal copy · kamjunhao@gmail.com

```
#! /bin/bash
apt-get update
apt-get -y install git
cd Code/Network_Config
mkdir PRODUCTION
cd PRODUCTION
touch state.yml
vi state.yml
```

Refer to the exhibit. A network engineer executes the bash script shown. Which two things are achieved by running the script? (Choose two.)

A A directory called PRODUCTION is created.

B The engineer changes to the parent directory.

C A YAML file is created.

D A YAML file is removed.

E A directory called state.yml is created.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. The Python script retrieves a list of tasks from a to-do list for effective project management purposes. Not all options are used.

Answer Area

```
import requests

response = [          ].get('https://todolist.example.com/tasks/')

if [          ].status_code != 200:
    raise ApiError('GET /tasks/ {}'.format(response.[          ]))

for item in response.json():
    print('{} {}'.format(item['id'], [          ]['summary']))
```

item	response
requests	get()
status_code	status

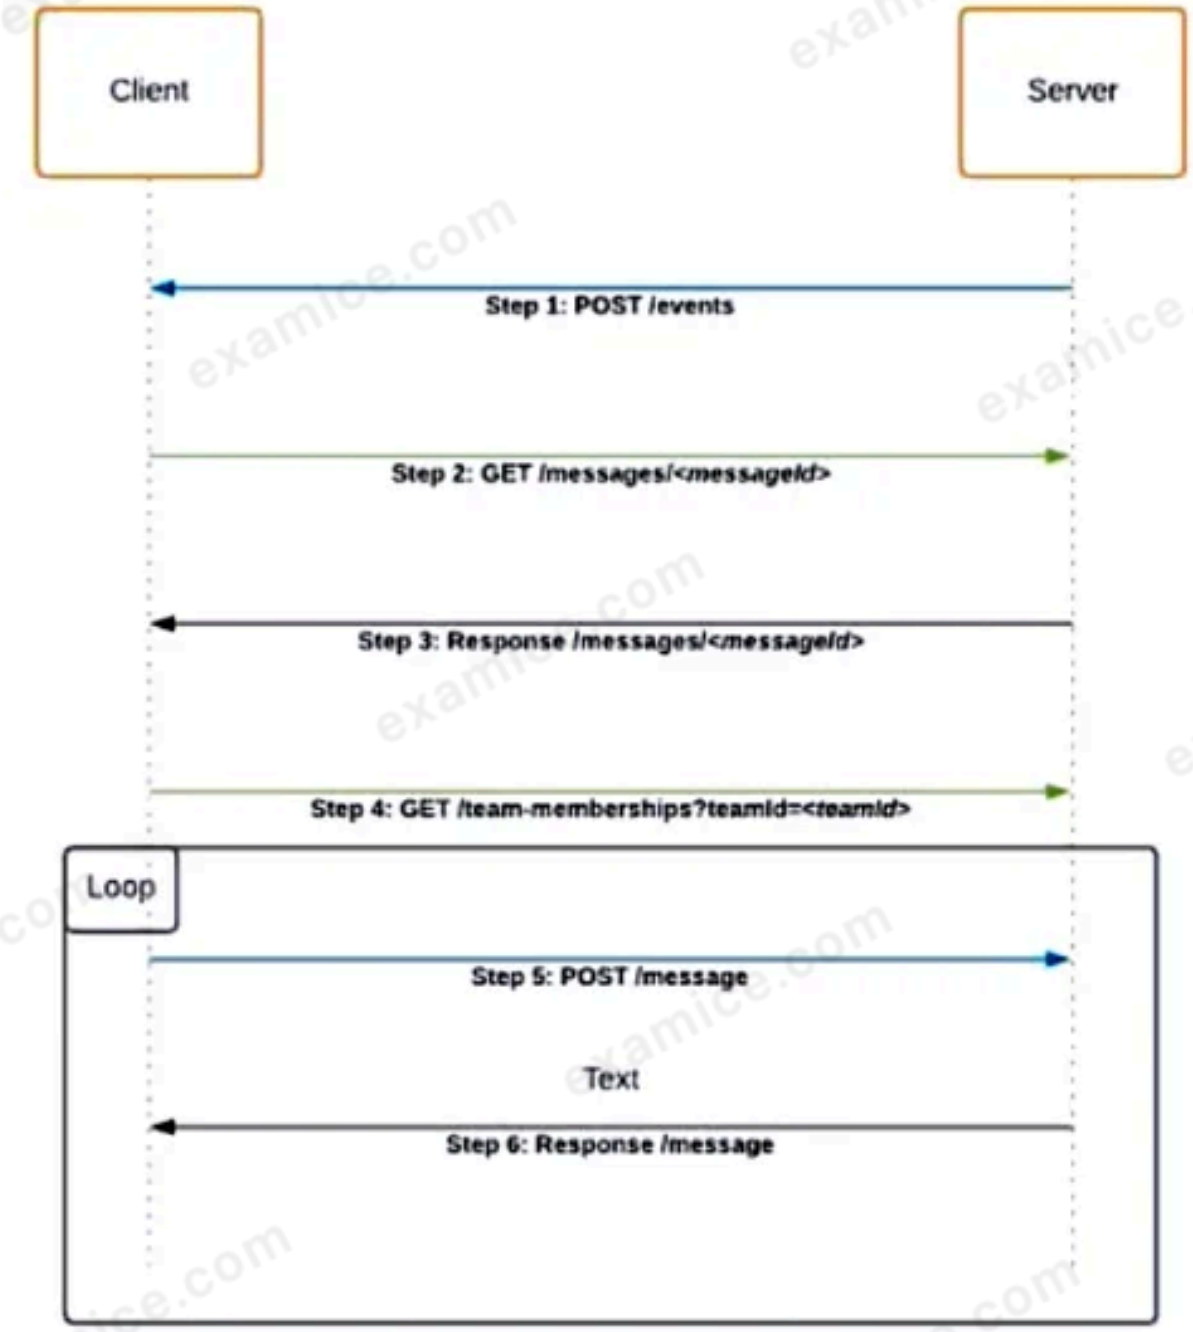

Refer to the exhibit. Which code snippet represents the sequence.

A

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
  json_data = request.json['data']
  response = requests.get(MESSAGE_URL +
json_data['id'], headers=headers)
  if response.json()['text'] == 'Alert':
    response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
    for info in response.json()['items']:
      data = {'personId': info['personId'], 'text':
'Alert'}
                response = requests.post(MESSAGES_URL,
headers=headers, params=params)
```

B

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
    json_data = request.json['data']
    if response.json()['text'] == 'Alert':
        response = requests.get(MESSAGE_URL +
json_data['id'], headers=headers)
        response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
        for info in response.json()['items']:
            data = {'personId': info['personId'],
'text': 'Alert'}
            response = requests.post(MESSAGES_URL,
headers=headers, params=params)
```

C

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
  json_data = request.json['data']
  response = requests.post(MESSAGE_URL +
json_data['id'], headers=headers)
  if response.json()['text'] == 'Alert':
    for info in response.json()['items']:
      response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
      data = {'personId': info['personId'], 'text':
'Alert'}
              response = requests.get(MESSAGES_URL,
headers=headers, params=params)
```

D

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
  json_data = request.json['data']
  response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
  if response.json()['text'] == 'Alert':
    response = requests.get(MESSAGE_URL +
json_data['id'], headers=headers)
    for info in response.json()['items']:
      data = {'personId': info['personId'], 'text':
'Alert'}
      response = requests.post(MESSAGES_URL,
headers=headers, params=params)
```

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer attempts to refactor and improve the application code. It is noticed that the code contains several pieces of key information that could be a security threat if this code is accessible by those who are not authorized to this data. Which approach addresses the security concerns noticed by the developer?

A Host the application code on a machine located in a secure data center.

B Utilize environment variables for username and password details.

C Rely on the security teams' goodwill to not give access to those who do not need it.

D Move the hardware that the application is deployed on to a secure location.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

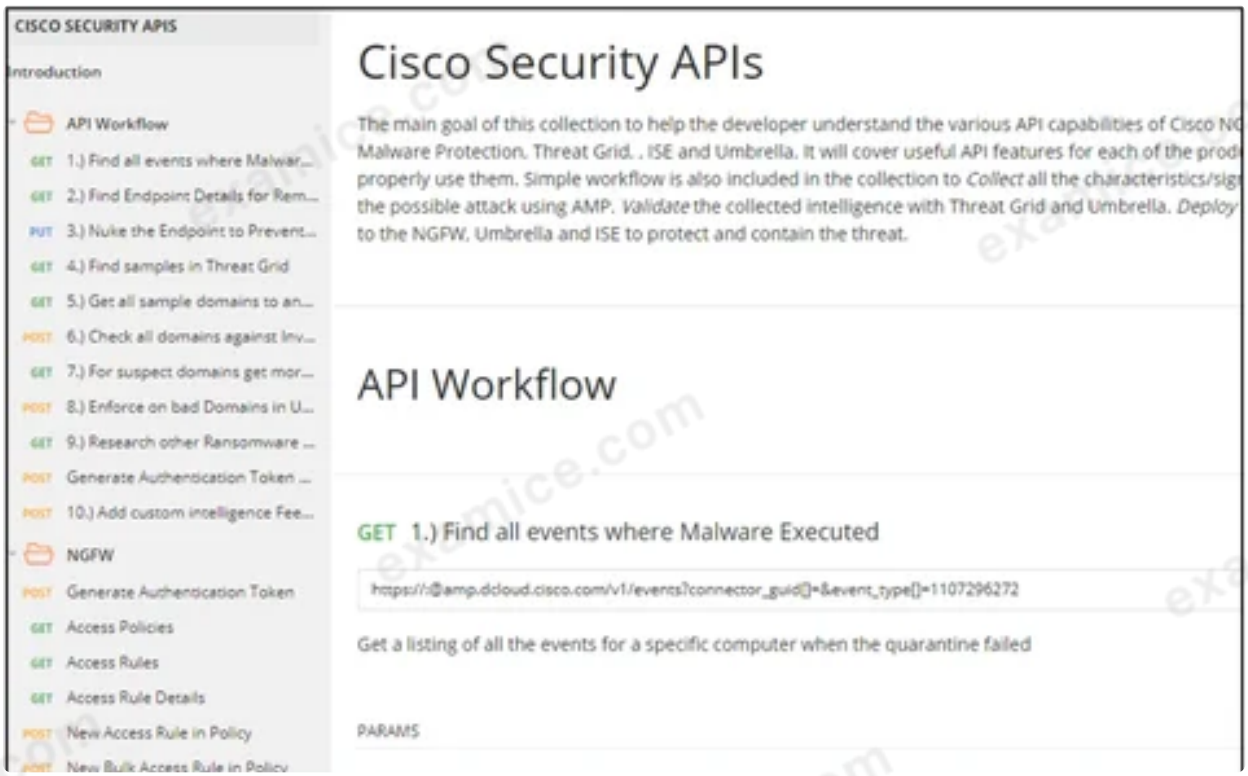

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. Not all options are used.

Answer Area

```
import requests

[          ] = "https://fmc-hostname/api/fmc_tid/v1/domain//tid/source"
payload = {
    "name": "Threat Grid Ransomware DNS",
    "delivery": "url",
    "uri": "https://panacea.threatgrid.com/api/v3/feeds"+
    "/ransomware-dns 2017-12-08.stix?api_key=",
    "refresh": 1440,
    "version": "1.0.0",
    "params": {
        "selfSignedServerCertificate": "true",
        "hostnameVerifier": "allow_all"
    },
    "property": {
        "ttl": 90,
        "publish": true,
        "action": "monitor"
    }
}
headers = {
  'X-auth-access-token': 'access_token', '          ': 'application/json'
}

response = requests.          ("POST", url,
  headers=headers, data =          )
print(response.text.encode('utf8'))
```

url	Encoding	base_url	Content-Type	post
request	payload			

QUESTION 343

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool provides a testing environment to run tests on network devices and perform network automation scenarios?

A Visual Studio Code

B Cisco VIRL

C pyATS

D Cisco Packet Tracer

Personal copy · kamjunhao@gmail.com

QUESTION 344

Issued to kamjunhao@gmail.com · October 17, 2026

A developer writes an application that refines data in temporary secure file storage hosted on the public cloud. Data will be deleted after processing and does not contain any private information. What is the advantage that a public cloud deployment provides to the developer?

A high security with encryption

B ease in infrastructure management

C flexible development

D bespoke services

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

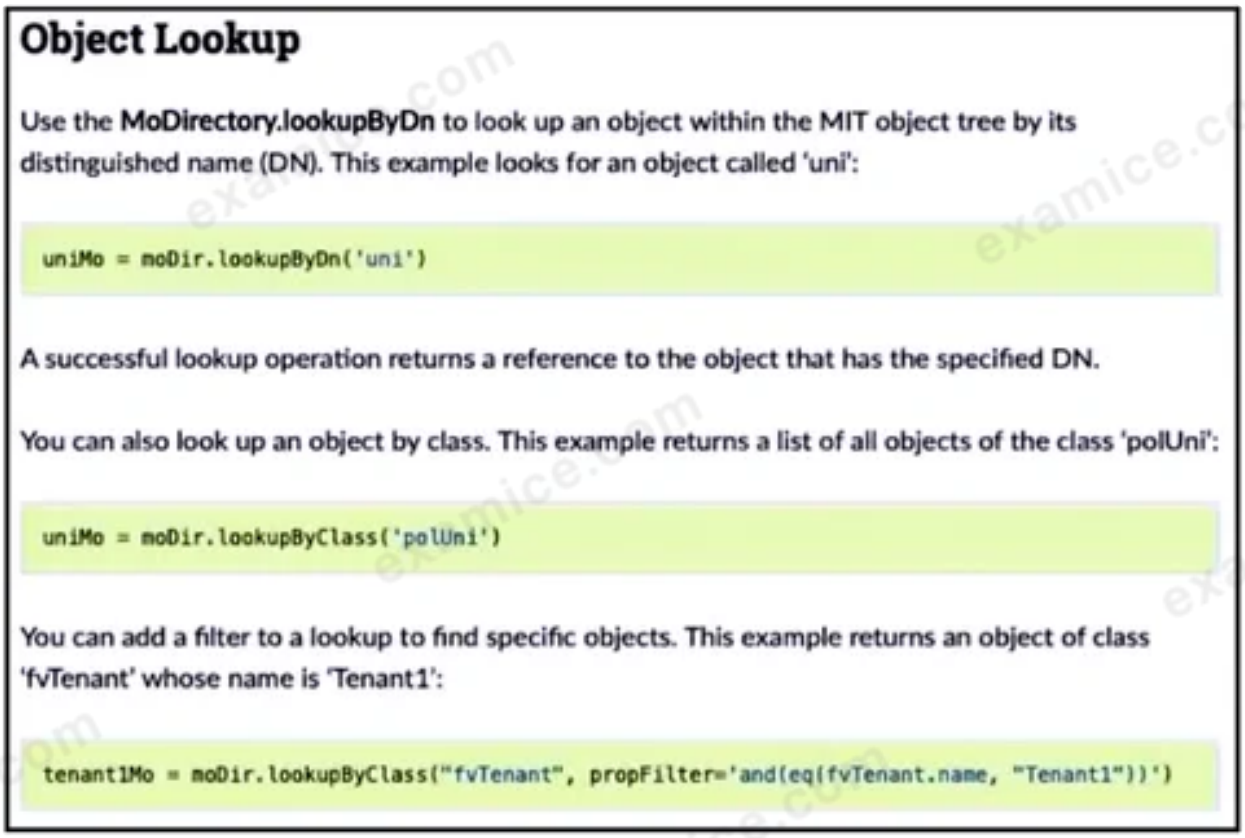

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to add a subnet to each bridge domain in the Ten1 tenant. Not all options are used.

Answer Area

```
from cobra.model import fv
from cobra.mit.request import ClassQuery, DnQuery
import cobra.mit.access
import cobra.mit.session

tenname = "Ten1"
ls = cobra.mit.session.LoginSession(
    'https://10.100.1.200', "admin", "Lab123!3")

aci = cobra.mit.access.MoDirectory(ls)
aci.login()
c = cobra.mit.request.ConfigRequest()

qry1 = [          ] (f'uni/tn-{tenname}')
fvTenant = aci.query(qry1)[0]

qry2 = [          ] ("fvBD")
qry2.propFilter = f'and(wcard(fvBD.dn,"{fvTenant.dn}"))'
fvBDs = aci.query(qry2)

i=0
for fvBD in fvBDs:
    fvsubnet = cobra.model.fv.Subnet( [          ] , ip=f'10.114.{i}.1/24')
    c.addMo(fvBD)
    aci.[          ] (c)
    i+=
```

fvBD	fvTenant	ClassQuery	bdname	DnQuery	ClassName	commit

Personal copy · kamjunhao@gmail.com

```
workstation:Network admin$ ls
PROD TEST
workstation:Network admin$ ls ./TEST
config.txt
workstation:Network admin$
```

Refer to the exhibit. A network engineer must copy the “config.txt” file from directory TEST to directory PROD. The copied file must also be renamed into “current.txt”. Which command must be used to accomplish these tasks?

A cp ./PROD/current.txt ./TEST/config.txt

B cp ./TESTi/current.txt ./PROD/config.txt

C cp ./PROD/config.txt ./TEST/current.txt

D cp ./TEST/config.txt ./PROD/current.txt

QUESTION 347

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using model-driven programmability for infrastructure automation?

A connected user tracking

B infrastructure resource optimization

C multiple device control protocols

D device performance monitoring

QUESTION 348

Issued to kamjunhao@gmail.com · October 17, 2026

What is the function of an Ethernet switch in a networking environment?

A to switch a frame from one port to another port based on IP address

B to switch a frame from one port to another port based on MAC address

C to provide IP addressing to connected hosts

D to block unwanted traffic

DRAG DROP

- -

Drag and drop characteristics from the left onto the infrastructure management methodologies on the right.

Answer Area

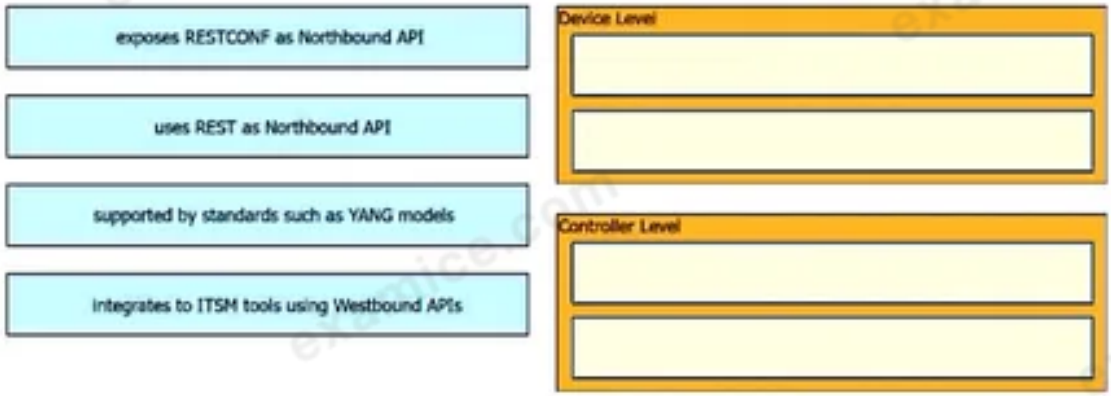

```
- hosts: nxos_rtr
  gather_facts: false
  tasks:
  - nxos_hsrp:
      group: "{{ item.group }}"
      vip: "{{ item.vip }}"
      priority: 115
      interface: "{{ item.interface }}"
      preempt: enabled
      auth_type: md5
      auth_string: "s3cuR3"
      version: 2
      host: "{{ hostvars['rtr-1a']['ansible_ssh_host'] }}"
    with_items:
      - "{{ hsrp_groups }}"
    delegate_to: "{{ hostvars['srv-1a']['ansible_ssh_host'] }}"
```

Refer to the exhibit. An engineer runs a network that consists of Cisco Nexus devices. The network is distributed between data centers in different locations. The switches are configured using standalone connections and a single point of failure. Which process is being automated by the Ansible playbook?

A enabling HSRP on the nxos_rtr inventory host

B enabling HSRP on the rtr-1a inventory host

C executing HSRP configuration from the Ansible controller node

D executing HSRP configuration from the srv-1a inventory host

Issued to kamjunhao@gmail.com · October 17, 2026

```
import requests
from requests.auth import HTTPBasicAuth

user= "user"
password= "PASSWORD"

token=requests.post('https://<DNAC ADRESS>/dna/system/api/v1/auth/token',
```

Refer to the exhibit. A developer must use a token to collect data from Cisco DNA Center API and prepares a Python script to send requests. Which line of code needs to be placed on the snippet where the code is missing to obtain a token from the Cisco DNA Center API?

A token=BasicAuth('user',password'))

B auth=BasicAuth('user',password'))

C auth=HTTPBasicAuth(user,password))

D token=HTTPBasicAuth(user,password))

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

To which stage of development do Infrastructure as Code principles relate?

A manual configuration

B service provisioning

C physical deployment

D requirement collection

Personal copy · kamjunhao@gmail.com

```
import os
import requests

# username and password

API_USER_NAME = "devnetuser"
API_PASSWORD = os.environ['API_PASSWORD']

requests.get('https://api.cisco.com/end-service', auth=(API_USER_NAME, API_PASSWORD))
```

Refer to the exhibit. An engineer must authorize a REST API call. The API password is "Cisco123!". Which Bash command must be placed in the code to authorize the call?

A mkdir API_PASSWORD=Cisco123!

B set API_PASSWORD=Cisco123!

C cp API_PASSWORD=Cisco123!

D export API_PASSWORD=Cisco123!

DRAG DROP

- -

```
user@host1:~/tmp$ cat Dockerfile
# Dockerfile to install traceroute
FROM ubuntu
MAINTAINER User One (userone@cisco.com)
RUN apt-get update && apt-get install traceroute
```

Refer to the exhibit. Drag and drop the Dockerfile contents from the left onto the functions on the right that create a container image to run traceroute to track network path to specific targets. Not all options are used.

Answer Area

document author	FROM ubuntu
command to execute	MAINTAINER User One (userone@cisco.com)
initializes a new build stage	RUN apt-get update && apt-get install traceroute
copies new files or directories	
sets the userid	

Issued to kamjunhao@gmail.com · October 17, 2026

Which function does a router provide to a network?

A broadcast domain segmentation

B unique host on a Layer 3 network

C unique hardware address for every node on a LAN

D broadcast domain extension

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to enable ports on a switch by using RESTCONF. Not all options are used.

Answer Area

```
def enable_function(if_name, if_status, if_type):
    headers = {'Accept': 'application/yang-data+json',
               'Content-Type': 'application/ [          ']}
    payload = {
              " [          ]": {
                "name": if_name,
                 "enabled": if_status,
                 "type": if_type,
                 }
               }
 [          ] = 'https://192.168.1.1:8443'
    restconf_url = '/restconf/data/ietf-interfaces:interfaces/interface'

    res = requests.put(f'{base_url}{restconf}={if_name}',
                       headers=headers, json=payload,
                           auth=('cisco', 'secret'), verify=False)

enable_function('Loopback1, true, ' [          ] ')
```

yang-data+json	application/xml
ietf-interfaces:interface	iana-if-type:softwareLoopback
base_url	run_function
iana-if-type:ethernetCsmacd	

QUESTION 357

Issued to kamjunhao@gmail.com · October 17, 2026

Which IP service is used to monitor the performance of network devices?

A SNMP

B DHCP

C DNS

D NTP

Personal copy · kamjunhao@gmail.com

QUESTION 358

Issued to kamjunhao@gmail.com · October 17, 2026

Which IP service synchronizes the time across devices?

A DNS

B NTP

C SNMP

D NAT

Personal copy · kamjunhao@gmail.com

QUESTION 359

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must configure Cisco Nexus devices and wants to automate this workflow. The engineer will use an Ansible playbook to configure devices through Cisco NX REST API. Before the code is run, which resource must be used to verify that the REST API requests work as expected?

A Cisco Open NX-OS

B Cisco NX-OS SDK

C Cisco Learning Labs

D Cisco Code Exchange for Nexus

Personal copy · kamjunhao@gmail.com

QUESTION 360

Issued to kamjunhao@gmail.com · October 17, 2026

What is a function of the default gateway in a network?

A to drop traffic that is destined to the default gateway

B to forward traffic to different subnets

C to forward traffic to the same subnet

D to drop traffic that is not destined to the default gateway

Personal copy · kamjunhao@gmail.com

QUESTION 361

Issued to kamjunhao@gmail.com · October 17, 2026

What is a firehose webhook?

A It collects data from third-party cloud APIs for custom applications.

B It enables an application to receive real-time data from Cisco Webex.

C It enables data to flow from the Cisco Webex API to a user's application.

D It sends a notification of any event for commonly used resources.

Personal copy · kamjunhao@gmail.com

QUESTION 362

Issued to kamjunhao@gmail.com · October 17, 2026

Which command reverses the last commit without changing the index file or the working tree position?

A git revert HEAD

B git reset --hard HEAD~3

C git reset --soft HEAD^

D git revert

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to complete the error path scenario. Not all options are used.

Answer Area

```
import pytest
class Player:
    def __init__(self, name):
        self.name = name
        [                                ]
    def set_rating(self, rating):
        if rating or rating is int(0):
            [                                ]:
                raise ValueError('rating is invalid', rating)
            else:
                [                                ]
                return True
        else:
            return False
@pytest.fixture
def player():
    player = Player('User One')
    yield player
    del player
@pytest.mark.usefixtures('player')
class TestErrorPathSetRating:
    def test_add_higher_rating(self, player):
        with pytest.raises(ValueError):
            player.set_rating(101)
    def test_add_invalid_rating(self, player):
        with pytest.raises(ValueError):
            [                                ]
    def test_add_lower_rating(self, player):
        with pytest.raises(ValueError):
            player.set_rating(-1)
```

player.set_rating(0)	if rating != 0:
player.set_rating(85)	if rating or rating is int(0):
if rating < 1 or rating > 100:	self.rating = rating
self.rating = None	

Issued to kamjunhao@gmail.com · October 17, 2026

A file in a local Git repository has been updated and issued the git add . command. The git diff command has been run to compare the changes to the previous commit, but nothing shows. Which action identifies the problem?

A Run the git add . command again in the correct subdirectory to ensure changes added to the staging area.

B Run the git commit command before the differences are compared to receive the end state of the code.

C Run the git status command to see the differences between current and previous code review stages.

D Run the git diff --staged command to compare the code added to the staging area.

Personal copy · kamjunhao@gmail.com

DRAG DROP

Drag and drop the characteristics from the left onto the corresponding categories on the right to compare RESTful and RPC APIs.

Answer Area

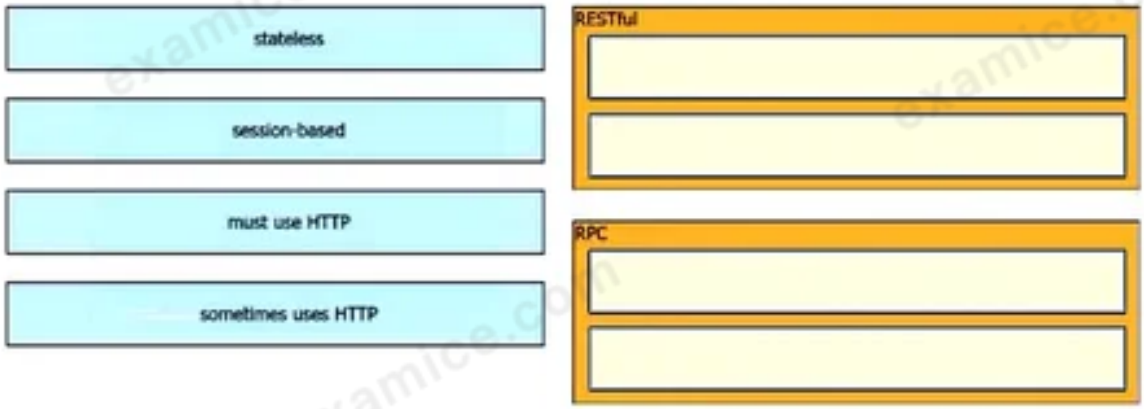

Which protocol runs over TCP port 830?

A NETCONF

B Telnet

C RESTCONF

D HTTP

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to authenticate with the Cisco DNA Center REST API by using basic authentication. Then generate a token for later use. Not all options are used.

Answer Area

```
import requests
from requests.auth import HTTPBasicAuth

BASE_URL = 'https://sandboxdnac2.cisco.com'
AUTH_URL = '/dna/system/api/v1/ [          ] '
USERNAME = 'admin'
PASSWORD = 'qwer1234!'

response = requests. [          ] (BASE_URL + AUTH_URL,
  auth=HTTPBasicAuth( [          ] , [          ] ))
token = response.json()['Token']
print(token)
```

auth/basic	/auth/token	post	get
USERNAME	Token	PASSWORD	

Issued to kamjunhao@gmail.com · October 17, 2026

Which solution reduces costs from MPLS, improves application performance, and simplifies operations?

A Cisco NSO

B Cisco SD-WAN

C Cisco ACI

D Cisco DNA Center

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer has experienced security issues with a previously developed application. The API offered by that application is open and without any constraints. During a recent attack, the application was overloaded with API requests. To address this issue, an API constraint is implemented to protect the application from future attacks or any sudden throttling. Which API constraint must the application developer implement in this situation?

A pagination

B rate limiting

C filtering

D payload limiting

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the capabilities from the left onto the Cisco Network Management Platforms that support the capabilities on the right.

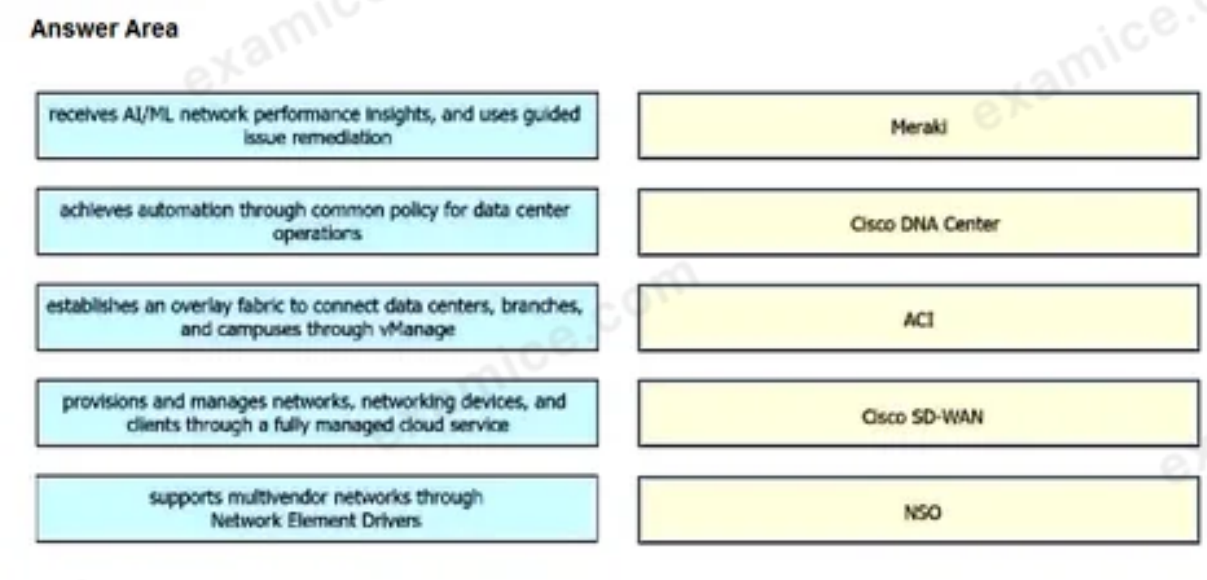

Issued to kamjunhao@gmail.com · October 17, 2026

A developer must test the performance and reliability of an application. After functional and load tests are run, the application crashes due to traffic spikes from users. Which type of API constraint must be implemented to maintain reliability?

A rate limiting

B pagination

C payload limits

D filtering

Personal copy · kamjunhao@gmail.com

DRAG DROP

An engineer must make changes on a network device through the management platform API. The engineer prepares a script to send the request and analyze the response, check headers, and read the body according to information inside response headers. Drag and drop the HTTP header values from the left onto the elements of an HTTP response on the right.

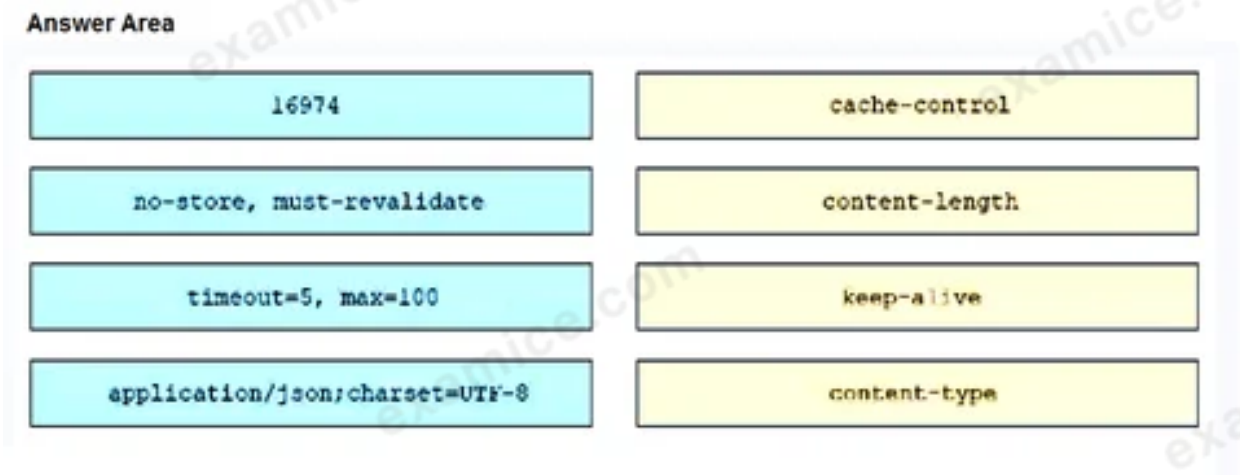

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a new feature in a branch named **newfeat123456789** and the current working primary branch is named **prim987654321**. The developer requires a merge commit during a fast forward merge for record-keeping purposes. Which Git command must be used?

A git merge --no-ff newfeat123456789

B git commit --no-ff newfeat123456789

C git add --commit-ff newfeat123456789

D git reset --commit-ff newfeat123456789

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A customer's cloud services must:

- Migrate services to another data center on demand.
- Save the operational state of the machine on demand.
- Support Windows and Linux GUIs.
- Maximize hardware utilization.

Which type of deployment meets these requirements?

A bare metal

B container

C virtual machine

D Kubernetes

Personal copy · kamjunhao@gmail.com

QUESTION 375

Issued to kamjunhao@gmail.com · October 17, 2026

How does edge computing analyze sensitive data in the context of privacy control?

A locally instead of sending the data to the cloud for analysis

B locally or on the cloud depending on the configuration

C all at once by sending the data to the cloud

D locally on each node, and then sends the data to the cloud

Personal copy · kamjunhao@gmail.com

QUESTION 376

Issued to kamjunhao@gmail.com · October 17, 2026

Which Python function is used to parse a string that contains JSON data into a Python dictionary?

A json.dumps()

B json.to_json()

C json.parse()

D json.loads()

Personal copy · kamjunhao@gmail.com

```
import requests
from requests.auth import HTTPBasicAuth
BASE_URL = 'https://<IP ADDRESS or FQDN>'
AUTH_URL = '/dna/system/api/v1/auth/token'
TOKEN = '<TOKEN>'

headers = {'X-Auth-Token': TOKEN, 'Content-Type': 'application/json'}

DEVICES_COUNT_URL = '/dna/intent/api/v1/network-device/count'
DEVICES_URL = '/dna/intent/api/v1/network-device'
DEVICES_BY_ID_URL = '/dna/intent/api/v1/network-device/'

def devices_func(headers):
    response = requests.get(BASE_URL + DEVICES_COUNT_URL,
                            headers = headers, verify=False)
    return response.json()['response']

def devices_test(headers, query_string_params):
    response = requests.get(BASE_URL + DEVICES_URL, headers = headers,
                            params = query_string_params, verify=False)
    return response.json()['response']

def devices_info(headers, device_id):
    response = requests.get(BASE_URL + DEVICES_BY_ID_URL + device_id,
                            headers =  headers, verify=False)
    return response.json()['response']

print(devices_func(headers))
print(devices_test(headers, {}))
print(devices_test(headers, {'hostname': 'CSR1Kv-01.devnet.local'}))
response = devices_test(headers, {'platformId': 'C9500-40X'})
print(devices_info(headers, response[0]['id']))
```

Refer to the exhibit. An engineer prepares a script to automate workflow by using Cisco DNA Center APIs to display:

- total count of devices
- list of the network devices
- information of one device with a hostname filter

What is displayed in the final step after the Python script is executed?

A information about a device of type C9500-40x.

B filtered results by the hostname and the platformId C9500-40X

C information about the test devices

D list of devices with platformId C9500-40x

QUESTION 378

A team of developers is responsible for a network orchestration application in the company. The responsibilities also include:

- developing and improving the application in a continuous manner
- deployment of the application and management of CI/CD frameworks
- monitoring the usage and problems and managing the performance improvements

Which **principle** best describes this DevOps practice?

A responsible for IT operations

B automation of processes

C end-to-end responsibility

D quality assurance checks

```
curl -i -k -X 'GET' 'https://172.18.110.64:443/restconf/data/Cisco-IOS-XE-native:native/hostname'
-H 'Accept: application/yang-data+json' \
-u 'cisco:cisco'
```

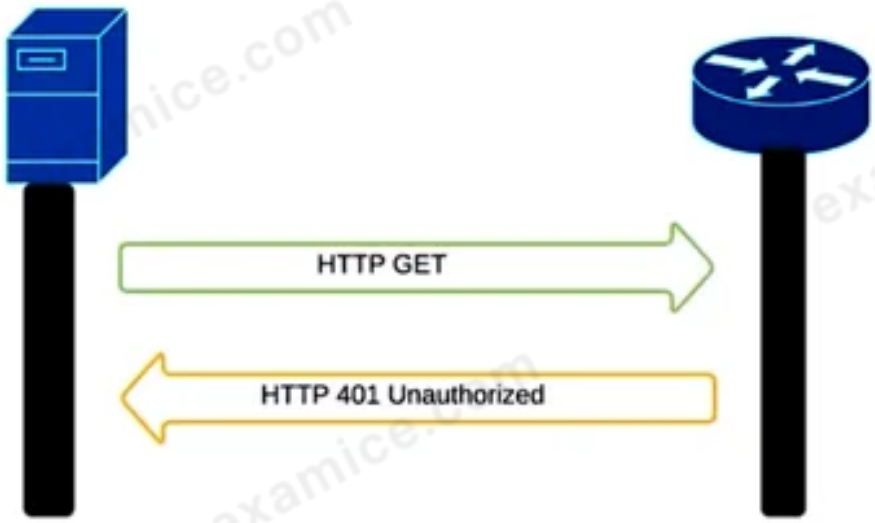

Refer to the exhibit. An administrator attempts to perform a GET operation by using the Cisco IOS XE RESTCONF API to return the hostname of a device. The sequence diagram in the exhibit illustrates the HTTP messages observed. Which change to the API request resolves the issue?

A Remove the -H 'Accept: application/yang-data+json' header.

B Replace -u cisco:cisco parameter with -u 'cisco:cisco'.

C Change the request method from -X 'GET' to -X 'POST'.

D Add the -H 'Content-Type: application/yang-data+json' header.

DRAG DROP

- -

Drag and drop the API characteristics from the left onto the corresponding categories on the right.

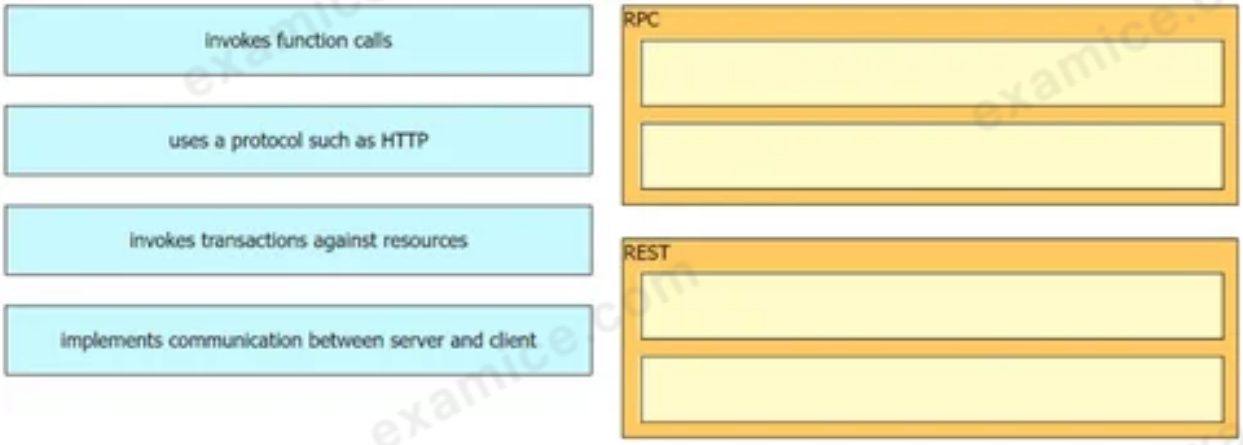

Issued to kamjunhao@gmail.com · October 17, 2026

A new application is being developed that requires the ability to be copied and moved from one location to another. The existing infrastructure is already heavily utilized, so the new application must have a low resource footprint. The application includes a small PostgreSQL database component. Which application deployment type meets the requirements?

A Python virtual environment

B bare metal

C virtual machine

D container

Personal copy · kamjunhao@gmail.com

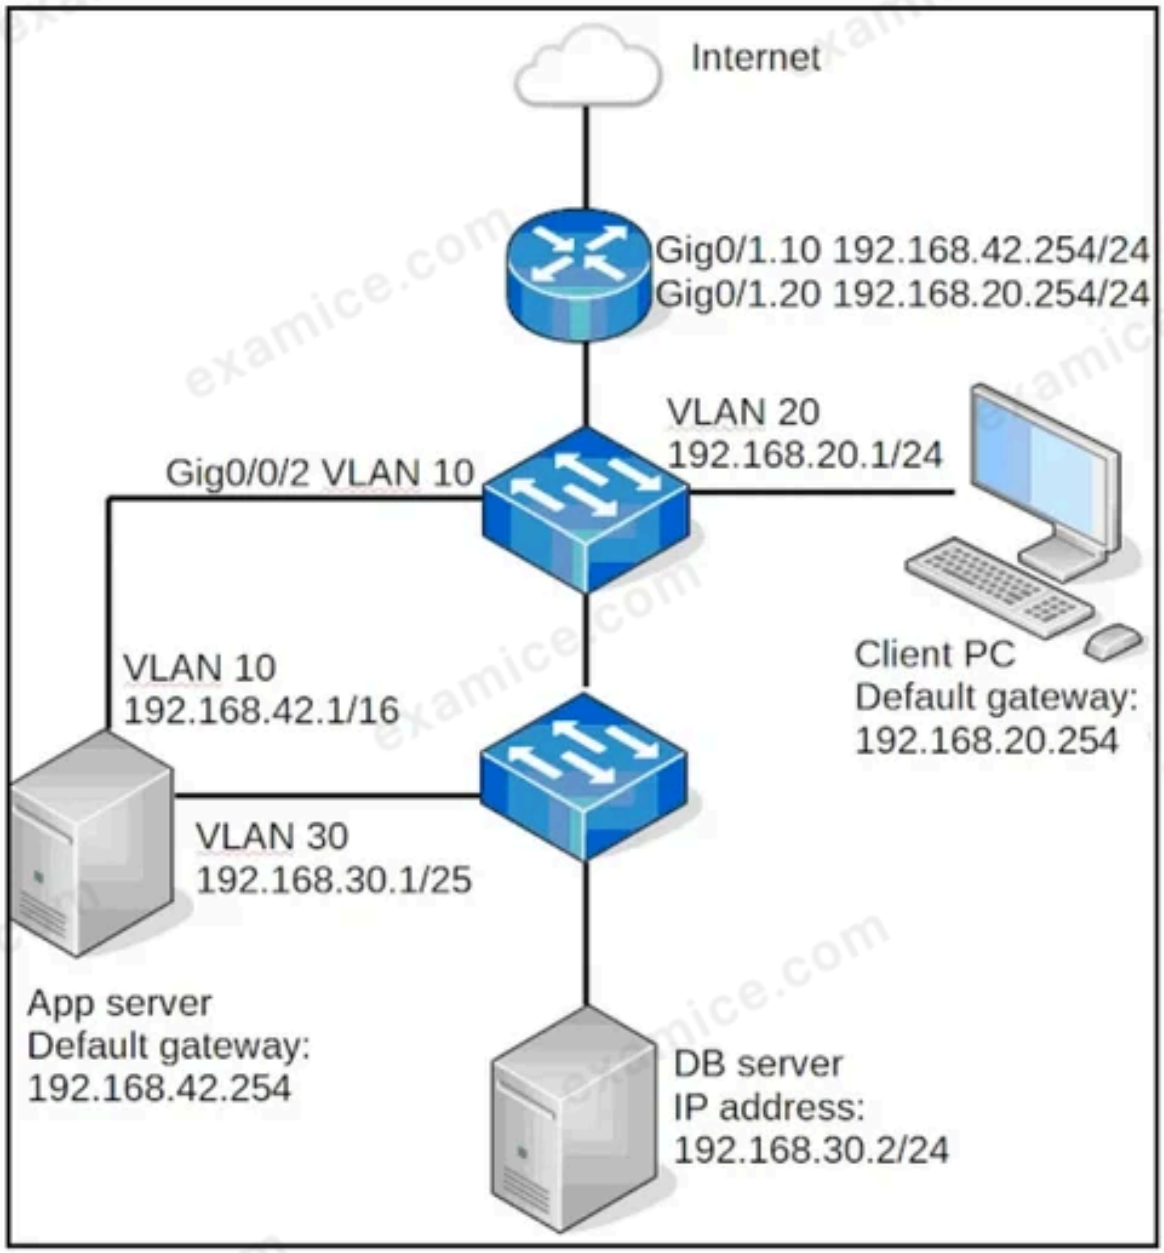

Refer to the exhibit. The internal client cannot access the app server, but access still works for clients on the Internet. Which two actions resolve the issue? (Choose two.)

A Move port Gi0/0/2 to VLAN 20.

B Add a host route on the server to the client.

C Change the subnet length on the client to 16.

D Change the subnet length on the server to 24.

E Add a host route on the client to the server.

Personal copy · kamjunhao@gmail.com

QUESTION 383

Issued to kamjunhao@gmail.com · October 17, 2026

What is used in JSON to represent a Python tuple?

A collection

B object

C array

D dict

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a principle of Infrastructure as Code?

A It requires manual resource provisioning.

B It encourages overlaps in services.

C It encourages repeatable processes.

D It requires the use of large components.

Personal copy · kamjunhao@gmail.com

```
git clone [--template=<template directory>]
          [-l] [-s] [--no-hardlinks] [-q] [-n] [--bare] [--mirror]
          [-o <name>] [-b <name>] [-u <upload-pack>] [--reference <repository>]
          [--dissociate] [--separate-git-dir <git dir>]
          [--depth <depth>] [--[no-]single-branch] [--no-tags]
          [--recurse-submodules[=<pathspec>]] [--[no-]shallow-submodules]
          [--[no-]remote-submodules] [--jobs <n>] [--sparse]
          [--filter=<filter>] [--] <repository>
          [<directory>]
```

Refer to the exhibit. A network engineer must improve the fabric discovery process in a data center. The engineer wants to check current ACI scripts in the myproject repository and clone them to a folder named aci. The engineer will optimize the scripts from the new folder. Which command performs this task on the Git repository?

A
```
git clone git@github.com:myproject -f aci
```

B
```
git clone git@github.com:myproject:aci
```

C
```
git clone git@github.com:myproject -dr aci
```

D
```
git clone git@github.com:myproject aci
```

DRAG DROP

- -

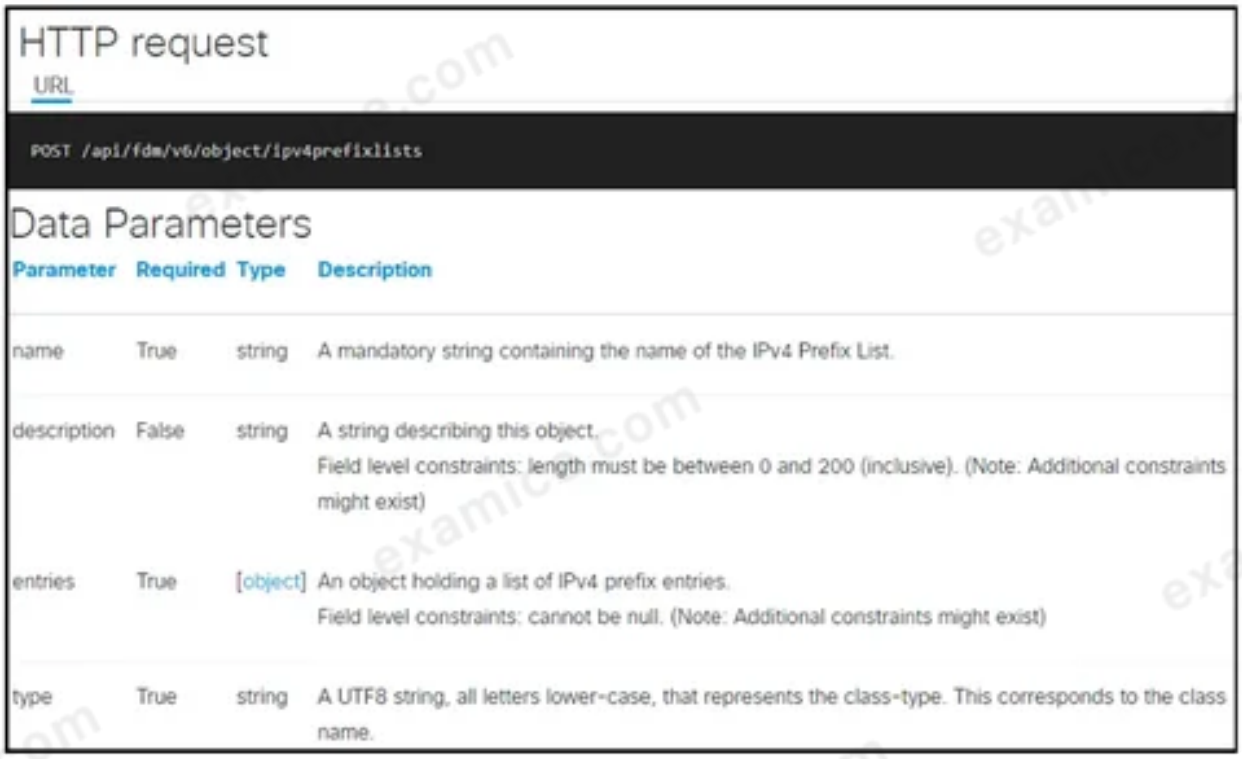

HTTP request

URL

```
POST /api/fdm/v6/object/ipv4prefixlists
```

Data Parameters

Parameter	Required	Type	Description
name	True	string	A mandatory string containing the name of the IPv4 Prefix List.
description	False	string	A string describing this object. Field level constraints: length must be between 0 and 200 (inclusive). (Note: Additional constraints might exist)
entries	True	[object]	An object holding a list of IPv4 prefix entries. Field level constraints: cannot be null. (Note: Additional constraints might exist)
type	True	string	A UTF8 string, all letters lower-case, that represents the class-type. This corresponds to the class name.

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct an API request that creates a new IPv4 prefix. Not all options are used.

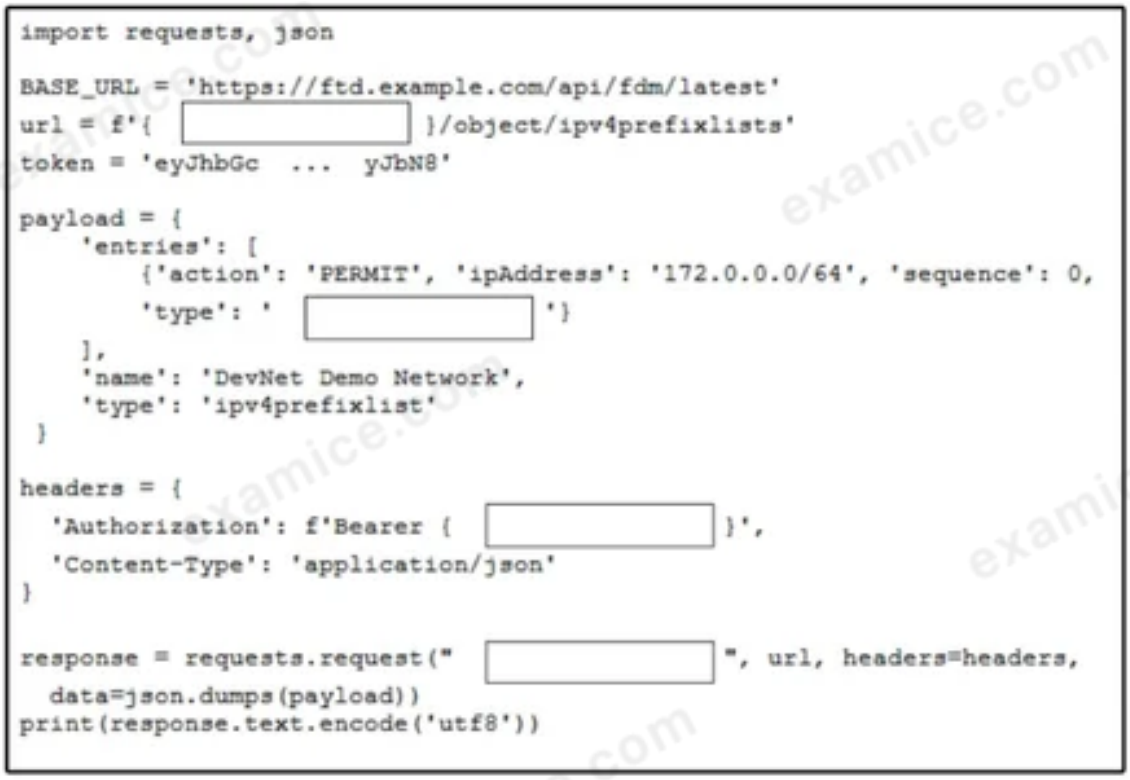

URL	ipv4prefixlist	token	api_key	BASE_URL
POST	GET			

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer improves the code repository to clean a bug on the custom network monitoring application. The developer adds the changes to the staging area and then commits on the local branch. Which command pushes commits that are made on a local branch to the remote repository?

A push origin master

B git push all

C push all

D git push origin master

Personal copy · kamjunhao@gmail.com

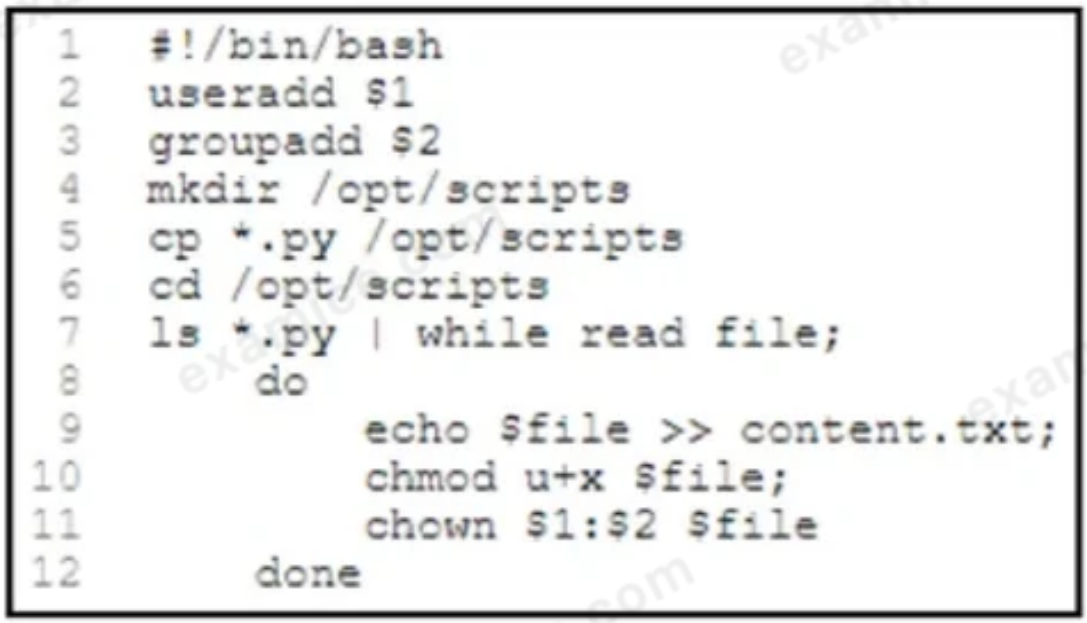

```
#!/bin/bash
useradd $1
groupadd $2
mkdir /opt/scripts
cp *.py /opt/scripts
cd /opt/scripts
ls *.py | while read file;
  do
      echo $file >> content.txt;
      chmod u+x $file;
      chown $1:$2 $file
done
```

Refer to the exhibit. An engineer must add new users and set privileges for executing a few Python scripts. The engineer prepares a Bash script to automate this task. The script adds a user and a group from the command-line arguments, creates a directory, and copies the Python scripts to it. The script then changes to the directory and lists the scripts. Based on the script workflow, which process is being automated within the loop by using the list of Python scripts?

A assigning execution privileges to the owner, setting the user and group owner to the scripts that were initially created, and storing the script names in a file.

B creating a file with the content of all the files, assigning execution permissions to each script, and then changing ownership to the initially created user and group.

C removing the files that are not Python, listing the Python files, and assigning execution privileges to the initially created user and group.

D assigning execution privileges to everyone and changing the ownership to the initially created user and group.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a function of an application load balancer?

A automatic distribution of TCP traffic

B automatic distribution of HTTP and HTTPS traffic

C manual distribution of TCP traffic

D manual distribution of HTTP and HTTPS traffic

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing on the Meraki Python script to create a new network.

```
base_url = "https://api.meraki.com/api/v0"
org_id = "123456789"
api_key = "1098hadpfsiapsf8ahf8ohp"
network_name = "New Network"
requests. post(
    base_url  + "/" [          ] "/" + [          ] + "/networks",
     [          ] = {
        "X-Cisco-Meraki-API-Key": [          ],
        "Content-Type": "application/json"
    },
    data=json.dumps({" [          ]": network_name,
                          "type": "wireless switch"
                          }))
```

organizations

headers

api_key

org_id

name

Personal copy · kamjunhao@gmail.com

```
Request:
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": false,
  "privilegeLevel": "high",
  "ASDM_CLIAccessType": "Null",
  "objectId": "userOne1973"
}
HTTP response Code: 400
```

Refer to the exhibit. An engineer must create a local user on Cisco ASA and prepares a script to send the request through ASA REST API. The engineer gets a response of 400 Bad Request. Which HTTP request produces a response code of 201?

A

```
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "name": "UserOne",
  "password": "p4ssW0rd",
  "privilegeLevel": 2,
  "ASDM_CLIAccessType": "Cli",
  "objectId": "userOne1973"
}
```

B

```
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": true,
  "privilegeLevel": "high",
  "ASDM_CLIAccessType": "None",
  "objectId": "userOne1973"
}
```

C

```
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "name": "UserOne",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": false,
  "privilegeLevel": 2,
  "ASDM_CLIAccessType": "Full"
}
```

D

```
POST/api/objects/localusergroups
Request Data
{
  "kind": "object#LocalUserObj",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": false,
  "privilegeLevel": "low",
  "ASDM_CLIAccessType": "Null"
}
```

Personal copy · kamjunhao@gmail.com

QUESTION 392

Issued to kamjunhao@gmail.com · October 17, 2026

What is a component of the first stage of an application development CI/CD pipeline?

A triggering of the automated testing phase

B commitment and pushing of code into a version control system

C triggering of the automated build phase

D developer writing the initial lines of code

Personal copy · kamjunhao@gmail.com

QUESTION 393

Issued to kamjunhao@gmail.com · October 17, 2026

What must be created on a network to enable devices in different network segments to communicate as if attached to the same wire?

A VLAN

B SAID

C VTP

D MTU

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

When a developer sends an HTTP request to an API, which two elements are expected in an HTTP response? (Choose two.)

A headers

B GET request

C POST request

D scripts

E status code

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

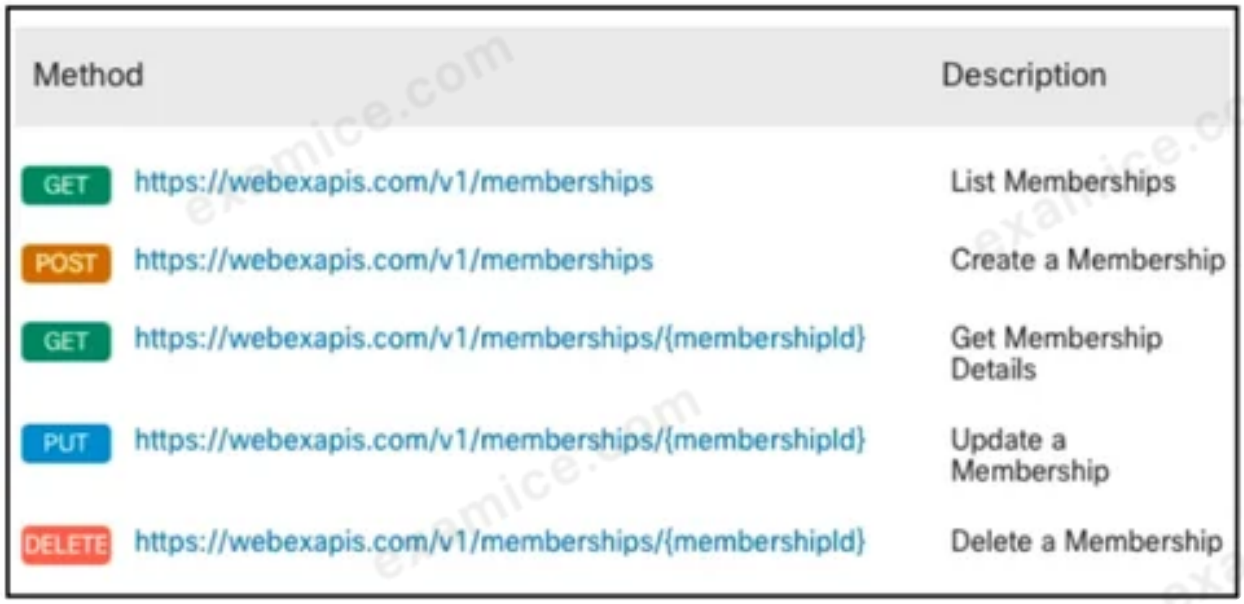

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to delete Developer1 from the ACI programmers' meeting room. Not all options are used.

Personal copy · kamjunhao@gmail.com

QUESTION 396

Issued to kamjunhao@gmail.com · October 17, 2026

What is the benefit of organizing data into functions?

A supports using same variable in different modules

B supports altering the state of an object

C organize code in a reusable way

D stores data values of different types

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which capability is used by Ansible to run a set of tasks when a property is changed?

A handlers

B playbooks

C roles

D tasks

Personal copy · kamjunhao@gmail.com

```
module devnet-users {

  namespace "http://devnet.com/devnet-users";
  prefix users;

  import ietf-yang-types { prefix yang; }

  container users {
    config true;

    list person {
      key name;
      leaf name { type string; }
      leaf creationdate { type yang:date-and-time; mandatory true;
    }
  }
}
```

Refer to the exhibit. The YANG module devnet-users shows a data model for user accounts. Which code snippet shows the XML representation of an instantiation of the YANG data model?

A

```
<data xmlrefs="urn:ietf:params:xml:ns:netconf:
base:1.0">
  <users xmlns="http://devnet.com/devnet-users">
    <person><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </person>
    <person><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </person>
  </users>
</data>
```

B

```
<data xmlns="urn:ietf:params:xml:ns:netconf:
base:1.0">
  <users xmlns="http://devnet.com/devnet-users">
    <person><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </person>
    <person><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </person>
  </users>
</data>
```

C

```
<data yang-model="urn:ietf:params:xml:
devnet-users">
  <users xmlns="person">
    <user><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </user>
    <user><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </user>
  </users>
</data>
```

D

```
<data xml="urn:ietf:params:xml:
devnet-users">
  <users xmlns="person">
    <person><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </person>
    <person><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </person>
  </users>
</data>
```


QUESTION 399 Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP

Drag and drop the code from the bottom onto the box where the code is missing to obtain an authorization token by using the Cisco DNA Center API. Not all options are used.

```
def dnac_login(host, username, password):

    url = "https://{}/api/system/v1/ [          ] ".format(host)

    response = requests.request(" [          ] ", url,
                auth= [          ] (username, password),
                headers=headers, verify=False)

    return [          ] .json()["Token"]
```

token	auth/token	response	request
HTTPBasicAuth	HTTPTokenAuth	POST	

QUESTION 400

Issued to kamjunhao@gmail.com · October 17, 2026

Which API is used to change the configuration of a device group that contains Cisco Catalyst 9000 Series Switches?

A xAPI

B Cisco Finesse

C JTAPI

D Cisco IOS XE

Personal copy · kamjunhao@gmail.com

QUESTION 401

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using model-driven programmability on Cisco devices?

A deeper monitoring

B better logging

C automated configuration

D increased security

Personal copy · kamjunhao@gmail.com

```
--- maketransitcurve.py2020-04-13 16:30:32.000000000 -0600
+++ maketransitmovie.py2020-04-13 16:30:32.000000000 -0600
@@ -1,79 +1,87 @@
-from  _future_  import print_function
-
+#"""
+#Matplotlib Animation Example

+from  _future_  import print_function
 import numpy as np
```

Refer to the exhibit. A developer got this output during the development of an application. Which action produces this output?

A execution of a Python script with numpy library

B enhancement to Python numpy library

C upload of a script to a git repository

D file comparison within the unified diff format

Issued to kamjunhao@gmail.com · October 17, 2026

A REST API service requires basic authentication. A user's credentials are "ned/33662255" and the Base64 encoding of the credentials is "a2lsbGE6NDU4ODI5". Which requirement must be met for a request to be authenticated?

A The header must include:
Authorization: Basic a2lsbGE6NDU4ODI5

B The payload must include:
Authorization: Basic a2lsbGE6NDU4ODI5

C The header must include:
username: ned,
password: 33662255

D The payload must include:
username: ned,
password: 33662255

Personal copy · kamjunhao@gmail.com

DRAG DROP

Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. Not all options are used.

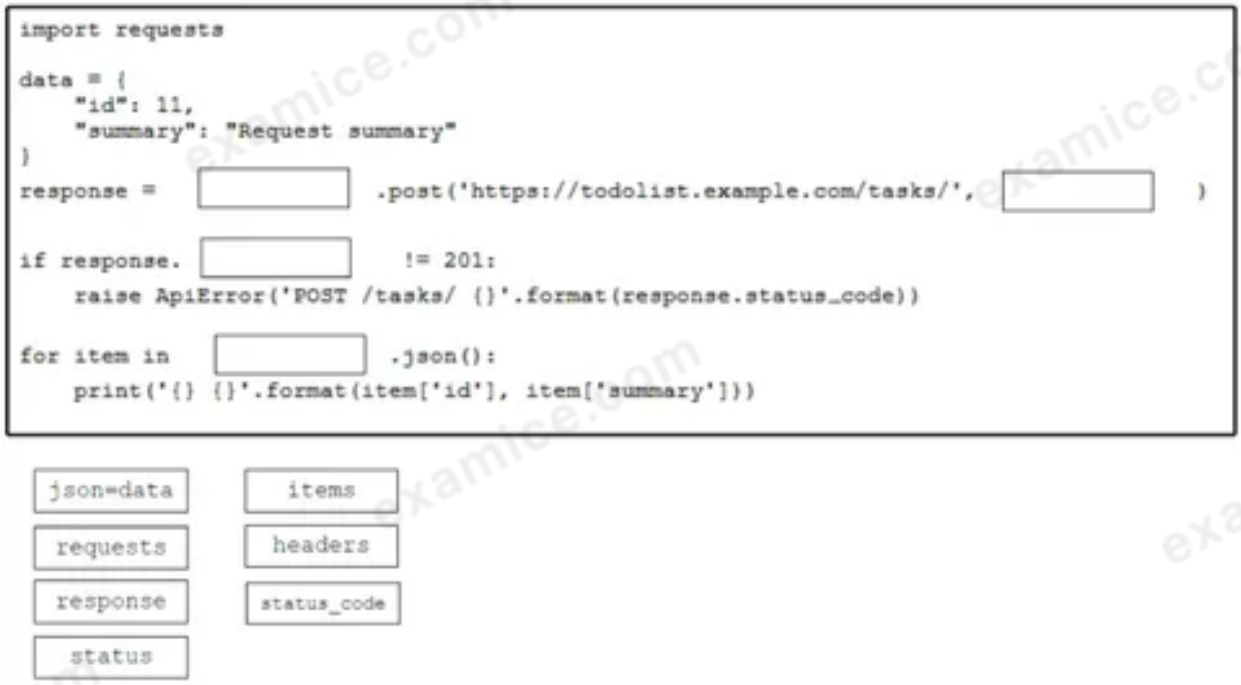

QUESTION 405

Issued to kamjunhao@gmail.com · October 17, 2026

What is a concept of test-driven development?

A Functions that validate the behavior of the product from the end user's perspective are written before any code is written.

B Business decision makers write tests to validate the product from the end user's perspective while the developer writes the code.

C One developer writes tests to validate the functionality of the code while another developer writes the code.

D Tests that validate the functionality of the code are written before any code is written.

Personal copy · kamjunhao@gmail.com

QUESTION 406

Issued to kamjunhao@gmail.com · October 17, 2026

Within a Bash shell, which command adds the current directory to the PATH without overwriting the current PATH for this shell and any subshells that are spawned from the current shell?

A export $PATH=PATH:$(pwd)

B set PATH=$PATH:${pwd}

C export PATH=$PATH:$(pwc1)

D set PATH=PATH+$(pwd)

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool simulates a network that runs Cisco equipment?

A Cisco Prime Infrastructure

B VMware

C Docker

D CML

Personal copy · kamjunhao@gmail.com

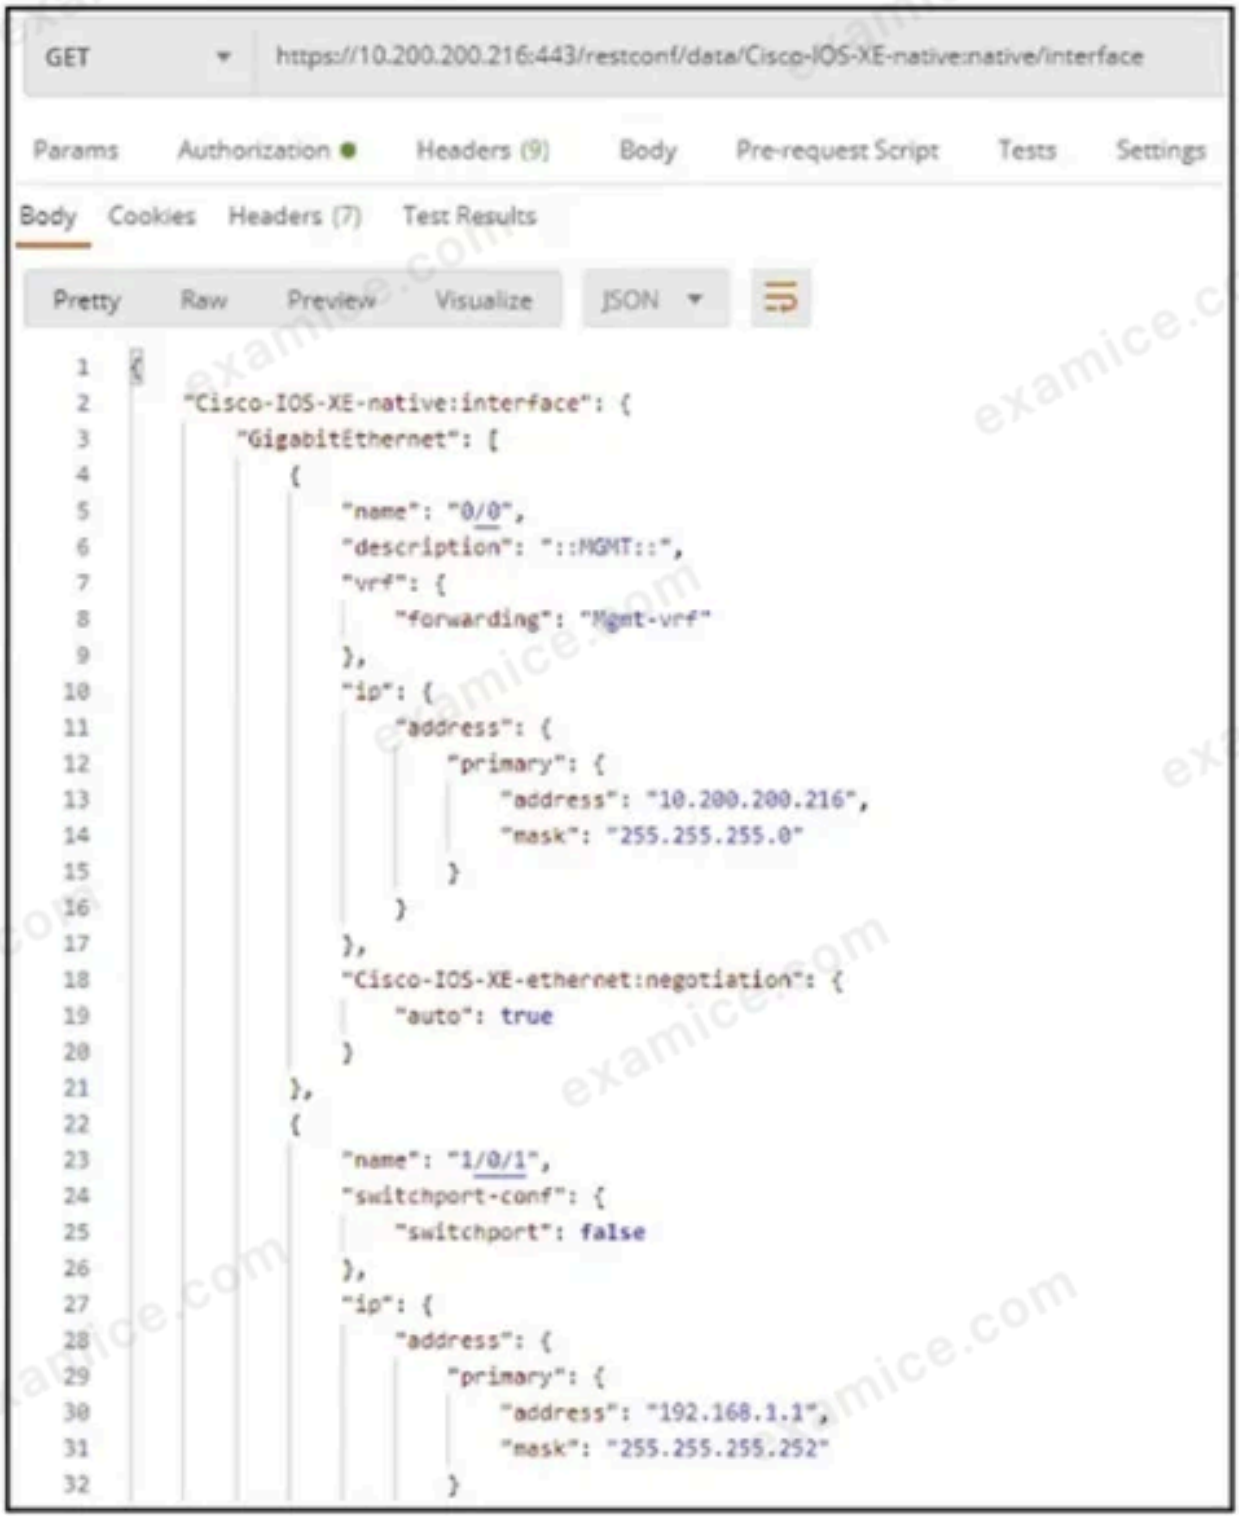

Refer to the exhibit. An administrator uses RESTCONF to retrieve the interface configuration of Gi1/0/1. Which URL path retrieves filtered information only for Gi1/0/1?

A `https://10.200.200.216:443/restconf/data/Cisco-IOS-XE-native:native/interface/GigabitEthernet=1%2F0%2F1`

B
```
http://10.200.200.216:80/restconf/data/Cisco-IOS-XE-
native:native/interface/GigabitEthernet1&2F0%2F1
```

C
```
https://10.200.200.216:443/restconf/data/Cisco-IOS-XE-
native:native/interface=GigabitEthernet1/0/1
```

D
```
http://10.200.200.216:80 /restconf/data/Cisco-IOS-XE-
native:native/interface/GigabitEthernet=1/0/1
```

Personal copy · kamjunhao@gmail.com

QUESTION 409

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco network management platform facilitates data center automation across private or public clouds?

A Meraki Systems Manager

B Cisco DNA Center

C SD-WAN

D ACI Anywhere

Personal copy · kamjunhao@gmail.com

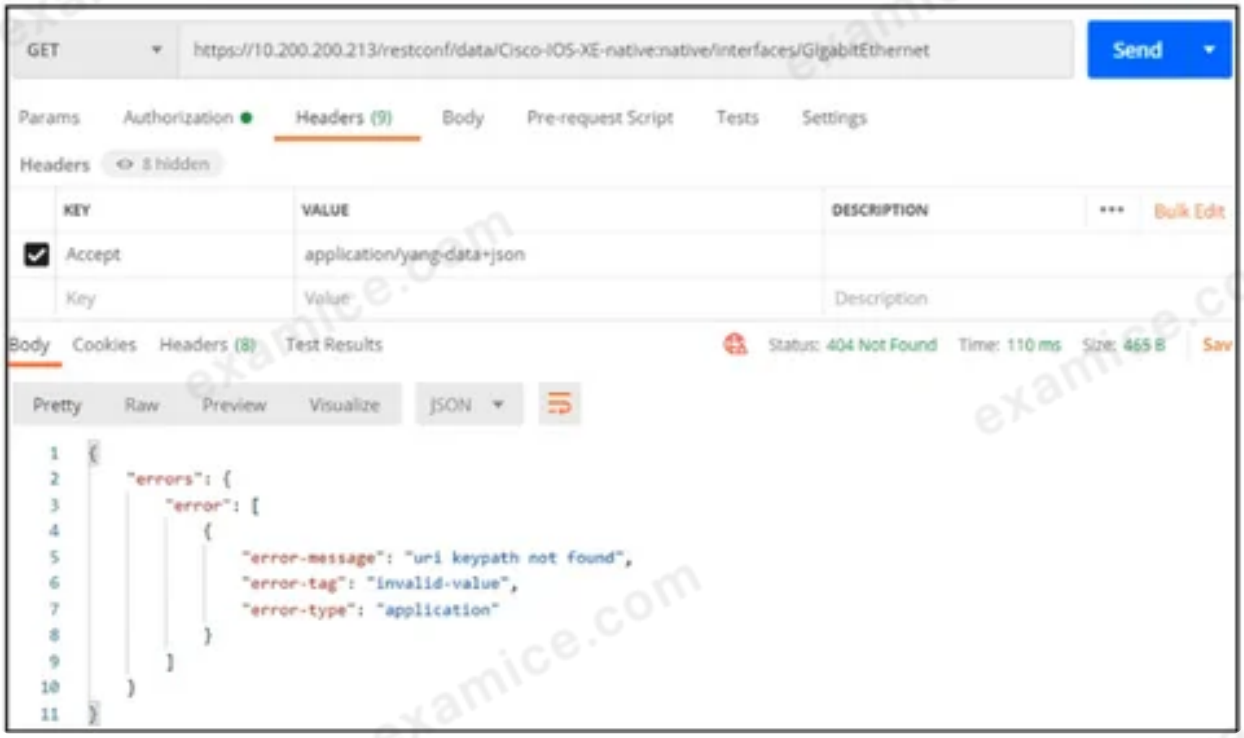

Refer to the exhibit. A developer is trying to collect data over RESTCONF API and prepares the request. The developer wants to get data in JSON format and with the IOS-XE-native model, but the request fails. Which HTTP part causes the failure?

A application value

B invalid URL

C missing URI header path

D incorrect request type