QUESTION 551

Issued to kamjunhao@gmail.com · October 17, 2026

Which network device plane is responsible for handling QoS?

A management plane

B data plane

C configuration plane

D control plane

Personal copy · kamjunhao@gmail.com

QUESTION 552

Issued to kamjunhao@gmail.com · October 17, 2026

Which two protocols are associated with the control plane on a network device? (Choose two.)

A BGP

B UDP

C SNMP

D FTP

E OSPF

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A lead engineer is managing the development of a web application with a team of remote developers using Git as the version control system. What is the advantage of a version control system that allows developers to pick code from any part of the project and perform updates on it?

A efficient handling of projects

B linear development

C build automation

D nonlinear development

Personal copy · kamjunhao@gmail.com

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0" message-id="">
  <edit-config>
    <target>
      <running/>
    </target>
    <config>
      <interfaces xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces">
        <interface nc:operation="delete"
        xmlns:nc="urn:ietf:params:xml:ns:netconf:base:1.0">
          <name>FastEthernet0/0/3.9</name>
          <description>FEther3.9b</description>
          <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
          type">ianaift:ethernetCsmacd</type>
          <enabled>true</enabled>
          <link-up-down-trap-enable>enabled</link-up-down-trap-enable>
          <ipv4 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip"/>
          <ipv6 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip"/>
        </interface>
      </interfaces>
    </config>
  </edit-config>
</rpc>
```

Refer to the exhibit. A developer needs to write a Python script to automate a task using a NETCONF query. What does the query do?

A It deletes some device configurations.

B It deletes all the device configurations.

C It shuts off the device.

D It adds a new device configuration.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer clones a repository that contains a Python script from GitLab to a laptop. After modifying the code, the engineer wants to validate the changes. Which command starts the CI/CD pipeline and runs the automated tests?

A git commit

B git test

C git fetch

D git push

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

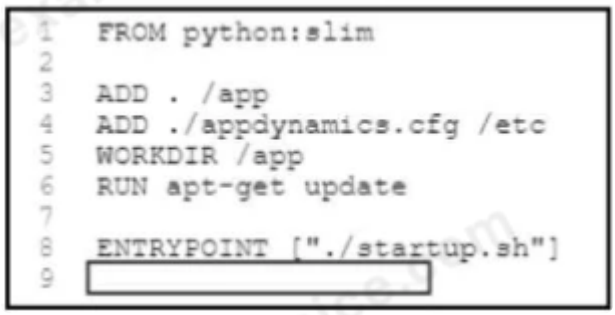

Refer to the exhibit. A developer needs to create a Docker image that listens on port 5000. Which code snippet must be placed onto the blank in the code?

A PORT 5000

B LISTEN 5000

C EXPOSE 5000

D OPEN 5000

Personal copy · kamjunhao@gmail.com

QUESTION 557

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of version control?

A application of code directly to hardware

B tracking development changes

C reuse of code-on-code patches

D compatibility with back-end systems

Personal copy · kamjunhao@gmail.com

QUESTION 558

Issued to kamjunhao@gmail.com · October 17, 2026

A network engineer makes several API calls to Cisco Prime to retrieve a list of all devices. Each time a response is received, only a subset of the devices is returned. The engineer notices that HTTP code 429 is returned instead of 200 for some API calls. Why did the response exclude some of the devices?

A The API applied an offset that was indicated in the request.

B The API failed to identify how many items to retrieve.

C The API timed out the request.

D The API rate limited the request.

Personal copy · kamjunhao@gmail.com

```
#!/bin/bash
#Run this script from the command line to get results
#-----------------------------------------------------------------------
# Update all applications
# Then install a desired package -- Docker

brew update  # To get the latest package lists
brew install docker

pip install --upgrade pip
pip install tensorflow
pip install pytorch

docker pull tensorflow/tensorflow:latest  # Download latest stable image
```

Refer to the exhibit. An engineer wants to create a Bash script to automate a workflow that is related to a machine learning-based application. The engineer wants to use the application as a container and use an image from the open-source public repository. What is accomplished by the script?

A Create a new software package

B Install and remove files.

C Update an existing software package.

D Install a software package.

A distributed application was developed using the Cisco Intersight SDK. While testing the interaction between the application and the Intersight API. the requests that were sent to the server could not execute because the application was blocked by the firewall. Which URL and port must be provided to the firewall administrator to allow the traffic?

A svc.intersight.com port 443

B intersight.com port 443

C intersight.com port 80

D svc.intersight.com port 80

What is a characteristic of test-driven development?

A It enables code refactoring.

B User tests are created after deployment.

C Infrastructure testing is done at every stage.

D Large updates are applied infrequently.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of Infrastructure as Code?

A to provide the ability of independent development process

B to manually configure and manage infrastructure at scale

C to apply new practices on the development process

D to use development engineering practices on the infrastructure

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

```
- name: stage1
  ansible.builtin.service:
    name: network
    state: restarted
    args: eth0
- name: stage2
  ansible.builtin.service:
    name: httpd
    state: started
```

Refer to the exhibit. The IT team deployed a new Linux virtual machine for a software engineer to use, but the engineer is not comfortable configuring services using Bash. Which workflow is automated by the Ansible playbook?

A Restart the network on the eth0 interface and start the httpd service if it is not already started.

B Restart the httpd service and start the network service for the eth0 interface.

C Start the network service on the eth0 interface even if it was brought down manually.

D Restart the httpd service and the network service regardless of the state.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must investigate the problems on a web application and address them to related teams. The engineer verifies the application reachability from the single public IP address with port and discovers that HTTPS access works to three servers of a network farm with IP 172.16.50.1 .2 and .4, but HTTPS access to the server with IP 172.16.50.3 does not work. Which problem type must be addressed as the cause for the case?

A VPN connectivity

B NAT

C blocked transport port

D proxy

Personal copy · kamjunhao@gmail.com

DRAG DROP

-

Drag and drop the Python data transformation methods from the left onto the data formats on the right.

Which RFC 1918 address space includes a subnet of 172.16.0.0 that uses a mask of 255.255.0.0?

A class A

B class B

C class C

D class D

```
{
    "Cisco-IOS-XE-native:GigabitEthernet": {
        "name": "2",
        "vrf": {
            "forwarding": "MANAGEMENT"
        },
        "ip": {
            "address": {
                "primary": {
                    "address": "192.168.1.10",
                    "mask": "255.255.0.0"
                }
            }
        },
        "mop": {
            "enabled": true
        },
        "Cisco-IOS-XE-ethernet:negotiation": {
            "auto": true
        }
    }
}
```

Refer to the exhibit. A network engineer makes a RESTCONF API call to Cisco IOS XE to retrieve information. Which HTTP method and URL does the engineer use to make the API call?

A GET https://devnetlab.local/restconf/api/running/native/GigabitEthernet

B GET https://devnetlab.local/restconf/api/running/native/interface/GigabitEthernet

C GET https://devnetlab.local/restconf/api/running/native/interface/GigabitEthernet/2/

D GET https://devnetlab.local/restconf/api/running/ios/native/interface/GigabitEthernet/1/

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform controls server, network, storage, and virtual resources with policy-driven management for up to 10000 physical Cisco servers?

A UCS Central

B Cisco Intersight

C Cisco DNA Center

D Cisco HyperFlex

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must review and clean up a code repository. During the review, the engineer finds a file named config.json that contains API URLs, shared keys, and other application configurations. Which two methods, according to **best** practice, **MUST** be used to protect secrets? (Choose two.)

A Store in plaintext if they are not stored in a code repository.

B Store as plaintext when the server is secured physically.

C Never appear in plaintext at rest or in transit.

D Make them long, secure strings that include numbers with special characters.

E Always store in a secure vault.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which IP service is responsible for automatically assigning an IP address to a device?

A DNS

B DHCP

C SNMP

D NAT

Personal copy · kamjunhao@gmail.com

```
FROM node:12-alpine
RUN apk add --no-cache ncdu g++ make
WORKDIR /app
COPY . .
RUN yarn install --production
CMD ["node", "source/server.js"]
```

Refer to the exhibit. The server.js Node.js script runs after the Dockerfile creates its container. What is the working directory of the application inside the container?

A /source

B /app

C /app/source

D /app/production

Issued to kamjunhao@gmail.com · October 17, 2026

What is an advantage of device-level management as compared to controller-level management to automate the configuration of network devices?

A Device-level management has access to all devices from a single point on the network and controller-level management does not.

B Device-level management supports all subsets of the potential device settings and controller-level management does not.

C Device-level management supports REST API-enabled devices and controller-level management does not.

D Device-level management requires one controller per vendor and controller-level management does not.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A resource named /item is protected by oAuth2 authentication. An endpoint named /login **must** request authentication. Which method **must** be used to access the resource by using the REST API?

A. Make a GET call to /login that includes the username and password, and retrieve a token to insert into the /item call.

B. Make a POST call to /login including the user credentials in the message, and retrieve a token to insert into the authorization header of the /item call.

C. Make a GET call to /item, then make a call to /login that includes the username and password in the body of the message, and wait for the authorization code.

D. Make a POST call to /item that includes the username and password in the body of the request message, and submit it to request access.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

```
$ diff -u file1.txt file2.txt
--- file1.txt   2018-01-11 10:39:38.237464052 +0000
+++ file2.txt   2018-01-11 10:40:00.323423021 +0000
@@ -1,4 +1,4 @@
```

Refer to the exhibit. What occurs when the script runs?

A The contents of both files are displayed.

B The total length of the files is displayed.

C The files are combined.

D File differences are compared.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of Cisco Webex?

A Join preconfigured or new spaces with fixed user rights.

B Configure devices at scale via automation scripts or by manual execution.

C Initiate or respond to calls automatically via automation.

D Get space history or notified in real time when new messages are posted.

Personal copy · kamjunhao@gmail.com

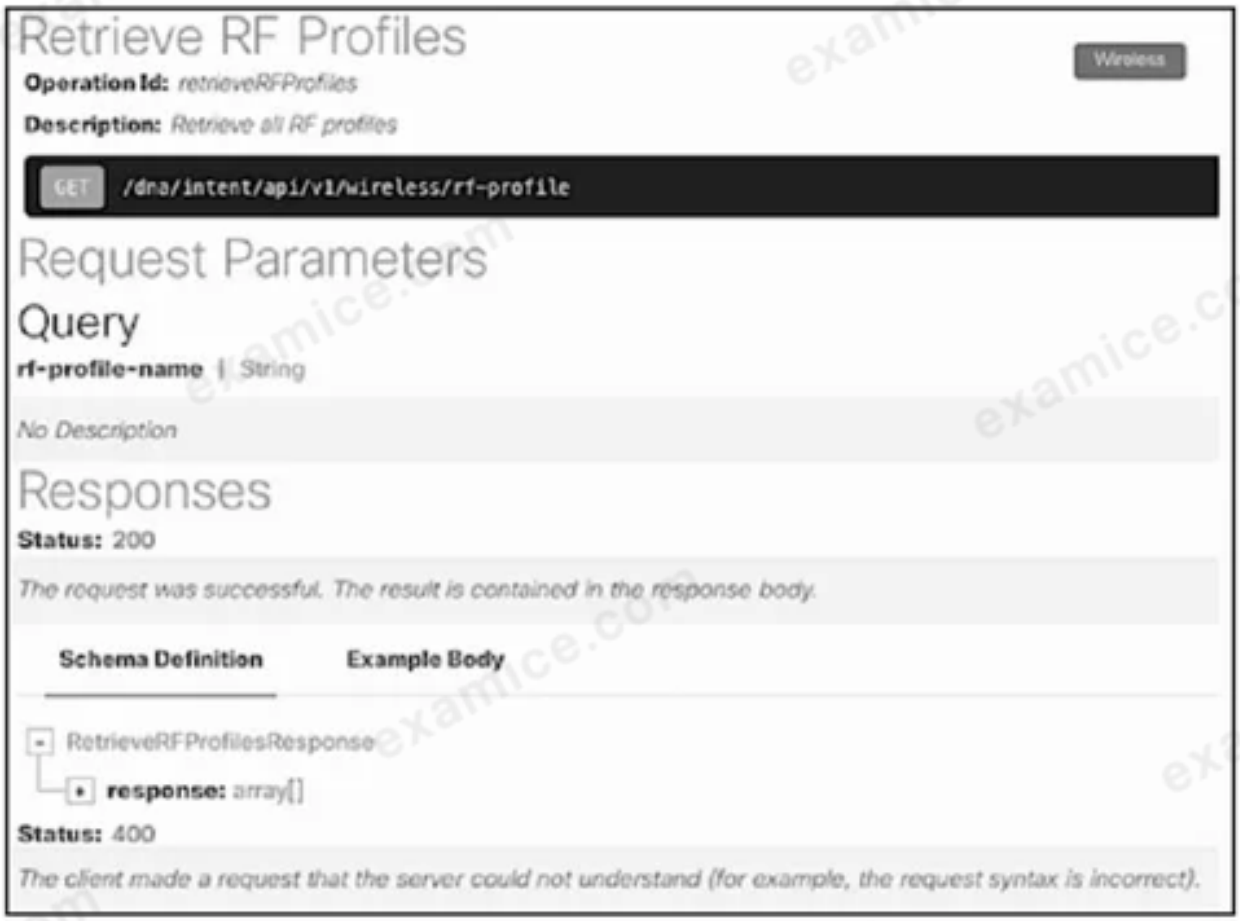

Refer to the exhibit. A developer uses a REST API to retrieve information about wireless access points. The API returns an HTTP 403 error when making a GET request. What resolves this issue?

A Provide the developer with the correct user access rights.

B Change the request HTTP method from GET to POST.

C Change the request timeout in the client software.

D Include a username/password request header.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer starts to learn about building applications that use Cisco APIs. The developer needs access to Cisco security products in a development lab to test the first new application that has been built. Which DevNet resource must be used?

A DevNet Code Exchange

B DevNet Automation Exchange

C DevNet Sandbox

D DevNet Communities

Personal copy · kamjunhao@gmail.com

```
import requests
class RestconfDevice():
    port = '443'
    headers = {'Accept': 'application/yang-data+json', 'Content-Type':
    'application/yang-data+json'}

    def __init__(self, username, password, hostname, port=port,
    headers=headers):
        self.username = username
        self.password = password
        self.hostname = hostname
        self.port = port
        self.headers = headers

    def save_config(self):
        try:
            response = requests.post(f'https://{self.hostname}:{self.port}/
            [          ]/operations/cisco-ia:save-config/',
                                    headers=self.headers, auth=(self.username,
                                    self.password), verify=False)

            result = response.json().get('cisco-ia:output').get('result')

            return result

        except:
            return response.raise_for_status()
```

Refer to the exhibit. A network engineer is creating a Python script to programmatically save network device configurations. Which code snippet must be placed onto the blank in the code?

A self.save

B {self.headers}

C restconf

D netconf

DRAG DROP

- -

Drag and drop the characteristics from the left onto the software development methodologies on the right.

QUESTION 580

Issued to kamjunhao@gmail.com · October 17, 2026

Which two HTTP code series relate to errors? (Choose two.)

A 100

B 200

C 300

D 400

E 500

Personal copy · kamjunhao@gmail.com

QUESTION 581

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using Python classes?

A They improve code organization by keeping data members and methods together.

B They remove the concept of inheritance to improve code readability and maintainability.

C They allow a Python script to import code from various independent modules.

D They simplify integration by testing the classes independently from other components.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of model-driven programmability for infrastructure automation?

A compatibility with any networking device

B automatic version control

C generic APIs that are compatible with multiple platforms

D a single data model across the network

Personal copy · kamjunhao@gmail.com

```
import requests
import json

url1 = "https://webexapis.com/v1/webhooks"
url2 = "https://example.com/devnet-message-events"
token = 'eyJhbGc  ...  yJbN8'

headers = {
    [redacted]
    'Content-Type': 'application/json'
}

payload = {
    "name": "Devnet Message Server",
    "targetUrl": url2,
    "resource": "messages",
    "event": "all"
}

response = requests.request("POST", url1, headers=headers,
data=json.dumps(payload))
print(response.text.encode('utf8'))
```

Refer to the exhibit. A developer needs to create a webhook to send all Cisco Webex messages to a third-party tool by using the Cisco Webex API The developer **must** authenticate with the API before any API calls can be made. To automate the procedure, a Python script is used. Which code snippet **must** be placed onto the blank in the code?

A ‘Authentication’: f’Bearer {token}’,

B ‘Authentication’: f’Basic {token}’,

C ‘Authorization: f’Basic {token}’,

D ‘Authorization: f’Bearer {token}’,

QUESTION 584

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must run tests on several Cisco controllers. Due to the nature of the task, the infrastructure must be running at all times and have access to APIs. Which **Cisco DevNet** source must the engineer use?

A DevNet Learning Labs

B DevNet Code Exchange

C DevNet Sandbox

D DevNet API documentation

Personal copy · kamjunhao@gmail.com

Q584 · October 17, 2026

QUESTION 585

Issued to kamjunhao@gmail.com · October 17, 2026

What does a developer import in a script to parse a file from XML to Python?

A function

B library

C variable

D method

Personal copy · kamjunhao@gmail.com

Q585 · October 17, 2026

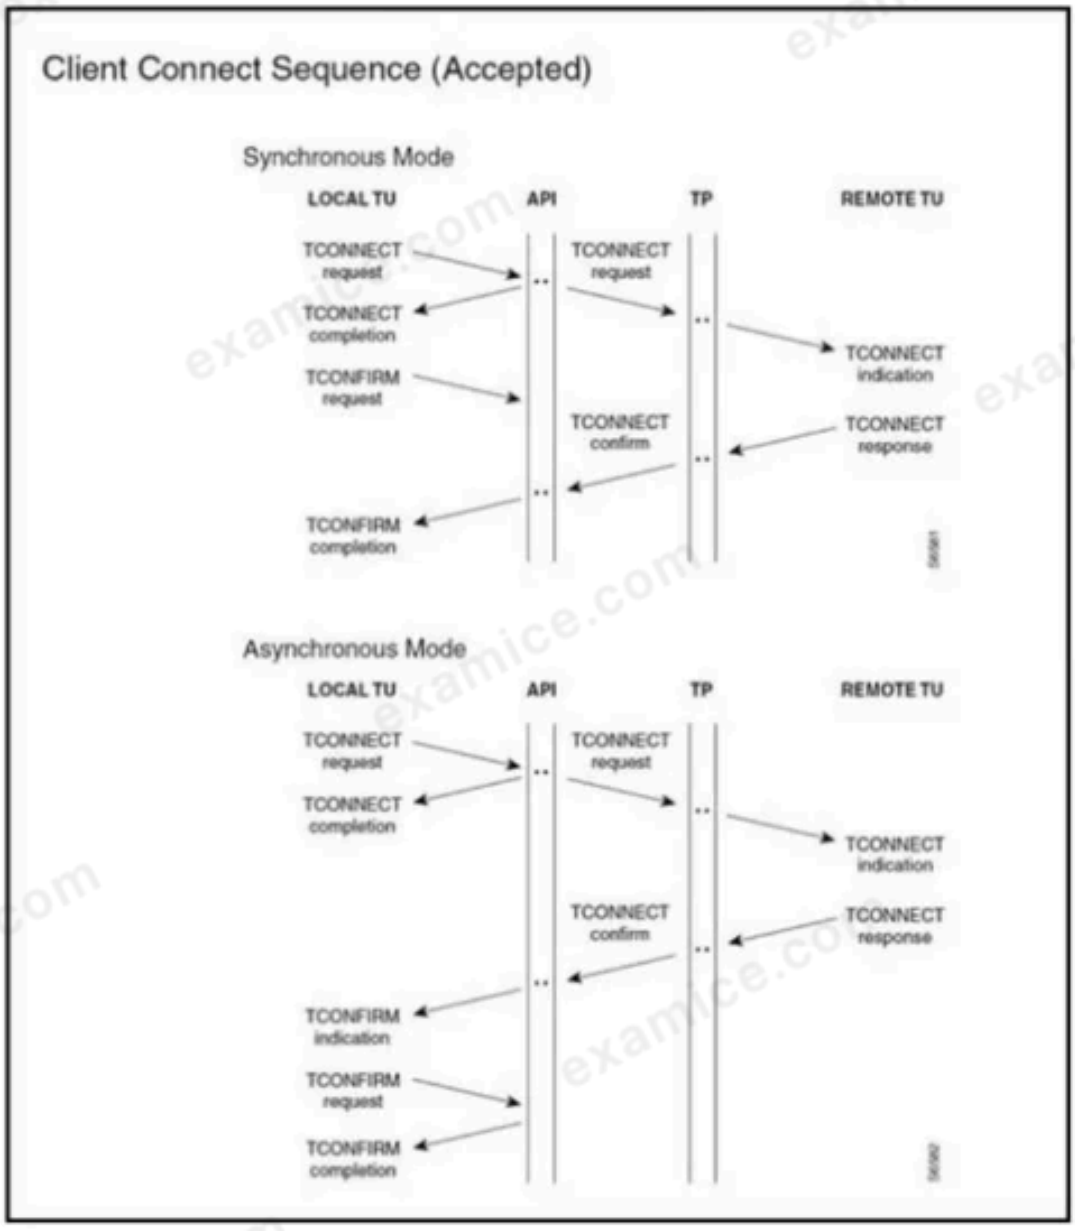

Refer to the exhibit. Which **API** is called when the REMOTE TU sends a TCONNECT Response to the LOCAL TU?

A TCONNECT completion

B TCONNECT request

C TCONNECT indication

D TCONNECT confirm

QUESTION 587

What is a capability of Ansible host files?

A constructs an inventory of resources under management

B points to each other or to lower-level roles

C contains Python code for user modules

D specifies the values of variables that refer to hosts

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which DNS record type allows a reverse proxy to communicate to a backend component without specifying the port?

A CNAME

B AAAA

C SRV

D PTR

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

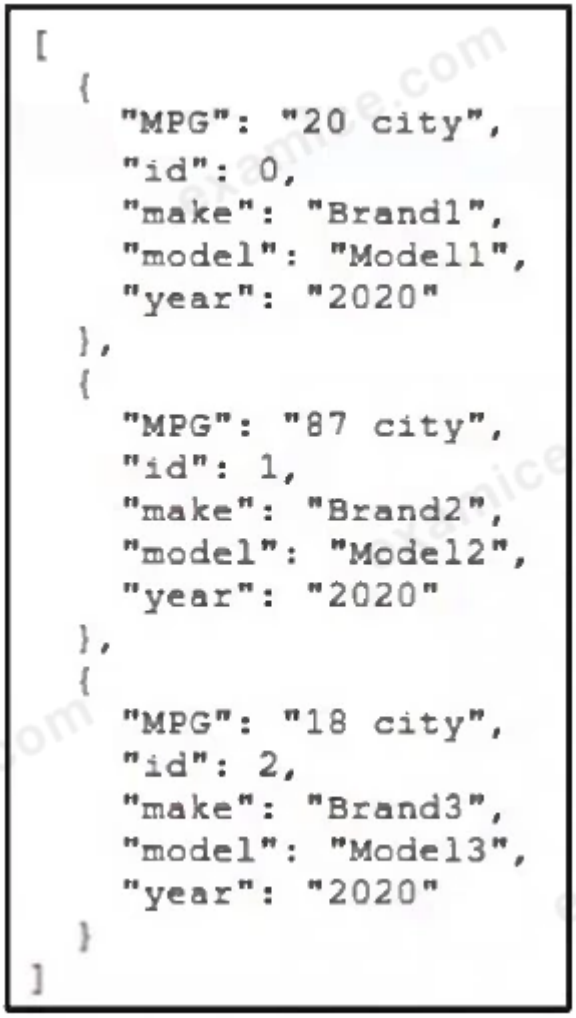

```
[
  {
    "MPG": "20 city",
    "id": 0,
    "make": "Brand1",
    "model": "Model1",
    "year": "2020"
  },
  {
    "MPG": "87 city",
    "id": 1,
    "make": "Brand2",
    "model": "Model2",
    "year": "2020"
  },
  {
    "MPG": "18 city",
    "id": 2,
    "make": "Brand3",
    "model": "Model3",
    "year": "2020"
  }
]
```

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python unittest that will test the status of the API. Not all options are used.

```
import unittest
import json
from apicars import app

class TestsAPICars(  [          ]  .TestCase):
  def setUp(self):
      self.app = app.test_client()

  # Check status response of API
  def  test_status_(self):
       resp = self.app.get('/cars/all')
       status_code = response.  [          ]
       self.assertEqual(status_code,200)

  # Check for content type is in application/json
  def _test_content_type(self):
       resp = self.app.get('/cars/all')
       self.assertEqual(resp.  [          ]  , 'application/json')

  def test_car_retrieval_with_id(self):
      resp = self.app.get('/cars?id=1')
      data = json.  [          ]  (resp.data)
      self.assertTrue(len(data) == 1)

if __name__ == '__main__':
   unittest.main()
```

status_code	test	encoding	loads
dumps	content-type	unittest	

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of NX-API REST?

A It runs Linux Bash commands.

B It returns requested data in YAML format.

C It utilizes Java Message Service as its transport.

D It uses SSH as its transport.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

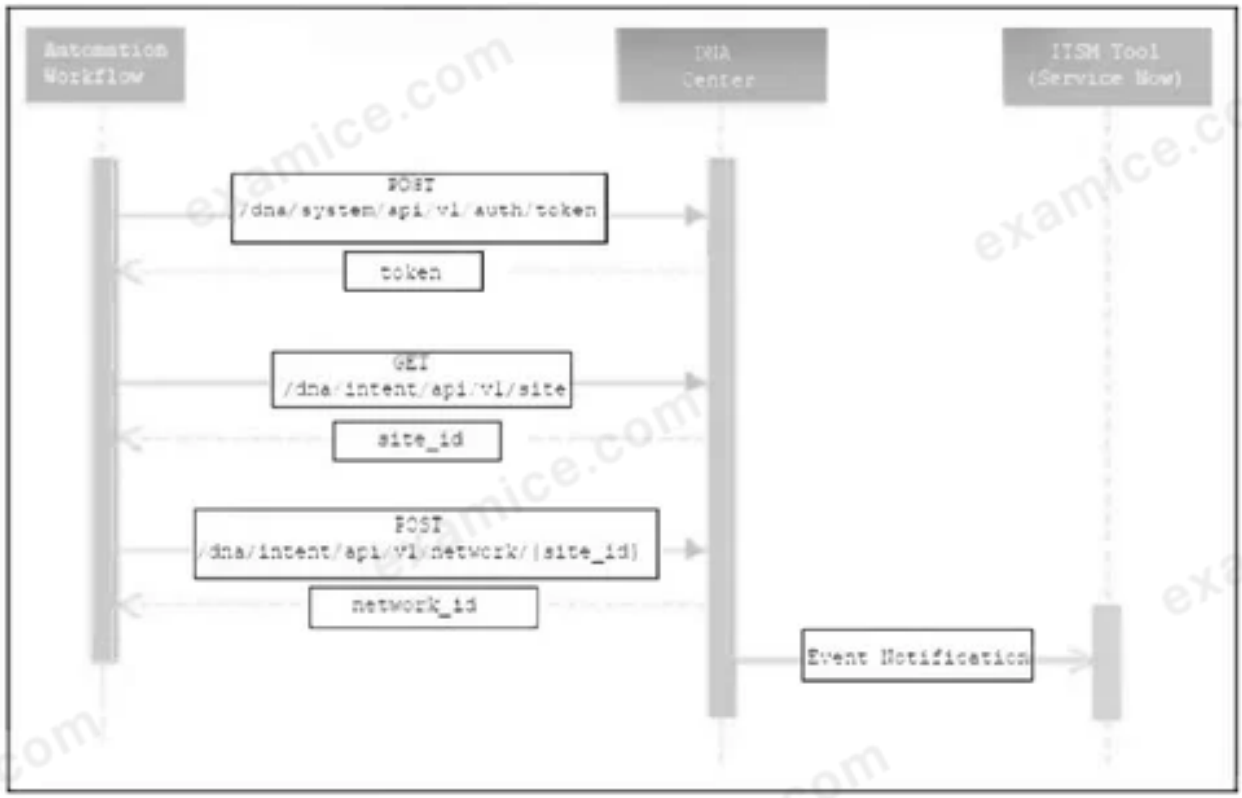

Refer to the exhibit. Drag and drop the steps from the left into the order on the right to perform the API authentication. Not all options are used.

Answer Area

Get a list of sites.	step 1
Create a new site.	step 2
Create a new network.	step 3
Authenticate and retrieve the token.	step 4
Notify the external tool of the state change.	step 5

QUESTION 592

Issued to kamjunhao@gmail.com · October 17, 2026

What is an advantage of using branches for developers working with a version control system?

A implementing a CI/CD pipeline to automate the deployment of code

B using different commit methods such as GUI/CLI

C making changes to code in isolation of each other

D tagging commits to capture a snapshot of a specific point in time

Personal copy · kamjunhao@gmail.com

QUESTION 593

Issued to kamjunhao@gmail.com · October 17, 2026

Which network device is used to configure a VPN?

A load balancer

B Layer 2 switch

C Layer 3 switch

D router

Personal copy · kamjunhao@gmail.com

QUESTION 594

Issued to kamjunhao@gmail.com · October 17, 2026

What is indicated when the green phase of the test-driven development cycle is complete?

A The unit test of the new code has written functions as intended.

B The new code is readable and maintainable.

C The new code meets the test requirements.

D The new code caused a break in the existing functionality.

Personal copy · kamjunhao@gmail.com

QUESTION 595

Issued to kamjunhao@gmail.com · October 17, 2026

When does a server return an HTTP 400 response code to the client?

A when the server could not understand the request due to invalid syntax

B when the server cannot find the requested resource

C when the client requests a resource that is unavailable

D when the client must authenticate itself to access the resource

Personal copy · kamjunhao@gmail.com

QUESTION 596

Issued to kamjunhao@gmail.com · October 17, 2026

How does edge computing increase security?

A by siloing data

B by distributing data

C by siloing security applications

D by distributing security applications

Personal copy · kamjunhao@gmail.com

QUESTION 597

Issued to kamjunhao@gmail.com · October 17, 2026

A developer changed a project and already staged the files in Git ready to be committed. The developer discovers that a colleague has also been working on the same project in Git. Before the commit is finalized, which Git command is used to identify changes after the last commit?

A git diff HEAD

B git diff

C git status

D git diff --cached

Personal copy · kamjunhao@gmail.com

QUESTION 598

Issued to kamjunhao@gmail.com · October 17, 2026

Which device is responsible for the transfer of frames between devices on a common network?

A load balancer

B firewall

C switch

D router

Personal copy · kamjunhao@gmail.com

QUESTION 599

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco UCM REST API is used for authenticated access and is compatible with any device?

A UDS

B Cisco Webex

C Cisco Intersight

D AXL

Personal copy · kamjunhao@gmail.com

```
workstation:DevNet user$ git pull
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0
Unpacking objects: 100% (3/3), done.
From https://github.com/netdeveloper/DevNet
    261f363..49fc949 master     -> origin/master
Updating 261f363..49fc949
error: Your local changes to the following files would be overwritten by merge:
    script.py
Please commit your changes or stash them before you merge.
Aborting
workstation:DevNet user$
```

Refer to the exhibit. A developer is working on a project and makes a few changes to test the code. After testing, the developer wants to revert to last commit but fails. Which command discards local changes?

A git reset --hard

B git stash

C git checkout origin/master -f

D git fetch origin

DRAG DROP

- -

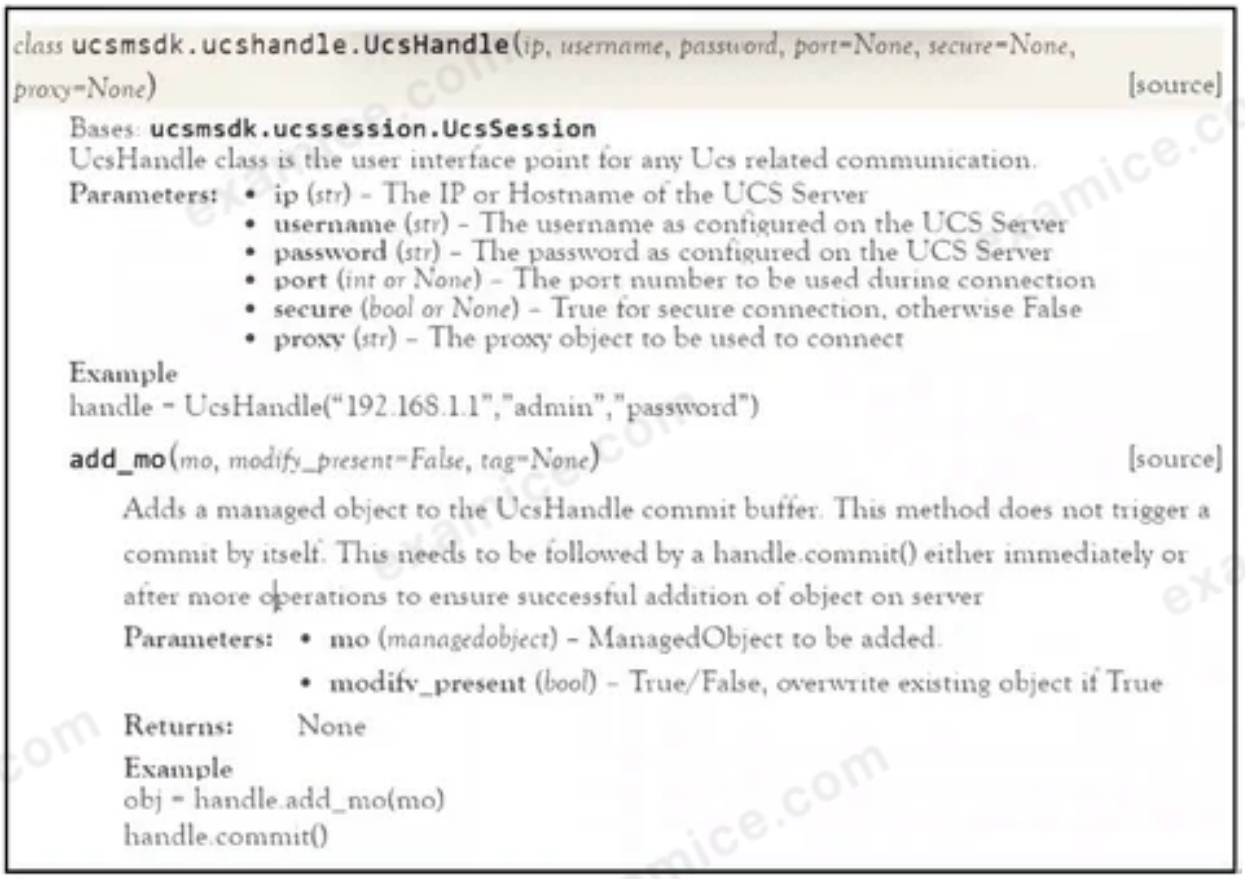

class **ucsmsdk.ucshandle.UcsHandle**(*ip, username, password, port=None, secure=None, proxy=None*) [source]

Bases: **ucsmsdk.ucssession.UcsSession**

UcsHandle class is the user interface point for any Ucs related communication.

Parameters:
- **ip** (*str*) – The IP or Hostname of the UCS Server
- **username** (*str*) – The username as configured on the UCS Server
- **password** (*str*) – The password as configured on the UCS Server
- **port** (*int or None*) – The port number to be used during connection
- **secure** (*bool or None*) – True for secure connection, otherwise False
- **proxy** (*str*) – The proxy object to be used to connect

Example

handle = UcsHandle("192.168.1.1","admin","password")

add_mo(*mo, modify_present=False, tag=None*) [source]

Adds a managed object to the UcsHandle commit buffer. This method does not trigger a commit by itself. This needs to be followed by a handle.commit() either immediately or after more operations to ensure successful addition of object on server

Parameters:
- **mo** (*managedobject*) – ManagedObject to be added.
- **modify_present** (*bool*) – True/False, overwrite existing object if True

Returns: None

Example

obj = handle.add_mo(mo)
handle.commit()

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the Python script to create multiple VLANs using the Cisco UCS Python SDK. Not all options are used.

```
from ucsmsdk.ucshandle import UcsHandle
from ucsmsdk.mometa.fabric.FabricVlan
import FabricVlan

handle = [                ]("ucsmanageip", "ucsadmin", "ucspsw")

lan_cloud = handle.query_classid("FabricLanCloud")

vlans = ["10", "20", "30"]

for vlan in [                ] :
 vlan_mo = [                ] (parent_mo_or_dn=lan_cloud[0],
           name="vlan"+vlan, id=vlan)
  handle.add_mo(vlan_mo, True)

handle. [                ] ()
```

UcsHandle	FabricVlan	Flask
vlans	commit	UcsServer

QUESTION 602

A developer is working on a feature named 'dvft4e8f5g0e3k3d6e8f1v1' in a branch. A file named 'dvft264744863v1.jpg' has been staged accidentally. To ensure that the commit is performed and branches are merged the developer needs to remove it. Which Git command must be used to unstage the file?

A git delete HEAD dvft264744863v1.jpg

B git reset HEAD dvft264744863v1.jpg

C gitrevertHEADdvft264744863v1.jpg

D git remove HEAD dvft264744863v1.jpg

QUESTION 603

Issued to kamjunhao@gmail.com · October 17, 2026

A network engineer needs to understand how to create API requests using Cisco DNA Center and IOS XE devices. Which Cisco DevNet resource should be used?

A Cisco product support

B DevNet Learning Labs

C Cisco developer documentation

D Cisco software support

Personal copy · kamjunhao@gmail.com

QUESTION 604

Issued to kamjunhao@gmail.com · October 17, 2026

What is a network management capability of the Cisco Meraki platform?

A enforces policies across mobile devices

B allows third-party applications to receive notifications through webhooks

C provisions the policies related to security products

D allows for a seamless import of IP address pools

Personal copy · kamjunhao@gmail.com

A small business company hires an engineer to deploy and manage a new application. The company must keep costs as low as possible while achieving the highest performance. The application is handling highly sensitive data that must **never** transit outside the corporate network. Which deployment model must be chosen?

A cloud

B bare metal

C vm

D containers

What is a characteristic of MAC addresses?

A They route packets that are based on data in the routing table.

B They use a local-link address to help devices interact on the same VLAN.

C They allow communication between devices in the same broadcast domain.

D A permanent IP address is assigned to the host.

```
import requests
import json

BASE_URL = 'https://api.meraki.com'
API_KEY = '6bec40cf957de430a6f1f2baa056b99a4fac8fa0'
url = f'{BASE_URL}/api/v0/networks/L_646829496481105433/floorPlans'

    headers = {
    'Content-Type': 'application/json',
    'X-Cisco-Meraki-API-Key': API_KEY
    }
    response = requests.get(url, headers=headers)

    if response.status_code == 200:
        for plan in response.json():
            print(f'{plan["name"]}')

            for device in plan["devices"]:
                print(f'\t{device["name"]}, {device["lat"]}, {device["lng"]}')
```

Refer to the exhibit. A network engineer creates a Python script that collects information by using the Cisco Meraki API. For the coordinates, the script uses location analytics data from the Meraki Map section. The information gathered from the API is visualized in a list on a custom dashboard application for enhanced monitoring. Which information is gathered by the workflow that is automated?

A all floor plans and networks

B all floor plans and devices

C all floor plans and devices and their location

D all floor plans and networks and their location

DRAG DROP

- -

Drag and drop the steps from the left into the order of the test-driven development cycle.

Answer Area

Verify that the new test fails.	step 1
Refactor the code.	step 2
Write a test.	step 3
Ensure that all tests pass.	step 4
Write code.	step 5

Issued to kamjunhao@gmail.com · October 17, 2026

Which security platform authenticates clients for network access?

A Cisco Umbrella

B Cisco Secure Endpoint

C Cisco Firepower

D Cisco ISE

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to output the status of the REST API response from the script. Some options may be used more than once. Not all options are used.

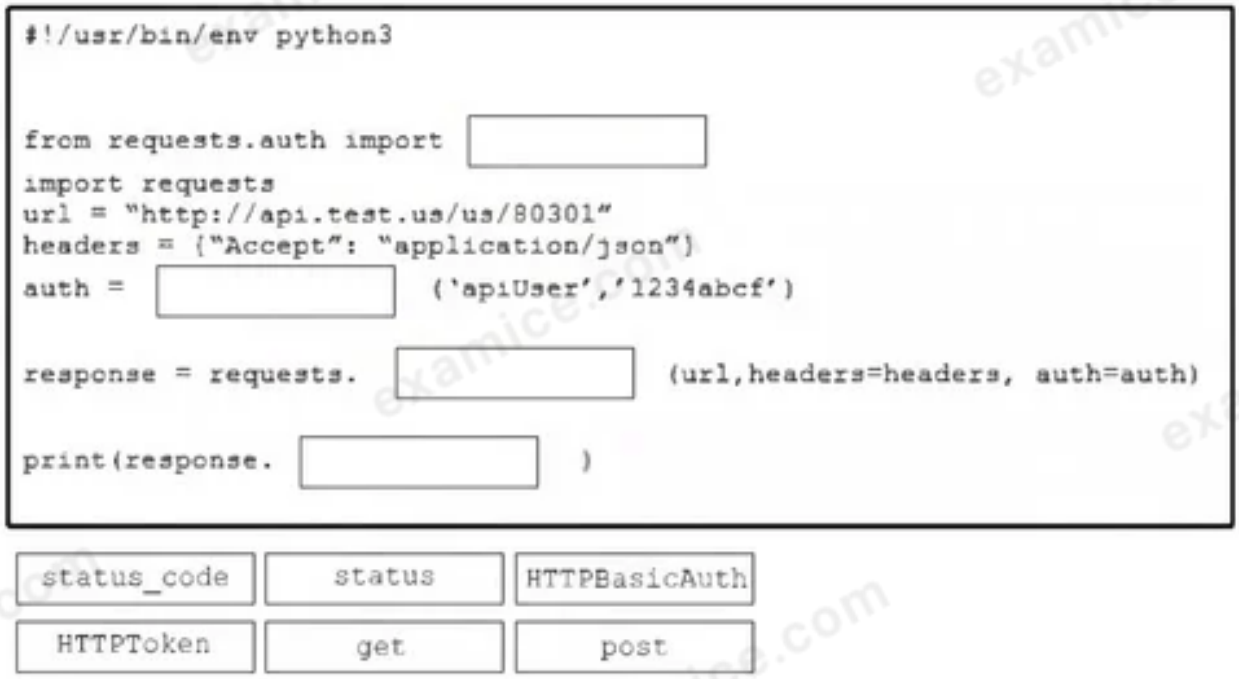

```
---
- hosts: nxos
connection: local
gather_facts: no
tasks:
- nxos_config:
    diff_against: intended
    pzovider: "{{ provider }}"
    intended_config: "{{ lookup('file', 'latest.txt') }}"
  register: config

- nxos_config:
    backup: yes
    provider: "{{provider}}"
  when: config.changed
...
```

Refer to the exhibit. A developer is creating an Ansible playbook for a Cisco NX-OS device. The tasks that are defined in the playbook focus on the configuration on the device and is combined with other playbooks to showcase Day 0 to Day N tasks using an agentless tool like Ansible. Which two tasks will execute when the playbook is run in check mode? (Choose two.)

A Create a backup if there are any differences detected in the diff output.

B Print any configuration differences to stdout.

C Compare the running-config against the latest.txt file.

D Deploy a configuration that is based on the latest.txt template.

E Compare the saved-config against the latest.txt file.

Issued to kamjunhao@gmail.com · October 17, 2026

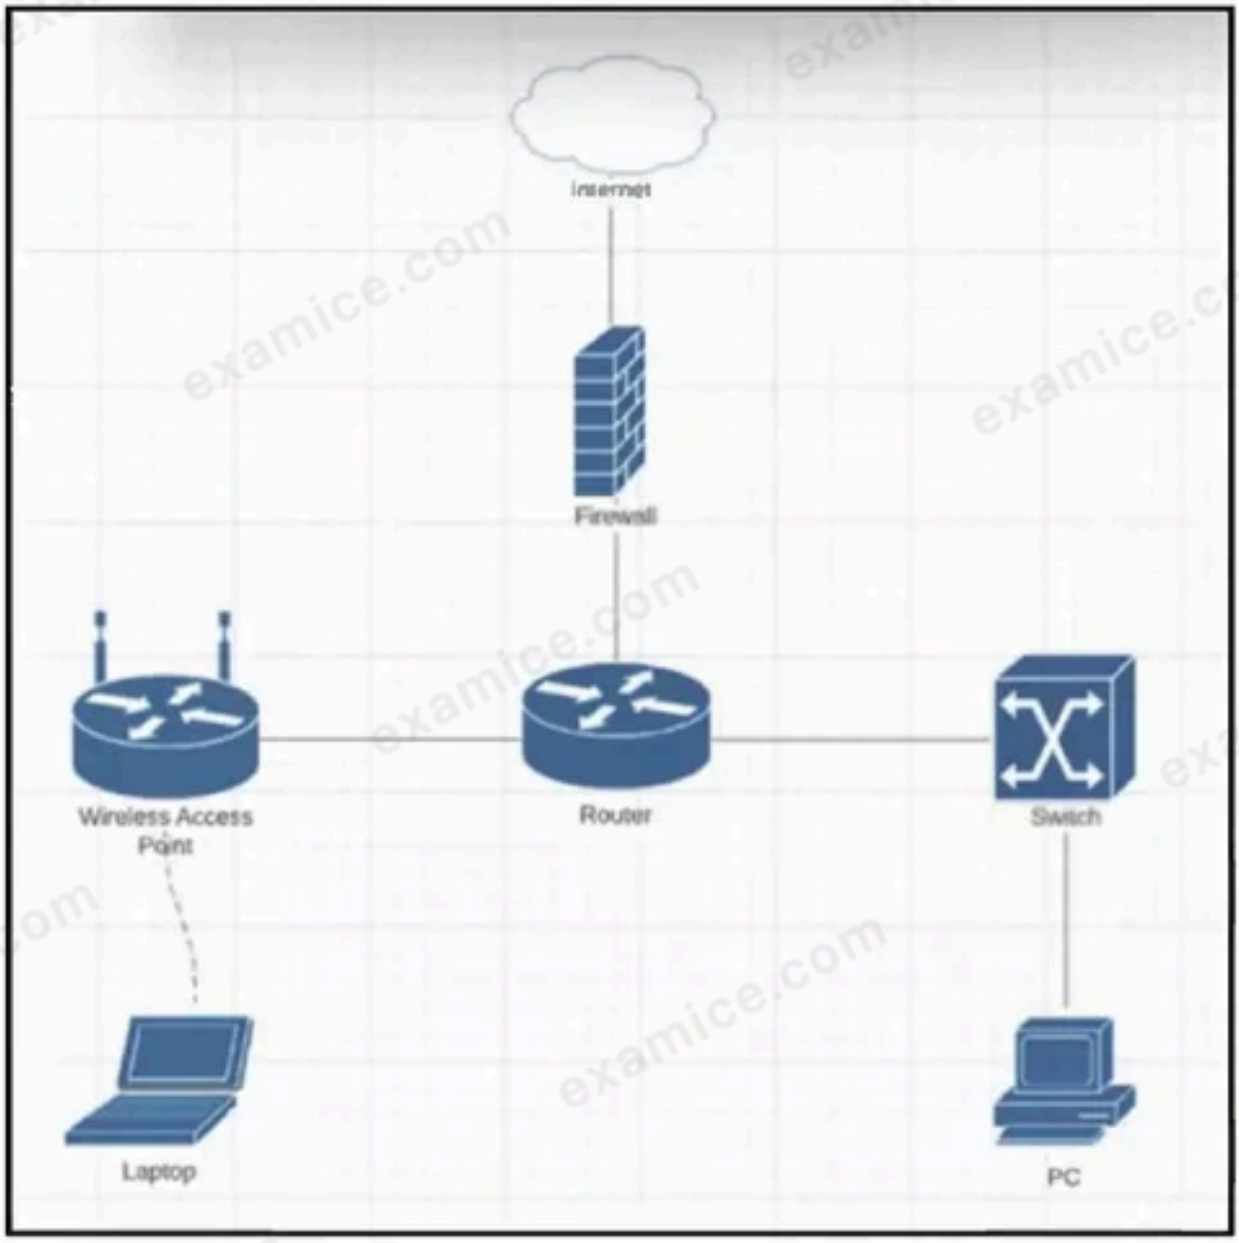

Refer to the exhibit. The employees of a store need remote access to the store network from anywhere on the internet. To achieve this, the network engineers configure a VPN in IPSec tunnel mode. The engineers want to minimize the amount of configuration to deploy and manage the solution. On which local device must the VPN terminate?

A switch

B firewall

C PC

D router

QUESTION 613

What is a benefit of managing the network configuration by using organized code that consumes APIs when deploying multiple network devices?

A simplifies the device configuration

B eliminates use of legacy management protocols

C increased device security

D fewer manual network changes

QUESTION 614

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP response code is used to indicate that the current state of the target resource conflicts with the request?

A 307

B 503

C 204

D 409

Personal copy · kamjunhao@gmail.com

QUESTION 615

Issued to kamjunhao@gmail.com · October 17, 2026

During development of a real-time VoIP application on a Cisco Webex platform, users report that their voice gets chopped or parts of the conversation drop out. The engineer checking the issue notices jitter on the network that affects the application. What does this mean?

A There is variability in the amount of time between when the packages are sent and received.

B More than 10% of packets are lost during transmission of RTP information.

C Too much time passes between when the packages are sent and received.

D Authentication details are lost due to routing rules applied by the Layer 3 device.

Personal copy · kamjunhao@gmail.com

QUESTION 616

Issued to kamjunhao@gmail.com · October 17, 2026

What is the relationship between code reviews and standards compliance?

A The standards highlight the bugs that are allowed in the review.

B The review process ensures compliance to international standards.

C The reviews provide the ability to maintain a set coding style.

D The standards enforce how the reviews are undertaken.

Personal copy · kamjunhao@gmail.com

QUESTION 617

Issued to kamjunhao@gmail.com · October 17, 2026

What is an example of a cross-site request forgery attack?

A forcing an existing authentication end user to perform unwanted actions on a web application

B compromise of passwords, keys, or session tokens, or exploitation of other implementation flaws to assume the identity of another user

C when untrusted data is sent to an interpreter as part of a command or query

D when unencrypted electronic documents that contain sensitive data are altered

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform controls server, network, storage, and virtual resources with policy-driven management for up to 160 physical Cisco severs?

A Cisco HyperFlex

B Cisco DNA Center

C Cisco Prime Infrastructure

D UCS Manager

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

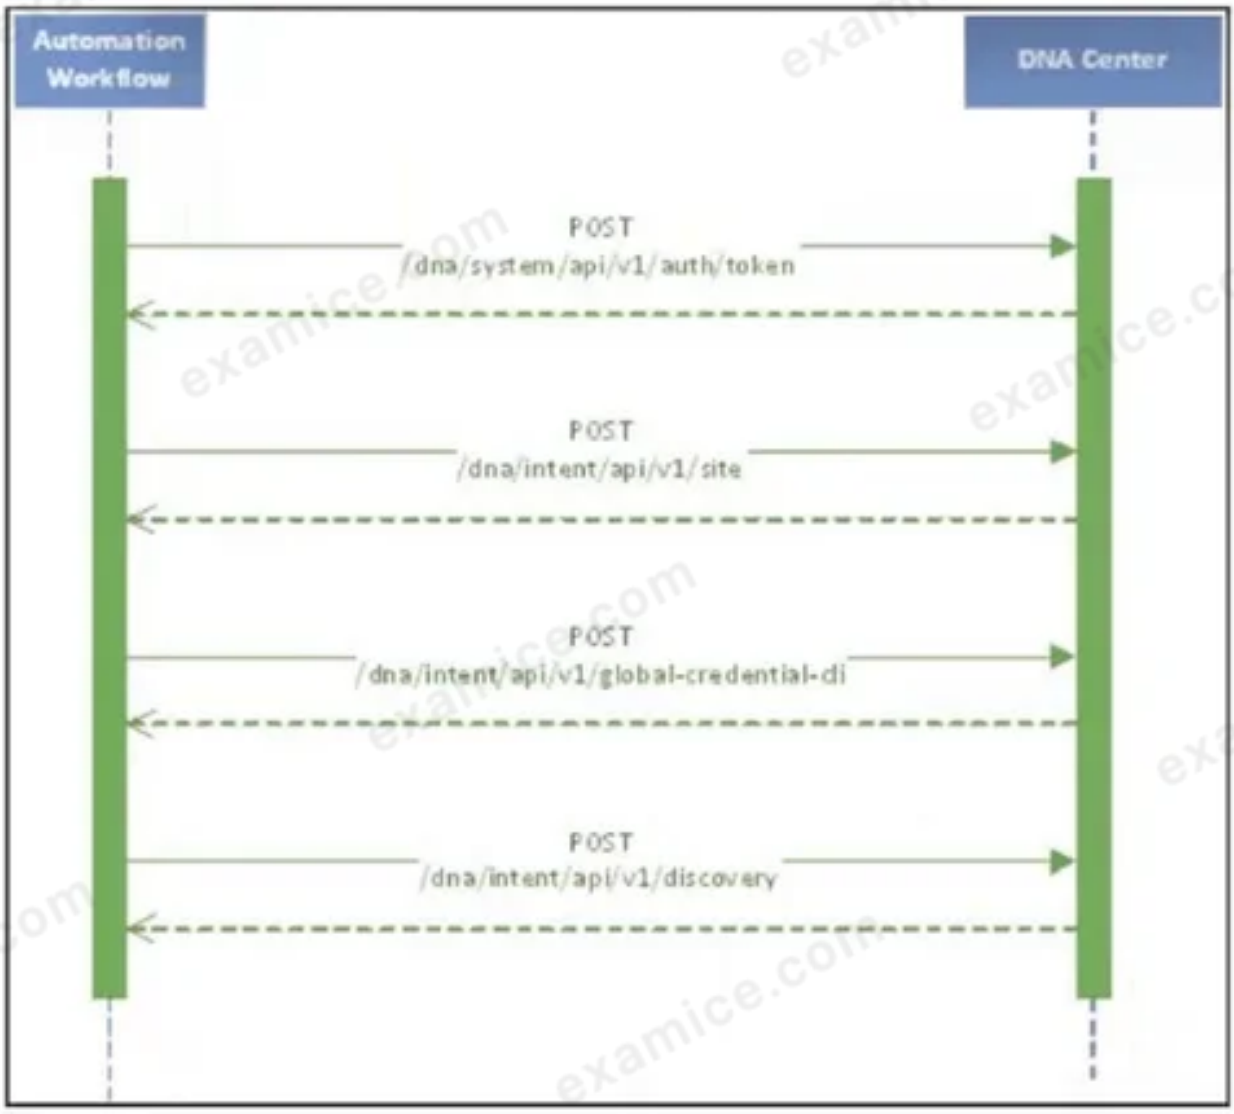

Refer to the exhibit. The diagram shows a sequence of API calls between an automation workflow and the Cisco DNA Center API. The API sequence is synchronous and manipulates data about sites, passes credentials, and explores the discovery state. Which workflow is automated?

A running commands against a device

B deletion of site area and building

C execution of network discovery

D addition of a network device

Personal copy · kamjunhao@gmail.com

QUESTION 620

DRAG DROP

- -

Drag and drop the characteristics from the left onto the software development methods on the right.

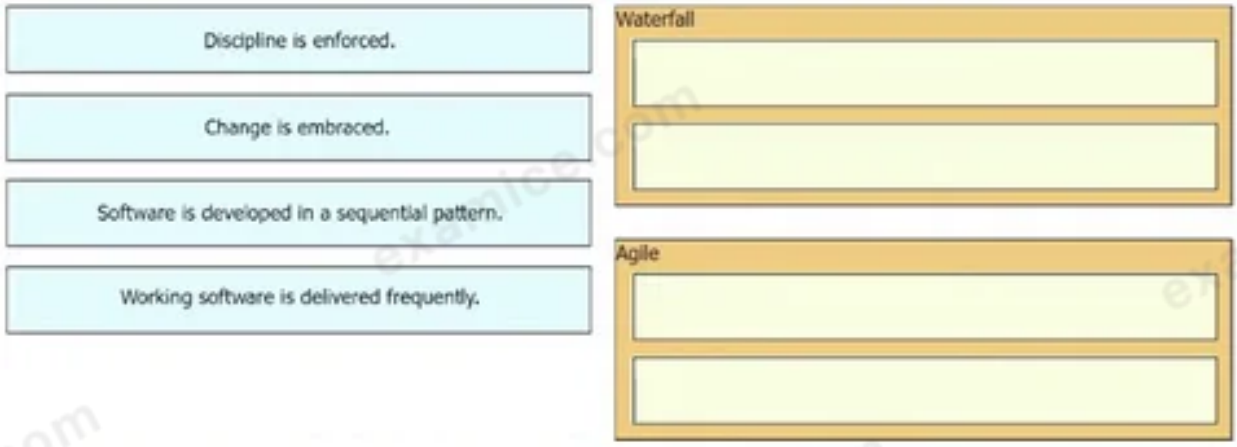

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco network management platform is a network automation and assurance solution that provides control and management of the Cisco intent-based networking system?

A Meraki Systems Manager

B Cisco DNA Center

C NSO

D ACI

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer has created a three-tier web application for network device control and management. The application consists of multiple objects assigned for different functionalities. When a configuration change is pushed to a running device, the status is reflected on the dashboard simultaneously. The architecture of the application is based on the Observer pattern. Which advantage does this pattern provide for the application design and architecture?

A Dependent objects are updated automatically.

B One object can query the state of other objects.

C It reinforces the object dependency.

D It updates the state of dependent objects directly.

Personal copy · kamjunhao@gmail.com

DRAG DROP

Drag and drop the code snippets from the bottom onto the blanks in the Python script to construct a unit test that checks the API response. Not all options are used.

DRAG DROP

- -

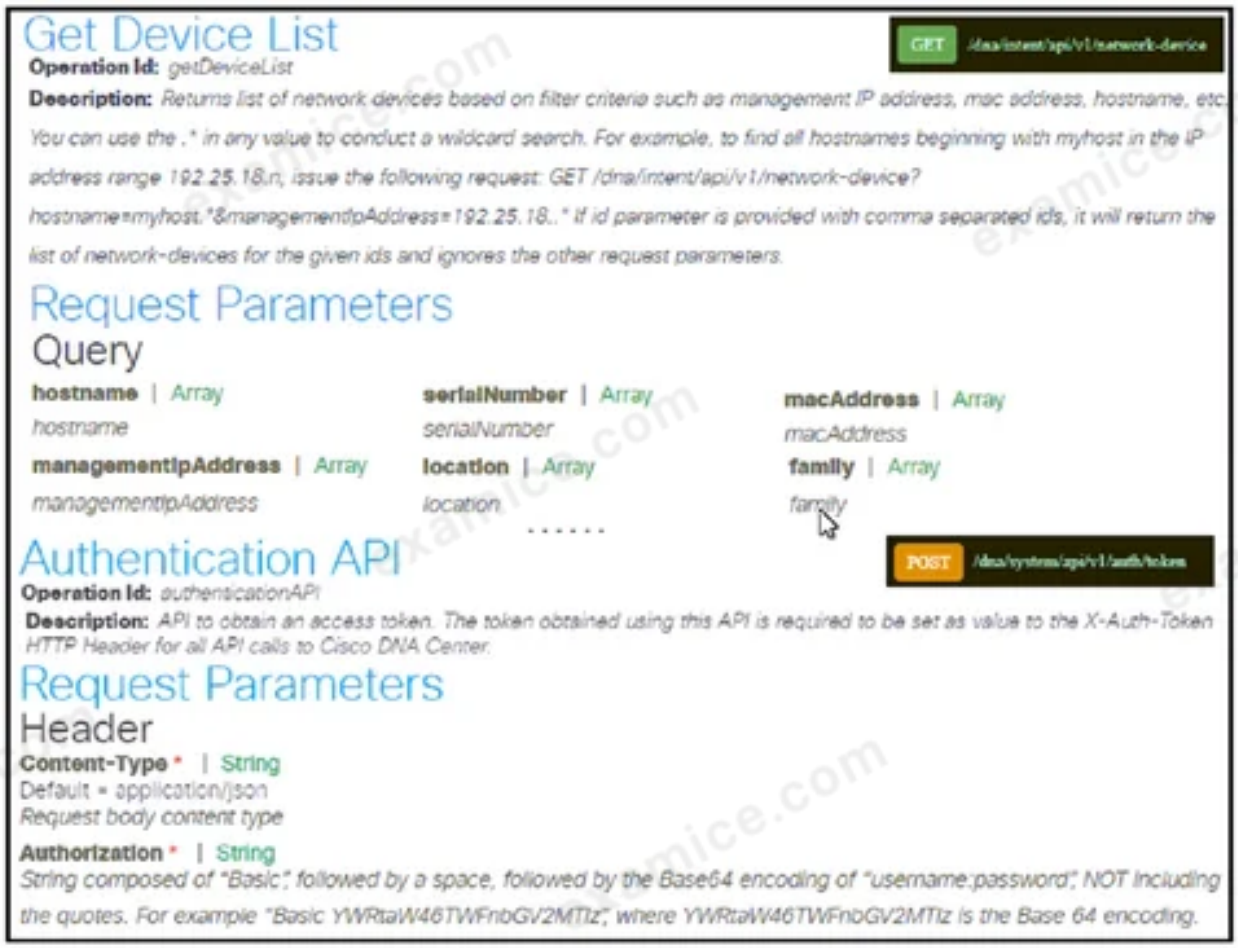

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the Python script to retrieve a list of hosts using the Cisco DNA Center API. Not all options are used.

Personal copy · kamjunhao@gmail.com

QUESTION 625

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer wants to make a local web server accessible over the Internet using Static NAT. What does Static NAT map in the network?

A many public IP addresses to a single local IP address

B many local IP addresses to a pool of public IP addresses

C single local IP address to single public IP address

D many local IP addresses to a single public IP address

Personal copy · kamjunhao@gmail.com

```
import requests
def main(token):
    count_client = 0
    url = 'https://172.18.3.252/dna/intent/api/v1/client-health'
    headers = {
        "Content-Type": "application/json",
        "Accept": "application/json",
        "X-auth-Token": token
    }
    response = requests.get(url,headers=headers, verify=False).json()
    for score in response['response'][0]['scoreDetail']:
        try:
            for category in score['scoreList']:
                print('\tType: {0}, Count: {1}'.format(
                    category['scoreCategory']['value'],
                    category['clientCount']))
                count_client = count_client + category['clientCount']
        except:
            pass
    print(count_client)
def auth():
    url = "https://172.18.23.52/dna/system/api/v1/auth/token"
    headers = {
        'Authorization': 'Basic FeBCH2NNEY9KD='
    }
    r=requests.post(url,headers=headers,data={},verify=False)
    return r.json()['Token']
if __name__ == '__main__':
    token = auth()
    main(token)
```

Refer to the exhibit. A support team deploys Cisco DNA Center to monitor and manage its entire network infrastructure. A network engineer on the support team creates a Python script to automate the generation of statistics and send the results to the team. Which workflow does the script automate?

A Count all the clients on the wireless and wired network and display their security score.

B Display all the clients that have a security score of Fair.

C Count all the clients on the wireless and wired network and display their health details.

D Count all the clients on the wired network.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to present GigabitEthernet2 details in the XML format. Not all options are used.

DRAG DROP

- -

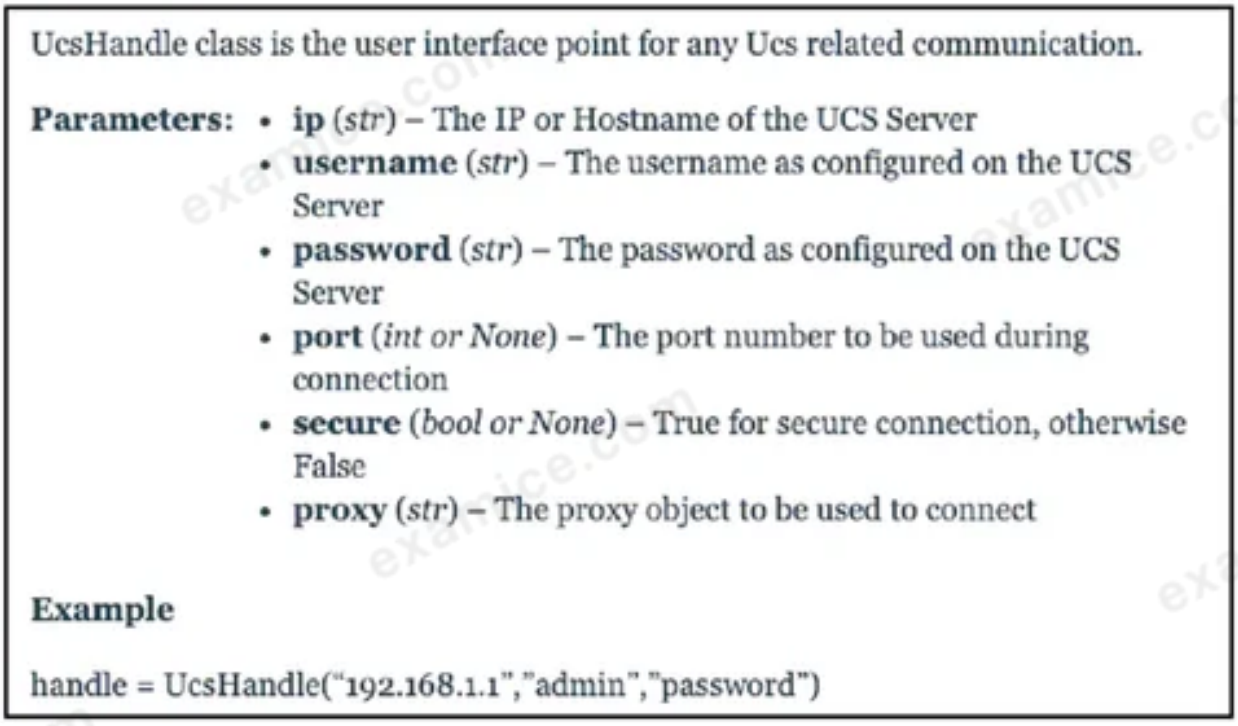

UcsHandle class is the user interface point for any Ucs related communication.

Parameters:
- **ip** (*str*) – The IP or Hostname of the UCS Server
- **username** (*str*) – The username as configured on the UCS Server
- **password** (*str*) – The password as configured on the UCS Server
- **port** (*int or None*) – The port number to be used during connection
- **secure** (*bool or None*) – True for secure connection, otherwise False
- **proxy** (*str*) – The proxy object to be used to connect

Example

handle = UcsHandle("192.168.1.1","admin","password")

Refer to the exhibit. An engineer needs to retrieve all the organizations in a Cisco UCS Manager deployment. Drag and drop the code snippets from the bottom onto the blanks in the Python script to print the information to standard output. Some options may be used more than once. Not all options are used.

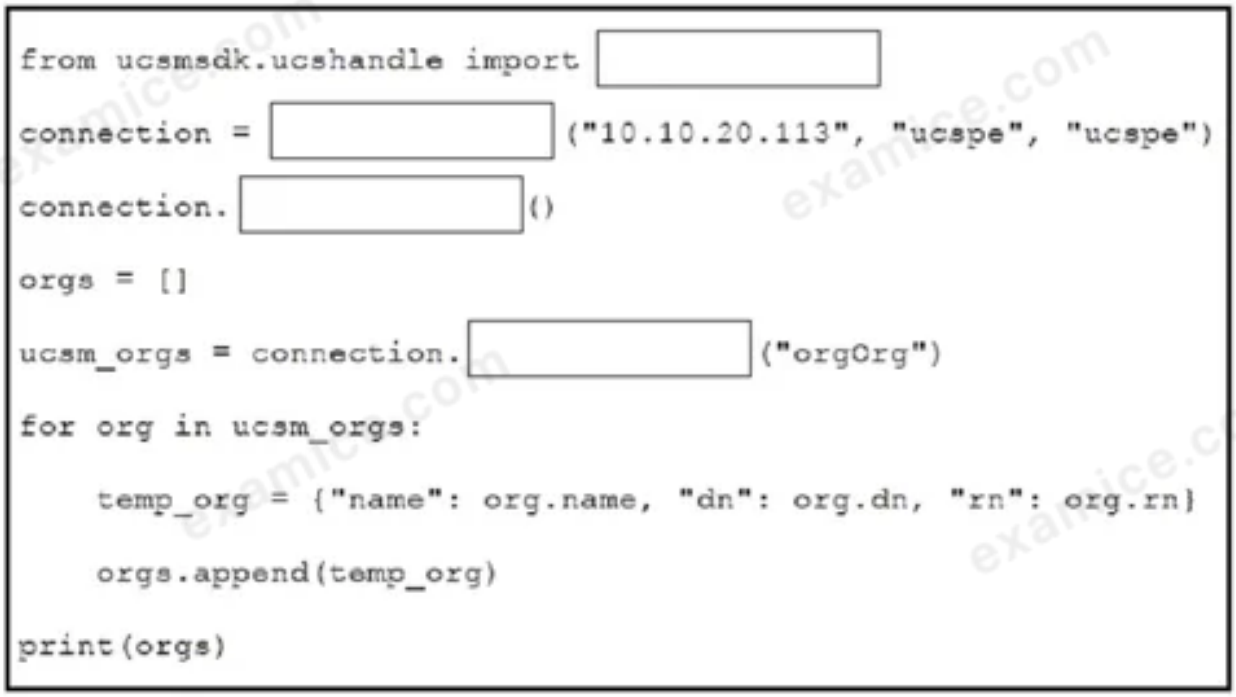

query_classid	UcsConnection	query	init
UcsHandle	login		

Personal copy · kamjunhao@gmail.com

```
interface GigabitEthernet0/0/0
 no ip address
 negotiation auto
!
interface GigabitEthernet0/0/0.10
 encapsulation dot1Q 20
 ip address 192.168.20.2 255.255.255.0
!
interface GigabitEthernet0/0/2
 ip address 173.38.153.102 255.255.255.252
 ip nat outside
 negotiation auto
!
ip nat pool NAT_POOL 42.42.4.2 42.42.4.2 netmask 255.255.255.0
ip nat inside source list 42 pool NAT_POOL overload
access-list 42 permit 192.168.0.0 0.0.42.255
```

Refer to the exhibit. A company recently acquired new IP-based security cameras. After discussion with the engineering team, they decide to segment the security camera traffic from the rest. The engineer assigns the new VLAN 10 for the security camera traffic. After all the devices are configured, it seems as if the cameras cannot access the Internet. After a few minutes of debugging, the engineer restricts the problem to the router configuration. What is the cause of the issue?

A A NAT inside rule is missing from the GigabitEthernet0/0/0.10 interface.

B A specific permit statement for the 192.168.20.0/24 subnet is missing from the access list.

C A NAT inside rule is missing from the GigabitEthernet0/0/0 interface.

D A specific permit statement for the 192.168.10.0/24 subnet is missing from the access list.

DRAG DROP

-

Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. Not all options are used.

```
#!/bin/bash
echo "Enter your commit message…"
read message
echo "Which branch?"
read branch
git add .
git commit -m"${message}"
git push -u origin ${branch}
echo "data pushed."
```

Refer to the exhibit. A developer notices that some tasks are repeated in the development workflow. To reduce the amount of work, the developer creates a Bash script to use during the development process. The script uses messages to interact with the user and integrates with a version control system. Which workflow is automated by the script?

A Update the master branch with an untracked file.

B Push all changed files on Git with a message on a branch.

C Undo a commit.

D Push on the current branch.