Issued to kamjunhao@gmail.com · October 17, 2026

An engineer deploys a Cisco CSR 1000 V instance to a virtual machine. The engineer must output the device configuration in JSON format. Which protocol is used for this task?

A YANG

B NETCONF

C SNMP

D RESTCONF ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

RESTCONF is the appropriate protocol for outputting device configuration in JSON format from a Cisco CSR 1000V instance. RESTCONF uses HTTP methods for communication and supports data formats like JSON and XML. It is designed to work with YANG data models, making it suitable for this task.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of implementing common data structures when working with APIs in remote systems? (Choose two.)

A ensures that developers are limited to using one data schema type

B prevents multivendor interoperability

C improves security in RESTful web services

D enforces standardized data structures ✓ CORRECT

E leverages code that is easily managed and reused ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D, E.

Implementing common data structures when working with APIs in remote systems enforces standardized data structures, which helps ensure consistent organization and ease of data parsing. This standardization simplifies the development and maintenance process for developers. Additionally, it leverages code that is easily managed and reused, saving time and resources by reducing the need for extensive rewriting and debugging. This reusability enhances the efficiency and reliability of the API.

A development team is creating an application used for contactless payments. The application must:

- Be web-based
- Capture and process the credit card information for a purchase.

Which security action must the web application use to gather and process the private customer data?

A Enable RATs to monitor the web application remotely.

B Disable botnets to eliminate risks.

C Disable TLS to increase the connection speed.

D Enable the encryption of network traffic. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To securely gather and process private customer data, the web application must enable the encryption of network traffic. This ensures that sensitive information such as credit card details are transmitted securely and are protected from interception by unauthorized parties. Encryption is a standard practice for safeguarding data in transit, especially for applications dealing with financial transactions.

examice.com

An engineer needs to collect information about 20,000 Bluetooth clients using the Cisco Meraki API. The API returns only 1,000 results. One of the HTTP response headers has the data:

Link: https://api.meraki.com.info/api/v0/networks/ABC/bluetoothClients?perPage=1000&startingAfter=1000>;rel="next"

Which RFC is implemented by the API to apply the restriction?

A RFC 5988 – Web Linking ✓ CORRECT

B RFC 5890 – Response Constraints

C RFC 5005 – Feed Paging and Archiving

D RFC 5446 – Content Limits

SUGGESTED ANSWER

The suggested answer is A.

The Cisco Meraki API uses the Link header for pagination, which provides URLs to the next set of results. This mechanism is defined by RFC 5988 – Web Linking. RFC 5988 specifies a way to represent links in HTTP headers, enabling navigation through pages of data. The use of the 'next' relation in the Link header to indicate the link to the next page of results aligns with the specifications laid out in RFC 5988.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of using classes over functions when writing applications? (Choose two.)

- A improved readability ✓ CORRECT
- B increased compatibility
- C variable reusability
- D increased performance
- E code organization ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is A, E.

One of the primary benefits of using classes over functions is improved readability. Classes can help organize code into logical units, grouping related data and methods together, making it easier to understand. Additionally, classes offer better code organization. They provide a structured way to bundle data and functionality together, which can simplify maintenance and development, separating concerns and responsibilities within the codebase.

DRAG DROP

- -

Drag and drop the steps from the left into order on the right to create a common CI/CD pipeline process. Not all options are used.

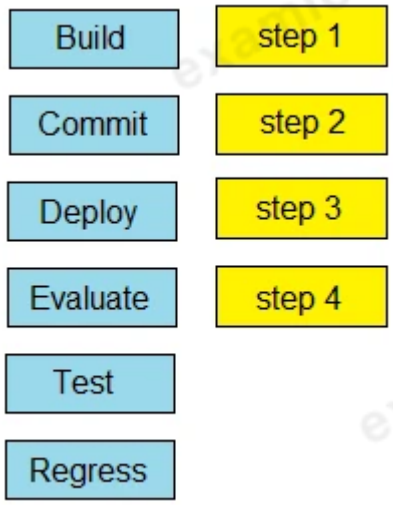

SUGGESTED ANSWER

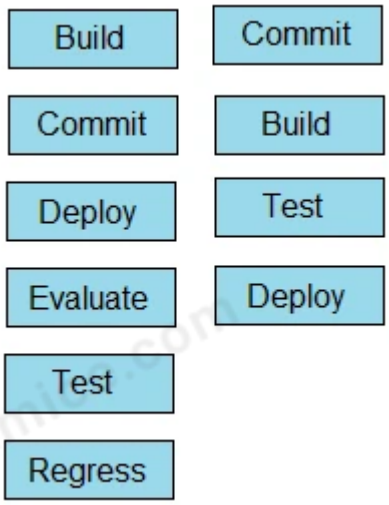

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to obtain a list of network devices by using the Cisco Meraki API. Not all options are used.

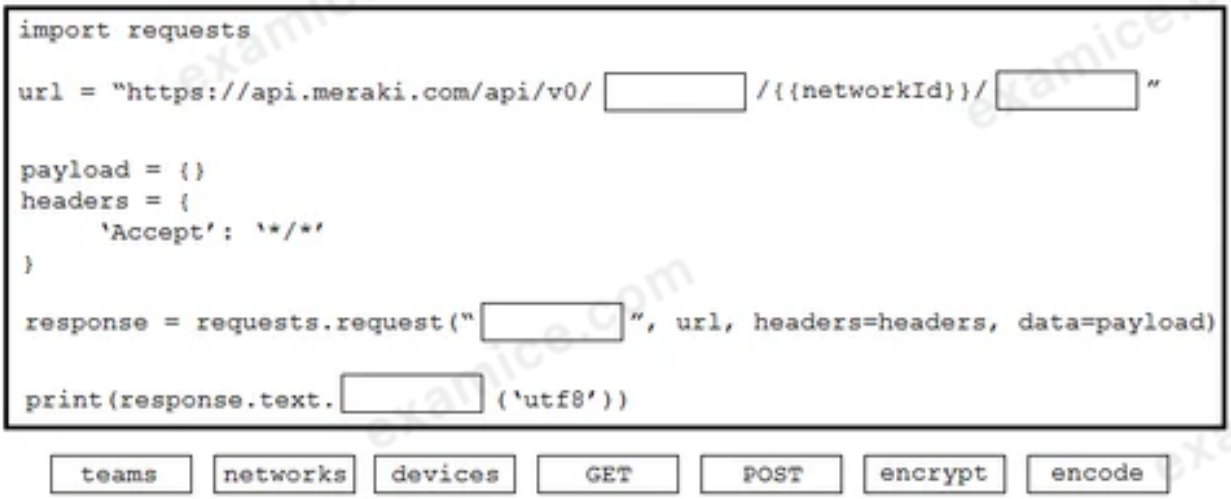

SUGGESTED ANSWER

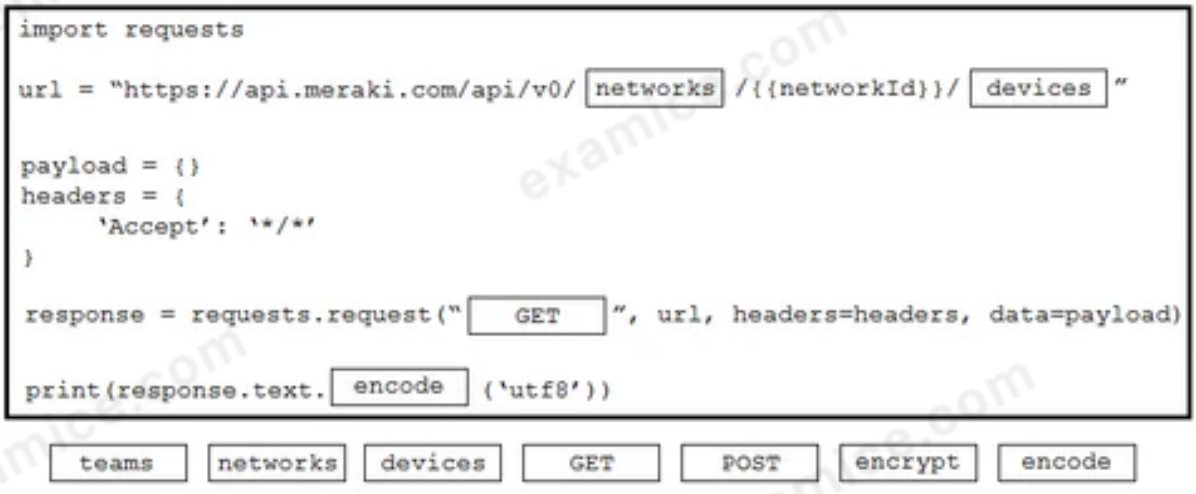

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a new application, but the application must be tested before being released to a customer. When a mobile phone that uses 4G is used to access the application, the request fails. Why does the connection to the application fail?

A The application is hosted on premises and VPN connectivity is required ✓ CORRECT

B The application must be added to the production server before testing.

C The application must be moved to the cloud before testing is possible.

D The application connectivity is limited to HTTPS protocol.

SUGGESTED ANSWER

The suggested answer is A.

The application is likely hosted on premises, which means it's not accessible over the public internet without a secure connection. Since the request fails when using a 4G mobile phone, it suggests that access to the application requires a VPN connection to establish a secure tunnel to the internal network where the application is hosted.

Issued to kamjunhao@gmail.com · October 17, 2026

Which platform has an API that has the capability to obtain a list of vulnerable software on user devices?

A Cisco Advanced Malware Protection ✓ CORRECT

B Cisco Umbrella

C Cisco Identity Services Engine

D Cisco Firepower

SUGGESTED ANSWER

The suggested answer is A.

Cisco Advanced Malware Protection (AMP) is designed to provide advanced detection, blocking, continuous analysis, and retrospective alerting of malware. AMP has the capability to obtain a list of vulnerable software on user devices, which allows it to offer comprehensive protection against various cyber threats.

A developer creates an application that must provide an encrypted connection or API keys. The keys will be used to communicate with a REST API. Which command must be used for the secure connection?

A curl –X PUSH 'http://username.app.com/endpoint/?api_key=12345abcdef'

B curl –v 'ftp://username.app.com/endpoint/?api_key=12345abcdef'

C curl –X GET 'https://username.app.com/endpoint/?api_key=12345abcdef' ✓ CORRECT

D curl –X GET 'http://username.app.com/endpoint/?api_key=12345abcdef'

SUGGESTED ANSWER

The suggested answer is C.

To ensure a secure connection, the command must use HTTPS, which stands for HyperText Transfer Protocol Secure. HTTPS encrypts the data transmitted between the client and server, ensuring that sensitive information such as API keys remains protected. Among the provided options, only the command using HTTPS fits this requirement, making it the correct choice.

examice.com

A developer is developing a web application that uses username and password to authenticate to the next service. The user credentials must be available at any time in the application. The developer must choose and implement a **secure** method of storing the authentication credentials that are used in the automation code. Which password handling method must be used to minimize the security risk?

A Store the username and password in a separate configuration file.

B Store the username and password in a vault. ✓ CORRECT

C Store the passwords in a dictionary.

D Store the username and password in code.

SUGGESTED ANSWER

The suggested answer is B.

The most secure method for storing authentication credentials used in an automation code is to store the username and password in a vault. A vault is a dedicated security mechanism designed to securely store and manage sensitive information such as credentials, ensuring that access to these secrets is tightly controlled and monitored. Storing passwords in a dictionary, a configuration file, or directly in the code poses significant security risks as they can be easily accessed by unauthorized parties if not properly protected.

What is a capability of the AXL API?

A. It signs a user in to a phone that is configured for extension mobility. ✓ CORRECT

B. It pulls logs for the Cisco Tomcat service.

C. It authenticates users who exist in Cisco Unified Communications Manager.

D. It provides support for HTTP and HTTPS communications.

SUGGESTED ANSWER

The suggested answer is A.

The AXL API is primarily designed to enable administrative operations such as adding, updating, and deleting users or devices within Cisco Unified Communications Manager. One of its capabilities includes signing a user in to a phone that is configured for extension mobility, which allows users to access their phone settings, like extension and speed dials, on any compatible Cisco phone. The other options do not correctly represent the primary intended use of the AXL API.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a program in which an object maintains a list of classes based on the observer pattern. The classes are dependent on the object. Whenever the state of the object changes, it notifies the dependent classes directly through callbacks. Which advantage of the observer pattern offers **minimum** dependencies and maximum flexibility between dependent objects or classes?

A tight coupling

B cohesion

C mediation

D loose coupling ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The observer pattern offers loose coupling, which means that objects and classes have minimal dependencies on each other. This allows for maximum flexibility as objects can be modified independently without affecting others. Loose coupling is achieved because the object being observed maintains a list of observers, but neither knows much about the other's implementation, enabling easy addition or removal of observers.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a feature of XML compared to other data formats?

A It uses tags to define the structure. ✓ CORRECT

B It uses parenthesis for key-value pairs.

C It uses indentation to define the structure.

D It uses namespaces for list representation.

SUGGESTED ANSWER

The suggested answer is A.

XML (Extensible Markup Language) uses tags to define the structure of the data. Each piece of data is enclosed within tags that clearly identify the nature of the data. This is unlike other data formats like JSON, which use key-value pairs enclosed in braces, or YAML, which relies on indentation. XML tags provide a clear, hierarchical structure, which is a distinct feature compared to other formats.

DRAG DROP

- -

```
FROM myImage
VOLUME ["/data"]
ENRYPOINT ["/bin/sh"]
```

Refer to the exhibit. Drag and drop the actions from the left that the contents of this Dockerfile accomplish onto the right. Not all options are used.

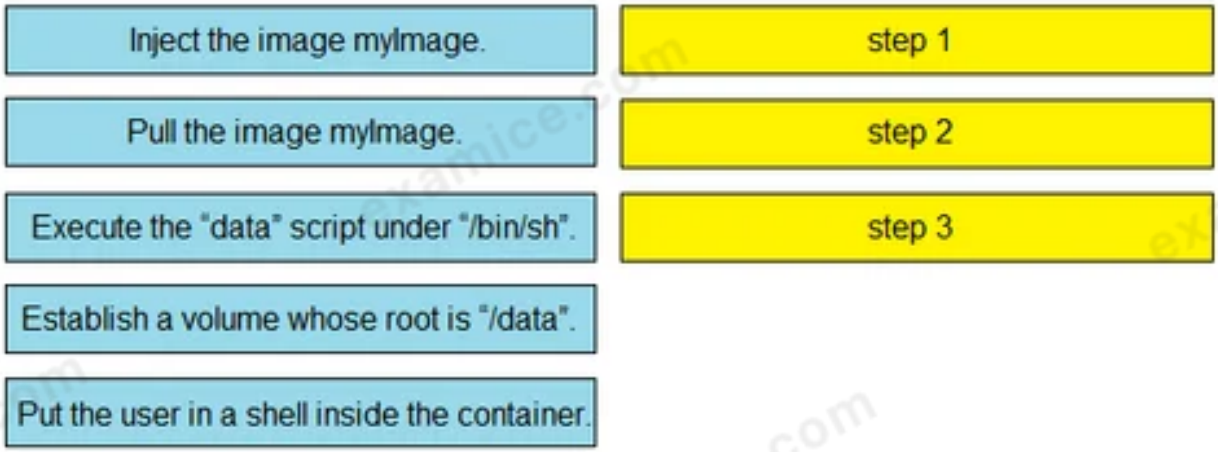

SUGGESTED ANSWER

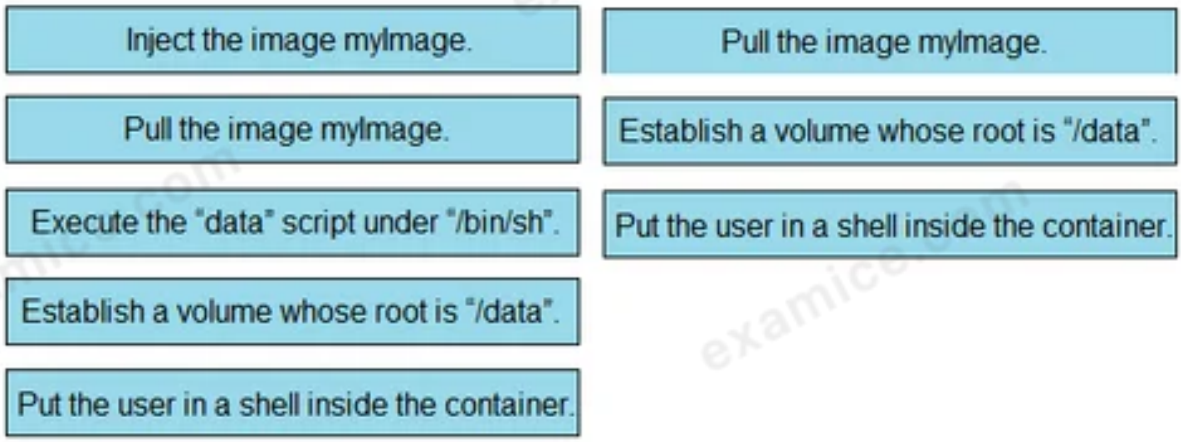

What is a capability of Ansible playbooks?

A They execute scheduled tasks regularly.

B They define the state for a device configuration. ✓ CORRECT

C They collect SNMP logs from networking devices.

D They utilize the target device agent to execute.

SUGGESTED ANSWER

The suggested answer is B.

Ansible playbooks define the state for a device configuration. Playbooks are used in Ansible to describe the desired state of a system or device configurations in a declarative manner. They provide a way to automate the process of applying and maintaining these configurations, facilitating consistent and repeatable deployments.

examice.com

DRAG DROP -

get_interface_info_by_id(*device_id*, *headers=None*, ***request_parameters*) [source]

Returns list of interfaces by specified device.

Parameters

- **device_id** (*basestring*) – Device ID.
- **headers** (*dict*) – Dictionary of HTTP Headers to send with the Request .
- ****request_parameters** – Additional request parameters (provides support for parameters that may be added in the future).

Returns

JSON response. Access the object's properties by using the dot notation or the bracket notation.

Return type

MyDict

Raises

- TypeError – If the parameter types are incorrect.
- MalformedRequest – If the request body created is invalid.
- ApiError – If the DNA Center cloud returns an error.

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to return the number of interfaces on a network device by using the Cisco DNA Center SDK. Not all options are used.

```
from dnacentersdk import DNACenterAPI
base_url = 'https://10.9.11.226'
[                ] = 'da4606c3-63ad-4ed4-8f35-6bfec7c2df04'

dnac = [                ](username='cisco', password='secret',
  base_url=base_url, version='1.3.3', verify=False)

[                ] = [item['portName'] for item in
    dnac.[                ].get_interface_info_by_id(device_id)['response']]

# Check the number of ports on the device
print(f'The list of interfaces contains {len(port_list)} items.')

# Output
# The list of interfaces contains 54 items.
```

router_id | device_id | DNACenterAPI | DNAC

port_list | routers | devices

SUGGESTED ANSWER

To return the number of interfaces on a network device using the Cisco DNA Center SDK, you should follow the code template provided in the exhibit. Here's a step-by-step explanation of how to fill in the missing code correctly: 1. First, you need to use 'device_id' to specify the device for which you want to retrieve interface information. 2. Next, 'DNACenterAPI' is the class to instantiate so that you can communicate with the DNA Center API. 3. You will store the port names in 'port_list' for each item in the response. 4. Finally, the method 'get_interface_info_by_id' belongs to the 'devices' attribute of your DNA Center API instance. Therefore, the correct code sequence is: 1: device_id 2: DNACenterAPI 3: port_list 4: devices

QUESTION 319

What is the purpose of running tests before writing code in test-driven development?

A to find unexpected failures in the tests

B to demonstrate that the tests fail for expected reasons ✓ CORRECT

C to ensure that the tests pass

D to provide proof of the work carried out

SUGGESTED ANSWER

The suggested answer is B.

In test-driven development (TDD), the purpose of running tests before writing code is to demonstrate that the tests fail for expected reasons. This initial failure is crucial because it confirms that the tests are correctly set up to identify the absence of the functionality that will be implemented. By ensuring that the tests fail for the expected reasons, developers can be confident that the tests will pass only when the appropriate code is written to fulfill the specified requirements.

Issued to kamjunhao@gmail.com · October 17, 2026

Which port does HTTPS use by default?

A 433

B 443 ✓ CORRECT

C 803

D 883

SUGGESTED ANSWER

The suggested answer is B.

HTTPS uses port 443 by default. This is the standard port for secure HTTP connections and is used to transmit secured data over the web.

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP method is used by webhooks and notifies a listener about an event change?

A PUT

B POST ✓ CORRECT

C PATCH

D GET

SUGGESTED ANSWER

The suggested answer is B.

The POST method is typically used by webhooks to notify a listener about an event change. Webhooks involve sending data to a specific URL whenever a specified event occurs, and POST is the method used to submit this data to the listener.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer completed the creation of a script using Git. Before delivering it to the customer, the developer wants to be sure about all untracked files, without losing any information. Which command gathers this information?

A git clean –n ✓ CORRECT

B git rm –f

C git clean –r

D git rm *

SUGGESTED ANSWER

The suggested answer is A.

The command 'git clean -n' is used to perform a dry run of the git clean command. This means it will display all the untracked files in the repository without actually deleting them, allowing the developer to review what would be removed. This command is useful to ensure no information is lost before executing the final cleaning.

Issued to kamjunhao@gmail.com · October 17, 2026

A company deploys an application via containers in its local data center. As soon as the application goes into production, it starts to crash at specific hours of the day. After investigation, it is concluded that the crashes are due to too many users accessing the application simultaneously. The spikes must be addressed and allow for future growth without discarding the investment already made. Which deployment model must be used?

A hybrid cloud ✓ CORRECT

B edge

C private cloud

D public cloud

SUGGESTED ANSWER

The suggested answer is A.

A hybrid cloud deployment model must be used. This allows the company to utilize both their local data center (keeping the existing investment) and the scalability of the public cloud to handle spikes in traffic. This ensures that the application can scale dynamically according to the demand without suffering crashes during peak times, while still leveraging the infrastructure already in place.

Issued to kamjunhao@gmail.com · October 17, 2026

Which TCP port is used to connect to a network device by using Telnet?

A 23 ✓ CORRECT

B 69

C 400

D 830

SUGGESTED ANSWER

The suggested answer is A.

The correct TCP port for connecting to a network device using Telnet is port 23. Telnet is a network protocol used to provide a command-line interface for communication with remote devices. Port 69 is used by TFTP, port 400 is not commonly associated with any standard protocols, and port 830 is used for NETCONF over SSH.

```
Import requests
def main():
    def getCreds():
        user = input('User: ')
        pwd = Getpass('Pass: ')
        return (user,pwd)

    def login(ipaddr,user,pwd):
        url = "https://{ipaddr}/api/aaaLogin.json".format(ipaddr=ipaddr)
        data = '{"aaaUser":{"attributes":{"name":"%(user)s","pwd":"%(pwd)s"}}}'
        % {"pwd":pwd,"user":user}
        response = requests.post(url,data=data,verify=False)
        cookie = response.headers['Set-Cookie']
        return cookie

    def getstuff(ipaddr,cookie):
        headers = {"Cookie":cookie}
        url = "https://{ipaddr}/api/node/class/
        fvTenant.json".format(ipaddr=ipaddr)
        response = requests.get(url,headers=headers,verify=False)
        grouplist = []
        for x in response.json()["imdata"]:
            grouplist.append(x["fvTenant"]["attributes"]["name"])
        return ','.join(grouplist)

    ipaddr = "192.168.255.2"
    user,pwd = getCreds()
    token = login(ipaddr,user,pwd)
    return getstuff(ipaddr,cookie)

if __name__ == '__main__':
    result = main()
    print(result)
```

Refer to the exhibit. Which action does the script perform?

A It queries user credentials from Cisco IOS XE devices.

B It retrieves device identification from Cisco DNA Center.

C It exports SSID information from Meraki dashboard.

D It collects group information from ACI. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The script interacts with a Cisco ACI (Application Centric Infrastructure) system. It does the following: collects user credentials, logs in to the ACI controller by sending a POST request to obtain a session cookie, and then retrieves information about tenants. The presence of

'fvTenant' in the REST API request URL and handling of the 'fvTenant' attribute in the script suggest it specifically gathers group information from an ACI environment.

Personal copy · kamjunhao@gmail.com

QUESTION 326

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of grouping devices in a VLAN?

A Devices communicate as if they are connected on the same wire. ✓ CORRECT

B Multicast network traffic is limited to the VLAN connected devices.

C Unicast messages are limited to the clients connected on the same VLAN.

D Network traffic is load balanced between the devices connected to the VLAN.

SUGGESTED ANSWER

The suggested answer is A.

Grouping devices in a VLAN allows them to communicate as if they are connected on the same physical wire, even if they are on different segments of the network. This logical grouping helps in managing network traffic, improving security, and reducing the number of physical cables required, thereby making network management more efficient.

Personal copy · kamjunhao@gmail.com

```
---
param0: Workflow1
param1:
  list:
  - name: VLAN_ID
    value: '198'
param2: 0
```

Refer to the exhibit. The YAML shown contains an object "param0" that is equal to "Workflow1", a second object "param1" that contains an object called "list" which contains an array of two objects, "name" (equal to "VLAN_ID") and "value" (equal to a text value "198"), and finally a third object "param2" that is equal to "0". What is the equivalent message in JSON data format?

A
```
[
"param0"="Workflow1";
 "param1"=
   "list"=
          ["name"="VLAN_ID";
           "value"="198"]
"param2"=0
]
```

B
```
{
"param0":"Workflow1";
 "param1": {
   "list":
      [
         {"name":"VLAN_ID";
          "value":"198"}
      ]
   },
"param2":0
}
```

C

```
[
"param0":"Workflow1",
 "param1": [
   "list":
      {
         ["name":"VLAN_ID",
          "value":"198"]
      }
   ],
"param2":0
]
```

D

```
[
"param0":"Workflow1",
 "param1": {
   "list":
      [
         {"name":"VLAN_ID",
          "value":"198"}
      ]
   },
"param2":0
}
```

✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The given YAML example shows a structured object with a workflow, a list containing a name/value pair, and a third parameter set to 0. When converting this to JSON format, objects should be encapsulated in curly braces {}, and key-value pairs should be separated by colons : with no semicolons ;. Based on this, the correct JSON format needs to properly use commas to separate key-value pairs inside objects and ensure the list structure is maintained. Option D correctly represents the structure and syntax required for valid JSON data, reflecting the YAML structure accurately.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer prepares a set of Python scripts to interact with network devices. To avoid network performance issues, the engineer wants to run them in a test environment. Which resource must be used to monitor the live execution of code in an always-available environment?

A packet tracer

B learning labs

C sandbox ✓ CORRECT

D code exchange

SUGGESTED ANSWER

The suggested answer is C.

To monitor the live execution of code in an always-available environment, the best choice is a sandbox. A sandbox provides a controlled and isolated environment where code can be run and tested without affecting the live network, making it ideal for testing Python scripts intended for network devices. This helps prevent network performance issues by ensuring that the code behaves as expected before deployment in a production environment.

Issued to kamjunhao@gmail.com · October 17, 2026

When a Cisco IOS XE networking device is configured by using RESTCONF, what is the default data encoding method?

A application/yaml-data+json

B application/yang-data+json ✓ CORRECT

C application/xml-data+json

D application/json-data+xml

SUGGESTED ANSWER

The suggested answer is B.

When configuring a Cisco IOS XE networking device using RESTCONF, the default data encoding method is application/yang-data+json. This is because RESTCONF is designed to work with data models defined using the YANG data modeling language, and the specified media types for RESTCONF include application/yang-data+json and application/yang-data+xml.

```
api_endpoint = f"https://veryusefulapi/v2/authenticate"

headers = {
    "Authorization": "Basic YWRtaW46c3VwZXJzZWNyZXQ="
    "Accept": "application/json"
}

req = requests.get(api_endpoint, headers=headers)
```

Refer to the exhibit. A developer is part of a team that is working on an open-source project in which source code is hosted in a public GitHub repository. While the application was built, security concerns were addressed by encrypting the credentials on the server. After a few months, the developer realized that a hacker managed to gain access to the account. The exhibit contains part of the source code for the login process. Why was the attacker able to access the developer's account?

A The encoded credentials were available in the source code. ✓ CORRECT

B The application was not encrypting the communication with the server.

C The credentials were encrypted in the source code.

D An SSL certificate was used instead of the TLS protocol to authenticate.

SUGGESTED ANSWER

The suggested answer is A.

The attacker was able to access the developer's account because the encoded credentials were available in the source code. Although the credentials appear to be encrypted, they are actually only base64 encoded. Base64 encoding is not a secure method for protecting sensitive information as it can be easily decoded. This made it possible for the attacker to retrieve the credentials and gain unauthorized access to the account.

Issued to kamjunhao@gmail.com · October 17, 2026

Which technology is responsible for matching a name to an IP address of an application running on a host?

A firewall

B proxy

C load balancer

D DNS ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The technology responsible for matching a name to an IP address of an application running on a host is DNS (Domain Name System). DNS translates domain names, which are human-readable addresses, into IP addresses, which are used by computers to identify each other on the network. This translation allows users to access websites and other resources using easy-to-remember names instead of numeric IP addresses.

Issued to kamjunhao@gmail.com · October 17, 2026

Which network constraint causes the performance of the application to decrease as the number of users accessing the application increases?

A latency

B loss

C bandwidth ✓ CORRECT

D jitter

SUGGESTED ANSWER

The suggested answer is C.

Bandwidth is the network constraint that directly affects the performance of an application as the number of users increases. Bandwidth refers to the maximum data transfer rate of a network or internet connection. As more users access the application, they consume more bandwidth, which can lead to congestion and slower performance due to limited capacity.

DRAG DROP

- -

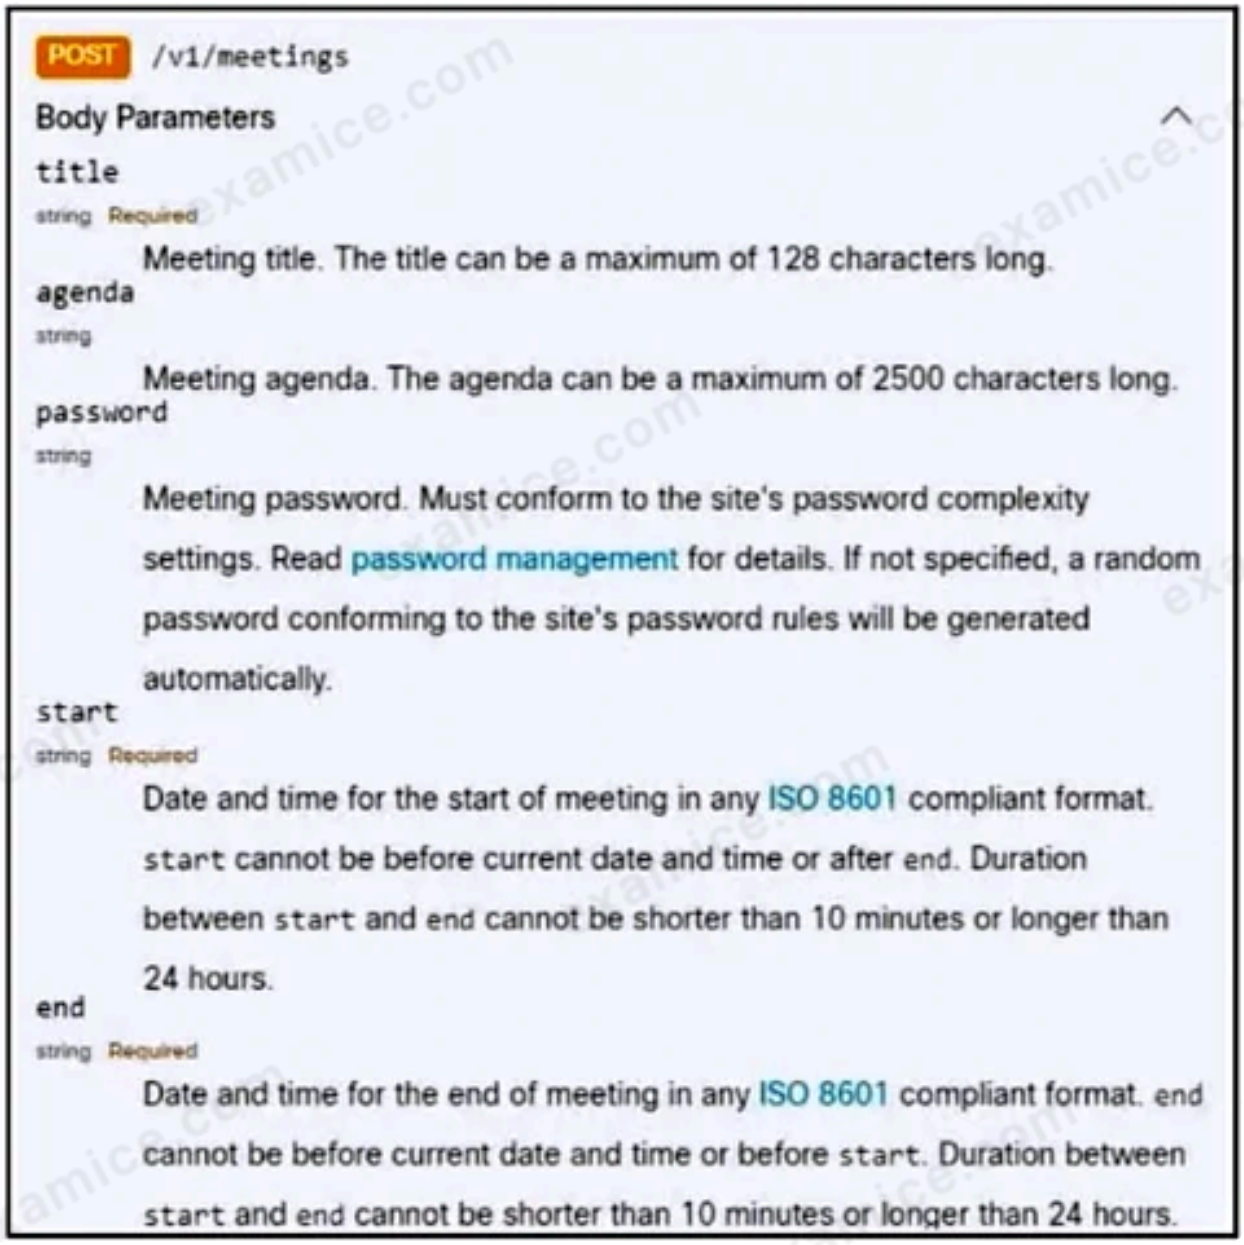

Refer to the exhibit. A bespoke meeting booking system must be integrated with Cisco Webex so that meetings are created automatically. Drag and drop the code from the bottom onto the box where the code is missing to create a sample meeting. Not all options are used.

Answer Area

```
import requests, json

[          ] = 'eyJhbGc  ...  yJbN8'

headers = {
  'Authorization': f'Bearer {token}',
  'Content-Type': 'application/json'
}

payload = {
    "title": "DevNet Webex Discussion",
    "password": "AGrtg1234",
    "start": "2020-11-10T15:00:00Z",
    "end": "2020-11-10T17:00:00Z",
    "enabledAutoRecordMeeting": False,
    "allowAnyUserToBeCoHost": False
}

response = requests.request(" [          ] ", f'{BASE_URL}/ [          ] ',
  headers=headers, data=json.dumps( [          ] ))
print(response.text.encode('utf8'))
```

payload | PUT | token

v1/meeting | v1/meetings | POST

SUGGESTED ANSWER

```
import requests, json

[  token  ] = 'eyJhbGc  ...  yJbN8'

headers = {
  'Authorization': f'Bearer {token}',
  'Content-Type': 'application/json'
}

payload = {
    "title": "DevNet Webex Discussion",
    "password": "AGrtg1234",
    "start": "2020-11-10T15:00:00Z",
    "end": "2020-11-10T17:00:00Z",
    "enabledAutoRecordMeeting": False,
    "allowAnyUserToBeCoHost": False
}

response = requests.request(" [  POST  ] ", f'{BASE_URL}/ [ v1/meetings ] ',
  headers=headers, data=json.dumps( [  payload  ] ))
print(response.text.encode('utf8'))
```

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of Waterfall compared to Agile software development method?

A Waterfall focuses on continuous improvement, and Agile focuses on the design phase.

B Waterfall separates the project development lifecycle into sprints, and Agile does not use cycles.

C Waterfall specifies requirements before development begins, and Agile responds flexibly to changes in requirements. ✓ CORRECT

D Waterfall uses reviews with step by step approach, and Agile uses a serially phased approach.

SUGGESTED ANSWER

The suggested answer is C.

Waterfall specifies requirements before development begins, as it follows a linear and sequential approach where each phase must be completed before moving on to the next. In contrast, Agile is characterized by its flexibility and ability to respond to changes in requirements, promoting iterative development and continuous feedback throughout the project lifecycle.

Users cannot access a webserver and after the traffic is captured, the capture tool snows an ICMP packet that reports "time exceeded in-transit". What is the cause of this webserver access issue?

A The large distance between the server and the users means that the packets require too much time to reach the destination.

B A router along the path is misrouting the packets in a wrong direction. ✓ CORRECT

C A router along the path has the wrong time.

D The server is overloaded and the connection was not able to be processed in time.

SUGGESTED ANSWER

The suggested answer is B.

When an ICMP packet reports 'time exceeded in-transit,' it means that the Time To Live (TTL) value of the packet has reached zero. TTL is a value in an IP packet that gets decremented by one at each hop when traversing the network. When the TTL value reaches zero, the packet is discarded, and an ICMP time exceeded message is sent back to the source. This situation is often a result of a routing loop, where packets circulate indefinitely within the network until the TTL value expires. Thus, a router along the path misrouting the packets in a wrong direction is the most likely cause of this issue.

```
--- functions.py   2020-09-26 14:26:25.000000000 -0600
+++ new.py 2020-09-26 14:26:10.000000000 -0600
@@ -21,7 +21,7 @@
 def print_devices_info(devices):
     # Print id, hostname and management IP
     for item in devices:
-        print(item['id'], item['hostname'], item['managementIpAddress'])
+        print(item['id'], item['hostname'])

 # Get Authentication token
 def get_dnac_jwt_token():
@@ -66,9 +66,15 @@
     response = get_devices_list(headers, {})
     print_devices_info(response)

+    # print devices list filtered by hostname
+    print('\nPrinting device list filtered by hostname ...')
+    query_string_params = {'hostname': 'CSR1Kv-01.devnet.local'}
+    response = get_devices_list(headers, query_string_params)
+    print_devices_info(response)
+
     # print devices list filtered by platform Id
     print('\nPrinting device list filtered by platform id...')
-    query_string_params = {'platformId': 'C9500-40X'}
+    query_string_params = {'platformId': 'AIR-AP1141N-A-K9'}
     response = get_devices_list(headers, query_string_params)
     print_devices_info(response)
```

Refer to the exhibit. An engineer is comparing two files by using the unified diff format. Which cade snippet belongs to the new.py file?

A
```
77 query_string_params = {'platformId':
'AIR-AP1141N-A-K9'}
```
✓ CORRECT

B
```
21 print(item['id'], item['hostname']
```

C

```
24 print(item['id'], item['hostname'],
item['managementIpAddress'])
```

D

```
66 # print devices list filtered by
hostname
67 print('\nPrinting device list
filtered by hostname ...')
68 query_string_params = {'hostname':
'CSR1Kv-01.devnet.local'}
69 response = get_devices_list
(headers, query_string_params)
70 print_devices_info(response)
```

SUGGESTED ANSWER

The suggested answer is A.

The unified diff format shows changes between two files. Lines starting with a plus '+' indicate additions in the new file, 'new.py'. Option A refers to the line 'query_string_params = {'platformId': 'AIR-AP1141N-A-K9'}' which is shown with a '77 +' indicating it has been added in the new.py file.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

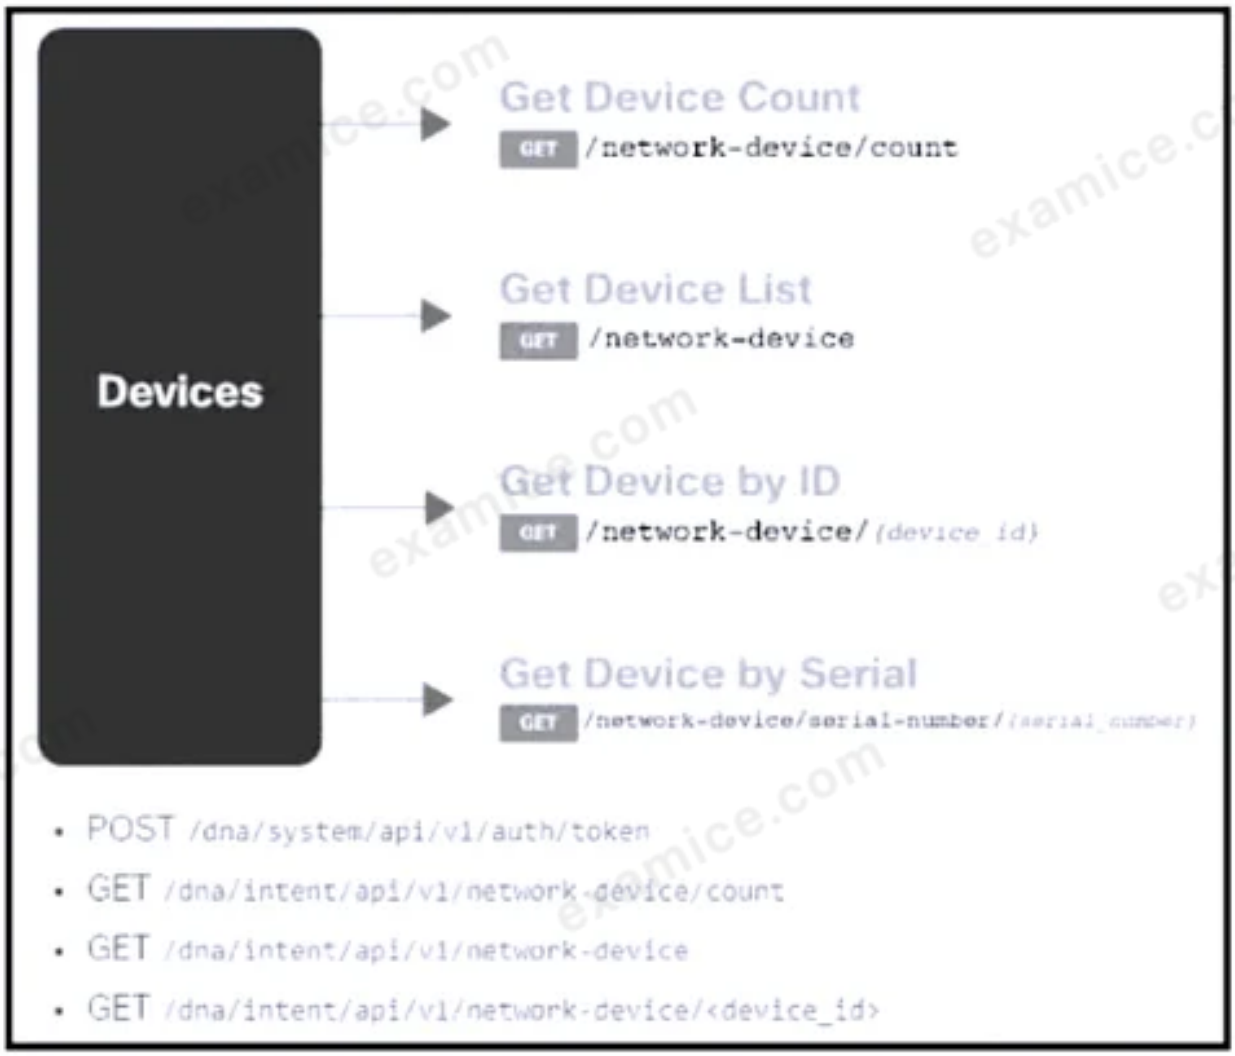

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a request that generates a security token and gets a list of network devices. Not all options are used.

Answer Area

```
import json, requests, urllib3
from requests.auth import HTTPBasicAuth
from config import host, username, password

headers = { 'content-type': "application/json", 'x-auth-token': "" }
def dna_api_auth(host, username, password):
    url = "https://{}/api/system/v1/auth/token".format(host)
    response = [                ] .post(url, auth=HTTPBasicAuth(username, password),
       headers=headers, verify=False)
    return response.json()["Token"]

def list_dna_devices(token):
    url = "https://{}/api/v1/network-device".format(host)
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = [                ] .json()
    for item in data['response']:
        print(item["hostname"])

token = [                ] (host, username, password)
[                ] (token)
```

response	reply	dna_api_auth	requests
json	list_dna_devices	list devices	

SUGGESTED ANSWER

```
import json, requests, urllib3
from requests.auth import HTTPBasicAuth
from config import host, username, password

headers = { 'content-type': "application/json", 'x-auth-token': "" }
def dna_api_auth(host, username, password):
    url = "https://{}/api/system/v1/auth/token".format(host)
    response = [  requests  ] .post(url, auth=HTTPBasicAuth(username, password),
       headers=headers, verify=False)
    return response.json()["Token"]

def list_dna_devices(token):
    url = "https://{}/api/v1/network-device".format(host)
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = [  response  ] .json()
    for item in data['response']:
        print(item["hostname"])

token = [  dna_api_auth  ] (host, username, password)
[  list dna devices  ] (token)
```

```
#! /bin/bash
apt-get update
apt-get -y install git
cd Code/Network_Config
mkdir PRODUCTION
cd PRODUCTION
touch state.yml
vi state.yml
```

Refer to the exhibit. A network engineer executes the bash script shown. Which two things are achieved by running the script? (Choose two.)

A. A directory called PRODUCTION is created. ✓ CORRECT

B. The engineer changes to the parent directory.

C. A YAML file is created. ✓ CORRECT

D. A YAML file is removed.

E. A directory called state.yml is created.

SUGGESTED ANSWER

The suggested answer is A, C.

Running the script achieves the creation of a directory called PRODUCTION and a YAML file named state.yml. The script performs the following actions: it updates the package list, installs git, changes to the Code/Network_Config directory, creates the PRODUCTION directory, navigates into the PRODUCTION directory, creates an empty file named state.yml, and then opens the file in the vi editor. Thus, the directory creation (A) and YAML file creation (C) are accomplished by the script.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. The Python script retrieves a list of tasks from a to-do list for effective project management purposes. Not all options are used.

Answer Area

```
import requests

response = [          ].get('https://todolist.example.com/tasks/')

if [          ].status_code != 200:
    raise ApiError('GET /tasks/ {}'.format(response.[          ]))

for item in response.json():
    print('{} {}'.format(item['id'], [          ]['summary']))
```

item	response
requests	get()
status_code	status

SUGGESTED ANSWER

```
import requests

response = [requests].get('https://todolist.example.com/tasks/')

if [response].status_code != 200:
    raise ApiError('GET /tasks/ {}'.format(response.[status_code]))

for item in response.json():
    print('{} {}'.format(item['id'], [item]['summary']))
```

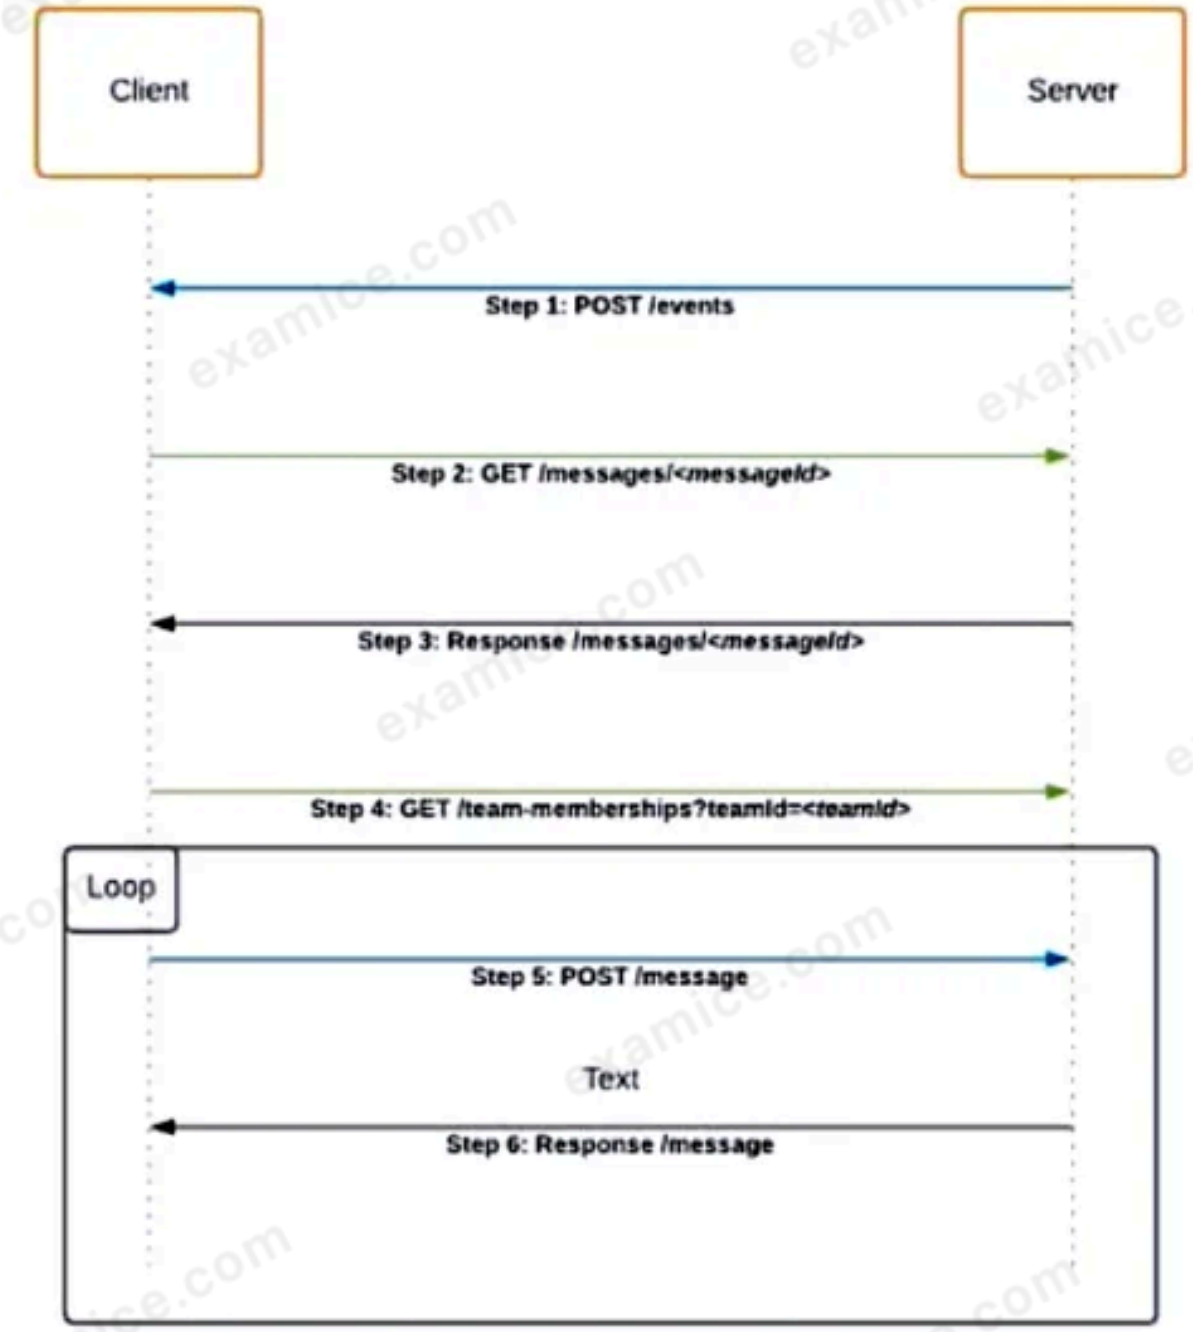

Refer to the exhibit. Which code snippet represents the sequence.

A

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
  json_data = request.json['data']
  response = requests.get(MESSAGE_URL +
json_data['id'], headers=headers)
  if response.json()['text'] == 'Alert':
    response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
    for info in response.json()['items']:
      data = {'personId': info['personId'], 'text':
'Alert'}
                response = requests.post(MESSAGES_URL,
headers=headers, params=params)
```

✓ CORRECT

B

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
    json_data = request.json['data']
    if response.json()['text'] == 'Alert':
        response = requests.get(MESSAGE_URL +
json_data['id'], headers=headers)
        response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
        for info in response.json()['items']:
            data = {'personId': info['personId'],
'text': 'Alert'}
            response = requests.post(MESSAGES_URL,
headers=headers, params=params)
```

C

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
  json_data = request.json['data']
  response = requests.post(MESSAGE_URL +
json_data['id'], headers=headers)
  if response.json()['text'] == 'Alert':
    for info in response.json()['items']:
      response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
      data = {'personId': info['personId'], 'text':
'Alert'}
              response = requests.get(MESSAGES_URL,
headers=headers, params=params)
```

D

```
@flask_app.route('/events', methods=['POST'])
def webex_teams_webhook_events():
  json_data = request.json['data']
  response = requests.get(TEAM_MEMBERSHIPS_URL,
headers=headers, params=params)
  if response.json()['text'] == 'Alert':
    response = requests.get(MESSAGE_URL +
json_data['id'], headers=headers)
    for info in response.json()['items']:
      data = {'personId': info['personId'], 'text':
'Alert'}
      response = requests.post(MESSAGES_URL,
headers=headers, params=params)
```

SUGGESTED ANSWER

The suggested answer is A.

The given sequence diagram shows operations between a Client and a Server. Step 1 is a POST request to /events, which matches how the function in Option A starts. Next, the sequence has a GET request for /messages/, and this is seen in the code where response = requests.get(MESSAGE_URL + json_data['id'], headers=headers) is used. Following this, if the text in the message is 'Alert', the code fetches membership information with another GET request to /team-memberships, which matches the sequence step. Lastly, for each team member, the code sends a POST request to /message. The code in Option A correctly follows

this sequence: POST /events, GET /messages/, GET /team-memberships?teamId=, and POST /message.

QUESTION 341

A developer attempts to refactor and improve the application code. It is noticed that the code contains several pieces of key information that could be a security threat if this code is accessible by those who are not authorized to this data. Which approach addresses the security concerns noticed by the developer?

A Host the application code on a machine located in a secure data center.

B Utilize environment variables for username and password details. ✓ CORRECT

C Rely on the security teams' goodwill to not give access to those who do not need it.

D Move the hardware that the application is deployed on to a secure location.

SUGGESTED ANSWER

The suggested answer is B.

To address security concerns regarding sensitive information like usernames and passwords in application code, utilizing environment variables is an effective approach. Environment variables help ensure that sensitive data is not hardcoded into the application code, making it harder for unauthorized users to access it. Instead, the sensitive information stays separate from the codebase and can be managed more securely. This practice reduces the chance of accidental exposure in version control or in logs.

DRAG DROP

- -

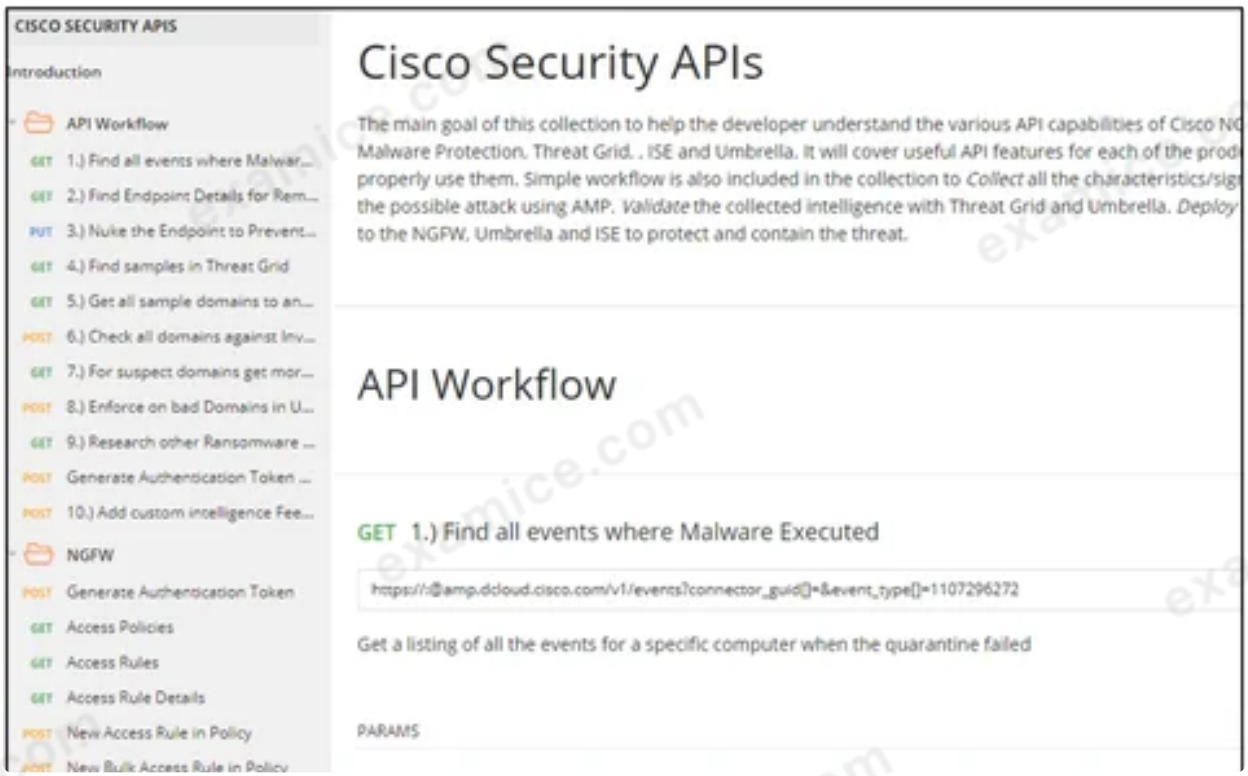

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. Not all options are used.

Answer Area

```
import requests

[                ] = "https://fmc-hostname/api/fmc_tid/v1/domain//tid/source"
payload = {
    "name": "Threat Grid Ransomware DNS",
    "delivery": "url",
    "uri": "https://panacea.threatgrid.com/api/v3/feeds"+
    "/ransomware-dns 2017-12-08.stix?api_key=",
    "refresh": 1440,
    "version": "1.0.0",
    "params": {
        "selfSignedServerCertificate": "true",
        "hostnameVerifier": "allow_all"
    },
    "property": {
        "ttl": 90,
        "publish": true,
        "action": "monitor"
    }
}
headers = {
  'X-auth-access-token': 'access_token', '  ': 'application/json'
}

response = requests.  ("POST", url,
  headers=headers, data =  )
print(response.text.encode('utf8'))
```

url	Encoding	base_url	Content-Type	post
request	payload			

SUGGESTED ANSWER

```
import requests

[  url  ] = "https://fmc-hostname/api/fmc_tid/v1/domain//tid/source"
payload = {
    "name": "Threat Grid Ransomware DNS",
    "delivery": "url",
    "uri": "https://panacea.threatgrid.com/api/v3/feeds"+
    "/ransomware-dns 2017-12-08.stix?api_key=",
    "refresh": 1440,
    "version": "1.0.0",
    "params": {
        "selfSignedServerCertificate": "true",
        "hostnameVerifier": "allow_all"
    },
    "property": {
        "ttl": 90,
        "publish": true,
        "action": "monitor"
    }
}
headers = {
  'X-auth-access-token': 'access_token', '  Content-Type  ': 'application/json'
}

response = requests.  request  ("POST", url,
  headers=headers, data =  base_url  )
print(response.text.encode('utf8'))
```

QUESTION 343

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool provides a testing environment to run tests on network devices and perform network automation scenarios?

A Visual Studio Code

B Cisco VIRL

C pyATS ✓ CORRECT

D Cisco Packet Tracer

SUGGESTED ANSWER

The suggested answer is C.

pyATS is a comprehensive testing and automation solution specifically designed for network devices. It provides a complete testing environment for running tests on network hardware, as well as performing complex network automation scenarios. Other options like Visual Studio Code, Cisco VIRL, and Cisco Packet Tracer are useful tools, but they do not specifically cater to the requirements of running tests and performing network automation scenarios in the same comprehensive manner as pyATS.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer writes an application that refines data in temporary secure file storage hosted on the public cloud. Data will be deleted after processing and does not contain any private information. What is the advantage that a public cloud deployment provides to the developer?

A high security with encryption

B ease in infrastructure management ✓ CORRECT

C flexible development

D bespoke services

SUGGESTED ANSWER

The suggested answer is B.

Public cloud deployments offer ease in infrastructure management because they allow developers to focus on application development without the need to maintain or manage the underlying hardware and software infrastructure. This advantage is especially beneficial for temporary data refinement tasks where efficiency and simplicity are key.

DRAG DROP

- -

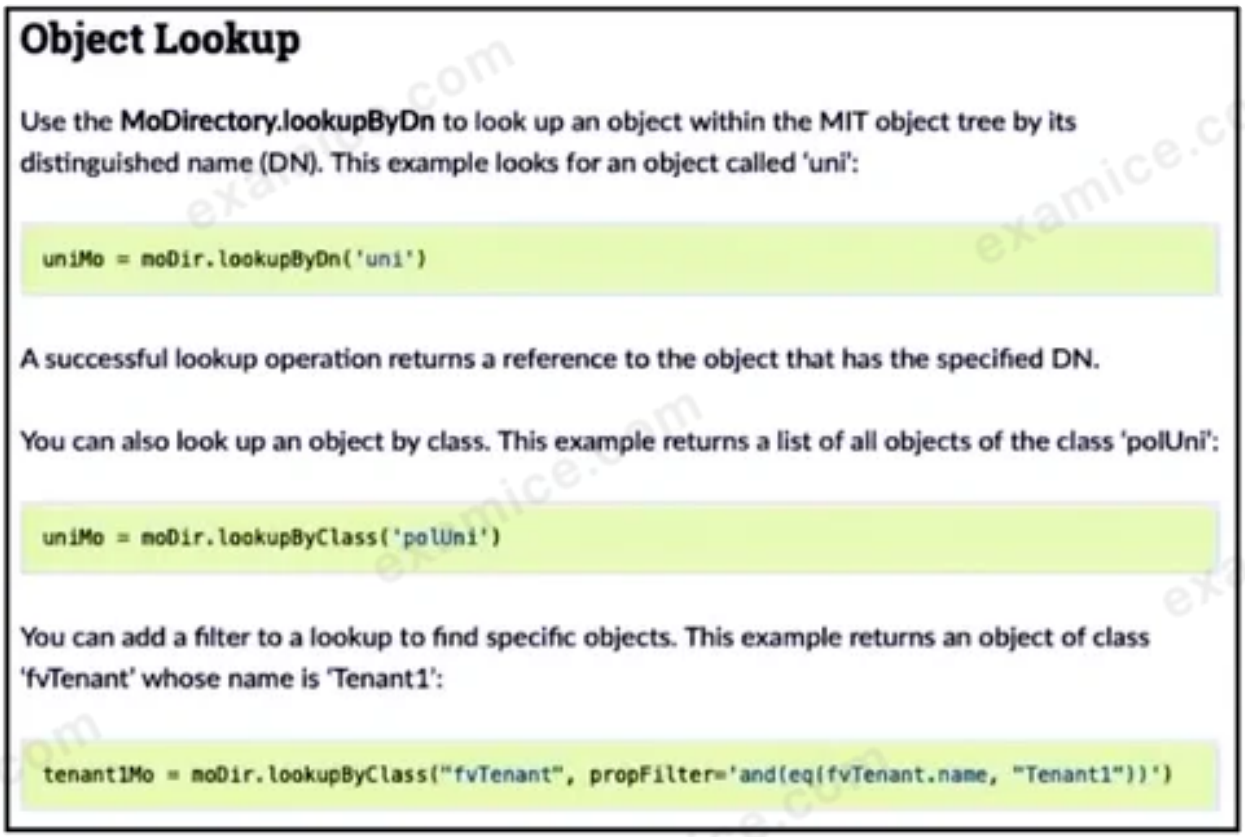

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to add a subnet to each bridge domain in the Ten1 tenant. Not all options are used.

Answer Area

```
from cobra.model import fv
from cobra.mit.request import ClassQuery, DnQuery
import cobra.mit.access
import cobra.mit.session

tenname = "Ten1"
ls = cobra.mit.session.LoginSession(
    'https://10.100.1.200', "admin", "Lab123!3")

aci = cobra.mit.access.MoDirectory(ls)
aci.login()
c = cobra.mit.request.ConfigRequest()

qry1 = [          ] (f'uni/tn-{tenname}')
fvTenant = aci.query(qry1)[0]

qry2 = [          ] ("fvBD")
qry2.propFilter = f'and(wcard(fvBD.dn,"{fvTenant.dn}"))'
fvBDs = aci.query(qry2)

i=0
for fvBD in fvBDs:
    fvsubnet = cobra.model.fv.Subnet( [          ] , ip=f'10.114.{i}.1/24')
    c.addMo(fvBD)
    aci. [          ] (c)
    i+=
```

fvBD	fvTenant	ClassQuery	bdname	DnQuery	ClassName	commit

SUGGESTED ANSWER

```
from cobra.model import fv
from cobra.mit.request import ClassQuery, DnQuery
import cobra.mit.access
import cobra.mit.session

tenname = "Ten1"
ls = cobra.mit.session.LoginSession(
    'https://10.100.1.200', "admin", "Lab123!3")

aci = cobra.mit.access.MoDirectory(ls)
aci.login()
c = cobra.mit.request.ConfigRequest()

qry1 = [ DnQuery ] (f'uni/tn-{tenname}')
fvTenant = aci.query(qry1)[0]

qry2 = [ ClassQuery ] ("fvBD")
qry2.propFilter = f'and(wcard(fvBD.dn,"{fvTenant.dn}"))'
fvBDs = aci.query(qry2)

i=0
for fvBD in fvBDs:
    fvsubnet = cobra.model.fv.Subnet( [ fvBD ] , ip=f'10.114.{i}.1/24')
    c.addMo(fvBD)
    aci. [ commit ] (c)
    i+=
```

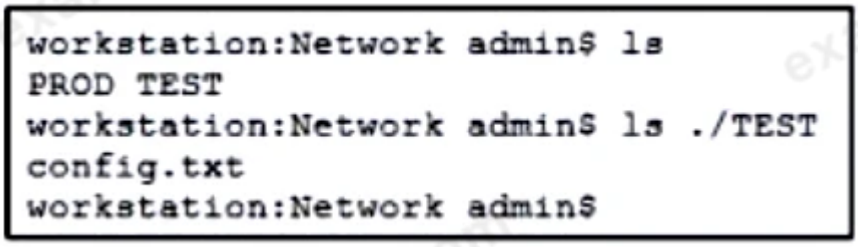

Refer to the exhibit. A network engineer must copy the “config.txt” file from directory TEST to directory PROD. The copied file must also be renamed into “current.txt”. Which command must be used to accomplish these tasks?

A cp ./PROD/current.txt ./TEST/config.txt

B cp ./TESTi/current.txt ./PROD/config.txt

C cp ./PROD/config.txt ./TEST/current.txt

D cp ./TEST/config.txt ./PROD/current.txt ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To copy a file from one directory to another and rename it at the same time, the 'cp' command in Unix/Linux is used with the source file path and the destination file path. In this case, you want to copy the 'config.txt' file from the 'TEST' directory to the 'PROD' directory and rename it to 'current.txt'. Therefore, the correct command is 'cp ./TEST/config.txt ./PROD/current.txt'.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using model-driven programmability for infrastructure automation?

A connected user tracking

B infrastructure resource optimization ✓ CORRECT

C multiple device control protocols

D device performance monitoring

SUGGESTED ANSWER

The suggested answer is B.

Model-driven programmability for infrastructure automation allows for efficient resource allocation and optimization. It helps in automating and managing the infrastructure more effectively by creating models that define the desired state of the system. This leads to better infrastructure resource optimization, as the system can dynamically allocate resources based on current needs and predefined models.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the function of an Ethernet switch in a networking environment?

A to switch a frame from one port to another port based on IP address

B to switch a frame from one port to another port based on MAC address ✓ CORRECT

C to provide IP addressing to connected hosts

D to block unwanted traffic

SUGGESTED ANSWER

The suggested answer is B.

An Ethernet switch functions by switching a frame from one port to another based on the MAC address. This helps in efficiently directing data packets to the correct destination within a local network, reducing unnecessary data traffic and improving network performance.

DRAG DROP

- -

Drag and drop characteristics from the left onto the infrastructure management methodologies on the right.

Answer Area

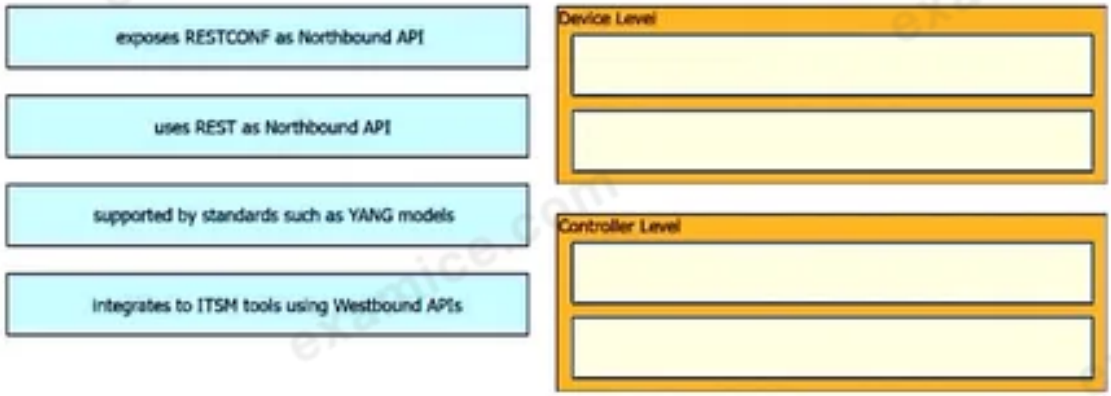

SUGGESTED ANSWER

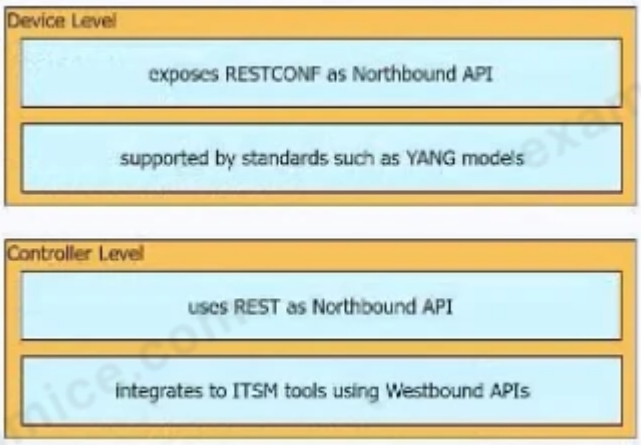

```
- hosts: nxos_rtr
  gather_facts: false
  tasks:
  - nxos_hsrp:
      group: "{{ item.group }}"
      vip: "{{ item.vip }}"
      priority: 115
      interface: "{{ item.interface }}"
      preempt: enabled
      auth_type: md5
      auth_string: "s3cuR3"
      version: 2
      host: "{{ hostvars['rtr-1a']['ansible_ssh_host'] }}"
    with_items:
      - "{{ hsrp_groups }}"
    delegate_to: "{{ hostvars['srv-1a']['ansible_ssh_host'] }}"
```

Refer to the exhibit. An engineer runs a network that consists of Cisco Nexus devices. The network is distributed between data centers in different locations. The switches are configured using standalone connections and a single point of failure. Which process is being automated by the Ansible playbook?

A enabling HSRP on the nxos_rtr inventory host ✓ CORRECT

B enabling HSRP on the rtr-1a inventory host

C executing HSRP configuration from the Ansible controller node

D executing HSRP configuration from the srv-1a inventory host

SUGGESTED ANSWER

The suggested answer is A.

The Ansible playbook is automating the process of enabling HSRP on the nxos_rtr inventory host. The playbook specifies that it should run tasks on hosts defined under 'nxos_rtr'. The parameters for HSRP configuration, such as 'group', 'vip', 'priority', and 'interface', are defined in the task. Although it includes host variables for 'rtr-1a', these are used in the 'host' field within the HSRP configuration task, not as the target of the playbook itself. Therefore, the playbook is intended to enable HSRP on the nxos_rtr inventory host.

QUESTION 351

Issued to kamjunhao@gmail.com · October 17, 2026

```
import requests
from requests.auth import HTTPBasicAuth

user= "user"
password= "PASSWORD"

token=requests.post('https://<DNAC ADRESS>/dna/system/api/v1/auth/token',
[                                                                        ]
```

Refer to the exhibit. A developer must use a token to collect data from Cisco DNA Center API and prepares a Python script to send requests. Which line of code needs to be placed on the snippet where the code is missing to obtain a token from the Cisco DNA Center API?

A token=BasicAuth('user',password'))

B auth=BasicAuth('user',password'))

C auth=HTTPBasicAuth(user,password)) ✓ CORRECT

D token=HTTPBasicAuth(user,password))

SUGGESTED ANSWER

The suggested answer is C.

To obtain a token from the Cisco DNA Center API, you need to authenticate using HTTP Basic Authentication. The correct line of code would be `auth=HTTPBasicAuth(user,password))` because `HTTPBasicAuth` is a class from the `requests.auth` module in Python that handles basic authentication by taking a username and a password. This will correctly format the authentication credentials to be sent in the request to obtain the token.

Issued to kamjunhao@gmail.com · October 17, 2026

To which stage of development do Infrastructure as Code principles relate?

A manual configuration

B service provisioning ✓ CORRECT

C physical deployment

D requirement collection

SUGGESTED ANSWER

The suggested answer is B.

Infrastructure as Code (IaC) principles relate to service provisioning. IaC automates the deployment and management of infrastructure through code, enabling the creation and configuration of infrastructure resources in a repeatable and consistent manner. This process directly involves provisioning services as it allows for automated setup and scaling of resources, ensuring that the infrastructure environment matches the desired state described in the scripts.

```
import os
import requests

# username and password

API_USER_NAME = "devnetuser"
API_PASSWORD = os.environ['API_PASSWORD']

requests.get('https://api.cisco.com/end-service', auth=(API_USER_NAME, API_PASSWORD))
```

Refer to the exhibit. An engineer must authorize a REST API call. The API password is "Cisco123!". Which Bash command must be placed in the code to authorize the call?

A mkdir API_PASSWORD=Cisco123!

B set API_PASSWORD=Cisco123!

C cp API_PASSWORD=Cisco123!

D export API_PASSWORD=Cisco123! ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The Bash command that must be placed in the code to authorize the call is 'export API_PASSWORD=Cisco123!'. This command sets the environment variable API_PASSWORD to 'Cisco123!' so that the Python script can access it via os.environ['API_PASSWORD'].

DRAG DROP

- -

```
user@host1:~/tmp$ cat Dockerfile
# Dockerfile to install traceroute
FROM ubuntu
MAINTAINER User One (userone@cisco.com)
RUN apt-get update && apt-get install traceroute
```

Refer to the exhibit. Drag and drop the Dockerfile contents from the left onto the functions on the right that create a container image to run traceroute to track network path to specific targets. Not all options are used.

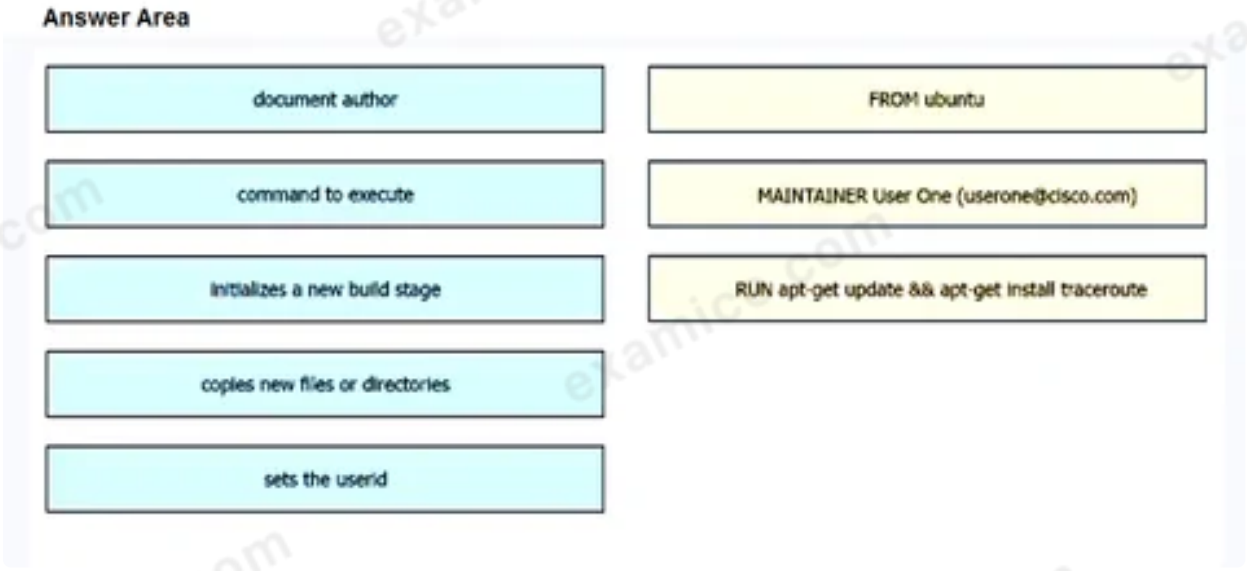

SUGGESTED ANSWER

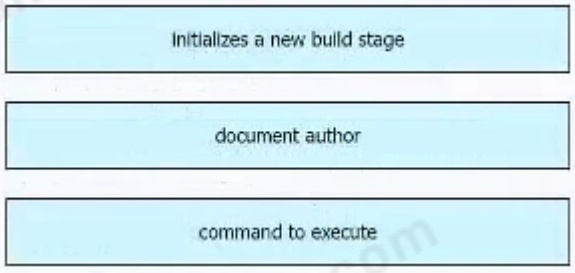

Issued to kamjunhao@gmail.com · October 17, 2026

Which function does a router provide to a network?

A broadcast domain segmentation ✓ CORRECT

B unique host on a Layer 3 network

C unique hardware address for every node on a LAN

D broadcast domain extension

SUGGESTED ANSWER

The suggested answer is A.

A router provides broadcast domain segmentation to a network. Routers operate at Layer 3 of the OSI model and are responsible for forwarding data between different networks, thereby dividing them into different broadcast domains. This segmentation helps to limit the spread of broadcast traffic, enhancing the efficiency and performance of the network.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to enable ports on a switch by using RESTCONF. Not all options are used.

Answer Area

```
def enable_function(if_name, if_status, if_type):
    headers = {'Accept': 'application/yang-data+json',
               'Content-Type': 'application/ [          ']}
    payload = {
              " [          ]": {
                "name": if_name,
                 "enabled": if_status,
                 "type": if_type,
                 }
              }
 [          ] = 'https://192.168.1.1:8443'
    restconf_url = '/restconf/data/ietf-interfaces:interfaces/interface'

    res = requests.put(f'{base_url}{restconf}={if_name}',
                       headers=headers, json=payload,
                           auth=('cisco', 'secret'), verify=False)

enable_function('Loopback1, true, ' [          ] ')
```

yang-data+json	application/xml
ietf-interfaces:interface	iana-if-type:softwareLoopback
base_url	run_function
iana-if-type:ethernetCsmacd	

SUGGESTED ANSWER

```
def enable_function(if_name, if_status, if_type):
    headers = {'Accept': 'application/yang-data+json',
               'Content-Type': 'application/ [ yang-data+json ] '}
    payload = {
              " [ ietf-interfaces:interface ] ": {
                "name": if_name,
                 "enabled": if_status,
                 "type": if_type,
                 }
               }
  [ base_url ] = 'https://192.168.1.1:8443'
    restconf_url = '/restconf/data/ietf-interfaces:interfaces/interface'

    res = requests.put(f'{base_url}{restconf}={if_name}',
                               headers=headers, json=payload,
                                   auth=('cisco', 'secret'), verify=False)

enable_function('Loopback1, true, ' [ iana-if-type:ethernetCsmacd ] ')
```

Issued to kamjunhao@gmail.com · October 17, 2026

Which IP service is used to monitor the performance of network devices?

A SNMP ✓ CORRECT

B DHCP

C DNS

D NTP

SUGGESTED ANSWER

The suggested answer is A.

Simple Network Management Protocol (SNMP) is used to monitor and manage network devices. SNMP facilitates the collection and organization of information about managed devices on IP networks and can also modify that information to change device behavior, typically to monitor network performance, detect network faults, and possibly configure network devices remotely. DHCP (Dynamic Host Configuration Protocol) is used to assign IP addresses to devices on a network, DNS (Domain Name System) translates domain names to IP addresses, and NTP (Network Time Protocol) is used to synchronize clocks on network devices.

Issued to kamjunhao@gmail.com · October 17, 2026

Which IP service synchronizes the time across devices?

A DNS

B NTP ✓ CORRECT

C SNMP

D NAT

SUGGESTED ANSWER

The suggested answer is B.

NTP (Network Time Protocol) is the IP service that synchronizes the time across devices. It is specifically designed to distribute accurate time across a network of computers, enabling them to operate in a synchronized manner.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must configure Cisco Nexus devices and wants to automate this workflow. The engineer will use an Ansible playbook to configure devices through Cisco NX REST API. Before the code is run, which resource must be used to verify that the REST API requests work as expected?

A Cisco Open NX-OS ✓ CORRECT

B Cisco NX-OS SDK

C Cisco Learning Labs

D Cisco Code Exchange for Nexus

SUGGESTED ANSWER

The suggested answer is A.

To verify that REST API requests work as expected before running the code, the best resource to use is Cisco Open NX-OS. This provides an environment to developers and network engineers to test their applications or scripts that use various APIs and interfaces available for Open NX-OS, ensuring that the REST API requests are correct before implementation.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a function of the default gateway in a network?

A to drop traffic that is destined to the default gateway

B to forward traffic to different subnets ✓ CORRECT

C to forward traffic to the same subnet

D to drop traffic that is not destined to the default gateway

SUGGESTED ANSWER

The suggested answer is B.

A default gateway is a device, such as a router, that forwards traffic from a local subnetwork to other subnetworks. It serves as an access point or IP router that a networked computer uses to send information to a computer in another subnet or the internet. Therefore, the default gateway's primary function is to forward traffic to different subnets.

What is a firehose webhook?

A It collects data from third-party cloud APIs for custom applications.

B It enables an application to receive real-time data from Cisco Webex.

C It enables data to flow from the Cisco Webex API to a user's application.

D It sends a notification of any event for commonly used resources. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A firehose webhook sends a notification of any event for commonly used resources. This allows an application to subscribe to multiple resources and events through a single webhook, enabling real-time updates and data flow from the source service to the user's application.

Issued to kamjunhao@gmail.com · October 17, 2026

Which command reverses the last commit without changing the index file or the working tree position?

A git revert HEAD ✓ CORRECT

B git reset --hard HEAD~3

C git reset --soft HEAD^

D git revert

SUGGESTED ANSWER

The suggested answer is A.

The correct command to reverse the last commit without changing the index file or the working tree position is 'git revert HEAD'. This command creates a new commit that undoes the changes made by the last commit, effectively reversing it, but leaving the working directory and the index untouched.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to complete the error path scenario. Not all options are used.

Answer Area

```
import pytest
class Player:
    def __init__(self, name):
        self.name = name
        [                              ]
    def set_rating(self, rating):
        if rating or rating is int(0):
            [                                  ]:
                raise ValueError('rating is invalid', rating)
            else:
                [                              ]
                return True
        else:
            return False
@pytest.fixture
def player():
    player = Player('User One')
    yield player
    del player
@pytest.mark.usefixtures('player')
class TestErrorPathSetRating:
    def test_add_higher_rating(self, player):
        with pytest.raises(ValueError):
            player.set_rating(101)
    def test_add_invalid_rating(self, player):
        with pytest.raises(ValueError):
            [                                  ]
    def test_add_lower_rating(self, player):
        with pytest.raises(ValueError):
            player.set_rating(-1)
```

player.set_rating(0)	if rating != 0:
player.set_rating(85)	if rating or rating is int(0):
if rating < 1 or rating > 100:	self.rating = rating
self.rating = None	

SUGGESTED ANSWER

```
import pytest
class Player:
    def __init__(self, name):
        self.name = name
            self.rating = rating
    def set_rating(self, rating):
        if rating or rating is int(0):
            if rating < 1 or rating > 100:
                raise ValueError('rating is invalid', rating)
            else:
                    if rating != 0:
                return True
        else:
            return False
@pytest.fixture
def player():
    player = Player('User One')
    yield player
    del player
@pytest.mark.usefixtures('player')
class TestErrorPathSetRating:
    def test_add_higher_rating(self, player):
        with pytest.raises(ValueError):
            player.set_rating(101)
    def test_add_invalid_rating(self, player):
        with pytest.raises(ValueError):
                player.set_rating(0)
    def test_add_lower_rating(self, player):
        with pytest.raises(ValueError):
            player.set_rating(-1)
```

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A file in a local Git repository has been updated and issued the git add . command. The git diff command has been run to compare the changes to the previous commit, but nothing shows. Which action identifies the problem?

A Run the git add . command again in the correct subdirectory to ensure changes added to the staging area.

B Run the git commit command before the differences are compared to receive the end state of the code.

C Run the git status command to see the differences between current and previous code review stages.

D Run the git diff --staged command to compare the code added to the staging area. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

After issuing the git add . command, the changes have been moved to the staging area. The git diff command without any options compares the working directory with the staging area, which is why it shows no changes, as the working directory changes have already been added to the staging area. To see the changes that have been staged but not yet committed, you need to use git diff --staged. This command compares the changes in the staging area with the previous commit.

DRAG DROP

Drag and drop the characteristics from the left onto the corresponding categories on the right to compare RESTful and RPC APIs.

Answer Area

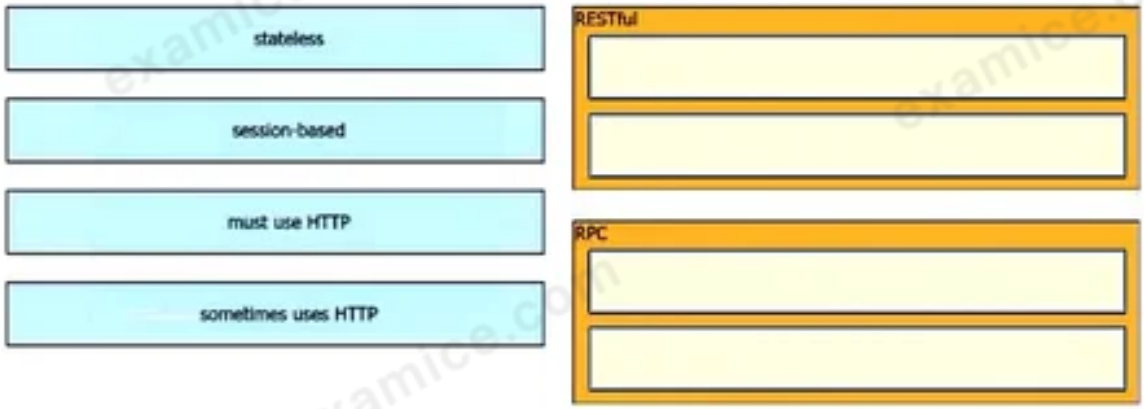

SUGGESTED ANSWER

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol runs over TCP port 830?

A NETCONF ✓ CORRECT

B Telnet

C RESTCONF

D HTTP

SUGGESTED ANSWER

The suggested answer is A.

NETCONF is the protocol that runs over TCP port 830. NETCONF (Network Configuration Protocol) is primarily used for communication between network devices and management systems. Telnet uses port 23, RESTCONF uses port 443, and HTTP uses port 80.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to authenticate with the Cisco DNA Center REST API by using basic authentication. Then generate a token for later use. Not all options are used.

Answer Area

```
import requests
from requests.auth import HTTPBasicAuth

BASE_URL = 'https://sandboxdnac2.cisco.com'
AUTH_URL = '/dna/system/api/v1/ [          ] '
USERNAME = 'admin'
PASSWORD = 'qwer1234!'

response = requests. [          ] (BASE_URL + AUTH_URL,
  auth=HTTPBasicAuth( [          ] , [          ] ))
token = response.json()['Token']
print(token)
```

auth/basic	/auth/token	post	get
USERNAME	Token	PASSWORD	

SUGGESTED ANSWER

```
import requests
from requests.auth import HTTPBasicAuth

BASE_URL = 'https://sandboxdnac2.cisco.com'
AUTH_URL = '/dna/system/api/v1/ [ /auth/token ] '
USERNAME = 'admin'
PASSWORD = 'qwer1234!'

response = requests. [ post ] (BASE_URL + AUTH_URL,
  auth=HTTPBasicAuth( [ USERNAME ] , [ PASSWORD ] ))
token = response.json()['Token']
print(token)
```

QUESTION 368

Issued to kamjunhao@gmail.com · October 17, 2026

Which solution reduces costs from MPLS, improves application performance, and simplifies operations?

A Cisco NSO

B Cisco SD-WAN ✓ CORRECT

C Cisco ACI

D Cisco DNA Center

SUGGESTED ANSWER

The suggested answer is B.

Cisco SD-WAN is designed to reduce costs related to MPLS, improve application performance, and simplify network operations. It achieves this by leveraging a combination of cost-effective internet links and intelligent software to manage traffic dynamically, ensuring optimal performance and reliability. This holistic approach addresses all three aspects mentioned in the question.

A developer has experienced security issues with a previously developed application. The API offered by that application is open and without any constraints. During a recent attack, the application was overloaded with API requests. To address this issue, an API constraint is implemented to protect the application from future attacks or any sudden throttling. Which API constraint must the application developer implement in this situation?

A pagination

B rate limiting ✓ CORRECT

C filtering

D payload limiting

SUGGESTED ANSWER

The suggested answer is B.

To address the security issue of the application being overloaded with API requests during an attack, the developer must implement rate limiting. Rate limiting helps control the number of requests that can be made to the API within a specified time window, protecting the application from being overwhelmed and potentially mitigating denial-of-service attacks.

DRAG DROP

- -

Drag and drop the capabilities from the left onto the Cisco Network Management Platforms that support the capabilities on the right.

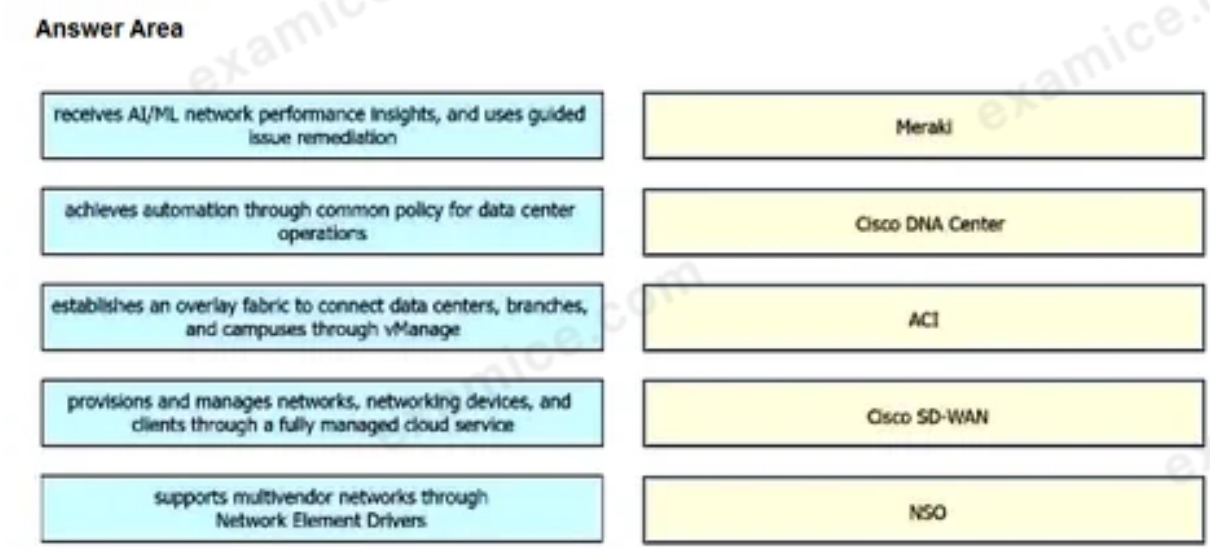

SUGGESTED ANSWER

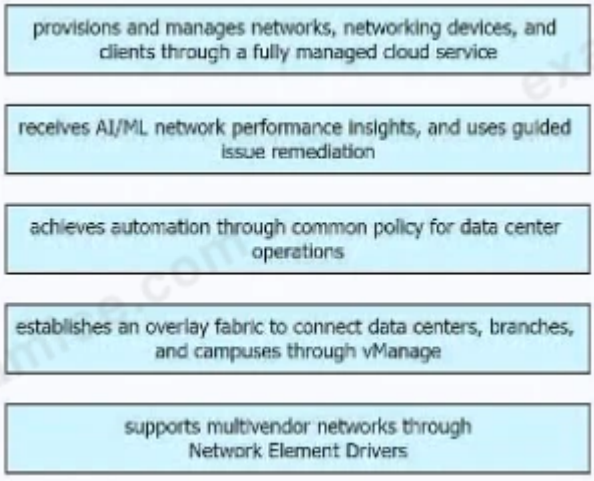

Issued to kamjunhao@gmail.com · October 17, 2026

A developer must test the performance and reliability of an application. After functional and load tests are run, the application crashes due to traffic spikes from users. Which type of API constraint must be implemented to maintain reliability?

A rate limiting ✓ CORRECT

B pagination

C payload limits

D filtering

SUGGESTED ANSWER

The suggested answer is A.

To maintain reliability when an application crashes due to traffic spikes from users, rate limiting must be implemented. Rate limiting helps control the number of requests an API can handle over a given period, preventing the system from being overwhelmed by too many requests at once. This ensures that the application remains stable and reliable during periods of high traffic.

DRAG DROP

An engineer must make changes on a network device through the management platform API. The engineer prepares a script to send the request and analyze the response, check headers, and read the body according to information inside response headers. Drag and drop the HTTP header values from the left onto the elements of an HTTP response on the right.

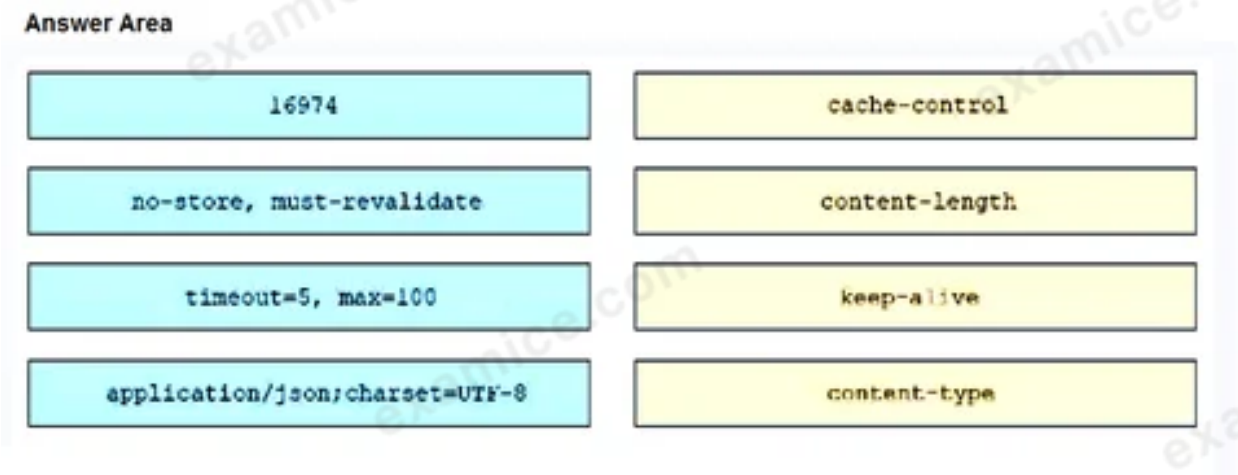

SUGGESTED ANSWER

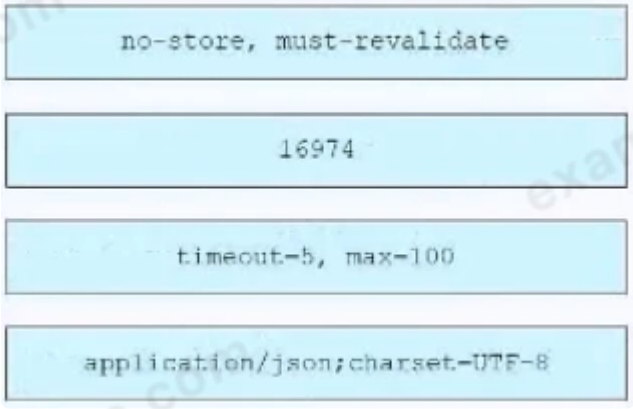

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a new feature in a branch named **newfeat123456789** and the current working primary branch is named **prim987654321**. The developer requires a merge commit during a fast forward merge for record-keeping purposes. Which Git command must be used?

A git merge --no-ff newfeat123456789 ✓ CORRECT

B git commit --no-ff newfeat123456789

C git add --commit-ff newfeat123456789

D git reset --commit-ff newfeat123456789

SUGGESTED ANSWER

The suggested answer is A.

To ensure a merge commit is always created, even when the merge could be fast-forwarded, you should use the command 'git merge --no-ff newfeat123456789'. This option guarantees a merge commit will be made for better documentation and record-keeping.

Issued to kamjunhao@gmail.com · October 17, 2026

A customer's cloud services must:

- Migrate services to another data center on demand.
- Save the operational state of the machine on demand.
- Support Windows and Linux GUIs.
- Maximize hardware utilization.

Which type of deployment meets these requirements?

A bare metal

B container

C virtual machine ✓ CORRECT

D Kubernetes

SUGGESTED ANSWER

The suggested answer is C.

To meet the specified requirements of migrating services to another data center on demand, saving the operational state of the machine on demand, supporting both Windows and Linux GUIs, and maximizing hardware utilization, a virtual machine is the most suitable option. Virtual machines provide the necessary environment to run multiple operating systems, including Windows and Linux with GUI support, on the same hardware. They also offer features such as snapshots for saving machine states and tools for migrating virtual instances across different data centers, making them the optimal solution for the given criteria.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

How does edge computing analyze sensitive data in the context of privacy control?

A locally instead of sending the data to the cloud for analysis ✓ CORRECT

B locally or on the cloud depending on the configuration

C all at once by sending the data to the cloud

D locally on each node, and then sends the data to the cloud

SUGGESTED ANSWER

The suggested answer is A.

Edge computing analyzes sensitive data by processing it locally instead of sending the data to the cloud for analysis. This method helps enhance privacy control by reducing the exposure of sensitive information to the broader internet, keeping the data closer to the source and within a more controlled environment.

Which Python function is used to parse a string that contains JSON data into a Python dictionary?

A json.dumps()

B json.to_json()

C json.parse()

D json.loads() ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The correct function to parse a string that contains JSON data into a Python dictionary is json.loads(). This function is used to deserialize a valid JSON string and convert it into a corresponding Python dictionary.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

```
import requests
from requests.auth import HTTPBasicAuth
BASE_URL = 'https://<IP ADDRESS or FQDN>'
AUTH_URL = '/dna/system/api/v1/auth/token'
TOKEN = '<TOKEN>'

headers = {'X-Auth-Token': TOKEN, 'Content-Type': 'application/json'}

DEVICES_COUNT_URL = '/dna/intent/api/v1/network-device/count'
DEVICES_URL = '/dna/intent/api/v1/network-device'
DEVICES_BY_ID_URL = '/dna/intent/api/v1/network-device/'

def devices_func(headers):
    response = requests.get(BASE_URL + DEVICES_COUNT_URL,
                            headers = headers, verify=False)
    return response.json()['response']

def devices_test(headers, query_string_params):
    response = requests.get(BASE_URL + DEVICES_URL, headers = headers,
                            params = query_string_params, verify=False)
    return response.json()['response']

def devices_info(headers, device_id):
    response = requests.get(BASE_URL + DEVICES_BY_ID_URL + device_id,
                            headers =  headers, verify=False)
    return response.json()['response']

print(devices_func(headers))
print(devices_test(headers, {}))
print(devices_test(headers, {'hostname': 'CSR1Kv-01.devnet.local'}))
response = devices_test(headers, {'platformId': 'C9500-40X'})
print(devices_info(headers, response[0]['id']))
```

Refer to the exhibit. An engineer prepares a script to automate workflow by using Cisco DNA Center APIs to display:

- total count of devices
- list of the network devices
- information of one device with a hostname filter

What is displayed in the final step after the Python script is executed?

A information about a device of type C9500-40x. ✓ CORRECT

B filtered results by the hostname and the platformId C9500-40X

C information about the test devices

D list of devices with platformId C9500-40x

SUGGESTED ANSWER

The suggested answer is A.

In the final step, the script retrieves information about one device by its ID that was returned from the previous step. This ID comes from the response list generated by the devices_test function, which filters devices based on the hostname and platformId. The devices_info function in the last step specifically fetches information for the device whose ID is the first item in that filtered list. Hence, the information displayed is about a particular device, not a list or filtered results.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A team of developers is responsible for a network orchestration application in the company. The responsibilities also include:

- developing and improving the application in a continuous manner
- deployment of the application and management of CI/CD frameworks
- monitoring the usage and problems and managing the performance improvements

Which **principle** best describes this DevOps practice?

A responsible for IT operations

B automation of processes

C end-to-end responsibility ✓ CORRECT

D quality assurance checks

SUGGESTED ANSWER

The suggested answer is C.

The responsibilities described, which include developing, deployment, monitoring, and managing performance improvements, indicate a comprehensive approach that is characteristic of end-to-end responsibility. This principle captures the essence of the DevOps practice, where a team manages the full lifecycle of a product, from development through to deployment and maintenance.

```
curl -i -k -X 'GET' 'https://172.18.110.64:443/restconf/data/Cisco-IOS-XE-native:native/hostname'
-H 'Accept: application/yang-data+json' \
-u 'cisco:cisco'
```

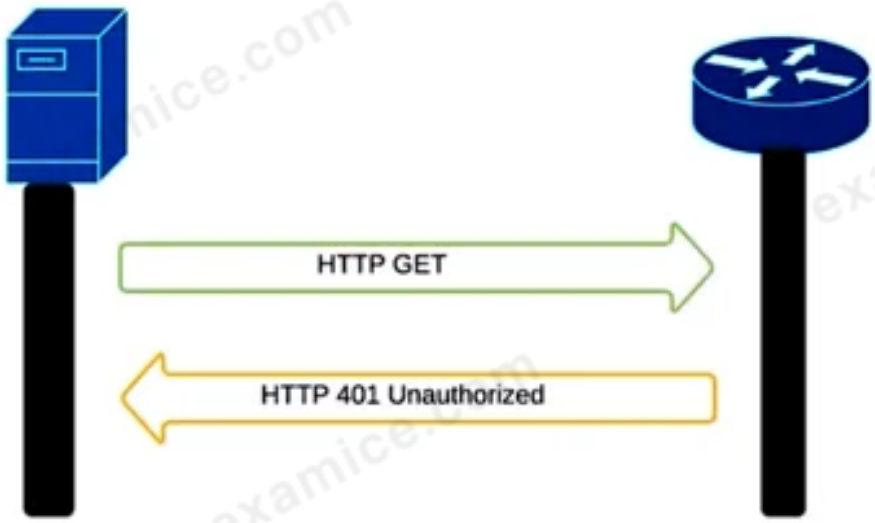

Refer to the exhibit. An administrator attempts to perform a GET operation by using the Cisco IOS XE RESTCONF API to return the hostname of a device. The sequence diagram in the exhibit illustrates the HTTP messages observed. Which change to the API request resolves the issue?

A Remove the -H 'Accept: application/yang-data+json' header.

B Replace -u cisco:cisco parameter with -u 'cisco:cisco'. ✓ CORRECT

C Change the request method from -X 'GET' to -X 'POST'.

D Add the -H 'Content-Type: application/yang-data+json' header.

SUGGESTED ANSWER

The suggested answer is B.

The 401 Unauthorized error in the sequence diagram indicates that the authentication credentials provided are likely incorrect or not formatted correctly. To resolve this, replacing the -u cisco:cisco parameter with -u 'cisco:cisco' ensures that the credentials are properly enclosed in quotes. This prevents any potential issues with special characters or spaces being misinterpreted by the shell.

QUESTION 380

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP

- -

Drag and drop the API characteristics from the left onto the corresponding categories on the right.

SUGGESTED ANSWER

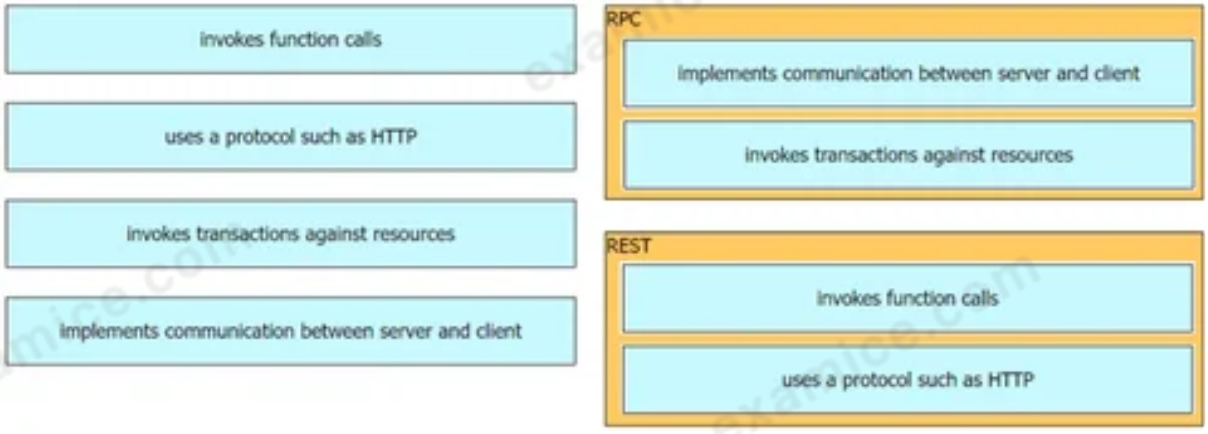

Issued to kamjunhao@gmail.com · October 17, 2026

A new application is being developed that requires the ability to be copied and moved from one location to another. The existing infrastructure is already heavily utilized, so the new application must have a low resource footprint. The application includes a small PostgreSQL database component. Which application deployment type meets the requirements?

A Python virtual environment

B bare metal

C virtual machine

D container ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

For an application that requires the ability to be copied and moved easily, while also having a low resource footprint, containers are the most suitable option. Containers provide a lightweight and portable environment, which allows for efficient resource usage and ease of movement across different environments. They are particularly well-suited for applications with components like small databases, as containers encapsulate the application and its dependencies, making it easy to replicate and deploy in new locations without affecting the existing infrastructure.

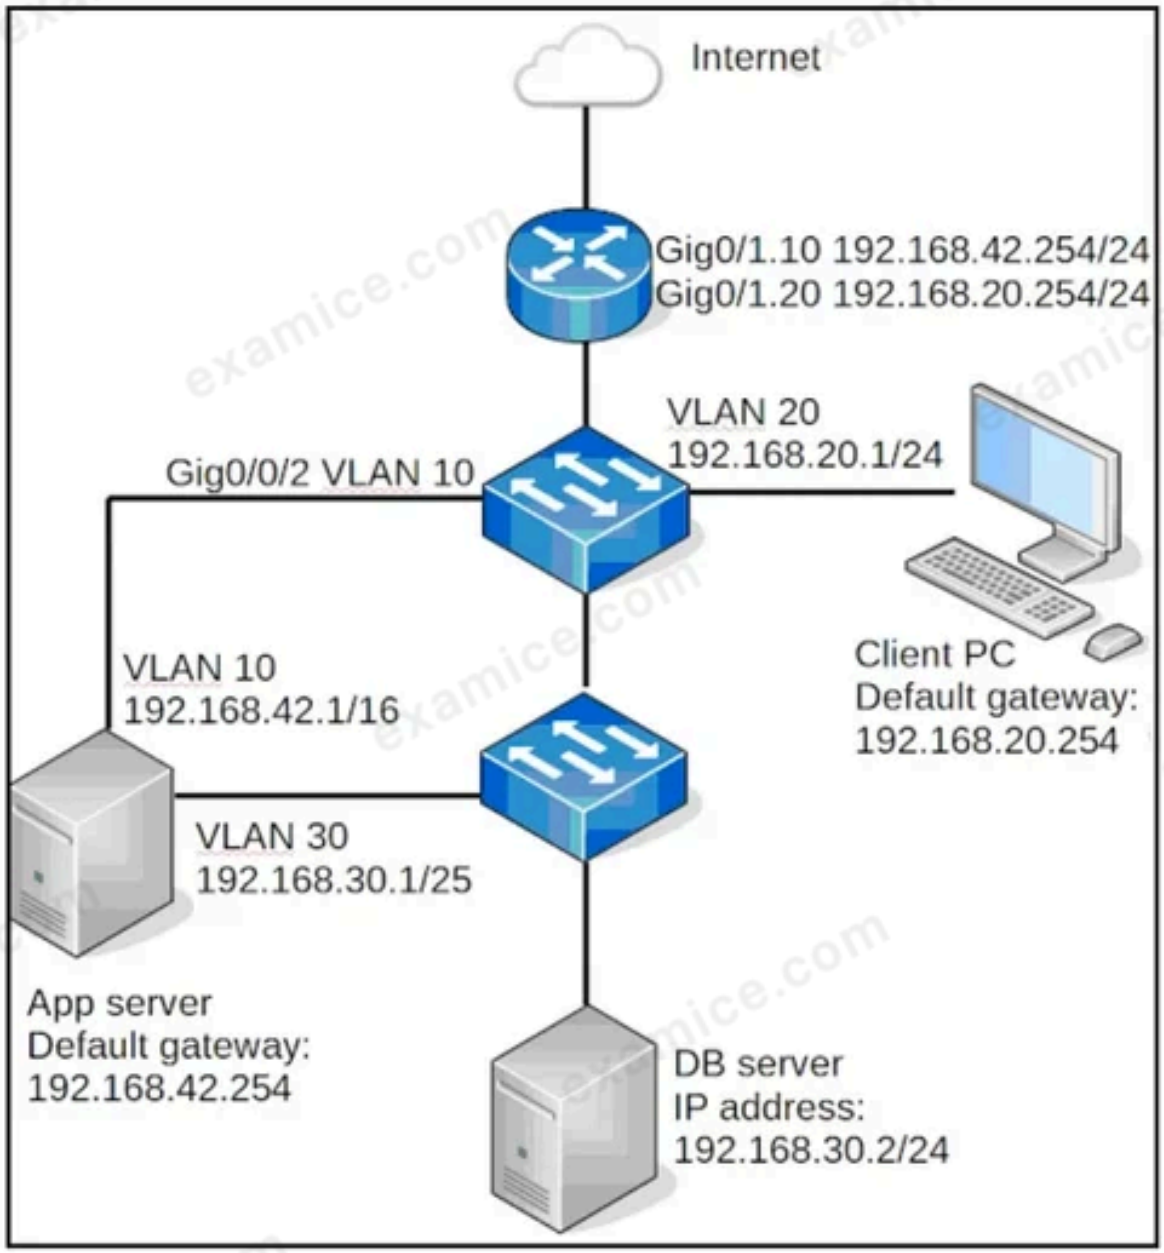

Refer to the exhibit. The internal client cannot access the app server, but access still works for clients on the Internet. Which two actions resolve the issue? (Choose two.)

A Move port Gi0/0/2 to VLAN 20. ✓ CORRECT

B Add a host route on the server to the client.

C Change the subnet length on the client to 16.

D Change the subnet length on the server to 24. ✓ CORRECT

E Add a host route on the client to the server.

SUGGESTED ANSWER

The suggested answer is A, D.

The issue is that the internal client is not on the same subnet as the app server and therefore cannot communicate directly with it. Moving port Gi0/0/2 to VLAN 20 will put the client and the app server on the same VLAN, making it possible for them to communicate directly. Additionally, since the app server is on a /16 subnet, changing the subnet length on the server to 24 will ensure that it matches the client's subnet mask and allows proper communication.

Personal copy · kamjunhao@gmail.com

What is used in JSON to represent a Python tuple?

A collection

B object

C array ✓ CORRECT

D dict

SUGGESTED ANSWER

The suggested answer is C.

In JSON, a Python tuple is represented as an array. JSON has two main data structures: objects (which correspond to Python dictionaries) and arrays (which correspond to Python lists). Since a tuple is a sequence of items, the most appropriate representation in JSON is an array.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a principle of Infrastructure as Code?

A It requires manual resource provisioning.

B It encourages overlaps in services.

C It encourages repeatable processes. ✓ CORRECT

D It requires the use of large components.

SUGGESTED ANSWER

The suggested answer is C.

One of the principles of Infrastructure as Code is that it encourages repeatable processes. This ensures that infrastructure can be easily reproduced and maintained consistently. Automated scripts and configuration files are used to set up infrastructure, eliminating the need for manual resource provisioning, avoiding overlaps in services, and allowing the use of both small and large components as needed.

```
git clone [--template=<template directory>]
          [-l] [-s] [--no-hardlinks] [-q] [-n] [--bare] [--mirror]
          [-o <name>] [-b <name>] [-u <upload-pack>] [--reference <repository>]
          [--dissociate] [--separate-git-dir <git dir>]
          [--depth <depth>] [--[no-]single-branch] [--no-tags]
          [--recurse-submodules[=<pathspec>]] [--[no-]shallow-submodules]
          [--[no-]remote-submodules] [--jobs <n>] [--sparse]
          [--filter=<filter>] [--] <repository>
          [<directory>]
```

Refer to the exhibit. A network engineer must improve the fabric discovery process in a data center. The engineer wants to check current ACI scripts in the myproject repository and clone them to a folder named aci. The engineer will optimize the scripts from the new folder. Which command performs this task on the Git repository?

A `git clone git@github.com:myproject -f aci`

B `git clone git@github.com:myproject:aci`

C `git clone git@github.com:myproject -dr aci`

D `git clone git@github.com:myproject aci` ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To clone a repository from GitHub to a specific folder, the correct command is 'git clone '. In this case, the repository URL is 'git@github.com:myproject', and the desired directory name is 'aci'. Therefore, the appropriate command is 'git clone git@github.com:myproject aci'.

DRAG DROP

- -

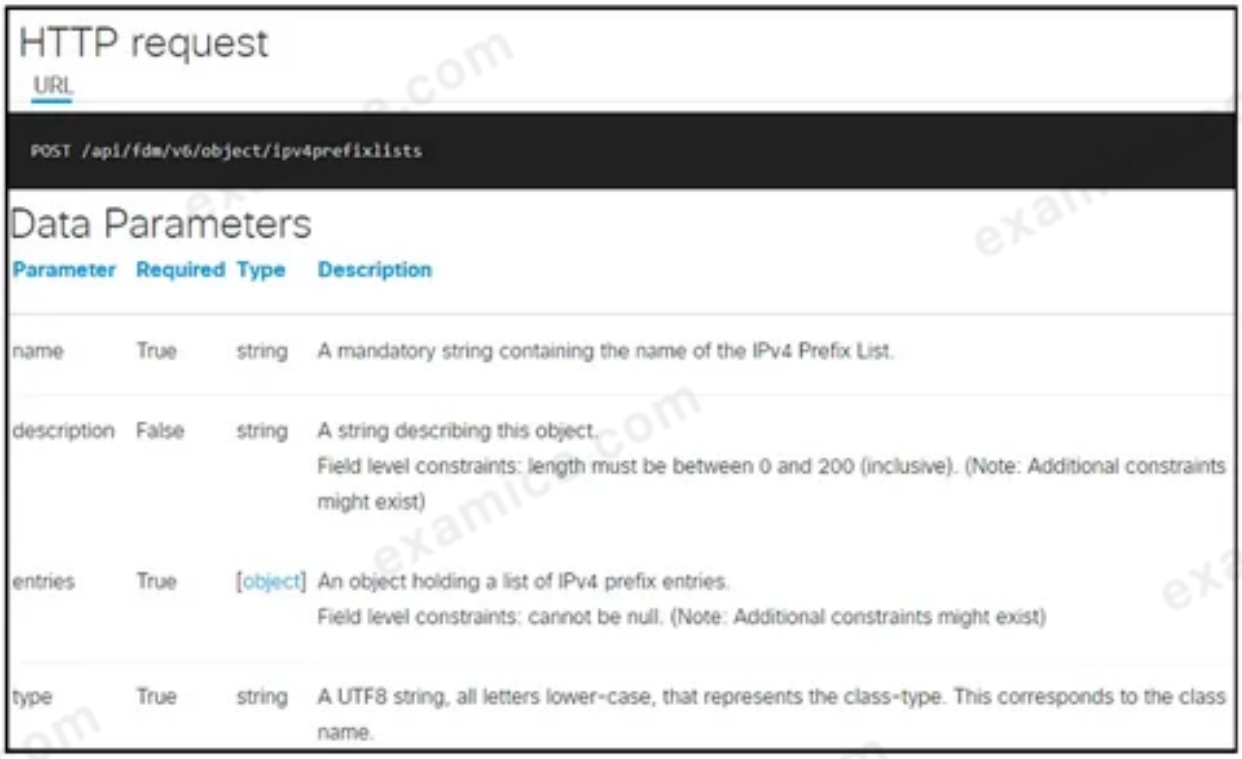

HTTP request

URL

```
POST /api/fdm/v6/object/ipv4prefixlists
```

Data Parameters

Parameter	Required	Type	Description
name	True	string	A mandatory string containing the name of the IPv4 Prefix List.
description	False	string	A string describing this object. Field level constraints: length must be between 0 and 200 (inclusive). (Note: Additional constraints might exist)
entries	True	[object]	An object holding a list of IPv4 prefix entries. Field level constraints: cannot be null. (Note: Additional constraints might exist)
type	True	string	A UTF8 string, all letters lower-case, that represents the class-type. This corresponds to the class name.

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct an API request that creates a new IPv4 prefix. Not all options are used.

```
import requests, json

BASE_URL = 'https://ftd.example.com/api/fdm/latest'
url = f'{                }/object/ipv4prefixlists'
token = 'eyJhbGc  ...  yJbN8'

payload = {
    'entries': [
        {'action': 'PERMIT', 'ipAddress': '172.0.0.0/64', 'sequence': 0,
        'type': '                '}
    ],
    'name': 'DevNet Demo Network',
    'type': 'ipv4prefixlist'
 }

headers = {
  'Authorization': f'Bearer {                }',
  'Content-Type': 'application/json'
}

response = requests.request("                ", url, headers=headers,
  data=json.dumps(payload))
print(response.text.encode('utf8'))
```

URL	ipv4prefixlist	token	api_key	BASE_URL

POST	GET

SUGGESTED ANSWER

```
import requests, json

BASE_URL = 'https://ftd.example.com/api/fdm/latest'
url = f'{    BASE_URL    }/object/ipv4prefixlists'
token = 'eyJhbGc  ...  yJbN8'

payload = {
    'entries': [
        {'action': 'PERMIT', 'ipAddress': '172.0.0.0/64', 'sequence': 0,
        'type': '    ipv4prefixlist    '}
    ],
    'name': 'DevNet Demo Network',
    'type': 'ipv4prefixlist'
 }

headers = {
  'Authorization': f'Bearer {    token    }',
  'Content-Type': 'application/json'
}

response = requests.request("    POST    ", url, headers=headers,
  data=json.dumps(payload))
print(response.text.encode('utf8'))
```

URL	ipv4prefixlist	token	api_key	BASE_URL

POST	GET

Issued to kamjunhao@gmail.com · October 17, 2026

A developer improves the code repository to clean a bug on the custom network monitoring application. The developer adds the changes to the staging area and then commits on the local branch. Which command pushes commits that are made on a local branch to the remote repository?

A push origin master

B git push all

C push all

D git push origin master ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The correct command to push commits that are made on a local branch to the remote repository is 'git push origin master'. This syntax specifies the push operation, the remote repository ('origin'), and the branch name ('master').

Issued to kamjunhao@gmail.com · October 17, 2026

```
#!/bin/bash
useradd $1
groupadd $2
mkdir /opt/scripts
cp *.py /opt/scripts
cd /opt/scripts
ls *.py | while read file;
    do
        echo $file >> content.txt;
        chmod u+x $file;
        chown $1:$2 $file
    done
```

Refer to the exhibit. An engineer must add new users and set privileges for executing a few Python scripts. The engineer prepares a Bash script to automate this task. The script adds a user and a group from the command-line arguments, creates a directory, and copies the Python scripts to it. The script then changes to the directory and lists the scripts. Based on the script workflow, which process is being automated within the loop by using the list of Python scripts?

A assigning execution privileges to the owner, setting the user and group owner to the scripts that were initially created, and storing the script names in a file. ✓ CORRECT

B creating a file with the content of all the files, assigning execution permissions to each script, and then changing ownership to the initially created user and group.

C removing the files that are not Python, listing the Python files, and assigning execution privileges to the initially created user and group.

D assigning execution privileges to everyone and changing the ownership to the initially created user and group.

SUGGESTED ANSWER

The suggested answer is A.

The script's loop processes each Python file by appending the filename to content.txt, assigning execution privileges to the owner, and setting the user and group ownership to the files. It does not concatenate the content of the files into content.txt or remove any files, so options B and C are incorrect. The script does not assign execution privileges to everyone, making option D incorrect. Therefore, the process being automated is described by option A: assigning execution privileges to the owner, setting the user and group owner to the scripts, and storing the script names in a file.

Personal copy · kamjunhao@gmail.com

QUESTION 389

Issued to kamjunhao@gmail.com · October 17, 2026

What is a function of an application load balancer?

A automatic distribution of TCP traffic

B automatic distribution of HTTP and HTTPS traffic ✓ CORRECT

C manual distribution of TCP traffic

D manual distribution of HTTP and HTTPS traffic

SUGGESTED ANSWER

The suggested answer is B.

An application load balancer is designed to automatically distribute HTTP and HTTPS traffic, which operates at the application layer (Layer 7 of the OSI model). It is responsible for routing requests to various instances based on the URL, hostname, or path. This functionality is crucial for managing web traffic efficiently.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing on the Meraki Python script to create a new network.

```
base_url = "https://api.meraki.com/api/v0"
org_id = "123456789"
api_key = "1098hadpfsiapsf8ahf8ohp"
network_name = "New Network"
requests. post(
    base_url  + "/ [          ] /" + [          ] + "/networks",
     [          ] = {
        "X-Cisco-Meraki-API-Key": [          ],
        "Content-Type": "application/json"
    },
    data=json.dumps({" [          ]": network_name,
                      "type": "wireless switch"
                      }))
```

organizations | headers | api_key | org_id | name

SUGGESTED ANSWER

```
base_url = "https://api.meraki.com/api/v0"
org_id = "123456789"
api_key = "1098hadpfsiapsf8ahf8ohp"
network_name = "New Network"
requests. post(
    base_url  + "/ organizations /" + org_id + "/networks",
     headers = {
        "X-Cisco-Meraki-API-Key": api_key ,
        "Content-Type": "application/json"
    },
    data=json.dumps({" name ": network_name,
                      "type": "wireless switch"
                      }))
```

organizations | headers | api_key | org_id | name

```
Request:
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": false,
  "privilegeLevel": "high",
  "ASDM_CLIAccessType": "Null",
  "objectId": "userOne1973"
}
HTTP response Code: 400
```

Refer to the exhibit. An engineer must create a local user on Cisco ASA and prepares a script to send the request through ASA REST API. The engineer gets a response of 400 Bad Request. Which HTTP request produces a response code of 201?

A

```
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "name": "UserOne",
  "password": "p4ssW0rd",
  "privilegeLevel": 2,
  "ASDM_CLIAccessType": "Cli",
  "objectId": "userOne1973"
}
```

✓ CORRECT

B

```
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": true,
  "privilegeLevel": "high",
  "ASDM_CLIAccessType": "None",
  "objectId": "userOne1973"
}
```

C

```
POST/api/objects/localusers
Request Data
{
  "kind": "object#LocalUserObj",
  "name": "UserOne",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": false,
  "privilegeLevel": 2,
  "ASDM_CLIAccessType": "Full"
}
```

D

```
POST/api/objects/localusergroups
Request Data
{
  "kind": "object#LocalUserObj",
  "password": "p4ssW0rd",
  "MSCHAPauthenticated": false,
  "privilegeLevel": "low",
  "ASDM_CLIAccessType": "Null"
}
```

SUGGESTED ANSWER

The suggested answer is A.

To produce a response code of 201 when creating a local user on Cisco ASA through the ASA REST API, the request must include all necessary fields and use the correct data format. Option A correctly includes the 'name' and 'objectId' fields, both of which are mandatory for user creation. Additionally, it specifies the 'kind' field, 'password', 'privilegeLevel', and 'ASDM_CLIAccesstype' appropriately. This ensures that the API request adheres to the requirements specified in the ASA REST API documentation.

Personal copy · kamjunhao@gmail.com

QUESTION 392

Issued to kamjunhao@gmail.com · October 17, 2026

What is a component of the first stage of an application development CI/CD pipeline?

A triggering of the automated testing phase

B commitment and pushing of code into a version control system ✓ CORRECT

C triggering of the automated build phase

D developer writing the initial lines of code

SUGGESTED ANSWER

The suggested answer is B.

The first stage of an application development CI/CD pipeline involves the commitment and pushing of code into a version control system. This step is essential as it initiates the CI/CD process, allowing for subsequent phases such as automated testing and building to be triggered automatically once code changes are detected in the repository.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What must be created on a network to enable devices in different network segments to communicate as if attached to the same wire?

A VLAN ✓ CORRECT

B SAID

C VTP

D MTU

SUGGESTED ANSWER

The suggested answer is A.

A VLAN (Virtual Local Area Network) enables devices in different network segments to communicate as if attached to the same wire by creating a logical, rather than physical, LAN. This allows for the grouping of devices within a network regardless of their actual physical location on the network infrastructure.

Issued to kamjunhao@gmail.com · October 17, 2026

When a developer sends an HTTP request to an API, which two elements are expected in an HTTP response? (Choose two.)

- A headers ✓ CORRECT
- B GET request
- C POST request
- D scripts
- E status code ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is A, E.

When a developer sends an HTTP request to an API, the HTTP response typically contains headers and a status code. Headers provide meta-information about the response, such as content type and length, which helps the client understand how to interpret the response. The status code indicates the result of the request, such as whether it was successful, if there were client or server errors, or if the resource was not found. These two elements are fundamental parts of any HTTP response.

DRAG DROP

- -

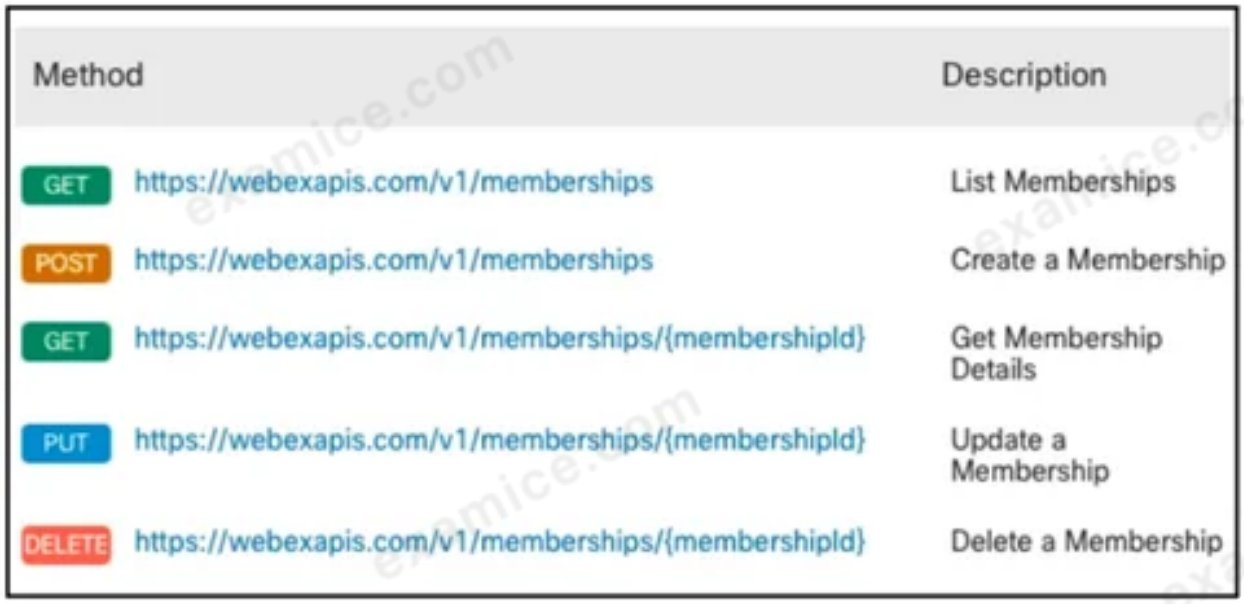

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to delete Developer1 from the ACI programmers' meeting room. Not all options are used.

```
3.9.b.2
devnetworkstation % curl --request GET \
  --header "Authorization: Bearer AAAAATUxZDYxYjUtYzg4NC00YT" \
  https://webexapis.com/v1/rooms

{"items": [
    { "id": "Y2lzY29zcGFyazovL3Vxxx.....",
      "title": "ACI programmmers",
      "ownerId": "Y2lzY29zcGFyazovL3Vzzz..." }
]}
devnetworkstation % curl --request [          ] \
  --header "Authorization: Bearer AAAAATUxZDYxYjUtYzg4NC00YT" \
  "https://webexapis.com/v1/memberships?roomId= [          ] "

{"items": [
    { "id": "Y2lzY29zcGFyazovL3Vwwww.....",
      "roomId": "Y2lzY29zcGFyazovL3Vxxx.....",
      "personId": "Y2lzY29zcGFyazovL3Vyyy.....",
      "personDisplayName": "Developer1",
      "personOrgId": "Y2lzY29zcGFyazovL3Vzzz..." },
    { "id": "Y2lzY29zcGFyazovL3Vttt.....",
      "roomId": "Y2lzY29zcGFyazovL3Vxxx.....",
      "personId": "Y2lzY29zcGFyazovL3Vuuu.....",
      "personDisplayName": "Developer2",
      "personOrgId": "Y2lzY29zcGFyazovL3Vzzz..." }
]}
devnetworkstation % curl --request [          ] \
  --header "Authorization: Bearer AAAAATUxZDYxYjUtYzg4NC00YT" \
  "https://webexapis.com/v1/memberships/ [          ] "
```

Y2lzY29zcGFyazovL3Vxxx.....	Y2lzY29zcGFyazovL3Vyyy.....	DELETE
Y2lzY29zcGFyazovL3Vwwww.....	GET	POST

SUGGESTED ANSWER

```
3.9.b.2
devnetworkstation % curl --request GET \
  --header "Authorization: Bearer AAAAATUxZDYxYjUtYzg4NC00YT" \
  https://webexapis.com/v1/rooms

{"items": [
    { "id": "Y2lzY29zcGFyazovL3Vxxx.....",
      "title": "ACI programmmers",
      "ownerId": "Y2lzY29zcGFyazovL3Vzzz..." }
]}
devnetworkstation % curl --request [   GET   ] \
  --header "Authorization: Bearer AAAAATUxZDYxYjUtYzg4NC00YT" \
  "https://webexapis.com/v1/memberships?roomId= [ Y2lzY29zcGFyazovL3Vxxx..... ] "

{"items": [
    { "id": "Y2lzY29zcGFyazovL3Vwwww.....",
      "roomId": "Y2lzY29zcGFyazovL3Vxxx.....",
      "personId": "Y2lzY29zcGFyazovL3Vyyy.....",
      "personDisplayName": "Developer1",
      "personOrgId": "Y2lzY29zcGFyazovL3Vzzz..." },
    { "id": "Y2lzY29zcGFyazovL3Vttt.....",
      "roomId": "Y2lzY29zcGFyazovL3Vxxx.....",
      "personId": "Y2lzY29zcGFyazovL3Vuuu.....",
      "personDisplayName": "Developer2",
      "personOrgId": "Y2lzY29zcGFyazovL3Vzzz..." }
]}
devnetworkstation % curl --request [  DELETE  ] \
  --header "Authorization: Bearer AAAAATUxZDYxYjUtYzg4NC00YT" \
  "https://webexapis.com/v1/memberships/ [ Y2lzY29zcGFyazovL3Vwwww..... ] "
```

Y2lzY29zcGFyazovL3Vxxx.....	Y2lzY29zcGFyazovL3Vyyy.....	DELETE
Y2lzY29zcGFyazovL3Vwwww.....	GET	POST

QUESTION 396

Issued to kamjunhao@gmail.com · October 17, 2026

What is the benefit of organizing data into functions?

A supports using same variable in different modules

B supports altering the state of an object

C organize code in a reusable way ✓ CORRECT

D stores data values of different types

SUGGESTED ANSWER

The suggested answer is C.

Organizing data into functions allows the code to be structured in a modular and reusable way. This means that specific blocks of code, which perform certain tasks, can be created and reused multiple times throughout the program without the need to duplicate the code. This promotes maintainability, ease of debugging, and enhances the overall organization of the code.

Issued to kamjunhao@gmail.com · October 17, 2026

Which capability is used by Ansible to run a set of tasks when a property is changed?

A handlers ✓ CORRECT

B playbooks

C roles

D tasks

SUGGESTED ANSWER

The suggested answer is A.

Handlers are used by Ansible to run a set of tasks when a property is changed. They are defined in the playbook and are only triggered when a task notifies them, usually because the task has made a change to the system (e.g., modifying a configuration file). This allows for specific actions, such as restarting a service, to be taken only when necessary, based on changes detected by Ansible.

```
module devnet-users {

  namespace "http://devnet.com/devnet-users";
  prefix users;

  import ietf-yang-types { prefix yang; }

  container users {
    config true;

    list person {
      key name;
      leaf name { type string; }
      leaf creationdate { type yang:date-and-time; mandatory true;
    }
  }
}
```

Refer to the exhibit. The YANG module devnet-users shows a data model for user accounts. Which code snippet shows the XML representation of an instantiation of the YANG data model?

A

```
<data xmlrefs="urn:ietf:params:xml:ns:netconf:
base:1.0">
  <users xmlns="http://devnet.com/devnet-users">
    <person><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </person>
    <person><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </person>
  </users>
</data>
```

B

```
<data xmlns="urn:ietf:params:xml:ns:netconf:
base:1.0">
  <users xmlns="http://devnet.com/devnet-users">
    <person><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </person>
    <person><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </person>
  </users>
</data>
```

C

```
<data yang-model="urn:ietf:params:xml:
devnet-users">
  <users xmlns="person">
    <user><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </user>
    <user><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </user>
  </users>
</data>
```

D

✓ CORRECT

```
<data xml="urn:ietf:params:xml:
devnet-users">
  <users xmlns="person">
    <person><name>User One</name>
      <creationdate>2020-08-24T00:00:00-00:00
      </creationdate>
    </person>
    <person><name>User Two</name>
      <creationdate>2020-10-05T00:00:00-00:00
      </creationdate>
    </person>
  </users>
</data>
```

SUGGESTED ANSWER

The suggested answer is D.

The correct XML representation should include the appropriate namespace and follow the specified structure of the YANG model. In this case, option D correctly specifies the namespace with 'xmlns' pointing to 'http://devnet.com/devnet-users' and properly represents the 'person' elements with their associated 'name' and 'creationdate' sub-elements as defined in the YANG module. Therefore, option D is the correct choice.

Personal copy · kamjunhao@gmail.com

DRAG DROP

Drag and drop the code from the bottom onto the box where the code is missing to obtain an authorization token by using the Cisco DNA Center API. Not all options are used.

SUGGESTED ANSWER

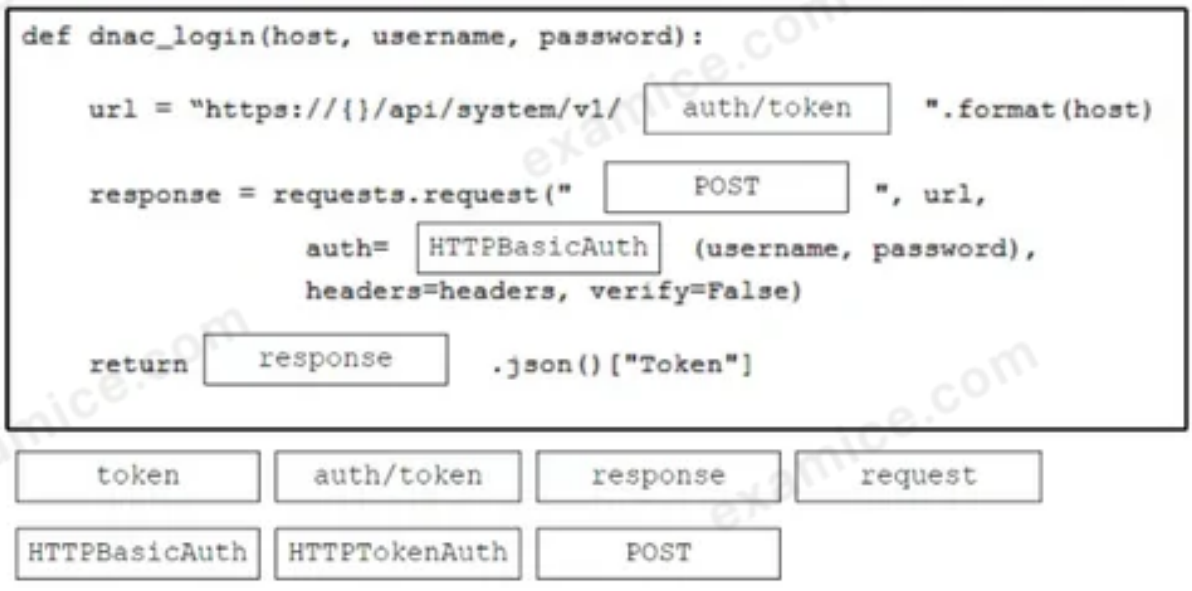

Issued to kamjunhao@gmail.com · October 17, 2026

Which API is used to change the configuration of a device group that contains Cisco Catalyst 9000 Series Switches?

A xAPI

B Cisco Finesse

C JTAPI

D Cisco IOS XE ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Cisco IOS XE is the correct API to use for changing the configuration of a device group that contains Cisco Catalyst 9000 Series Switches. Cisco IOS XE is a network operating system that provides APIs and other tools for managing and configuring Cisco networking devices such as switches and routers, including the Cisco Catalyst 9000 Series.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using model-driven programmability on Cisco devices?

A deeper monitoring

B better logging

C automated configuration ✓ CORRECT

D increased security

SUGGESTED ANSWER

The suggested answer is C.

Model-driven programmability on Cisco devices allows for automated configuration. This approach leverages models to define configurations and policies, enabling automation tools to programmatically manage and configure the network devices, which increases efficiency and reduces the potential for human error.

```
--- maketransitcurve.py2020-04-13 16:30:32.000000000 -0600
+++ maketransitmovie.py2020-04-13 16:30:32.000000000 -0600
@@ -1,79 +1,87 @@
-from __future__ import print_function
-
+#"""
+#Matplotlib Animation Example

+from __future__ import print_function
 import numpy as np
```

Refer to the exhibit. A developer got this output during the development of an application. Which action produces this output?

A execution of a Python script with numpy library

B enhancement to Python numpy library

C upload of a script to a git repository

D file comparison within the unified diff format ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The exhibit shows the output in the unified diff format. This format is commonly used to display the differences between two files using a file comparison tool. The output indicates changes made to a Python script by showing lines removed and added, reflecting a comparison between two file versions. Therefore, the action that produces this output is a file comparison within the unified diff format.