```
from ydk.services import CRUDService
from ydk.providers import NetconfServiceProvider as nc
from ydk.models.cisco_ios_xe import Cisco_IOS_XE_native as model
ip = '10.10.20.48'
prtcl = 'ssh'
user = 'developer'
psw = 'P@s$W0rD'
port = 830
provider = nc(address=ip, port=port, username=user, password=psw, protocol=prtcl)
crud = CRUDService()

interface = [                                    ]

interface.name = '3'
interface.description = 'Interface Description'

[                                    ] = '172.16.10.10'

[                                    ] = '255.255.255.0'

[                                    ]
```

```
crud.update(provider, interface)
model.Native.Interface.GigabitEthernet()
crud.create(provider, interface)
interface.ip.mask
interface.ip.address.primary.address
interface.ip.address.primary.mask
interface.ip.address.virtual.mask
```

SUGGESTED ANSWER

```
from ydk.services import CRUDService
from ydk.providers import NetconfServiceProvider as nc
from ydk.models.cisco_ios_xe import Cisco_IOS_XE_native as model
ip = '10.10.20.48'
prtcl = 'ssh'
user = 'developer'
psw = 'P@s$W0rD'
port = 830
provider = nc(address=ip, port=port, username=user, password=psw, protocol=prtcl)
crud = CRUDService()

interface = model.Native.Interface.GigabitEthernet()

interface.name = '3'
interface.description = 'Interface Description'

interface.ip.address.primary.address = '172.16.10.10'

interface.ip.address.primary.mask = '255.255.255.0'

crud.create(provider, interface)
```

```
crud.update(provider, interface)
```

```
interface.ip.mask
```

```
interface.ip.address.virtual.mask
```

What is a feature of Cisco Modeling Labs?

A Practice administration skills for exam certification.

B Automate simulations that connect to external networks.

C Design and test against virtual network equipment. ✓ CORRECT

D Create and manage user groups to control lab access.

SUGGESTED ANSWER

The suggested answer is C.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which port does HTTP use by default?

A 22

B 80 ✓ CORRECT

C 430

D 443

SUGGESTED ANSWER

The suggested answer is B.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a branch called topic that was created from the master branch to add a new feature to the product. After making a few commits on the branch, the developer wants to compare the changes between the topic and the master branches. Which two Git commands are used? (Choose two.)

A git diff topic - -cached

B git diff topic...master ✓ CORRECT

C git diff topic HEAD

D git diff topic-master

E git diff topic master ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is B, E.

To compare changes between two branches in Git, the commands used can be 'git diff topic...master' and 'git diff topic master'. The command 'git diff topic...master' compares the changes between the common ancestor of the two branches (where they initially diverged) and the tip of each branch. The command 'git diff topic master' directly compares the changes between the tips of the topic and master branches.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of Cisco UCS Director?

A It is used to generate workflow reports on any hardware equipment in the network.

B It is used to create multistep workflows to automate large and repetitive tasks. ✓ CORRECT

C It supports only hardware created by Cisco to ensure scalability across the network.

D It is a platform for monitoring and troubleshooting server-related issues.

SUGGESTED ANSWER

The suggested answer is B.

Cisco UCS Director is used to create multistep workflows to automate large and repetitive tasks. This capability allows for the efficient management of data center resources and supports automation across various IT processes.

```
import requests
url = 'https://api.meraki.com/api/v0/networks/net1/httpServers'
headers = { 'Accept': '*/*' }
response = requests.get(url = URL, headers=HEADERS, verify=False, timeout=5)
```

Refer to the exhibit. A developer created a Python script by using the Cisco Meraki API. The solution must:

- Obtain a list of HTTP servers for a network named "net1".
- Print the response body if the HTTP status code is 200.
- Handle the timeout requests as exceptions, and print Timeout Error next to the exception to stdout.

Which block of code completes the script?

A ✓ CORRECT

```
except requests.Timeout as e:
   print("Timeout Error: {}". Format(e))
if response.status_code ==200:
   print(response.text)
```

B

```
except Timeout as exception:
   print("Timeout Error")
if status_code == 200;
   print(response.text)
```

C

```
except requests Timeout:
   print("Timeout Error")
if response.status_code == 200;
   print(response)
```

D

```
except requests.Timeout as exception:
   print("Timeout Error: exception")
if response.status_code == 200:
   print(response)
```

SUGGESTED ANSWER

The suggested answer is A.

This script needs to handle request timeouts and display a specific message if a timeout occurs, as well as print the response body if the HTTP status code is 200. Among the provided options, the most fitting is the one that correctly handles the timeout exception using 'requests.Timeout', prints 'Timeout Error', and then checks if 'response.status_code == 200' to print the response text. This is accurately accomplished in option A.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using a version control system?

A tracks changes to the files ✓ CORRECT

B enforces change management controls

C centralizes binary files

D prevents code from being stored locally

SUGGESTED ANSWER

The suggested answer is A.

One of the primary benefits of using a version control system is that it tracks changes to files. This allows developers to keep a history of modifications, revert to previous versions if necessary, and collaborate more effectively by merging changes from different contributors.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a principle of test-driven development?

A write and run tests before writing new code ✓ CORRECT

B write tests after adding new blocks of code

C run tests after writing new code

D write documentation for tests

SUGGESTED ANSWER

The suggested answer is A.

Test-driven development (TDD) is a software development approach where tests are written before writing the actual code. This practice helps in defining the desired behavior of the software and ensures that the code meets its requirements right from the beginning.

DRAG DROP

- -

Drag and drop the protocols from the left onto the management technologies on the right that expose the protocols to network engineers.

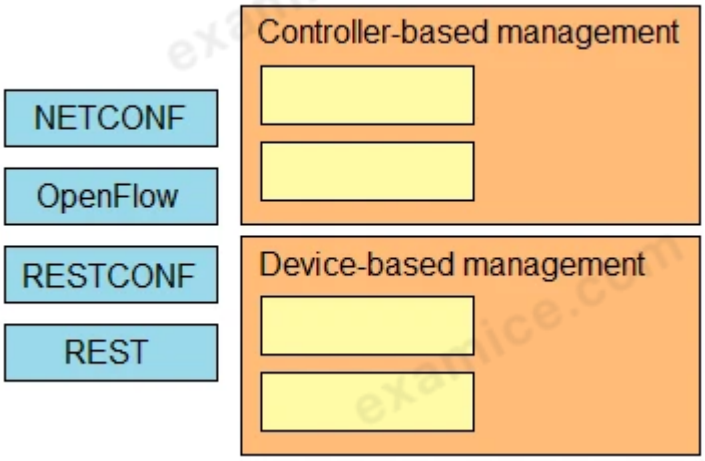

SUGGESTED ANSWER

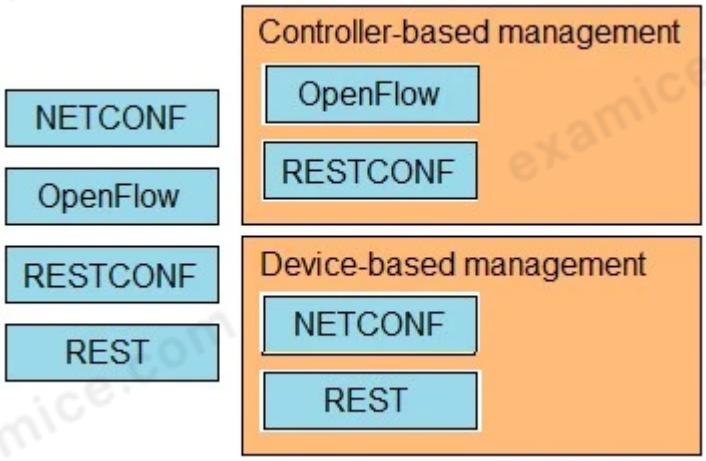

Calling a REST API returns a 404 error. What does this code represent?

A A query parameter is missing.

B The URI being requested is incorrect. ✓ CORRECT

C A header is missing.

D The payload is formatted incorrectly.

SUGGESTED ANSWER

The suggested answer is B.

A 404 error in RESTful APIs indicates that the requested URI is incorrect. This means that the server cannot find the resource based on the given URL. It does not indicate that a query parameter, header, or payload is missing or formatted incorrectly.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer prepares a Python application to monitor network performance on specific applications. The developer tests the code on a test environment but requires more use cases and wants the scripts to be improved for different networks. Which resource must be used to take advantage of open-source communities and contributors for the application?

A code exchange ✓ CORRECT

B sandbox

C packet tracer

D learning labs

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco network management platform should be used for integration with DevOps toolchains and third-party services in a service provider environment?

A Cisco NSO ✓ CORRECT

B Cisco DNA Center

C Cisco ACI

D Cisco SD-WAN

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

Which unique identifier allows network traffic to be routed to a host?

A hostname

B network prefix

C IP address ✓ CORRECT

D subnet mask

SUGGESTED ANSWER

The suggested answer is C.

An IP address is a unique identifier that allows network traffic to be routed to a host. Unlike hostnames, which are human-readable, IP addresses are used at the network layer to identify devices and facilitate data routing between them. The network prefix and the subnet mask are used for creating and managing subnets but do not directly serve as unique identifiers for routing traffic to an individual host.

Issued to kamjunhao@gmail.com · October 17, 2026

Which automation tool uses NEDs to abstract southbound interfaces?

A Chef

B Puppet

C Ansible

D Cisco NSO ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must investigate the problems on a web application and address them to related teams. The engineer verifies that the network farm serving the application is working properly and is accessible through the internal IP address and port. Each server has a public DNS name and public IP. While name resolutions from the outside network to the public IP address are working properly too, the engineer discovers that some servers are not accessible from the public Internet. Which problem type must be addressed as the cause for the case?

A internal network connectivity

B blocked transport block

C proxy

D NAT ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer is creating an API to automatically obtain specific zones from Cisco Meraki MV cameras. The data that is provided when the API runs must represent the current analytic zones that are configured on the cameras. The API must start automatically at 6 p.m. every day and save the data on a server for further processing. Which part of the HTTP request must be configured to meet these requirements?

A request body with Status Code set to "302"

B request body with Content-Type set to "application/xml"

C request header with Content-Type set to "application/json" ✓ CORRECT

D request header with Content-Encoding set to "application/xml"

SUGGESTED ANSWER

The suggested answer is C.

To automatically obtain specific zones from Cisco Meraki MV cameras and save the data for further processing, the content type of the request header should be set to 'application/json'. Cisco Meraki APIs typically use JSON for data interchange. Therefore, setting the Content-Type to 'application/json' in the request header ensures that the API understands and correctly processes the request.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer has created a three-tier web application for network device control and management. The application consists of multiple objects assigned for different functionalities. The architecture of the application is based on the Observer pattern. Which advantage does this pattern provide for the application design and architecture?

A Independent observers are updated automatically.

B It updates the state of dependent subjects directly.

C One observer can query the state of other subjects

D It decouples the subjects from the observers. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The Observer pattern primarily provides the advantage of decoupling the subjects from the observers. This allows changes to either the subjects or observers to occur independently without affecting the other, promoting loose coupling, independence, and flexibility in updating the components.

Issued to kamjunhao@gmail.com · October 17, 2026

Which type of OWASP threat forges a malicious HTTP request into an application?

A Clickjacking

B SQL Injection

C XSS

D CSRF ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

CSRF, or Cross-Site Request Forgery, forges malicious HTTP requests into an application. This type of attack tricks the victim into submitting a request unknowingly, typically through their own browser while they are authenticated to the target application, thereby executing unwanted actions.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a difference between REST and RPC API styles?

A RPC uses HTML format and REST uses JSON format.

B RPC has a single style and REST has multiple styles

C RPC uses the POST operation to update and REST uses the PUT operation to update.

D RPC is stateful in nature and REST is stateless in nature. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

One of the fundamental distinctions between RPC (Remote Procedure Call) and REST (Representational State Transfer) is their statefulness. RPC can be stateful, meaning it can maintain a session state between the client and server across multiple requests. On the other hand, REST is designed to be stateless, meaning each client request must contain all the information the server needs to fulfill that request, and no session state is stored between requests. This allows REST to be more scalable and simpler to implement.

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool is able to create a network design that simulates a topology?

A Docker

B pyATS

C Cisco DevNet Sandbox

D CML ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Cisco Modeling Labs (CML) is a tool specifically designed to create and simulate network topologies, allowing users to design, build, and test network configurations in a virtual environment. It is capable of running real Cisco images to provide an accurate simulation of Cisco and non-Cisco networks. Docker, pyATS, and Cisco DevNet Sandbox serve different purposes related to network automation and testing but are not primarily used for designing and simulating network topologies in the way CML is.

Issued to kamjunhao@gmail.com · October 17, 2026

Which API has the capability to configure phone books and contacts in Cisco Unified Contact Center?

A AXL

B Cisco Webex Meetings

C Cisco Finesse ✓ CORRECT

D Cisco Webex

SUGGESTED ANSWER

The suggested answer is C.

Cisco Finesse is a desktop solution designed for the Cisco Unified Contact Center Enterprise. It provides APIs that allow integration and customization of agent desktop environments, including managing phone books and contacts.

DRAG DROP

-

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to create a new room within Webex Teams. Not all options are used.

Answer Area

```
import requests

def createRoom(roomName):
        url = "https://webexapis.com/v1/rooms"
        payload = {"          ": roomName}
        ________ = {
                "Content-Type": "application/x-www-form-urlencoded",
                "Authorization": TOKEN
        }
        requests.________("________", url, data=payload, headers=headers)
```

headers	request	PUT
title	POST	data

SUGGESTED ANSWER

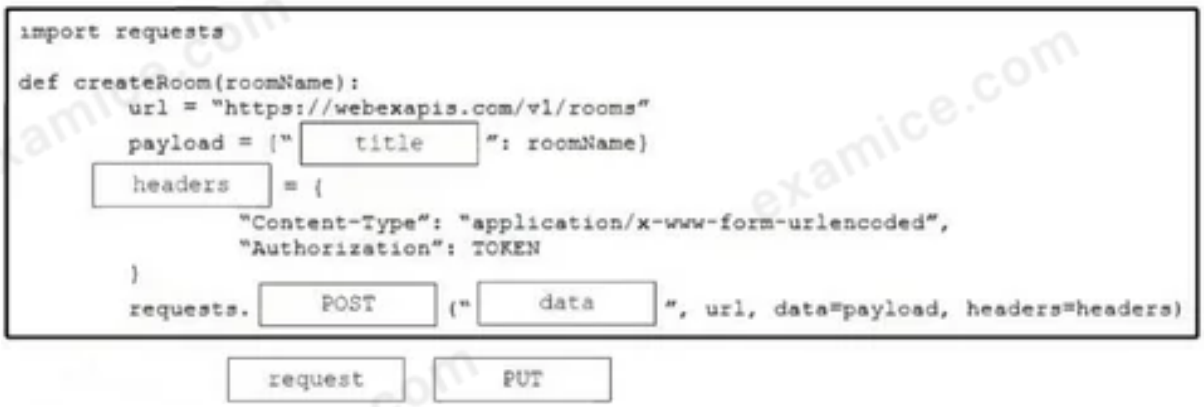

QUESTION 531 Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP status code is returned when a server is down for maintenance?

A 401

B 403

C 501

D 503 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The HTTP 503 status code indicates that the server is currently unable to handle the request due to temporary overloading or maintenance of the server. This status is used when the server is down for maintenance, which aligns with the question.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the well-known port for HTTPS?

A 81

B 443 ✓ CORRECT

C 80

D 440

SUGGESTED ANSWER

The suggested answer is B.

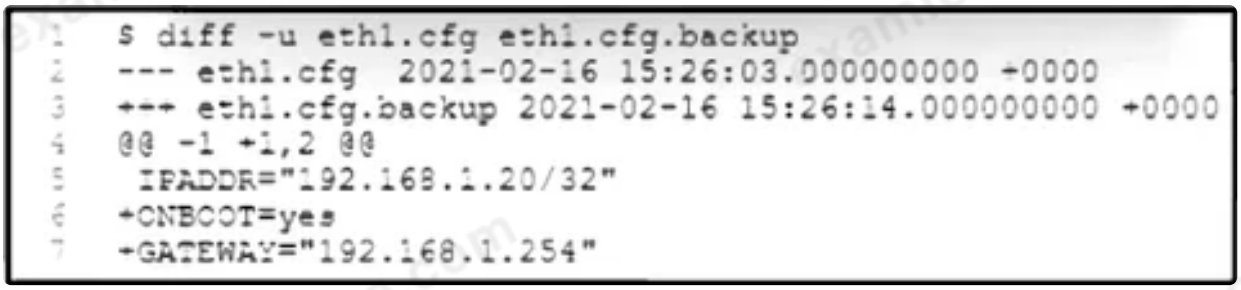

```
$ diff -u eth1.cfg eth1.cfg.backup
--- eth1.cfg  2021-02-16 15:26:03.000000000 +0000
+++ eth1.cfg.backup 2021-02-16 15:26:14.000000000 +0000
@@ -1 +1,2 @@
 IPADDR="192.168.1.20/32"
+ONBOOT=yes
+GATEWAY="192.168.1.254"
```

Refer to the exhibit. A network engineer changes the configuration of a device interface, and the device becomes unreachable. The engineer accesses the server console to review the differences with the backup file. Which change must be made in the eth1.cfg file to restore the original configuration?

A Remove the line GATEWAY="192.168.1.254".

B Remove the line IPADDR="192.168.1.20/32".

C Add lines ONBOOT=yes and GATEWAY="192.168.1.254". ✓ CORRECT

D Add lines ONBOOT=yes and IPADDR="192.168.1.20/32".

SUGGESTED ANSWER

The suggested answer is C.

To restore the original configuration, add lines `ONBOOT=yes` and `GATEWAY=192.168.1.254` to the `eth1.cfg` file. Without these lines, the interface won't be configured to start on boot (`ONBOOT=yes`), and the default gateway (`GATEWAY=192.168.1.254`) won't be set, both of which are necessary for proper network connectivity.

What is a benefit of organizing code into modules?

A improves compatibility with the hardware

B improves the user interface

C easier to work with the code ✓ CORRECT

D easy to compile and test

SUGGESTED ANSWER

The suggested answer is C.

examice.com

A company wants to optimize the use of its existing compute resources by running multiple operating systems on a single Cisco UCS server. The company also wants to minimize new purchases for physical resources such as hard drives. The network connectivity between virtual hosts and the physical host needs to be bridged. Which deployment model type must be used?

A bare metal

B Docker

C container

D virtual machine ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To optimize the use of existing compute resources by running multiple operating systems on a single Cisco UCS server while minimizing new purchases for physical resources, the company should use virtual machines. Virtual machines allow the execution of multiple operating systems on a single physical server by utilizing hypervisor technology. This approach not only maximizes resource utilization but also provides the necessary network connectivity between virtual hosts and the physical host through network bridging. Containers, while lightweight and efficient, are more suited to running multiple applications within the same operating system rather than different operating systems. Bare metal solutions do not provide the necessary abstraction to run multiple operating systems on the same physical hardware.

Issued to kamjunhao@gmail.com · October 17, 2026

A retail store is launching an online presence through their new application. The amount of end-user traffic on the application is expected to fluctuate depending on whether there are sales on or not. The application developer has decided to adopt an application-deployment model that allows them to leverage cloud bursting. Which deployment approach would allow cloud bursting?

A local infrastructure

B edge computing

C on-premises

D hybrid ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A hybrid deployment approach is the most suitable for cloud bursting. It combines both on-premises and cloud resources, allowing the application to handle variable user traffic by utilizing additional resources from a public cloud during peak times. This ensures the application can scale efficiently without over-provisioning on-premises infrastructure.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP status code means that the server cannot or will not process the request because of a perceived client error?

A 100

B 203

C 303

D 400 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

```
import requests
import os
from dotenv import load_dotenv
load_dotenv()
def main():
    token = os.environ.get("api-token")
    url = f"https://192.168.190.42/dna/intent/api/v1/network-device"
    headers = {
        "Content-Type": "application/json",
        "Accept": "application/json",
        "X-auth-Token": token
    }
    response =  requests.get(url, headers=headers, verify=False).json()

    for device in response["response"]:
        print("{serial_number} retreived".format(serial_number=device['serialNumber']))

if __name__ == "__main__":
   main()
```

Refer to the exhibit. A developer created a Python script that is used by network engineers to retrieve information from Cisco DNA Center by using the Cisco DNA Center API. Which workflow does the Python script execute?

A Retrieve all the devices and serial numbers in Cisco DNA Center. ✓ CORRECT

B Provision a new device in Cisco DNA Center.

C Retrieve all network information in Cisco DNA Center.

D Retrieve a specific device from Cisco DNA Center by using a serial number.

SUGGESTED ANSWER

The suggested answer is A.

The Python script is designed to retrieve all devices and their serial numbers from the Cisco DNA Center. It does this by sending a GET request to the '/dna/intent/api/v1/network-device' endpoint, which is typically used to retrieve information about all network devices. The script then iterates over each device in the response, retrieving and printing the serial number. There is no filtering mechanism for a specific device based on serial number in the provided script, which confirms that its purpose is to retrieve all devices and their associated serial numbers.

QUESTION 539

Issued to kamjunhao@gmail.com · October 17, 2026

```
$ curl --connect-timeout 10 --key ./admin-key.pem --cert ./admin.pem https://
devnet.lab.com/
curl: (28) Connection timed out after 10000 milliseconds
```

Refer to the exhibit. A developer is using `cURL` to test connectivity to a webpage. The request times out after 10 seconds. The developer tested connectivity by using Ping and can open a TCP socket to the remote server by using Telnet. Other users confirm that they can access the webpage from their device. The developer has SSH access to the remote server and runs commands to troubleshoot. What causes the issue?

A Connectivity from the remote server back to the client is down.

B Firewall rules on the remote server block the client on port 443.

C Application-layer security features on the remote server block the connection. ✓ CORRECT

D HTTPS proxy configured on the remote server blocks the connection.

SUGGESTED ANSWER

The suggested answer is C.

The issue is likely due to application-layer security features on the remote server blocking the connection. This can happen if the server has security policies in place that specifically block certain types of requests, such as those made by cURL. Even though the developer can ping the server and establish a TCP connection via Telnet, these methods do not test the same application-layer protocols and security features that cURL and HTTPS use. Therefore, the server's application-layer security settings are the probable cause of the timeout.

Issued to kamjunhao@gmail.com · October 17, 2026

Which CI/CD component is used to store and track code changes during development?

A Artifactory

B Vault

C version control system ✓ CORRECT

D ticketing system

SUGGESTED ANSWER

The suggested answer is C.

```
< rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0" message-id="">

<ok/>

</rpc-reply>

]]>]]
```

Refer to the exhibit. A network engineer wants to change the name of a device. The engineer submits a NETCONF request and receives a response. Which NETCONF request did the engineer submit?

A

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <new-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </new-config>
</rpc>
```

✓ CORRECT

B

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <edits-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </edits-config>
</rpc>
```

C

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <copy-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </copy-config>
</rpc>
```

D

```
<rpc mlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <edit-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </edit-config>
</rpc>
```

SUGGESTED ANSWER

The suggested answer is A.

The received response in the provided exhibit shows a successful operation with the element, indicating that the request was processed correctly. Among the given NETCONF requests, the tag is used for defining a new configuration. In the context of changing the device's name, the tag makes the most sense as it implies setting up a new configuration for the running target. Therefore, the correct NETCONF request that the engineer submitted is the one with the tag.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which service **must** be configured to provide time synchronization to the devices on a network to make it easier to correlate log events?

A DHCP

B SNMP

C NAT

D NTP ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The Network Time Protocol (NTP) is specifically designed for time synchronization across devices in a network. This helps ensure that all devices have the same time, making it easier to correlate log events accurately. DHCP is used for assigning IP addresses and SNMP is used for network management. NAT is related to network address translation. Therefore, NTP is the correct service for time synchronization.

Issued to kamjunhao@gmail.com · October 17, 2026

A distributed application is under development and the interaction between the application and an API is being tested using the URL and port:

devasc468262987.com port 443

The requests that were sent to the server could not execute because the application was blocked by the firewall. Which protocol must be allowed by the firewall to fix the issue?

A SSH

B HTTP

C HTTPS ✓ CORRECT

D FTP

SUGGESTED ANSWER

The suggested answer is C.

```
module future-industries-tech {
    yang-version "1";

    namespace "https://future-industries-tech.io/yang-future-industries-tech";
    prefix "future-industries-tech";

    identity AFFILIATION {
      description "To which technology that belongs to which group";
    }
    identity UNITED_REPUBLIC {
      base AFFILIATION;
      description "Affiliated to Republic City";
    }
    // this grouping will all data assigned to the piece of technology
    grouping mechanical-data {
        leaf name {
            type string;
        }
        leaf affiliation {
            type identityref {
                base future-industries-tech:AFFILIATION;
            }
        }
    }
    // this is the root object defined by the model
    container nation {
        list technology {
            // tag each piece of technology by its name
            key "name";

           uses mechanical-data;
        }
    }
}
```

Refer to the exhibit. A developer is creating a YANG file to design data with Python. Which code must be used for the tree of the YANG file?

A pyang -f tree future-industries-tech.yang ✓ CORRECT

B pyang -i tree future-industries-tech.yang

C pyang -f leaf future-industries-tech.yang

D pyang tree future-industries-tech.yang

SUGGESTED ANSWER

The suggested answer is A.

To generate a tree representation of the YANG model, the correct pyang command to use is 'pyang -f tree future-industries-tech.yang'. The '-f tree' option specifies the output format as

a tree structure, which is necessary for visualizing the hierarchical organization of data defined in the YANG file.

QUESTION 545

Which data structure is created when parsing XML data in Python?

A item

B list

C library

D dictionary ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

What should be used to send real-time notifications to a third-party application when an event occurs in an SD-WAN deployment?

A loopback

B callback

C API

D webhook ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A network engineer developed an application that performs configuration automation. The engineer used the MVC model for the application design. It has a web interface for users to interact, collect configuration directives for specific devices, and communicate with network devices through REST-based APIs. What is the advantage of the model component in this scenario?

A It contains data and responds to state queries and updates. ✓ CORRECT

B It keeps views and controllers updated during the execution.

C It defines main application behavior and contains functions to run.

D It renders the data for easy use by the remaining parts of the design.

SUGGESTED ANSWER

The suggested answer is A.

DRAG DROP

- -

Drag and drop the characteristics from the left onto the software development methods on the right.

Answer Area

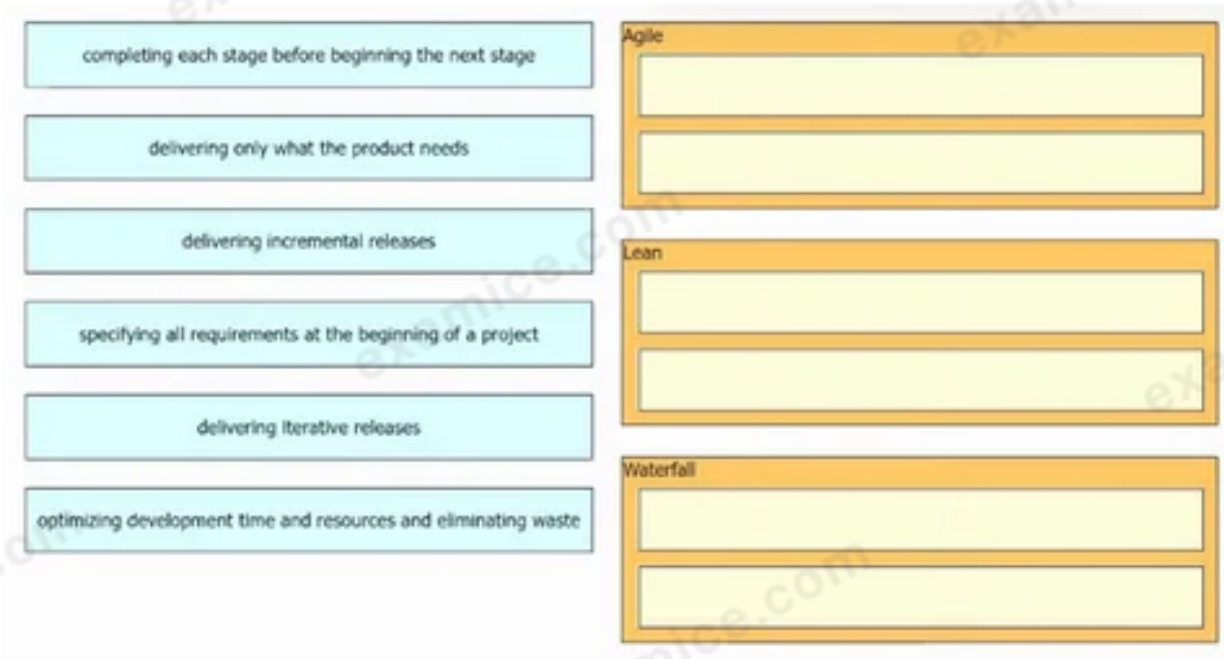

SUGGESTED ANSWER

QUESTION 549

Issued to kamjunhao@gmail.com · October 17, 2026

What is impacted by the network bandwidth on an application?

A time taken for a data packet to travel between two endpoints

B number of data packets dropped during transmission

C consistency in the arrival of data packets between two endpoints

D rate of data transferred between two endpoints ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The rate of data transferred between two endpoints is impacted by the network bandwidth. Network bandwidth refers to the maximum amount of data that can be transmitted over an internet connection in a given amount of time. It determines the data transfer rate, which is a measure of how much data can be sent and received within a specific time frame.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of a model-driven approach for infrastructure automation?

A It automates the translation of a declarative language of the model into an actionable script. ✓ CORRECT

B It enforces the generation and verification of all automation scripts through the modeling environment.

C It provides a small learning curve and helps system administrators with limited coding experience.

D It ensures that system administrators gain a good understanding of coding, and expand their experience and capabilities.

SUGGESTED ANSWER

The suggested answer is A.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which network device plane is responsible for handling QoS?

A management plane

B data plane

C configuration plane

D control plane ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two protocols are associated with the control plane on a network device? (Choose two.)

A BGP ✓ CORRECT

B UDP

C SNMP

D FTP

E OSPF ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is A, E.

Issued to kamjunhao@gmail.com · October 17, 2026

A lead engineer is managing the development of a web application with a team of remote developers using Git as the version control system. What is the advantage of a version control system that allows developers to pick code from any part of the project and perform updates on it?

A efficient handling of projects

B linear development

C build automation

D nonlinear development ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0" message-id="">
  <edit-config>
    <target>
      <running/>
    </target>
    <config>
      <interfaces xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces">
        <interface nc:operation="delete"
        xmlns:nc="urn:ietf:params:xml:ns:netconf:base:1.0">
          <name>FastEthernet0/0/3.9</name>
          <description>FEther3.9b</description>
          <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
          type">ianaift:ethernetCsmacd</type>
          <enabled>true</enabled>
          <link-up-down-trap-enable>enabled</link-up-down-trap-enable>
          <ipv4 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip"/>
          <ipv6 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip"/>
        </interface>
      </interfaces>
    </config>
  </edit-config>
</rpc>
```

Refer to the exhibit. A developer needs to write a Python script to automate a task using a NETCONF query. What does the query do?

A It deletes some device configurations. ✓ CORRECT

B It deletes all the device configurations.

C It shuts off the device.

D It adds a new device configuration.

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer clones a repository that contains a Python script from GitLab to a laptop. After modifying the code, the engineer wants to validate the changes. Which command starts the CI/CD pipeline and runs the automated tests?

A git commit

B git test

C git fetch

D git push ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

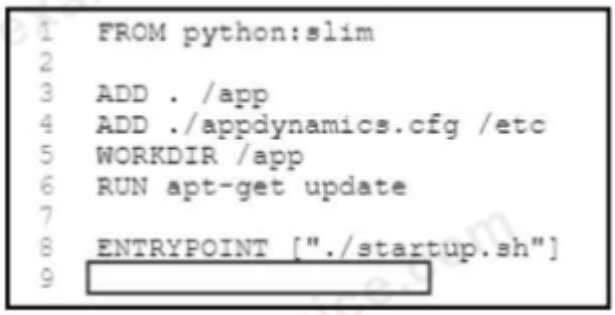

Refer to the exhibit. A developer needs to create a Docker image that listens on port 5000. Which code snippet must be placed onto the blank in the code?

A PORT 5000

B LISTEN 5000

C EXPOSE 5000 ✓ CORRECT

D OPEN 5000

SUGGESTED ANSWER

The suggested answer is C.

What is a benefit of version control?

A application of code directly to hardware

B tracking development changes ✓ CORRECT

C reuse of code-on-code patches

D compatibility with back-end systems

SUGGESTED ANSWER

The suggested answer is B.

examice.com

A network engineer makes several API calls to Cisco Prime to retrieve a list of all devices. Each time a response is received, only a subset of the devices is returned. The engineer notices that HTTP code **429** is returned instead of **200** for some API calls. Why did the response exclude some of the devices?

A The API applied an offset that was indicated in the request.

B The API failed to identify how many items to retrieve.

C The API timed out the request.

D The API rate limited the request. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

examice.com

```
#!/bin/bash
#Run this script from the command line to get results
#------------------------------------------------------------------------
# Update all applications
# Then install a desired package -- Docker

brew update  # To get the latest package lists
brew install docker

pip install --upgrade pip
pip install tensorflow
pip install pytorch

docker pull tensorflow/tensorflow:latest  # Download latest stable image
```

Refer to the exhibit. An engineer wants to create a Bash script to automate a workflow that is related to a machine learning-based application. The engineer wants to use the application as a container and use an image from the open-source public repository. What is accomplished by the script?

A Create a new software package

B Install and remove files.

C Update an existing software package.

D Install a software package. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

A distributed application was developed using the Cisco Intersight SDK. While testing the interaction between the application and the Intersight API. the requests that were sent to the server could not execute because the application was blocked by the firewall. Which URL and port must be provided to the firewall administrator to allow the traffic?

A svc.intersight.com port 443 ✓ CORRECT

B intersight.com port 443

C intersight.com port 80

D svc.intersight.com port 80

SUGGESTED ANSWER

The suggested answer is A.

Personal copy · kamjunhao@gmail.com

What is a characteristic of test-driven development?

A It enables code refactoring. ✓ CORRECT

B User tests are created after deployment.

C Infrastructure testing is done at every stage.

D Large updates are applied infrequently.

SUGGESTED ANSWER

The suggested answer is A.

examice.com

What is the purpose of Infrastructure as Code?

A to provide the ability of independent development process

B to manually configure and manage infrastructure at scale

C to apply new practices on the development process

D to use development engineering practices on the infrastructure ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

examice.com

```
- name: stage1
  ansible.builtin.service:
    name: network
    state: restarted
    args: eth0
- name: stage2
  ansible.builtin.service:
    name: httpd
    state: started
```

Refer to the exhibit. The IT team deployed a new Linux virtual machine for a software engineer to use, but the engineer is not comfortable configuring services using Bash. Which workflow is automated by the Ansible playbook?

A Restart the network on the eth0 interface and start the httpd service if it is not already started. ✓ CORRECT

B Restart the httpd service and start the network service for the eth0 interface.

C Start the network service on the eth0 interface even if it was brought down manually.

D Restart the httpd service and the network service regardless of the state.

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must investigate the problems on a web application and address them to related teams. The engineer verifies the application reachability from the single public IP address with port and discovers that HTTPS access works to three servers of a network farm with IP 172.16.50.1 .2 and .4, but HTTPS access to the server with IP 172.16.50.3 does not work. Which problem type must be addressed as the cause for the case?

A VPN connectivity

B NAT

C blocked transport port ✓ CORRECT

D proxy

SUGGESTED ANSWER

The suggested answer is C.

The issue described is that HTTPS access fails specifically for one server in a network farm, while it works for the others. Since HTTPS uses port 443, a blocked transport port is the most likely issue causing the connectivity problem to that particular server. If the transport port 443 is blocked for the server with IP 172.16.50.3, HTTPS traffic would not be able to reach it, even though it works for the other servers.

Personal copy · kamjunhao@gmail.com

DRAG DROP

-

Drag and drop the Python data transformation methods from the left onto the data formats on the right.

SUGGESTED ANSWER

Issued to kamjunhao@gmail.com · October 17, 2026

Which RFC 1918 address space includes a subnet of 172.16.0.0 that uses a mask of 255.255.0.0?

A class A

B class B ✓ CORRECT

C class C

D class D

SUGGESTED ANSWER

The suggested answer is B.

```
{
    "Cisco-IOS-XE-native:GigabitEthernet": {
        "name": "2",
        "vrf": {
            "forwarding": "MANAGEMENT"
        },
        "ip": {
            "address": {
                "primary": {
                    "address": "192.168.1.10",
                    "mask": "255.255.0.0"
                }
            }
        },
        "mop": {
            "enabled": true
        },
        "Cisco-IOS-XE-ethernet:negotiation": {
            "auto": true
        }
    }
}
```

Refer to the exhibit. A network engineer makes a RESTCONF API call to Cisco IOS XE to retrieve information. Which HTTP method and URL does the engineer use to make the API call?

A GET https://devnetlab.local/restconf/api/running/native/GigabitEthernet

B GET https://devnetlab.local/restconf/api/running/native/interface/GigabitEthernet

C GET https://devnetlab.local/restconf/api/running/native/interface/GigabitEthernet/2/ ✓ CORRECT

D GET https://devnetlab.local/restconf/api/running/ios/native/interface/GigabitEthernet/1/

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform controls server, network, storage, and virtual resources with policy-driven management for up to 10000 physical Cisco servers?

A UCS Central ✓ CORRECT

B Cisco Intersight

C Cisco DNA Center

D Cisco HyperFlex

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must review and clean up a code repository. During the review, the engineer finds a file named config.json that contains API URLs, shared keys, and other application configurations. Which two methods, according to **best** practice, **MUST** be used to protect secrets? (Choose two.)

A Store in plaintext if they are not stored in a code repository.

B Store as plaintext when the server is secured physically.

C Never appear in plaintext at rest or in transit. ✓ CORRECT

D Make them long, secure strings that include numbers with special characters.

E Always store in a secure vault. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is C, E.

Issued to kamjunhao@gmail.com · October 17, 2026

Which IP service is responsible for automatically assigning an IP address to a device?

A DNS

B DHCP ✓ CORRECT

C SNMP

D NAT

SUGGESTED ANSWER

The suggested answer is B.

Issued to kamjunhao@gmail.com · October 17, 2026

```
FROM node:12-alpine
RUN apk add --no-cache ncdu g++ make
WORKDIR /app
COPY . .
RUN yarn install --production
CMD ["node", "source/server.js"]
```

Refer to the exhibit. The server.js Node.js script runs after the Dockerfile creates its container. What is the working directory of the application inside the container?

A /source

B /app ✓ CORRECT

C /app/source

D /app/production

SUGGESTED ANSWER

The suggested answer is B.

What is an advantage of device-level management as compared to controller-level management to automate the configuration of network devices?

A Device-level management has access to all devices from a single point on the network and controller-level management does not.

B Device-level management supports all subsets of the potential device settings and controller-level management does not. ✓ CORRECT

C Device-level management supports REST API-enabled devices and controller-level management does not.

D Device-level management requires one controller per vendor and controller-level management does not.

SUGGESTED ANSWER

The suggested answer is B.

Issued to kamjunhao@gmail.com · October 17, 2026

A resource named /item is protected by oAuth2 authentication. An endpoint named /login **must** request authentication. Which method **must** be used to access the resource by using the REST API?

A Make a GET call to /login that includes the username and password, and retrieve a token to insert into the /item call.

B Make a POST call to /login including the user credentials in the message, and retrieve a token to insert into the authorization header of the /item call. ✓ CORRECT

C Make a GET call to /item, then make a call to /login that includes the username and password in the body of the message, and wait for the authorization code.

D Make a POST call to /item that includes the username and password in the body of the request message, and submit it to request access.

SUGGESTED ANSWER

The suggested answer is B.

Personal copy · kamjunhao@gmail.com

```
$ diff -u file1.txt file2.txt
--- file1.txt   2018-01-11 10:39:38.237464052 +0000
+++ file2.txt   2018-01-11 10:40:00.323423021 +0000
@@ -1,4 +1,4 @@
```

Refer to the exhibit. What occurs when the script runs?

A The contents of both files are displayed.

B The total length of the files is displayed.

C The files are combined.

D File differences are compared. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of Cisco Webex?

A Join preconfigured or new spaces with fixed user rights.

B Configure devices at scale via automation scripts or by manual execution.

C Initiate or respond to calls automatically via automation.

D Get space history or notified in real time when new messages are posted. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

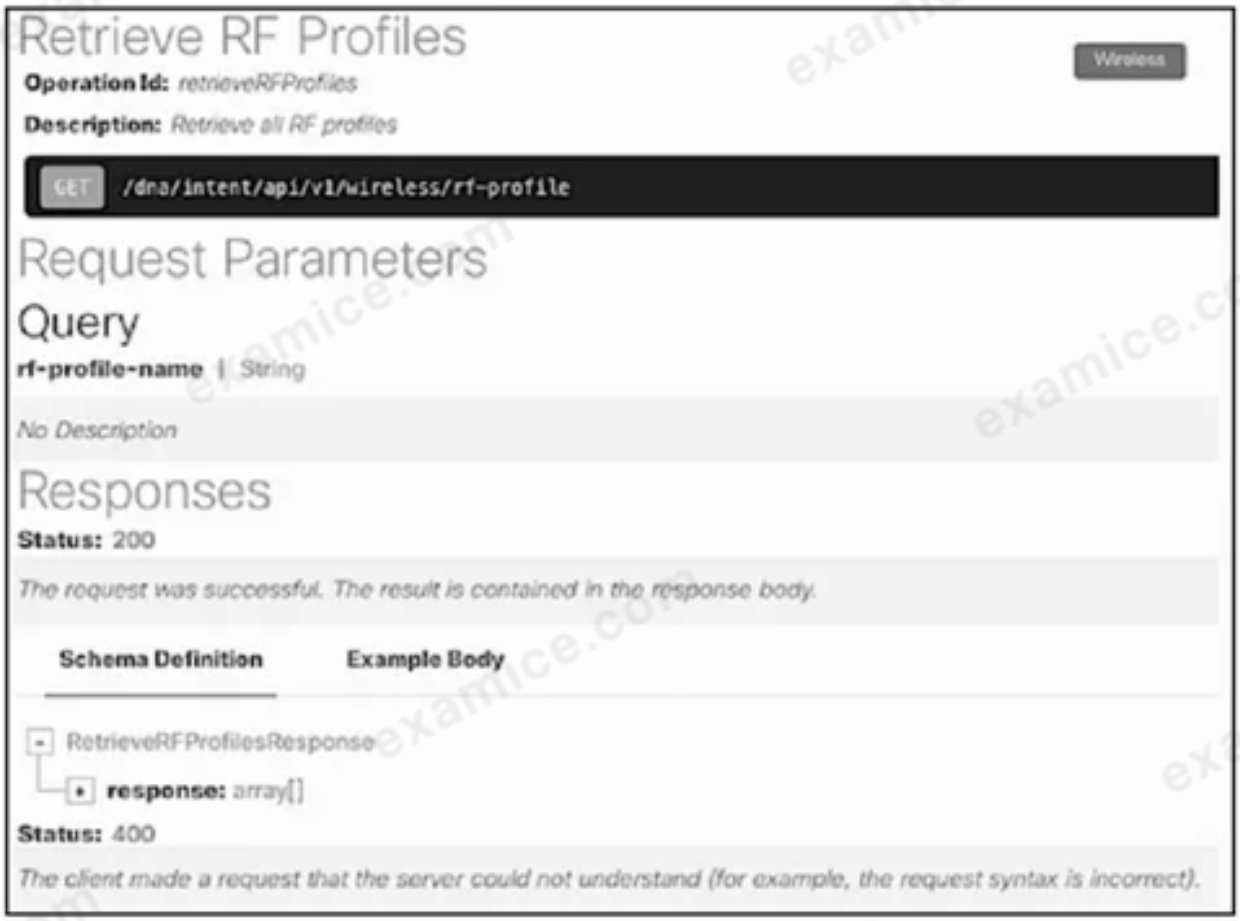

Refer to the exhibit. A developer uses a REST API to retrieve information about wireless access points. The API returns an HTTP 403 error when making a GET request. What resolves this issue?

A Provide the developer with the correct user access rights. ✓ CORRECT

B Change the request HTTP method from GET to POST.

C Change the request timeout in the client software.

D Include a username/password request header.

SUGGESTED ANSWER

The suggested answer is A.

QUESTION 577

Issued to kamjunhao@gmail.com · October 17, 2026

A developer starts to learn about building applications that use Cisco APIs. The developer needs access to Cisco security products in a development lab to test the first new application that has been built. Which DevNet resource must be used?

A DevNet Code Exchange

B DevNet Automation Exchange

C DevNet Sandbox ✓ CORRECT

D DevNet Communities

SUGGESTED ANSWER

The suggested answer is C.

```
import requests
class RestconfDevice():
    port = '443'
    headers = {'Accept': 'application/yang-data+json', 'Content-Type':
    'application/yang-data+json'}

    def __init__(self, username, password, hostname, port=port,
    headers=headers):
        self.username = username
        self.password = password
        self.hostname = hostname
        self.port = port
        self.headers = headers

    def save_config(self):
        try:
            response = requests.post(f'https://{self.hostname}:{self.port}/
            [          ]/operations/cisco-ia:save-config/',
                                    headers=self.headers, auth=(self.username,
                                    self.password), verify=False)

            result = response.json().get('cisco-ia:output').get('result')

            return result

        except:
            return response.raise_for_status()
```

Refer to the exhibit. A network engineer is creating a Python script to programmatically save network device configurations. Which code snippet must be placed onto the blank in the code?

A self.save

B {self.headers}

C restconf ✓ CORRECT

D netconf

SUGGESTED ANSWER

The suggested answer is C.

DRAG DROP

- -

Drag and drop the characteristics from the left onto the software development methodologies on the right.

SUGGESTED ANSWER

Issued to kamjunhao@gmail.com · October 17, 2026

Which two HTTP code series relate to errors? (Choose two.)

A 100

B 200

C 300

D 400 ✓ CORRECT

E 500 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D, E.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of using Python classes?

A They improve code organization by keeping data members and methods together. ✓ CORRECT

B They remove the concept of inheritance to improve code readability and maintainability.

C They allow a Python script to import code from various independent modules.

D They simplify integration by testing the classes independently from other components.

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of model-driven programmability for infrastructure automation?

A compatibility with any networking device

B automatic version control

C generic APIs that are compatible with multiple platforms

D a single data model across the network ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Model-driven programmability for infrastructure automation aims to provide a unified and consistent way to manage and automate network configurations and operations. One of its primary capabilities is having a single data model across the network, ensuring that all devices and services can be managed in a standardized manner. This promotes efficiency, consistency, and simplifies the automation processes across diverse network environments.

```
import requests
import json

url1 = "https://webexapis.com/v1/webhooks"
url2 = "https://example.com/devnet-message-events"
token = 'eyJhbGc  ...  yJbN8'

headers = {
    [redacted]
    'Content-Type': 'application/json'
}

payload = {
    "name": "Devnet Message Server",
    "targetUrl": url2,
    "resource": "messages",
    "event": "all"
}

response = requests.request("POST", url1, headers=headers,
data=json.dumps(payload))
print(response.text.encode('utf8'))
```

Refer to the exhibit. A developer needs to create a webhook to send all Cisco Webex messages to a third-party tool by using the Cisco Webex API The developer **must** authenticate with the API before any API calls can be made. To automate the procedure, a Python script is used. Which code snippet **must** be placed onto the blank in the code?

A 'Authentication': f'Bearer {token}',

B 'Authentication': f'Basic {token}',

C 'Authorization: f'Basic {token}',

D 'Authorization: f'Bearer {token}', ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must run tests on several Cisco controllers. Due to the nature of the task, the infrastructure must be running at all times and have access to APIs. Which **Cisco DevNet** source must the engineer use?

A DevNet Learning Labs

B DevNet Code Exchange

C DevNet Sandbox ✓ CORRECT

D DevNet API documentation

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

What does a developer import in a script to parse a file from XML to Python?

A function

B library ✓ CORRECT

C variable

D method

SUGGESTED ANSWER

The suggested answer is B.

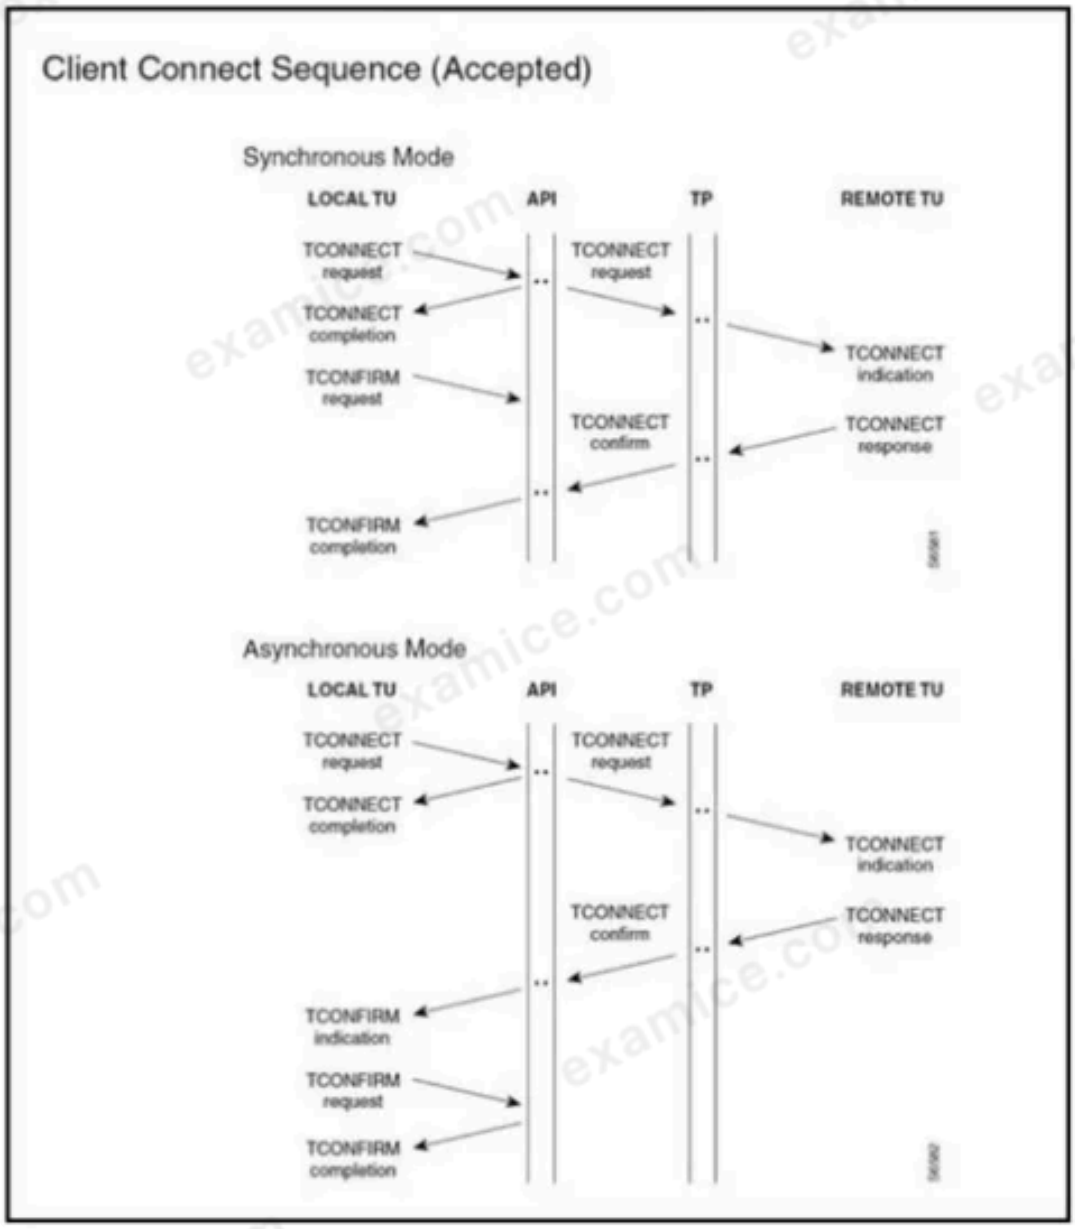

Refer to the exhibit. Which **API** is called when the REMOTE TU sends a TCONNECT Response to the LOCAL TU?

A TCONNECT completion

B TCONNECT request

C TCONNECT indication

D TCONNECT confirm ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

QUESTION 587

What is a capability of Ansible host files?

A constructs an inventory of resources under management ✓ CORRECT

B points to each other or to lower-level roles

C contains Python code for user modules

D specifies the values of variables that refer to hosts

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

Which DNS record type allows a reverse proxy to communicate to a backend component without specifying the port?

A CNAME

B AAAA

C SRV ✓ CORRECT

D PTR

SUGGESTED ANSWER

The suggested answer is C.

DRAG DROP

- -

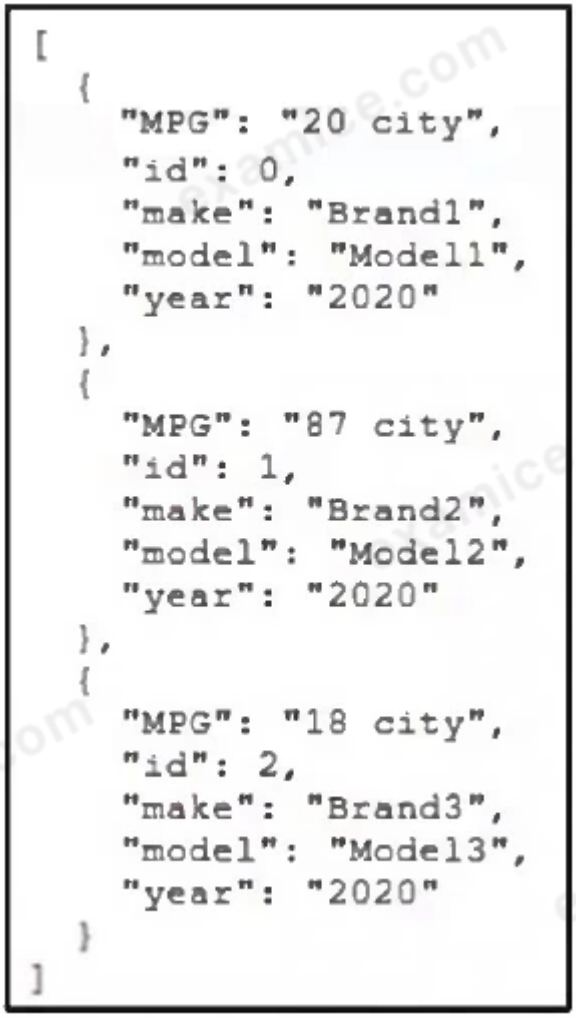

```
[
  {
    "MPG": "20 city",
    "id": 0,
    "make": "Brand1",
    "model": "Model1",
    "year": "2020"
  },
  {
    "MPG": "87 city",
    "id": 1,
    "make": "Brand2",
    "model": "Model2",
    "year": "2020"
  },
  {
    "MPG": "18 city",
    "id": 2,
    "make": "Brand3",
    "model": "Model3",
    "year": "2020"
  }
]
```

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python unittest that will test the status of the API. Not all options are used.

```
import unittest
import json
from apicars import app

class TestsAPICars(  [          ]  .TestCase):
  def setUp(self):
      self.app = app.test_client()

  # Check status response of API
  def  test_status_(self):
       resp = self.app.get('/cars/all')
       status_code = response.  [          ]
       self.assertEqual(status_code,200)

  # Check for content type is in application/json
  def _test_content_type(self):
       resp = self.app.get('/cars/all')
       self.assertEqual(resp.  [          ]  , 'application/json')

  def test_car_retrieval_with_id(self):
      resp = self.app.get('/cars?id=1')
      data = json.  [          ]  (resp.data)
      self.assertTrue(len(data) == 1)

if __name__ == '__main__':
   unittest.main()
```

status_code	test	encoding	loads
dumps	content-type	unittest	

SUGGESTED ANSWER

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of NX-API REST?

A It runs Linux Bash commands.

B It returns requested data in YAML format.

C It utilizes Java Message Service as its transport.

D It uses SSH as its transport. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

DRAG DROP

- -

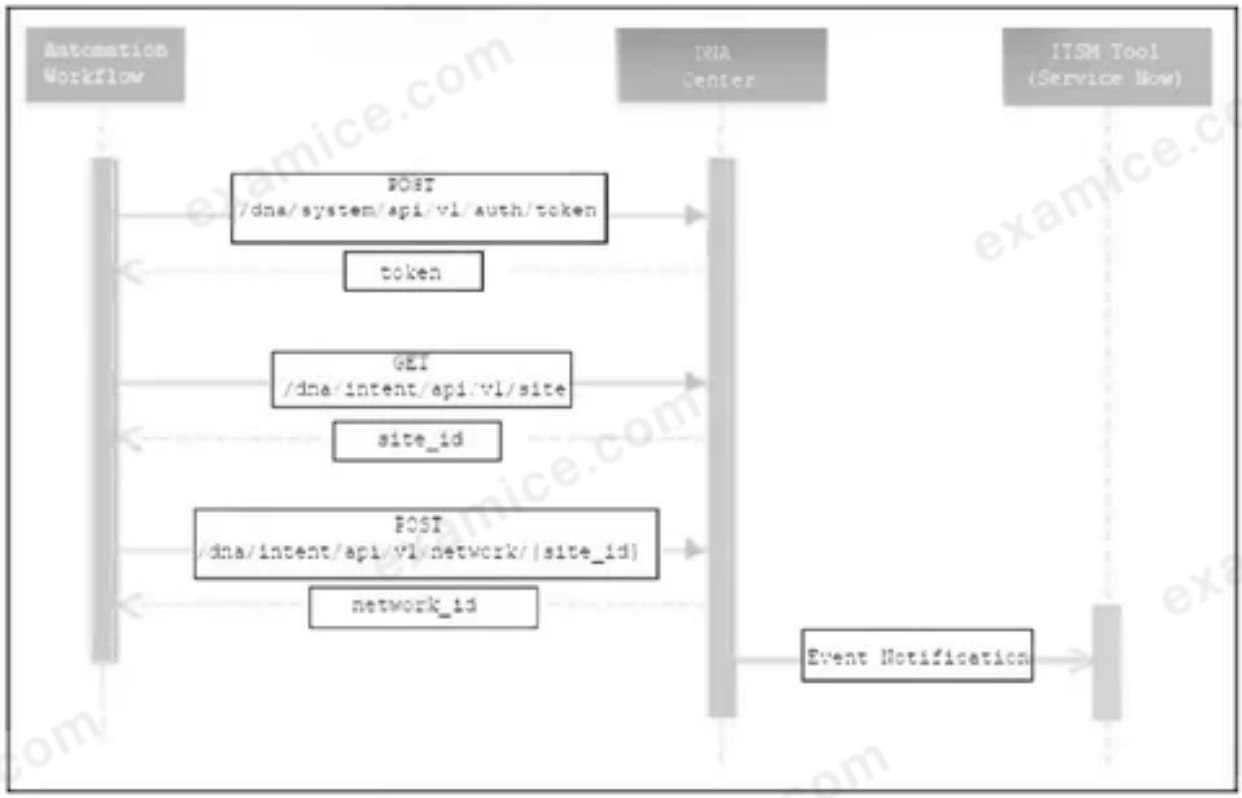

Refer to the exhibit. Drag and drop the steps from the left into the order on the right to perform the API authentication. Not all options are used.

Answer Area

Get a list of sites.	step 1
Create a new site.	step 2
Create a new network.	step 3
Authenticate and retrieve the token.	step 4
Notify the external tool of the state change.	step 5

SUGGESTED ANSWER

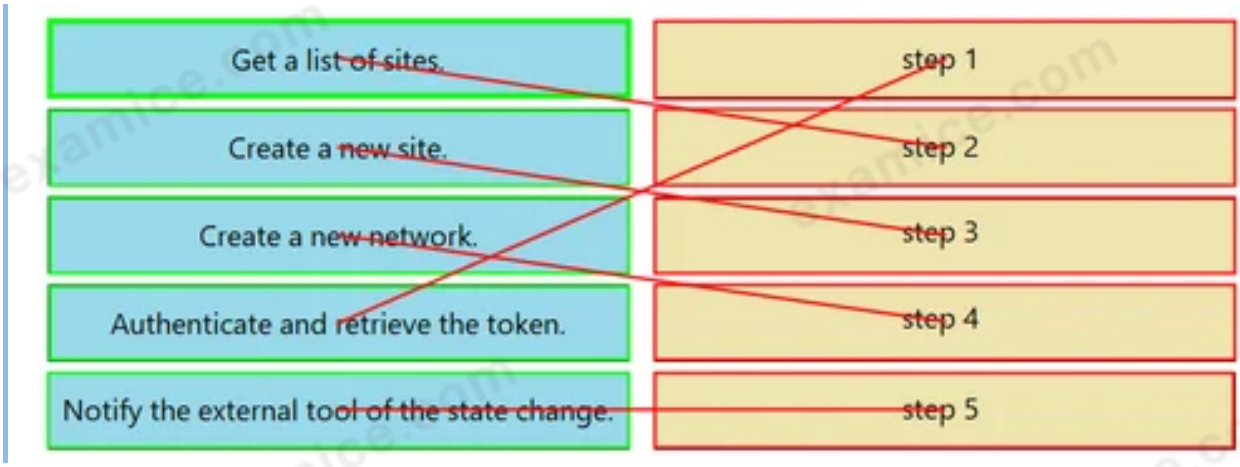

QUESTION 592

What is an advantage of using branches for developers working with a version control system?

A implementing a CI/CD pipeline to automate the deployment of code

B using different commit methods such as GUI/CLI

C making changes to code in isolation of each other ✓ CORRECT

D tagging commits to capture a snapshot of a specific point in time

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

Which network device is used to configure a VPN?

A load balancer

B Layer 2 switch

C Layer 3 switch

D router ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

What is indicated when the green phase of the test-driven development cycle is complete?

A The unit test of the new code has written functions as intended.

B The new code is readable and maintainable.

C The new code meets the test requirements. ✓ CORRECT

D The new code caused a break in the existing functionality.

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

When does a server return an HTTP 400 response code to the client?

A when the server could not understand the request due to invalid syntax ✓ CORRECT

B when the server cannot find the requested resource

C when the client requests a resource that is unavailable

D when the client must authenticate itself to access the resource

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

How does edge computing increase security?

A by siloing data ✓ CORRECT

B by distributing data

C by siloing security applications

D by distributing security applications

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer changed a project and already staged the files in Git ready to be committed. The developer discovers that a colleague has also been working on the same project in Git. Before the commit is finalized, which Git command is used to identify changes after the last commit?

A git diff HEAD

B git diff

C git status

D git diff --cached ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

Which device is responsible for the transfer of frames between devices on a common network?

A load balancer

B firewall

C switch ✓ CORRECT

D router

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco UCM REST API is used for authenticated access and is compatible with any device?

A UDS ✓ CORRECT

B Cisco Webex

C Cisco Intersight

D AXL

SUGGESTED ANSWER

The suggested answer is A.

```
workstation:DevNet user$ git pull
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0
Unpacking objects: 100% (3/3), done.
From https://github.com/netdeveloper/DevNet
    261f363..49fc949 master     -> origin/master
Updating 261f363..49fc949
error: Your local changes to the following files would be overwritten by merge:
    script.py
Please commit your changes or stash them before you merge.
Aborting
workstation:DevNet user$
```

Refer to the exhibit. A developer is working on a project and makes a few changes to test the code. After testing, the developer wants to revert to last commit but fails. Which command discards local changes?

A git reset --hard ✓ CORRECT

B git stash

C git checkout origin/master -f

D git fetch origin

SUGGESTED ANSWER

The suggested answer is A.

DRAG DROP

- -

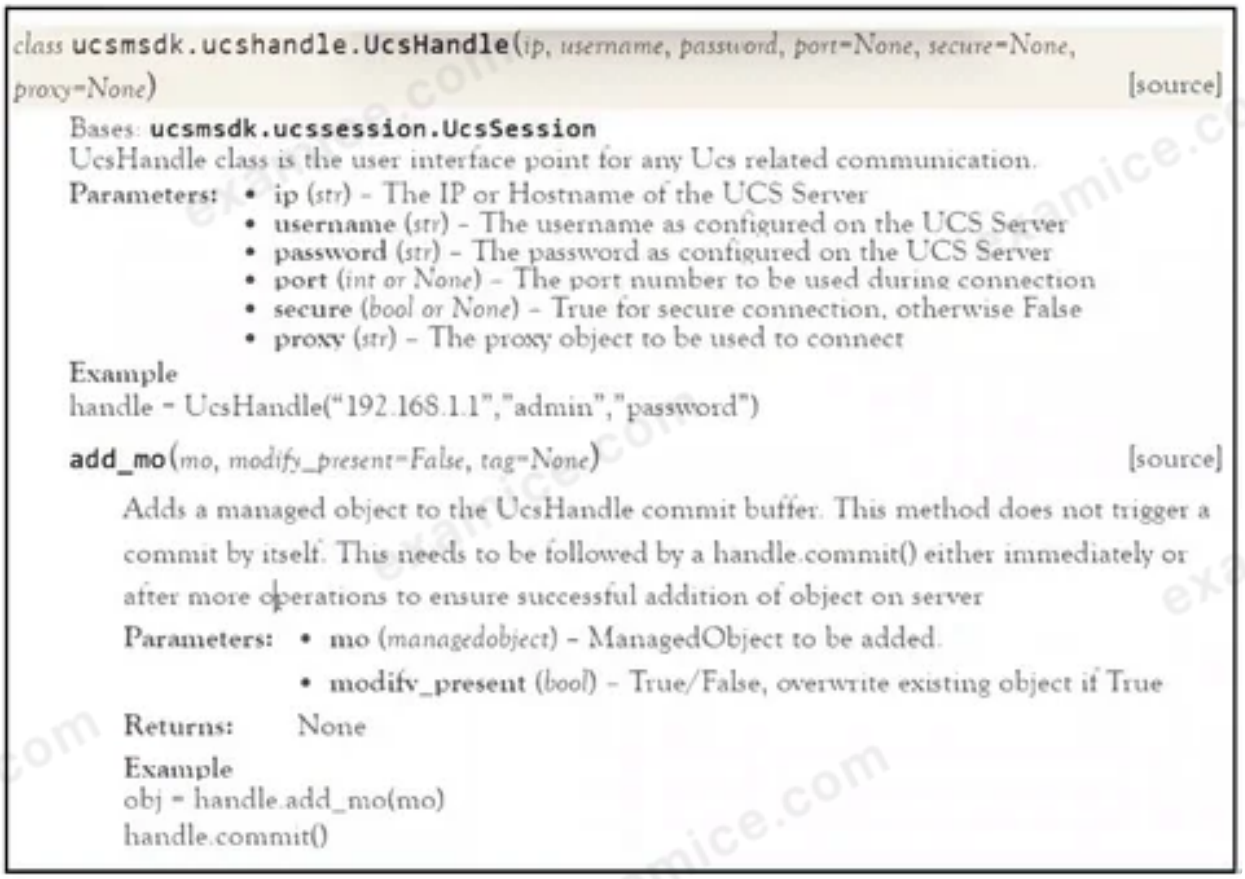

class **ucsmsdk.ucshandle.UcsHandle**(*ip, username, password, port=None, secure=None, proxy=None*) [source]

Bases: **ucsmsdk.ucssession.UcsSession**

UcsHandle class is the user interface point for any Ucs related communication.

Parameters:
- **ip** (*str*) – The IP or Hostname of the UCS Server
- **username** (*str*) – The username as configured on the UCS Server
- **password** (*str*) – The password as configured on the UCS Server
- **port** (*int or None*) – The port number to be used during connection
- **secure** (*bool or None*) – True for secure connection, otherwise False
- **proxy** (*str*) – The proxy object to be used to connect

Example

handle = UcsHandle("192.168.1.1","admin","password")

add_mo(*mo, modify_present=False, tag=None*) [source]

Adds a managed object to the UcsHandle commit buffer. This method does not trigger a commit by itself. This needs to be followed by a handle.commit() either immediately or after more operations to ensure successful addition of object on server

Parameters:
- **mo** (*managedobject*) – ManagedObject to be added.
- **modify_present** (*bool*) – True/False, overwrite existing object if True

Returns: None

Example

obj = handle.add_mo(mo)
handle.commit()

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the Python script to create multiple VLANs using the Cisco UCS Python SDK. Not all options are used.

```
from ucsmsdk.ucshandle import UcsHandle
from ucsmsdk.mometa.fabric.FabricVlan
import FabricVlan

handle = [          ]("ucsmanageip", "ucsadmin", "ucspsw")

lan_cloud = handle.query_classid("FabricLanCloud")

vlans = ["10", "20", "30"]

for vlan in [          ] :
 vlan_mo = [          ] (parent_mo_or_dn=lan_cloud[0],
           name="vlan"+vlan, id=vlan)
  handle.add_mo(vlan_mo, True)

handle. [          ] ()
```

UcsHandle	FabricVlan	Flask
vlans	commit	UcsServer

SUGGESTED ANSWER

```
from ucsmsdk.ucshandle import UcsHandle
from ucsmsdk.mometa.fabric.FabricVlan
import FabricVlan

handle = [          ]("ucsmanageip", "ucsadmin", "ucspsw")

lan_cloud = handle.query_classid("FabricLanCloud")

vlans = ["10", "20", "30"]

for vlan in [          ] :
 vlan_mo = [          ] (parent_mo_or_dn=lan_cloud[0],
           name="vlan"+vlan, id=vlan)
  handle.add_mo(vlan_mo, True)

handle. [          ] ()
```

UcsHandle	FabricVlan	Flask
vlans	commit	UcsServer

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a feature named 'dvft4e8f5g0e3k3d6e8f1v1' in a branch. A file named 'dvft264744863v1.jpg' has been staged accidentally. To ensure that the commit is performed and branches are merged the developer needs to remove it. Which Git command must be used to unstage the file?

A git delete HEAD dvft264744863v1.jpg

B git reset HEAD dvft264744863v1.jpg ✓ CORRECT

C gitrevertHEADdvft264744863v1.jpg

D git remove HEAD dvft264744863v1.jpg

SUGGESTED ANSWER

The suggested answer is B.

Issued to kamjunhao@gmail.com · October 17, 2026

A network engineer needs to understand how to create API requests using Cisco DNA Center and IOS XE devices. Which Cisco DevNet resource should be used?

A Cisco product support

B DevNet Learning Labs ✓ CORRECT

C Cisco developer documentation

D Cisco software support

SUGGESTED ANSWER

The suggested answer is B.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a network management capability of the Cisco Meraki platform?

A enforces policies across mobile devices

B allows third-party applications to receive notifications through webhooks ✓ CORRECT

C provisions the policies related to security products

D allows for a seamless import of IP address pools

SUGGESTED ANSWER

The suggested answer is B.

Issued to kamjunhao@gmail.com · October 17, 2026

A small business company hires an engineer to deploy and manage a new application. The company must keep costs as low as possible while achieving the highest performance. The application is handling highly sensitive data that must **never** transit outside the corporate network. Which deployment model must be chosen?

A cloud

B bare metal ✓ CORRECT

C vm

D containers

SUGGESTED ANSWER

The suggested answer is B.

What is a characteristic of MAC addresses?

A They route packets that are based on data in the routing table.

B They use a local-link address to help devices interact on the same VLAN.

C They allow communication between devices in the same broadcast domain. ✓ CORRECT

D A permanent IP address is assigned to the host.

SUGGESTED ANSWER

The suggested answer is C.

```
import requests
import json

BASE_URL = 'https://api.meraki.com'
API_KEY = '6bec40cf957de430a6f1f2baa056b99a4fac8fa0'
url = f'{BASE_URL}/api/v0/networks/L_646829496481105433/floorPlans'

    headers = {
    'Content-Type': 'application/json',
    'X-Cisco-Meraki-API-Key': API_KEY
    }
    response = requests.get(url, headers=headers)

    if response.status_code == 200:
        for plan in response.json():
            print(f'{plan["name"]}')

            for device in plan["devices"]:
                print(f'\t{device["name"]}, {device["lat"]}, {device["lng"]}')
```

Refer to the exhibit. A network engineer creates a Python script that collects information by using the Cisco Meraki API. For the coordinates, the script uses location analytics data from the Meraki Map section. The information gathered from the API is visualized in a list on a custom dashboard application for enhanced monitoring. Which information is gathered by the workflow that is automated?

A all floor plans and networks

B all floor plans and devices

C all floor plans and devices and their location ✓ CORRECT

D all floor plans and networks and their location

SUGGESTED ANSWER

The suggested answer is C.

DRAG DROP

- -

Drag and drop the steps from the left into the order of the test-driven development cycle.

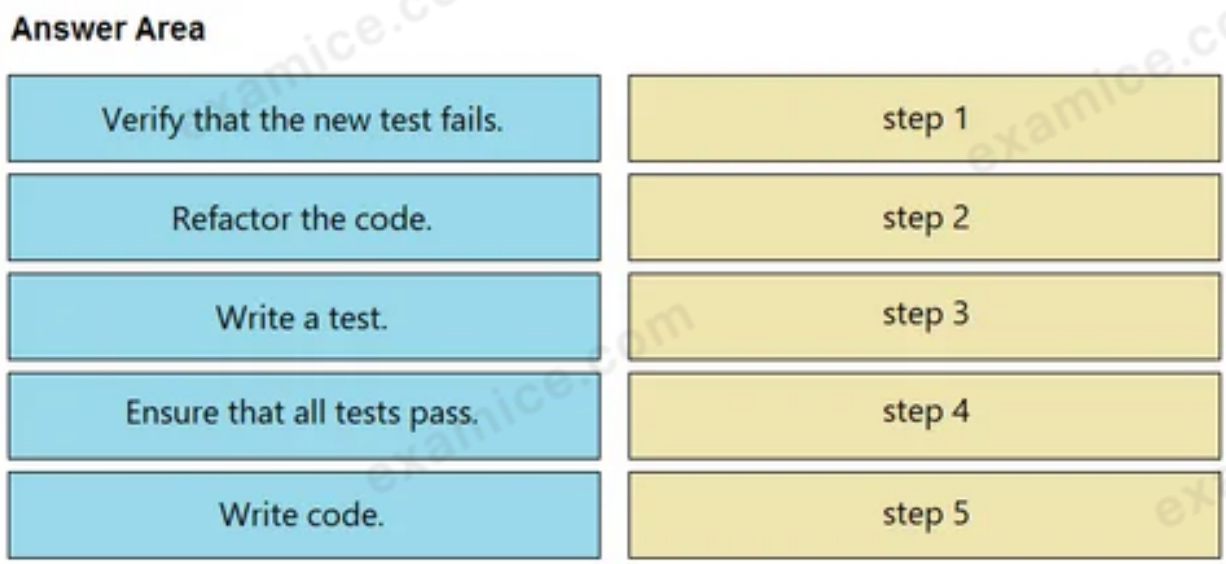

SUGGESTED ANSWER

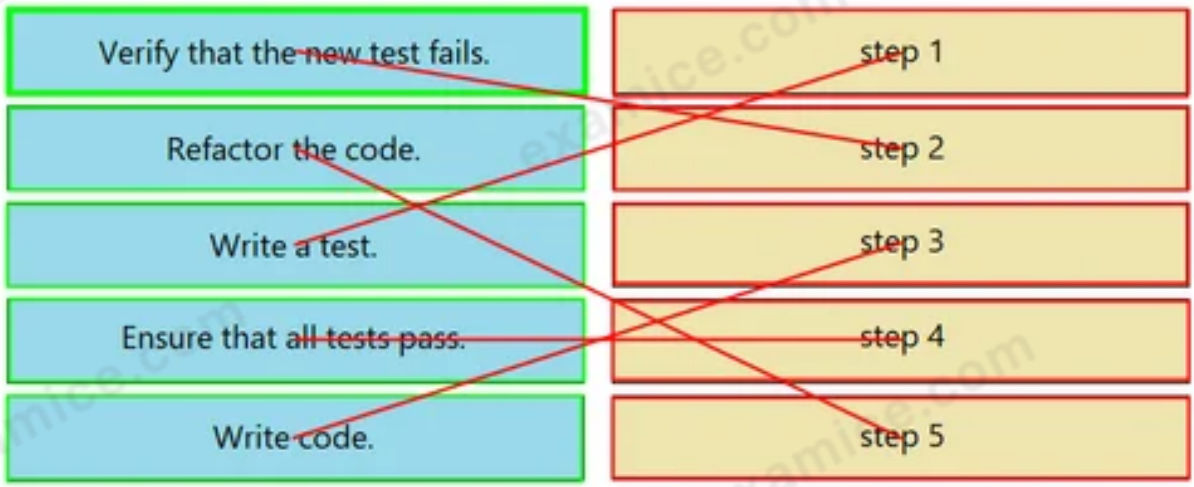

Issued to kamjunhao@gmail.com · October 17, 2026

Which security platform authenticates clients for network access?

A Cisco Umbrella

B Cisco Secure Endpoint

C Cisco Firepower

D Cisco ISE ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to output the status of the REST API response from the script. Some options may be used more than once. Not all options are used.

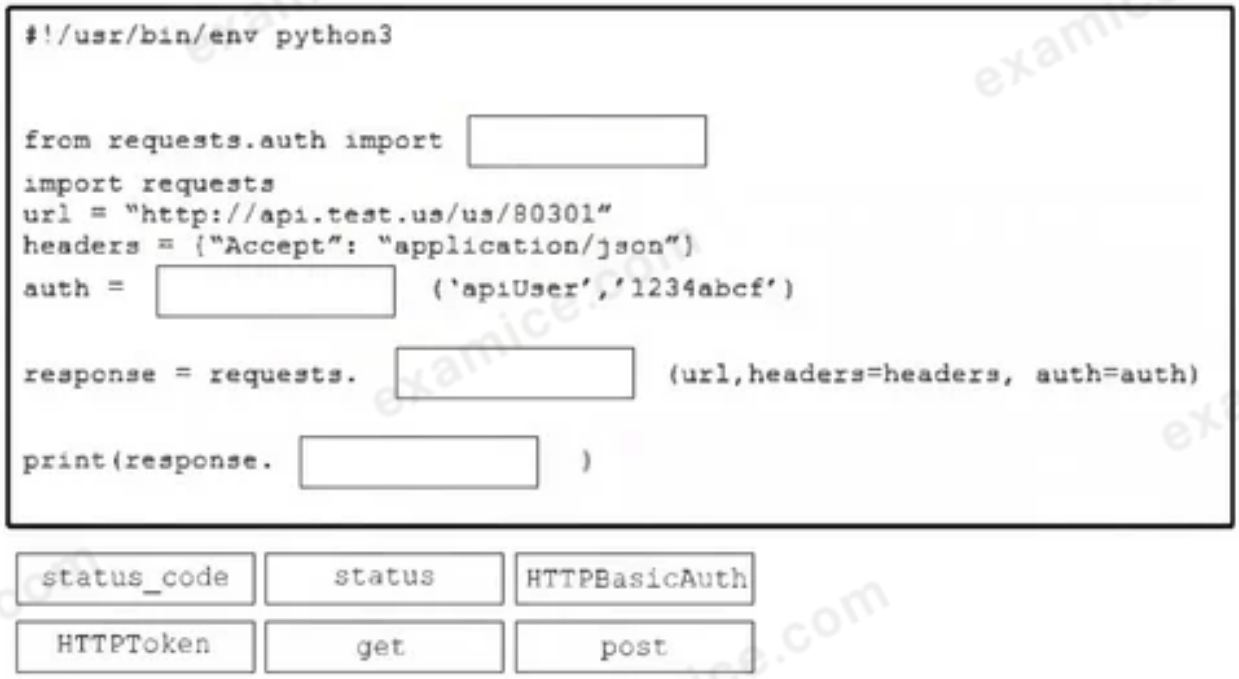

SUGGESTED ANSWER

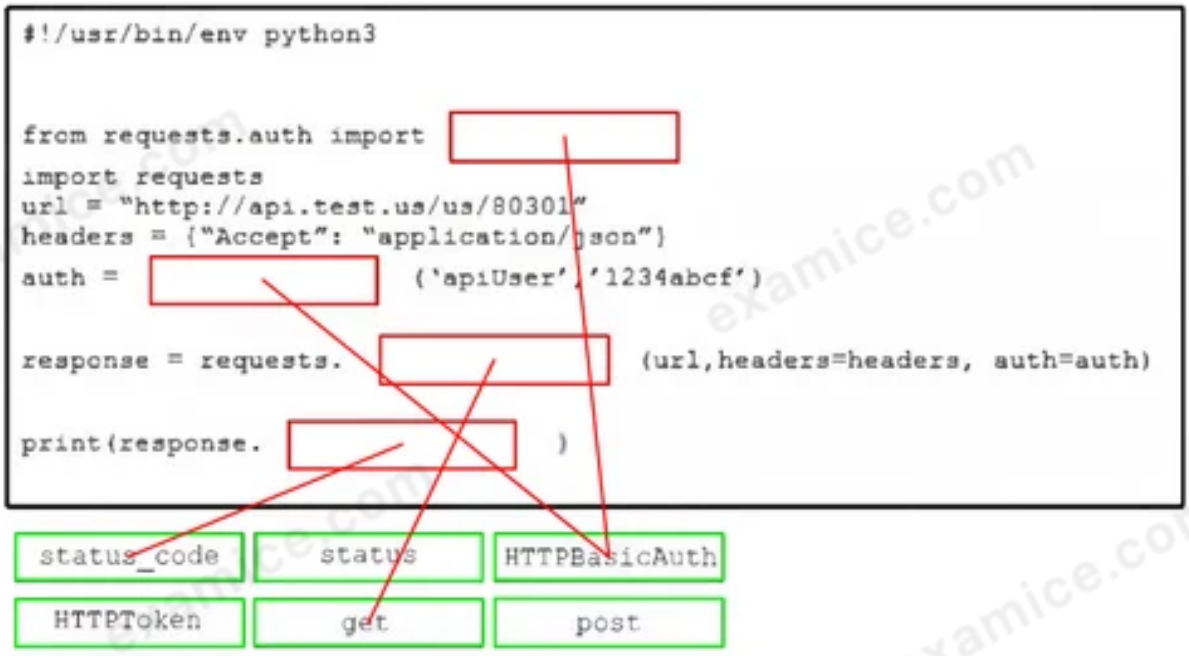

```
---
- hosts: nxos
connection: local
gather_facts: no
tasks:
- nxos_config:
    diff_against: intended
    pzovider: "{{ provider }}"
    intended_config: "{{ lookup('file', 'latest.txt') }}"
  register: config

- nxos_config:
    backup: yes
    provider: "{{provider}}"
  when: config.changed
...
```

Refer to the exhibit. A developer is creating an Ansible playbook for a Cisco NX-OS device. The tasks that are defined in the playbook focus on the configuration on the device and is combined with other playbooks to showcase Day 0 to Day N tasks using an agentless tool like Ansible. Which two tasks will execute when the playbook is run in check mode? (Choose two.)

A Create a backup if there are any differences detected in the diff output.

B Print any configuration differences to stdout. ✓ CORRECT

C Compare the running-config against the latest.txt file. ✓ CORRECT

D Deploy a configuration that is based on the latest.txt template.

E Compare the saved-config against the latest.txt file.

SUGGESTED ANSWER

The suggested answer is B, C.

Issued to kamjunhao@gmail.com · October 17, 2026

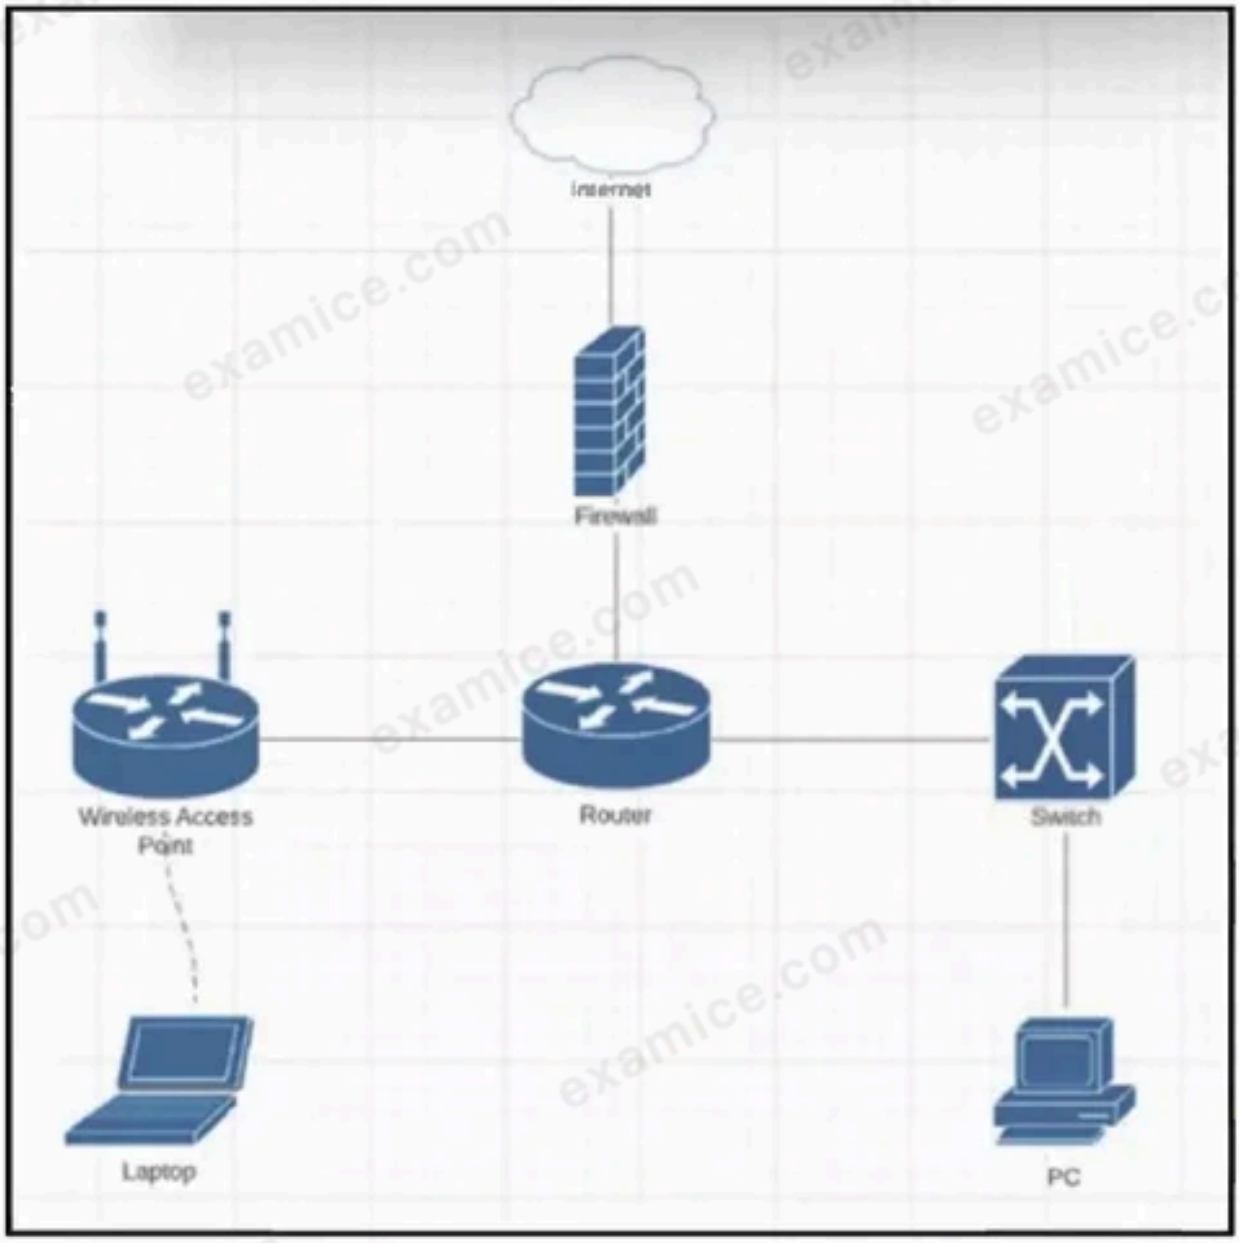

Refer to the exhibit. The employees of a store need remote access to the store network from anywhere on the internet. To achieve this, the network engineers configure a VPN in IPSec tunnel mode. The engineers want to minimize the amount of configuration to deploy and manage the solution. On which local device must the VPN terminate?

A switch

B firewall ✓ CORRECT

C PC

D router

SUGGESTED ANSWER

The suggested answer is B.

QUESTION 613

What is a benefit of managing the network configuration by using organized code that consumes APIs when deploying multiple network devices?

A simplifies the device configuration

B eliminates use of legacy management protocols

C increased device security

D fewer manual network changes ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Which HTTP response code is used to indicate that the current state of the target resource conflicts with the request?

A 307

B 503

C 204

D 409 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

examice.com

During development of a real-time VoIP application on a Cisco Webex platform, users report that their voice gets chopped or parts of the conversation drop out. The engineer checking the issue notices jitter on the network that affects the application. What does this mean?

A There is variability in the amount of time between when the packages are sent and received. ✓ CORRECT

B More than 10% of packets are lost during transmission of RTP information.

C Too much time passes between when the packages are sent and received.

D Authentication details are lost due to routing rules applied by the Layer 3 device.

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the relationship between code reviews and standards compliance?

A The standards highlight the bugs that are allowed in the review.

B The review process ensures compliance to international standards.

C The reviews provide the ability to maintain a set coding style. ✓ CORRECT

D The standards enforce how the reviews are undertaken.

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

What is an example of a cross-site request forgery attack?

A forcing an existing authentication end user to perform unwanted actions on a web application ✓ CORRECT

B compromise of passwords, keys, or session tokens, or exploitation of other implementation flaws to assume the identity of another user

C when untrusted data is sent to an interpreter as part of a command or query

D when unencrypted electronic documents that contain sensitive data are altered

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform controls server, network, storage, and virtual resources with policy-driven management for up to 160 physical Cisco severs?

A Cisco HyperFlex

B Cisco DNA Center

C Cisco Prime Infrastructure

D UCS Manager ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

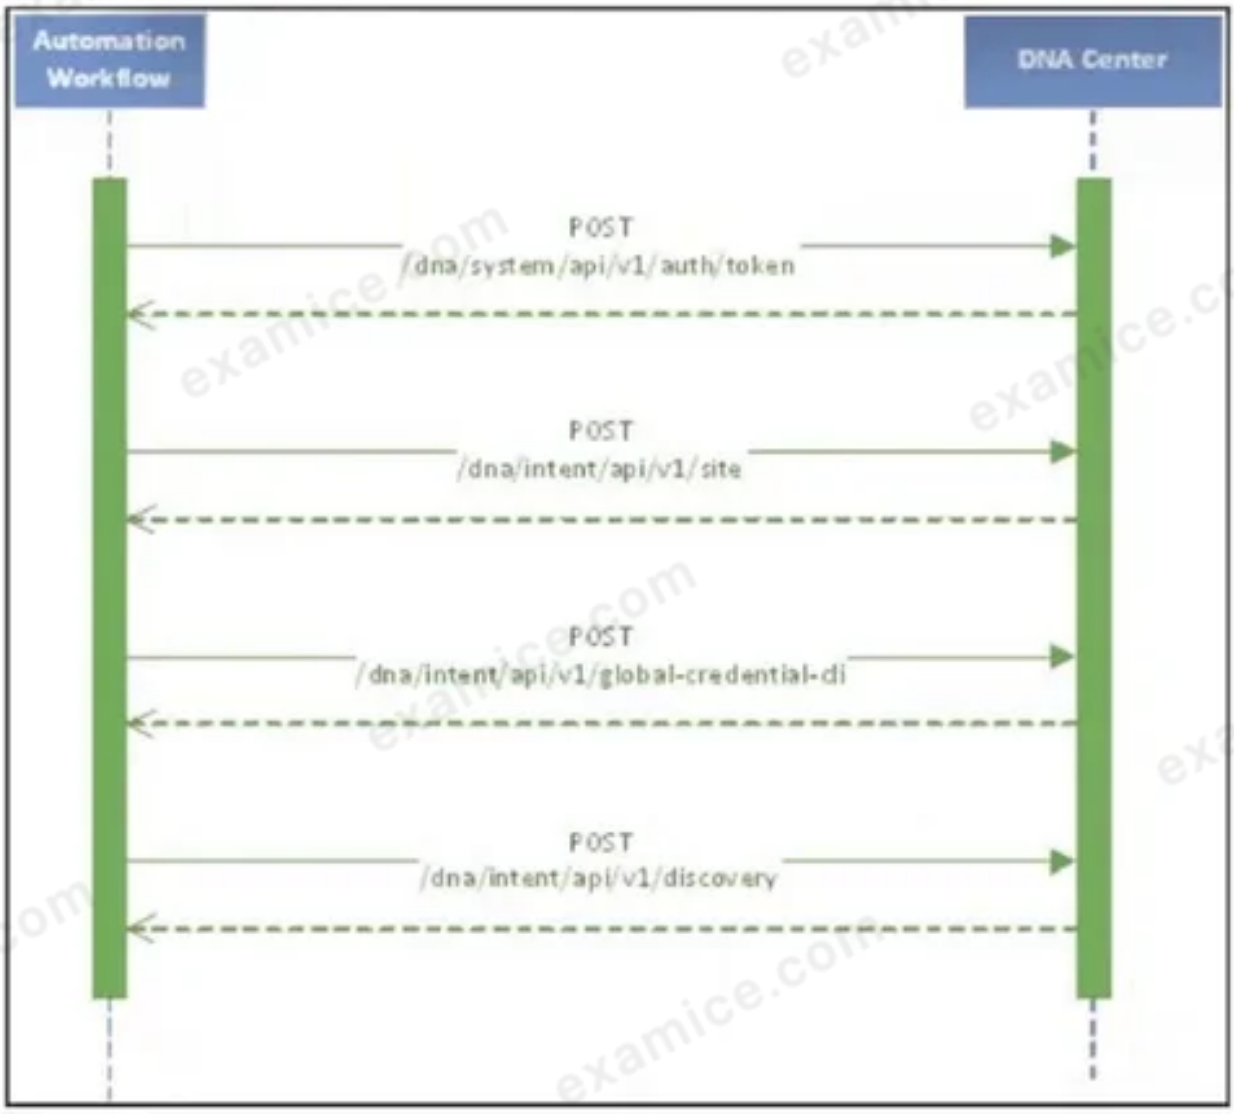

Refer to the exhibit. The diagram shows a sequence of API calls between an automation workflow and the Cisco DNA Center API. The API sequence is synchronous and manipulates data about sites, passes credentials, and explores the discovery state. Which workflow is automated?

A running commands against a device

B deletion of site area and building

C execution of network discovery ✓ CORRECT

D addition of a network device

SUGGESTED ANSWER

The suggested answer is C.

QUESTION 620

DRAG DROP

- -

Drag and drop the characteristics from the left onto the software development methods on the right.

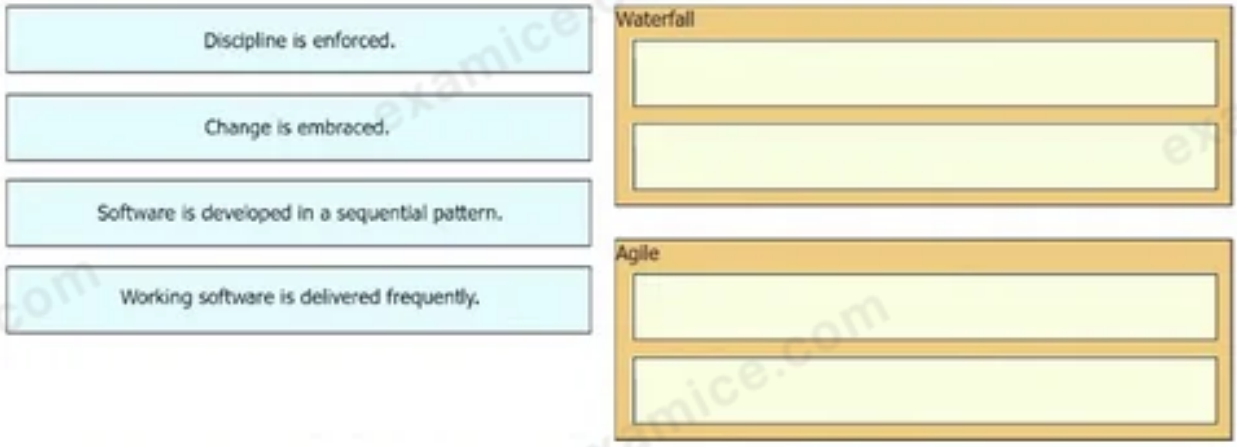

SUGGESTED ANSWER

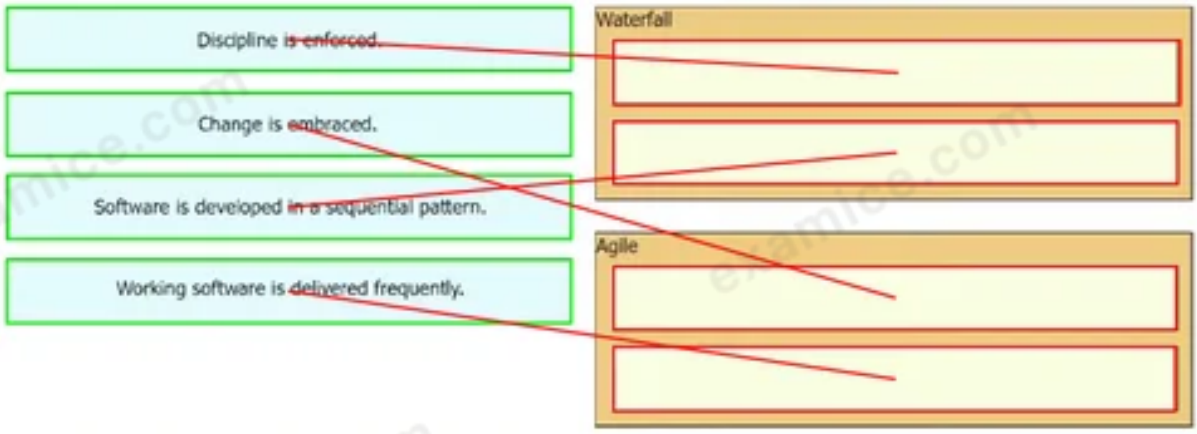

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco network management platform is a network automation and assurance solution that provides control and management of the Cisco intent-based networking system?

A Meraki Systems Manager

B Cisco DNA Center ✓ CORRECT

C NSO

D ACI

SUGGESTED ANSWER

The suggested answer is B.