QUESTION 411

Issued to kamjunhao@gmail.com · October 17, 2026

A development team is using a version control system that has a centralized workflow. Which feature of the version control system ensures the integrity of the central repository?

A central common code versioning backup

B built-in conflict resolution mechanism

C distributed nature of the version control system architecture

D tracked code changes of the developers

Personal copy · kamjunhao@gmail.com

QUESTION 412

Issued to kamjunhao@gmail.com · October 17, 2026

Which two factors reduce the experience of an application? (Choose two.)

A source location

B traffic class

C packet loss

D network latency

E usage

Personal copy · kamjunhao@gmail.com

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="109"
 xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
 <edit-config>
  <target>
   <running/>
  </target>
  <default-operation>none</default-operation>
  <config
   xmlns:xc="urn:ietf:params:xml:ns:netconf:base:1.0">
   <top
    xmlns="http://example.com/schema/1.2/config">
    <interface xc:operation="delete">
     <name>Ethernet0/0</name>
    </interface>
   </top>
  </config>
</edit-config></rpc>]]>]]>
```

Refer to the exhibit. A developer has created an XML-based configuration model for a Cisco switch that is going to configure the device using NETCONF. From which configuration is the Interface Ethernet 0/0 deleted when this script is executed?

A candidate

B startup

C current

D base

QUESTION 414

Issued to kamjunhao@gmail.com · October 17, 2026

Which CI/CD component allows for the storing of code packages and enables the testing of the same code that is running on the live system?

A Artifactory

B Jira

C ITSM

D Git

Personal copy · kamjunhao@gmail.com

QUESTION 415

Issued to kamjunhao@gmail.com · October 17, 2026

A development team needs to containerize an application named 'custapp4o3p2r6d3s6w7x6t9'. A Dockerfile has been created and now the docker build command must be run using the current folder to find the Dockerfile, build the image and create a local repository named 'custapp4d5c-repo' that points to that image. Which command must be used?

A docker build custapp4d5c-repo Dockerfile .

B docker build -t acustapp4d5c-repo Dockerfile.txt

C docker build custapp4d5c-repo -f Dockerfile.txt

D docker build -t custapp4d5c-repo -f Dockerfile .

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A web app must be accessible from computers and mobile devices. It must maintain the same data structure on both types of devices. What is the advantage of using the MVC design pattern for this app?

A to asynchronously update the graphical interface

B to define different algorithms for data manipulation

C to separate the logic of the graphic interface of the different devices

D to have only one instance of the objects that contain the data

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the first four stages of a DevOps toolchain from the left into the order on the right to create a new complex product. Not all options are used.

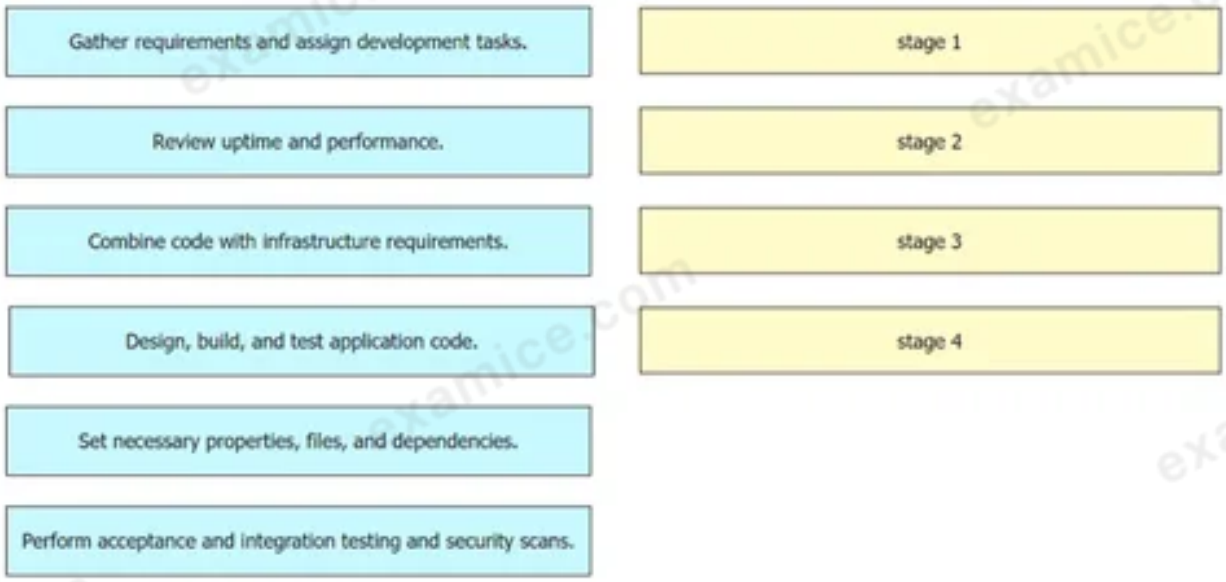

QUESTION 418

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of a router in a network?

A to provide wireless connectivity to a LAN

B to filter harmful incoming traffic on a network

C to connect multiple networks

D to implement network high availability

Personal copy · kamjunhao@gmail.com

QUESTION 419

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of edge architecture? (Choose two.)

A device authentication

B secure access

C service deployment

D offline support

E data management

Personal copy · kamjunhao@gmail.com

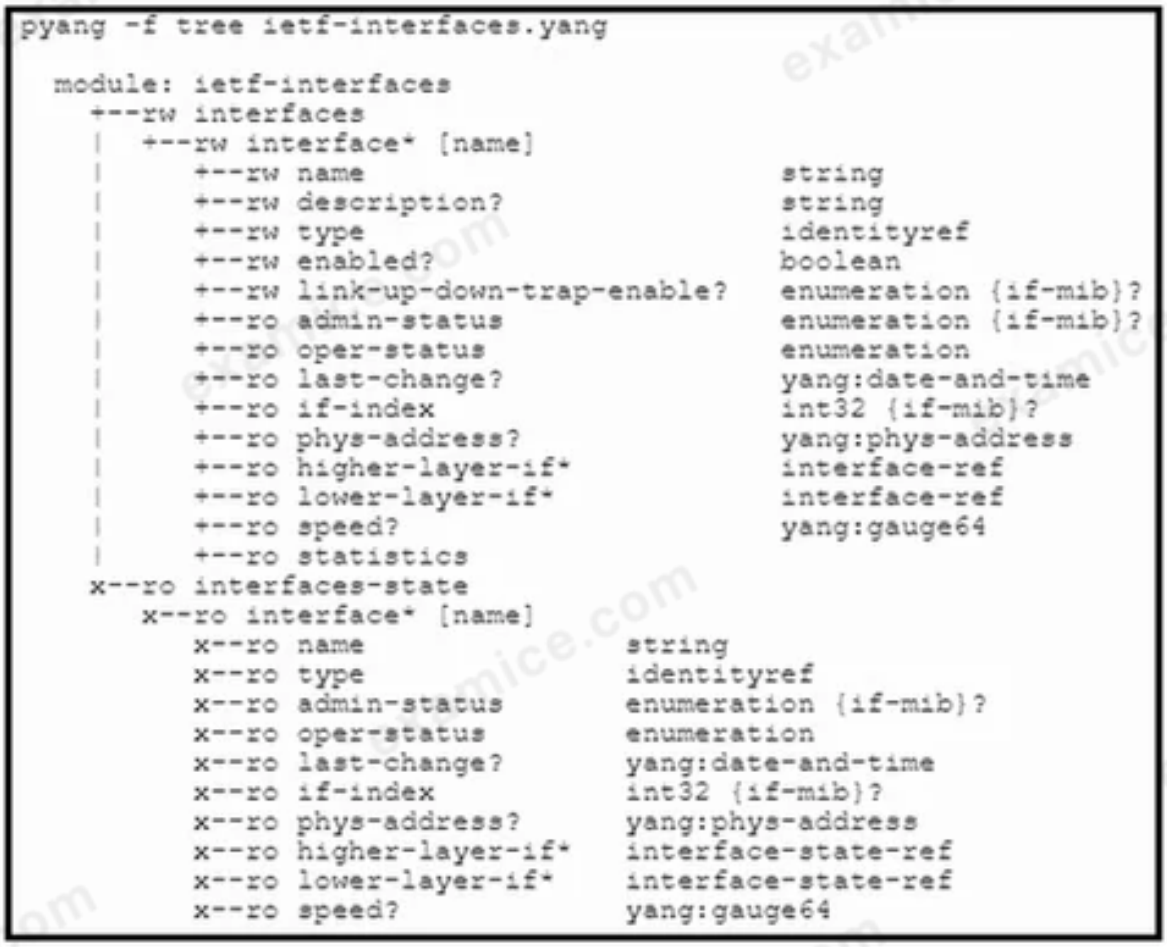

```
pyang -f tree ietf-interfaces.yang

  module: ietf-interfaces
    +--rw interfaces
    |  +--rw interface* [name]
    |     +--rw name                          string
    |     +--rw description?                  string
    |     +--rw type                          identityref
    |     +--rw enabled?                      boolean
    |     +--rw link-up-down-trap-enable?     enumeration {if-mib}?
    |     +--ro admin-status                  enumeration {if-mib}?
    |     +--ro oper-status                   enumeration
    |     +--ro last-change?                  yang:date-and-time
    |     +--ro if-index                      int32 {if-mib}?
    |     +--ro phys-address?                 yang:phys-address
    |     +--ro higher-layer-if*              interface-ref
    |     +--ro lower-layer-if*               interface-ref
    |     +--ro speed?                        yang:gauge64
    |     +--ro statistics
    x--ro interfaces-state
       x--ro interface* [name]
          x--ro name                 string
          x--ro type                 identityref
          x--ro admin-status         enumeration {if-mib}?
          x--ro oper-status          enumeration
          x--ro last-change?         yang:date-and-time
          x--ro if-index             int32 {if-mib}?
          x--ro phys-address?        yang:phys-address
          x--ro higher-layer-if*     interface-state-ref
          x--ro lower-layer-if*      interface-state-ref
          x--ro speed?               yang:gauge64
```

Refer to the exhibit. Which type of YANG object is “interfaces”?

A subitem

B container

C item

D node

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol is associated with the management plane on a network device?

A ARP

B ICMP

C BGP

D SSH

Personal copy · kamjunhao@gmail.com

DRAG DROP

-

Drag and drop the code from the bottom onto the box where the code is missing to retrieve the RESTCONF running configuration for an interface named TwentyFiveGigabitEthernet 1/1/2. Not all options are used.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of organizing code into modules?

A better maintainability

B simplified development

C compatibility with REST APIs

D reduced development costs

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

```
def formatted_name(first_name, last_name):
        full_name = first_name + ' ' + last_name
    return full_name.title()
```

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing in the Python unittest to verify whether the function returns the correct values. Not all options are used.

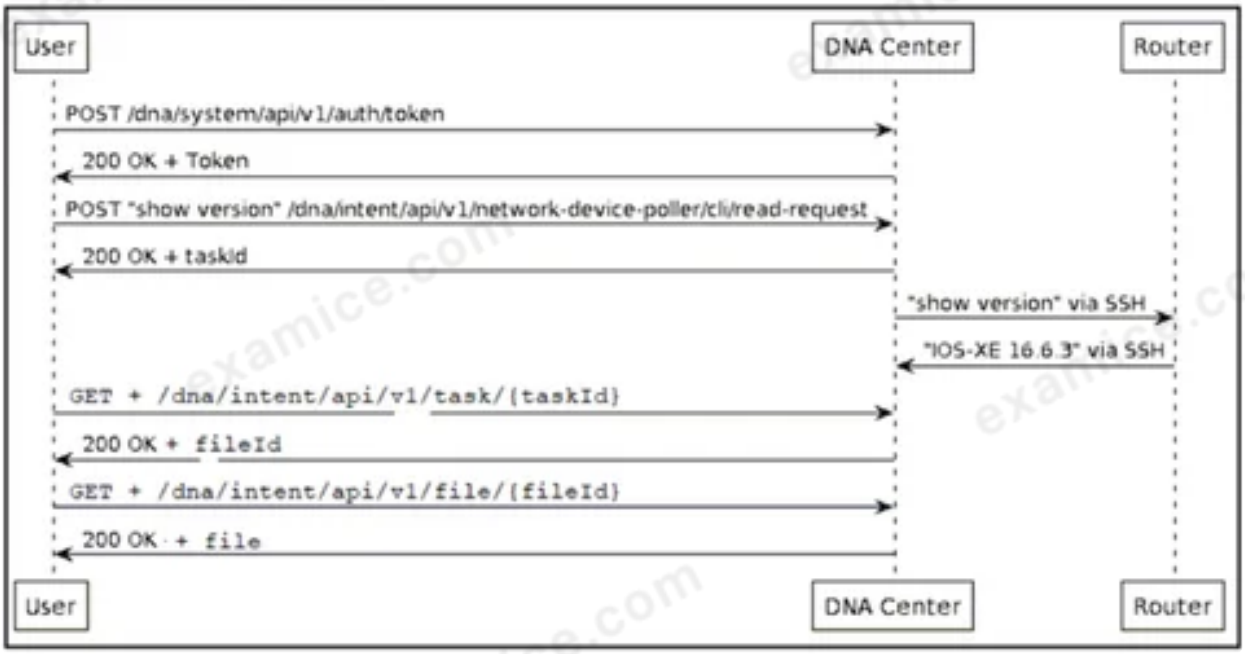

Refer to the exhibit. What is the result of the API sequence diagram?

A export of the authenticated user on the device

B text file that contains the authentication token

C export of the Cisco IOS XE configuration file

D text file that contains the string IOS-XE 16.6.3

Issued to kamjunhao@gmail.com · October 17, 2026

Which plane is used to enable routing on a network-connected device?

A management

B data

C control

D forwarding

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that allows an engineer to retrieve interface data. Not all options are used.

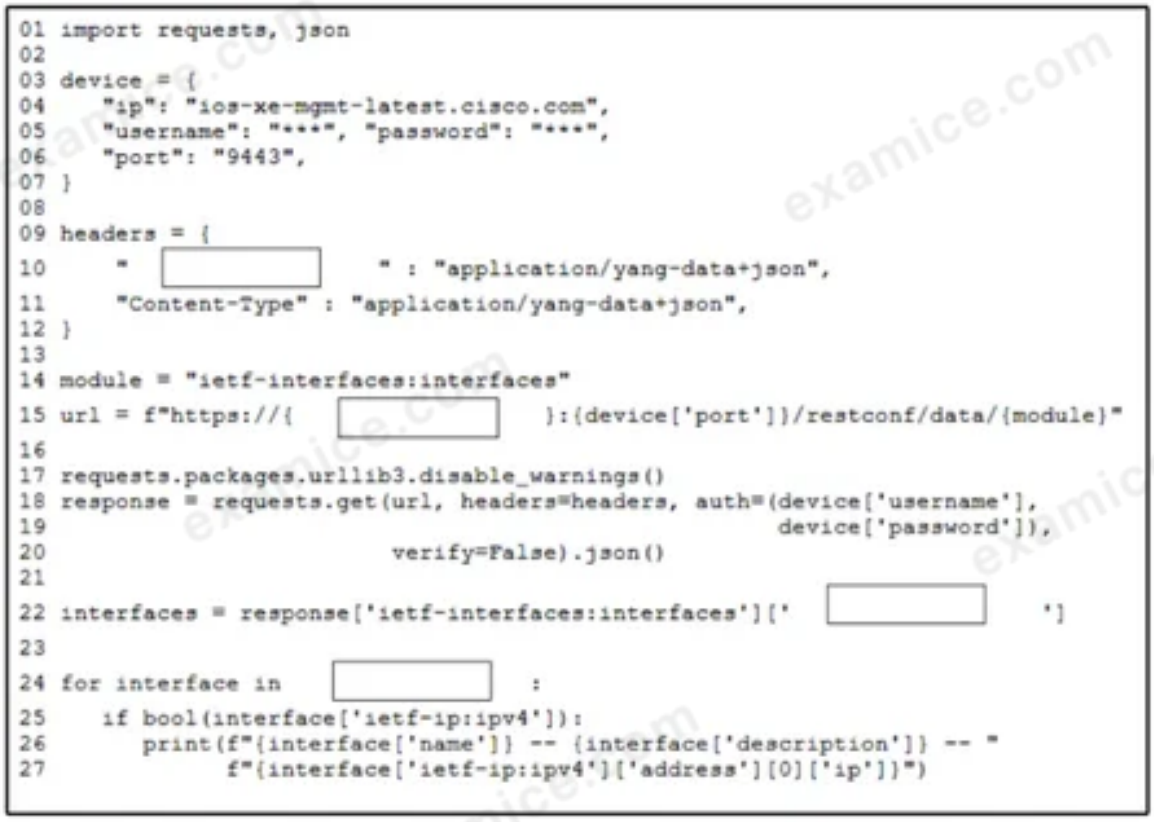

```
01 import requests, json
02
03 device = {
04    "ip": "ios-xe-mgmt-latest.cisco.com",
05    "username": "***", "password": "***",
06    "port": "9443",
07 }
08
09 headers = {
10     "              " : "application/yang-data+json",
11     "Content-Type" : "application/yang-data+json",
12 }
13
14 module = "ietf-interfaces:interfaces"
15 url = f"https://{              }:{device['port']}/restconf/data/{module}"
16
17 requests.packages.urllib3.disable_warnings()
18 response = requests.get(url, headers=headers, auth=(device['username'],
19                                                     device['password']),
20                         verify=False).json()
21
22 interfaces = response['ietf-interfaces:interfaces']['              ']
23
24 for interface in              :
25    if bool(interface['ietf-ip:ipv4']):
26       print(f"{interface['name']} -- {interface['description']} -- "
27             f"{interface['ietf-ip:ipv4']['address'][0]['ip']}")
```

interface | interfaces | devices | ipaddress | Accept | Encoding | device['ip']

Personal copy · kamjunhao@gmail.com

While delivering a product, a team spends a lot of time installing dependencies to maintain the development and test environments. Both environments must be identical. Which action improves the delivery?

A Use an Ansible playbook to install the dependencies.

B Pack everything into the released product.

C Use containers to keep the environment consistent.

D Pre-install the product into a virtual machine.

Which process does a developer use to import a string and convert the file into a Python data structure?

A parsing

B exploding

C serializing

D translating

QUESTION 430

Issued to kamjunhao@gmail.com · October 17, 2026

What is the IANA-assigned TCP port for NETCONF over SSH?

A 21

B 22

C 830

D 8443

Personal copy · kamjunhao@gmail.com

QUESTION 431

Issued to kamjunhao@gmail.com · October 17, 2026

What is a feature of a MAC address?

A It consists of 38 bits.

B It consists of 12 hexadecimal numbers.

C It consists of 6 hexadecimal numbers.

D It consists of 24 bits.

Personal copy · kamjunhao@gmail.com

QUESTION 432

Issued to kamjunhao@gmail.com · October 17, 2026

Which TCP port is used by default for HTTPS?

A 53

B 80

C 143

D 443

Personal copy · kamjunhao@gmail.com

QUESTION 433

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of the AXL API?

A It adds a user to a collaboration space to share information and files.

B It allows a meeting to be created with users that do not belong to same organization.

C It collects information about system, cluster, and database settings.

D It executes SQL commands in Cisco Unified Communications Manager.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which two commands create a new branch in a Git repository? (Choose two.)

A git branch

B git checkout

C git checkout

D git branch

E git checkout -b

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Get Network Connectivity Monitoring Destinations

HTTP REQUEST

GET /networks/{networkId}/connectivityMonitoringDestinations

AUTHORIZATION

In addition to the path URL, an Authorization header must be added to every API request with the following format.

JSON

```
{
  "X-Cisco-Meraki-API-Key": "<Meraki_API_Key>"
}
```

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing in the Cisco Meraki code to obtain the connectivity testing destinations for an MX network. Not all options are used.

```
import requests

base_url = "https://api.meraki.com/api/v0"
network_id = "N_12345678910"
api_key = "6bec40cf957de430a6f1f2baa056b99a4fac9ea0"

response = requests. [          ] (base_url + "/networks/" +
 [          ], "/connectivityMonitoringDestinations",
  headers={"X-Cisco-Meraki-API-Key": [          ],
  "Content-Type": "application/json",
  " [          ]": "application/json"})
```

post	get	network_id	api_key	api_token
Encoding	Accept			

```
import csv
import json
import requests

headers = {'Content-type': 'application/json', 'Accept': 'text/plain'}

response = requests.post('https://httpbin.org')

with open("rovers.csv", "r", encoding='utf-8-sig') as f:
    reader = csv.DictReader(f)
    rovers = list(reader)
    print(rovers)

url = 'https://httpbin.org/put'

json_object = json.dumps(countries, indent=4)
print(json_object)

r = requests.put(url, data=json_object)

print(r.headers)

print(url)

print(r.status_code)

try:
    r = requests.get('https://httpbin.org/get')
    r.raise_for_status()
except requests.exceptions.HTTPError as err:
    raise SystemExit(err)
```

Refer to the exhibit. An astronomer creates a Python script named makeexoplanetapi.py to import external data for comparison with the department data. The astronomer changes the script after a discussion with another astronomer. Which code snippet shows a unified diff of the script?

A

```
--- makeexoplanetapi.py 2020-12-20 19:30:32
+++ makeexoplanetapi.py 2020-12-20 19:30:32
@@ -1,49 +1,59 @@-
          -response = requests.post
                     ('https://httpbin.org')
+app = flask.Flask(__name__)
+app.config['DEBUG'] = True
-with open("planets_exo.csv", "r", encoding='utf-8-
sig') as f:
+with open("exo_api.csv", "r", encoding='utf-8-sig')
as f:
+    exo = list(reader)
+    print(exo)
```

B

```
--- makeexoplanetapi.py  2020-12-20 19:30:32
+++ makeexoplanetapi.py  2020-12-20 19:30:32
!! -1,49 +1,59 !!
{sub}response = requests.post('https://httpbin.org')
{add}app = flask.Flask(__name__)
{add}app.config['DEBUG'] = True
{sub}with open("planets_exo.csv", "r", encoding='utf
{sub}8{sub}sig') as f:
{add}with open("exo_api.csv", "r", encoding='utf{sub}8
{sub}sig') as f:
{add}  ex= list(reader)
{add}    print(exo)
```

C

```
--- makeexoplanetapi.py  20-12-20 19:30:32
+++ makeexoplanetapi.py  2020-12-20 19:30:32
~~~ -1,79 +1,87 ~~~
~response = requests.post('https://httpbin.org')
*app = flask.Flask(__name__)
*app.config['DEBUG'] = True
~with open("planets_exo.csv", "r", encoding='utf-8-
sig') as f:
*with open("exo_api.csv", "r", encoding='utf-8-sig') as
f:
 ~    exo = list(reader)
~     print(exo)
```

D

```
--- exoplanetsapi.py  2020-12-20 19:30:32
+++ exoplanetsapi.py  2020-12-20 19:30:32
@@ -1,49 +1,59 @@
~response = requests.post('https://httpbin.org')
*app = flask.Flask(__name__)
*app.config['DEBUG'] = True
~with open("planets_exo.csv", "r", encoding='utf-8-
sig') as f:
*with open("exo_api.csv", "r", encoding='utf-8-sig')
as f:
~  exo = list(reader)
~    printexo)
```

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A company plans to develop an application by using Cisco APIs. The application must use code repositories approved by Cisco. The development team wants to make use of community-supported, open-source code. Which resource should be used?

A Cisco DevNet Code Exchange

B Cisco TAC

C Cisco DevNet Sandbox

D Cisco DevNet Learning Labs

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

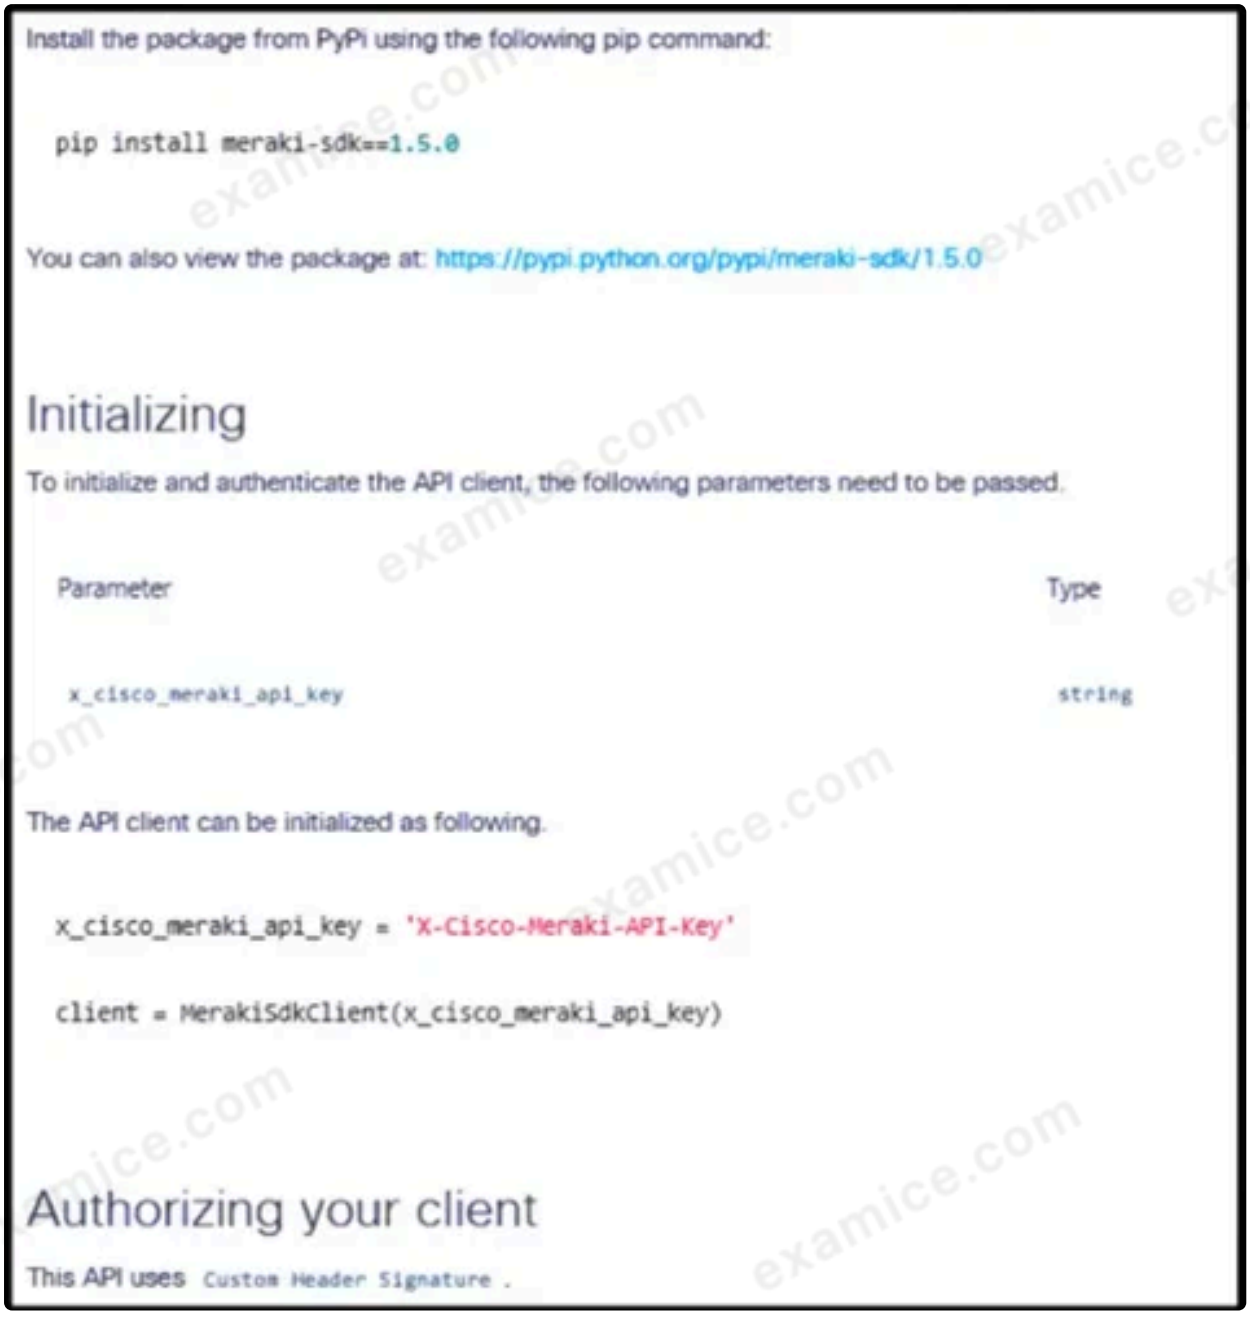

Refer to the exhibit. Drag and drop the code snippets from the bottom into the blanks in the Python code to import the Cisco Meraki library and set the API key for authorization.

QUESTION 439

Issued to kamjunhao@gmail.com · October 17, 2026

Package updates from a local server are failing to download. The same updates work when a much slower external repository is used. The server has the configuration:

- hostname: devbox111012120
- IP: 192.168.1.51
- Mask: 255.255.255.0

Why are local updates failing?

A The Internet is down at the moment, which causes the local server to not be able to respond.

B The Internet connection is too slow.

C The server is running out of disk space.

D The update utility is trying to use a proxy to access the internal resource.

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP response code is returned from a successful REST API call to create a new resource?

A 201

B 204

C 302

D 429

Personal copy · kamjunhao@gmail.com

```
import requests
import os
from dotenv import load_dotenv
import json
load_dotenv()
def main(token):
    url = f"https://172.19.3.22/dna/intent/api/v1/network-device"
    headers = {
        "Content-Type": "application/json",
        "Accept": "application/json",
        "X-auth-Token": token
    }
    response =  requests.get(url, headers=headers, verify=False).json()
    for device in response["response"]:
        print("{serial_number}
        retreived".format(serial_number=device['serialNumber']))
def auth():
    url = "https://172.19.3.22/dna/system/api/v1/auth/token"
    headers = {
        'Authorization': 'Basic jzgVYFG35743MEJKG=='
    }
    r=requests.[                                    ]
    return r.json()['Token']
if __name__ == "__main__":
    token = auth()
    main(token)
```

Refer to the exhibit. A software engineer needs to collect data about devices that are registered in Cisco DNA Center using the API. Before collecting the data, the engineer must obtain a token and authenticate with the API. To automate the procedure, a Python script is used. Which code snippet must be placed onto the blank in the code?

A get(uri,headers = headers,data={}, verify-True)

B post(uri,headers=headers,data={}, verify=False)

C get(uri,headers= headers,data={}, verify=False)

D post(uri,headers=headers,data={"Basic"}, verify=False)

Issued to kamjunhao@gmail.com · October 17, 2026

A developer needs to create an application with these requirements:

- decouples from the underlying infrastructure
- runs application on any cloud or on-premises provider

Which deployment type must be used for this application?

A bare metal

B hyperconverged

C container

D virtual machine

Personal copy · kamjunhao@gmail.com

```
1  ---
2  - name: Server Provisioning
3    hosts: server
4
5    vars:
6       packages: ['pip', 'git', ' vim']
7
8    tasks:
9       - name: Packages
10        apt: name={{ item }} state=latest
11        with_items: "{{ packages }}"
```

Refer to the exhibit. An engineer develops an Ansible playbook to perform tasks that automate the provisioning of a server. What occurs on the server after the playbook is run?

A The Vim, Git, and Pip packages are removed.

B The Vim, Git, and Pip packages are backed up.

C Only the Vim package is installed as the most recent package.

D The most relevant versions of the Vim, Git, and Pip packages are installed.

QUESTION 444

Issued to kamjunhao@gmail.com · October 17, 2026

Which network component enables communication between broadcast domains?

A router

B firewall

C switch

D load balancer

Personal copy · kamjunhao@gmail.com

QUESTION 445

Issued to kamjunhao@gmail.com · October 17, 2026

What type of efficiency is achieved by using model-driven programmability for infrastructure automation?

A Apply configuration changes across devices using the same model.

B Implement infrastructure components using a single platform.

C Collect logging information using a single model across the infrastructure.

D Configure the infrastructure using a multi-interface API.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer prepares an API to be used by administrators. API requires username and password to be verified for validated access to data, however username-password combination of users must not be sent to the API service itself. Authentication and authorization will be provided over the same mechanism. Which authentication mechanism must be used by the API service?

A OAuth Authentication

B Digest Access Authentication

C Basic Authentication

D API Key Authentication

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a REST API that runs on a load balancer for clients to query information about stocks. The data in the back-end database is updated every 15 minutes, but clients are polling the API every 2 minutes. The developer needs to reduce the load on the database without making changes to the client side. Which constraint must the engineer address?

A The load balancer is not configured to use memcached as the primary back end.

B Use of Cache-Control headers and max-age validation is not enforced.

C Request throttling on the load balancer database is not enabled.

D Dynamic IP deny listing, which allows requests every 15 minutes, is not configured.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two advantages of the MVC design pattern? (Choose two.)

A It represents the visualization of data contained with a model.

B It allows filtering of a set of objects using different criteria.

C It controls the data flow into a model object and updates a view whenever data changes.

D It separates low-level data accessing operations from high-level business services.

E It builds a final object through a step-by-step approach.

Personal copy · kamjunhao@gmail.com

```
- meraki_device:
    auth_key: cisco23456
    org_name: Acme
    net_name: AcmeNet
    serial: st22f35
    state: "{{ item }}"
  with_items:
    - query
    - absent
  delegate_to: localhost
```

Refer to the exhibit. A security team observes an attack that originates from a Cisco Meraki device. To mitigate the attack, the team requests that the engineering team remove the device from the network. The security team also requests information about the device, such as its name and location. Which tool must the engineering team use to meet the requirements by using tasks?

A cURL

B Postman

C Ansible

D Puppet

What is a characteristic of a VLAN?

A associated with IP address subnetworks

B consist of physically segmented LANs

C users access data from different VLANs

D associated with MAC address subnetworks

DRAG DROP

-

An engineer must configure devices over Cisco DNA Center. A repository already exists that contains scripts to communicate with Cisco DNA Center over APIs. The engineer wants to add their own scripts to the same repository. Drag and drop the actions from the left into the order on the right to clone a Git repository named DNA.

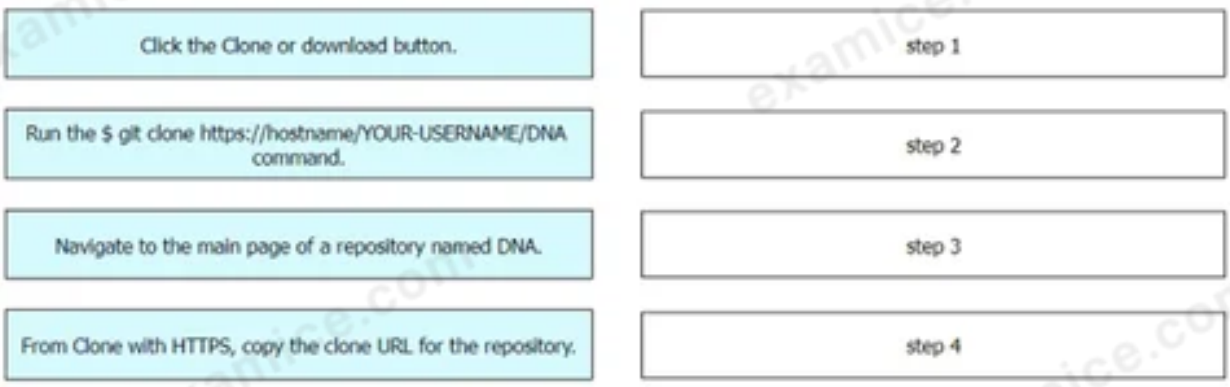

QUESTION 452

Issued to kamjunhao@gmail.com · October 17, 2026

Which response code family is returned when further action must be taken to complete the request?

A 2xx

B 3xx

C 4xx

D 5xx

Personal copy · kamjunhao@gmail.com

QUESTION 453

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform enables the management of Cisco UCS, Cisco HyperFlex, Pure Storage, and Cisco Network Insights from a single platform?

A Cisco UCS Manager

B Cisco Intersight

C Cisco HyperFlex

D Cisco UCS Director

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP

- -

Drag and drop the steps from the left into the order on the right to create a test-driven development cycle. Some options are used more than once.

Issued to kamjunhao@gmail.com · October 17, 2026

A customer is building a new DevOps business. The customer plans to deploy a modern version control system that supports multiple branches. Then the customer will aim to integrate into a CI/CD pipeline for automated provisioning and agile development. What should the customer use first for the version control system?

A Cisco ACI

B Jenkins

C GitHub

D Ansible

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

```
find ${PWD} -type d -name __pycache__ -exec rm -r {} +
```

Refer to the exhibit. A development team is creating a Python application. After several days of work, a developer notices several pycache folders and creates a Bash script to clean up the folders. What being automated by the Bash script?

A Recursively delete all the __pycache__ folders.

B Find all the empty __pycache__ folders and delete them.

C Delete all the files in the __pycache__ folders.

D Find all the files named PWD and delete them.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which type of OWASP threat uses malicious scripts that are injected into otherwise benign and trusted websites?

A brute force

B man-in-the-middle

C XSS

D SQL injection

Personal copy · kamjunhao@gmail.com

Refer to the exhibit. The sequence diagram shows a RESTful API call. Which step and response will represent the behavior of the REST API call to be synchronous?

A POST/discovery/ when there is a slot available and get the response from the POST call with the discovery details.

B GET/discovery/ when the discovery is finished and get the response from the GET call with the discovery requirements.

C POST/discovery?discoveryid= when the discovery is created and get the response from the POST call with the discovery details.

D PUT/discovery/ when the discovery is created and get the response of the discovery when it is updated.

Issued to kamjunhao@gmail.com · October 17, 2026

How do the processes used by the Agile methodology compare with the processes used by the Lean methodology?

A Agile concentrates on optimizing the development process, and Lean concentrates on optimizing the production process.

B Agile and Lean concentrate on optimizing the production process.

C Agile and Lean concentrate on optimizing the development process.

D Agile concentrates on optimizing the production process, and Lean concentrates on optimizing the development process.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a new feature named ‘feat434370483’ in a branch. A file named ‘devasc321345515.jpg’ has accidentally been staged. The developer needs to remove this so that the commit is performed and branches are merged. Which Git command must be used to unstage the file?

A get delete HEAD devasc321345515.jpg

B get reset HEAD devasc321345515.jpg

C git remove HEAD devasc321345515.jpg

D git revert HEAD devasc321345515.jpg

Personal copy · kamjunhao@gmail.com

QUESTION 461

Issued to kamjunhao@gmail.com · October 17, 2026

What are two advantages of model-driven programmability as compared to traditional network management? (Choose two.)

A standardized transport protocol

B better performance

C better visibility and control

D device abstraction

E access to more routing features

Personal copy · kamjunhao@gmail.com

QUESTION 462

Issued to kamjunhao@gmail.com · October 17, 2026

Which cloud-based security solution is focused on DNS resolution?

A Cisco AMP

B Cisco Meraki Dashboard

C Cisco DNA Center

D Cisco Umbrella

Personal copy · kamjunhao@gmail.com

```
sme@cisco:~/cisco/logs$ mkdir backup; [          ] do cp $file ./backup;
done
```

Refer to the exhibit. An engineer needs to construct a Bash command to create a new backup folder and then copy all files from the current folder to the backup folder. Which code snippet must be placed on the blank in the code?

A `for file in $ (cd);`

B `for file in $ (ls);`

C `for files in $ (ls);`

D `for file in files;`

Issued to kamjunhao@gmail.com · October 17, 2026

The API documentation has this requirement for a REST API request:

“For methods that accept request parameters, the platform accepts either application/json or application/x-www-form-urlencoded content types and currently only supports returning data in application/json format”.

Which field returns content in the required format?

A
```
Accept: application/xml; q=0.5, application/json
```

B
```
Content-Type: application/json
```

C
```
Content-Type : application/xml; q=0.5, application/json
```

D
```
Expect: application/json
```

A developer checks the performance of a web application. The application is in the local data center and used a REST-based API. Based on the API logs, it is discovered that many users abandon API requests. Also, the response is taking too long to get back. What is the reason for this issue?

A Token-based authentication is disabled.

B Pagination is not implemented.

C Rate limiting is not implemented.

D Token-based authentication is enabled.

Which network device forwards packets between networks?

A router

B load balancer

C firewall

D switch

```
1 import requests
2 url= 'https://cisco.devnet.com/rest'
3
```

Refer to the exhibit. A developer creates a Python script to query a REST API by using an HTTP GET request. The remote server will authorize the request only if it includes HTTP Basic Auth parameters. The username is admin and the password is devnet123. Which line of code needs to be placed on the snippet where the code is missing?

A
```
requests.get(url, auth= ('admin', 'devnet123'))
```

B
```
requests.get(url, auth=HTTPDigestAuth('admin', 'devnet123'))
```

C
```
requests.get(url, auth=HTTPBasicAuth('admin': 'devnet123'))
```

D
```
requests.get(url, 'admin', 'devnet123')
```

```
--- file2.py   2020-09-26 15:27:49.000000000 -0600
+++ file1.py   2020-09-26 15:27:11.000000000 -0600
@@ -14,7 +14,7 @@
 USERNAME = '<USERNAME>' # Example USERNAME = 'devnetuser'
 PASSWORD = '<PASSWORD>' # Example PASSWORD = 'Cisco123!'

-
+auth = HTTPBasicAuth(USERNAME, PASSWORD)

 # URLs
 DEVICES_URL = '/dna/intent/api/v1/network-device'
@@ -23,7 +23,7 @@

 def get_dnac_jwt_token():
     response = requests.post(BASE_URL + AUTH_URL,
-                             auth=HTTPBasicAuth(USERNAME, PASSWORD),
+                             auth=auth,
                              verify=False)
     token = response.json()['Token']
     return token
@@ -89,8 +89,9 @@
         'destIP': dst_ip_address,
         'inclusions': [
             'INTERFACE-STATS',
+            'DEVICE-STATS',
             'ACL-TRACE',
-            'DEVICE-STATS'
+            'QOS-STATS'
         ],
         'protocol': 'icmp'
     }
```

Refer to the exhibit. An engineer is comparing two files by using the unified diff format. What is determined by the content in the file2.py file?

A Line 93 of file.py is 'DEVICE-STATS'.

B Line 92 of file2.py is 'DEVICE-STATS'.

C Line 16 of file2.py is auth=HTTPBasicAuth(USERNAME, PASSWORD).

D Line 17 of file2.py is auth = HTTPBasicAuth(USERNAME, PASSWORD).

QUESTION 469

Issued to kamjunhao@gmail.com · October 17, 2026

What is the reason for an HTTP 404 code returned from a REST API request?

A The requested URL exists, but the HTTP method is not applicable.

B The requested resource is not found.

C The request was missing or had an invalid authentication token.

D The request was successful, but nothing is in the response body.

Personal copy · kamjunhao@gmail.com

QUESTION 470

Issued to kamjunhao@gmail.com · October 17, 2026

An existing application is accessible from an external IP address. Which device or service must be configured to make the application accessible through a URL by using a domain name?

A reverse proxy

B DNS

C firewall

D load balancer

Personal copy · kamjunhao@gmail.com

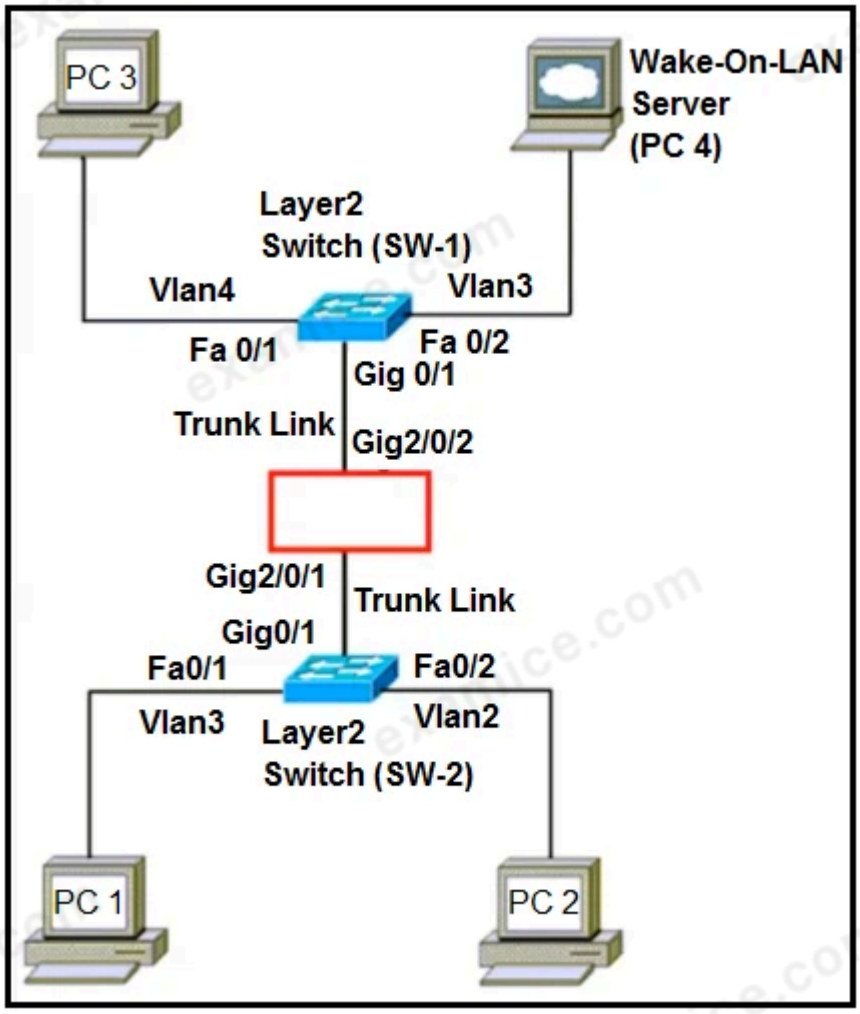

Refer to the exhibit. Which device should be used to interconnect the hosts?

A load balancer

B VPN gateway

C Layer 2 switch

D Layer 3 switch

QUESTION 472

Issued to kamjunhao@gmail.com · October 17, 2026

What is the main purpose of a code review?

A to identify and review errors with the team

B to detect logical errors

C to ensure that all code is checked in simultaneously

D to provide the technical lead visibility into all code

Personal copy · kamjunhao@gmail.com

QUESTION 473

Issued to kamjunhao@gmail.com · October 17, 2026

Which Python data type resembles JSON data structures?

A list

B dictionary

C string

D tuple

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of organizing code into classes, methods, functions, and modules? (Choose two.)

A improves readability

B improves reusability

C improves parallelism

D improves performance

E decreases complexity

```
1 import unittest
2 from webexteamssdk import WebexTeamsAPI
3
4
5 def send_message (text) :
6    api = WebexTeamsAPI ()
7    message = api.messages.create(toPersonEmail= 'johndoe@example.com', text=text)
8    return message.text
9
10
11 class TestMessage (unittest.TestCase) :
12   def test message (self) :
13
14
15 if _name_ == '_main_':
16   unittest.main ()
```

Refer to the exhibit. Which code should be added at the snippet to perform a unit test?

A
```
self.assertIsInstance (send_message ("hello"),
                       "hello", "Should be the same")
```

B
```
self.assertIs (send_message ("hello"),
          "hello", "Should be the same")
```

C
```
self.assertCompare (send_message ("hello"),
                    "hello", "Should be the same")
```

D
```
self.assertEqual (send_message ("hello"),
                  "hello", "Should be the same")
```

Issued to kamjunhao@gmail.com · October 17, 2026

A development team must find a cloud deployment model to scale its new product to external and internal users. The team is small and the data is massive. The team wants high flexibility and higher security. Which application deployment model should the team use?

A hybrid cloud

B edge

C public cloud

D private cloud

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

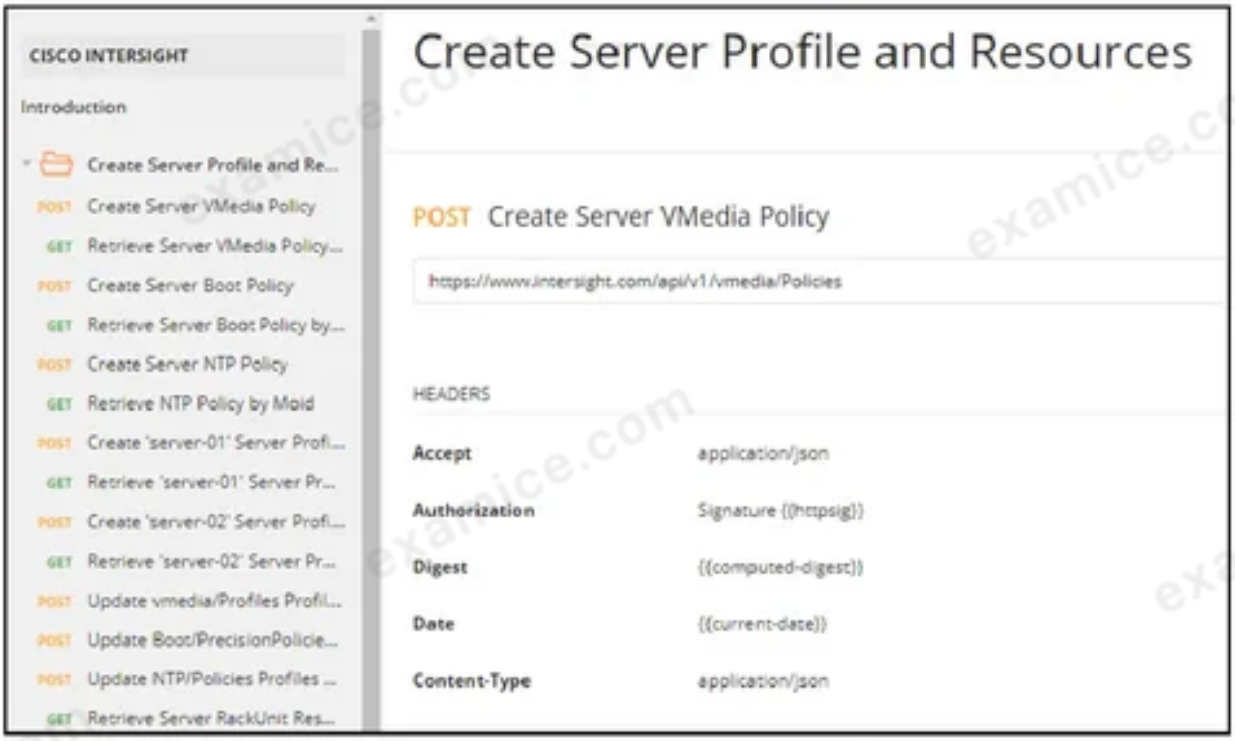

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script by using the Cisco SDK. Not all options are used.

Personal copy · kamjunhao@gmail.com

QUESTION 478

Issued to kamjunhao@gmail.com · October 17, 2026

An application developer deploys several applications on the same server. The environment runs on a single operating system and allows the developer to bind dependencies with the application code. Which environment has the code been developed in?

A bare metal server

B virtual machine

C container

D Linux server

Personal copy · kamjunhao@gmail.com

QUESTION 479

Issued to kamjunhao@gmail.com · October 17, 2026

How do JSON and XML compare?

A The syntax of JSON contains tags, elements, and attributes whereas XML objects are collections of key-value pairs.

B JSON objects are an ordered set of element attributes whereas XML arrays are an unordered set of key-value pairs.

C The syntax of XML contains tags, elements, and attributes whereas JSON objects are collections of key-value pairs.

D JSON arrays are an unordered set of key-value pairs whereas XML objects are an ordered set of element attributes.

Personal copy · kamjunhao@gmail.com

QUESTION 480

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform is a premises based solution that Automates and Orchestrates Cisco and non-Cisco infrastructure?

A UCS Manager

B Cisco Integrated Management Controller

C UCS Director

D Cisco Intersight

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the steps from the left into the order on the right to implement a CI/CD toolchain. Not all options are used.

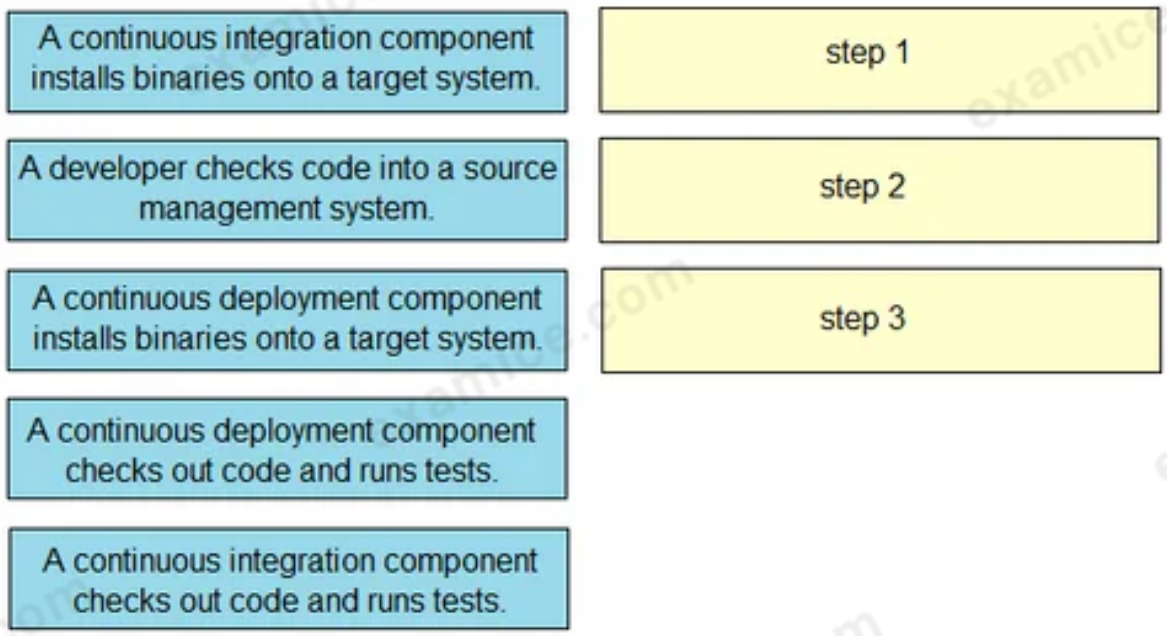

DRAG DROP

- -

```
[[ $1 = '' ]] && BRANCH="master" || BRANCH=$1

SSH_KEY_PATH="key.pem"
SERVER="remote_username@remote_host"
DEST_FOLDER="path_to_project_folder"
PARAMS="BRANCH=\"$BRANCH\" DEST_FOLDER=\"$DEST_FOLDER\""

ssh -i $SSH_KEY_PATH $SERVER $PARAMS 'bash -i'  <<-'ENDSSH'
    cd $DEST_FOLDER

    git stash
    git pull
    git checkout $BRANCH
    git pull origin $BRANCH

    rm -rf node_modules/
    npm install

    pm2 stop app_name
    pm2 start app_name
    pm2 save
    pm2 list

    exit
ENDSSH
```

Refer to the exhibit. A developer is responsible for managing an application. The developer wants to deploy the new version of the application on the test environment whenever it is released. To automate this workflow, the developer writes a bash script. Drag and drop the deployment steps from the left into the order on the right to identify the workflow that is automated by the script.

connects to the server	step 1
installs the application	step 2
restarts the application	step 3
creates variables for remote execution	step 4
places a new application version on the server	step 5

Issued to kamjunhao@gmail.com · October 17, 2026

When changes are made to the same file across two branches, which git status is shown when the branches are combined?

A unmerged

B uncommitted

C conflict

D branched

Personal copy · kamjunhao@gmail.com

DRAG DROP

```
commit ac40974fe81b5cf2be9adadecca37d92159ca917 (HEAD ->
example_branch, origin/example_branch)
Author: John Smith <john.smith@example.com>
Date:   Mon Dec 16 09:00:00 2019

    commit message

commit 0b20aeb8940b845562ac7e291727155be2488cf4
Author: John Smith <john.smith@example.com>
Date:   Mon Dec 15 09:00:00 2019

    initial commit
```

Refer to the exhibit. Running the git merge example_branch command results in an error due to conflicts. The exhibit shows the output of the git log command on a branch named example_branch. Drag and drop the code from the bottom into the order to resolve the conflicts and merge example_branch into the remote master branch.

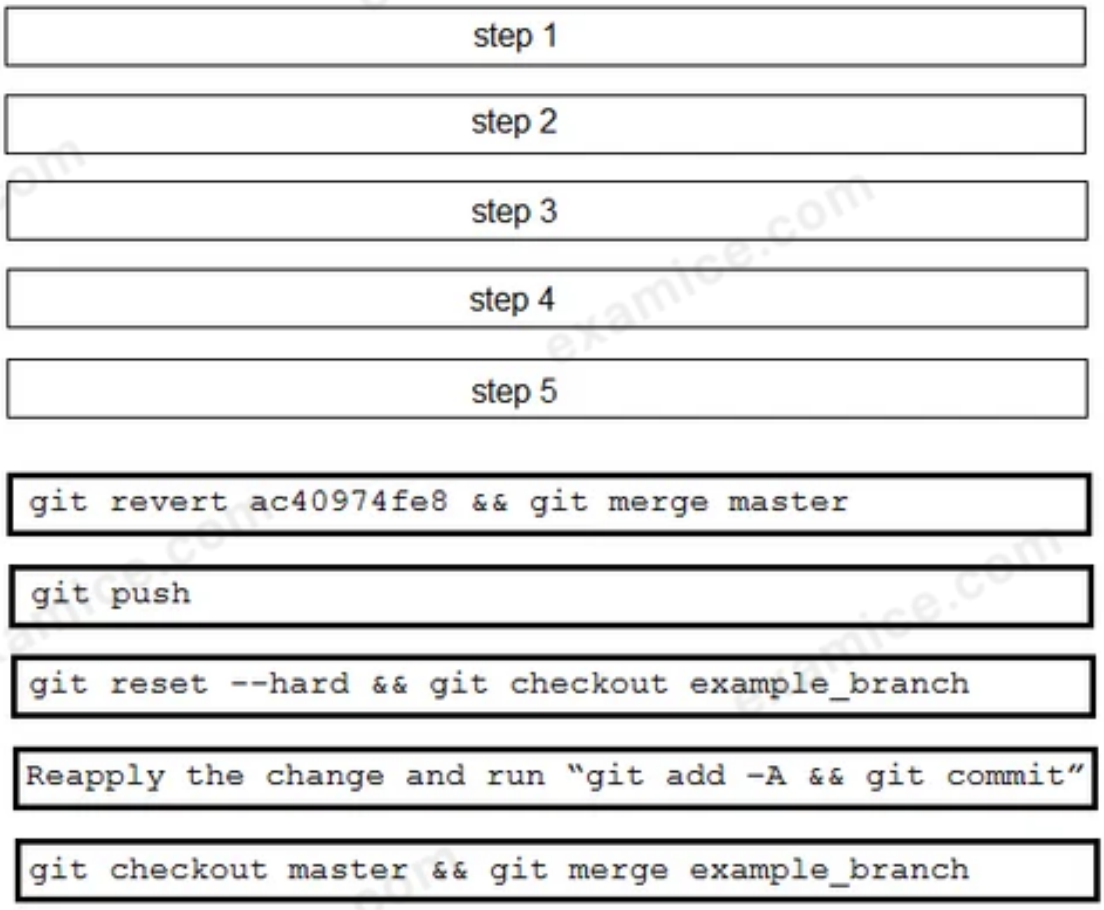

Issued to kamjunhao@gmail.com · October 17, 2026

What is an advantage of the Agile software development method as compared to Waterfall?

A In Agile the development teams deliver the whole project at once, and in Waterfall the project is delivered in phases.

B In Agile the customer involvement is limited to the requirement collection phase, and in Waterfall the customer is involved in all development phases.

C In Agile every aspect of development is continually revisited, and in Waterfall the revision takes place in another project.

D In Agile each development team works independently, and in Waterfall the development team collaborate.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of using version control? (Choose two.)

A It enables multiple team members to work on the same project simultaneously.

B It provides a complete long-term change history of every file of an application.

C It improves code availability by distributing the data across different machines.

D It provides automation of the build and deployment process out of the box.

E It executes tests and reveals compilation errors before the code is committed.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A system administrator works with a software development department to implement code to production. The administrator wants to review the code to be implemented and not do it automatically. The code must be ready for production and should be implemented by the administrator without additional intervention from the development team. Which DevOps concept does this scenario represent?

A continuous deployment

B continuous testing

C continuous integration

D continuous delivery

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a difference between device-level and controller-level infrastructure management?

A Device-level management uses NETCONF, whereas controller-level management does not support NETCONF to automate the infrastructure.

B Controller-level management uses APIs to simplify the developer experience, whereas device-level management uses traditional management protocols.

C Controller-level management is more widely supported because it is standards-based, whereas device-level management is proprietary to each vendor.

D Controller-level management exposes northbound, southbound, eastbound, and westbound APIs, easing integration with other technologies, whereas device-level management does not use a controller-based API.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are the two benefits of edge computing architecture? (Choose two.)

A run applications

B centralized implementation

C event logging

D node distribution

E complex event processing

Personal copy · kamjunhao@gmail.com

```
{
    "ietf-interfaces:interfaces": {
        "interface": [
            {
                "name": "GigabitEthernet1",
                "description": "Network interface",
                "type": "iana-if-type:ethernetCsmacd",
                "enabled": true,
                "ietf-ip:ipv4": {
                    "address": [
                        {
                            "ip": "10.10.20.48",
                            "netmask": "255.255.255.0"
                        }
                    ]
                }
            },
            {
                "name": "GigabitEthernet2",
                "description": "Network Interface",
                "type": "iana-if-type:ethernetCsmacd",
                "enabled": false,
                "ietf-ip:ipv4": {}
            },
            {
                "name": "GigabitEthernet3",
                "description": "Network Interface",
                "type": "iana-if-type:ethernetCsmacd",
                "enabled": false,
                "ietf-ip:ipv4": {}
            }
        ]
    }
}
```

Refer to the exhibit. What are two results of running the RESTCONF query? (Choose two.)

A GigabitEthernet1 becomes shut down.

B Interfaces are created as containers.

C GigabitEthernet2 becomes shut down.

D Descriptions for two interfaces are applied.

E The module left-interfaces:interfaces is created.

QUESTION 491


```
import requests
url = "https://webexapis.com/v1/xapi/status?deviceId={{_deviceId}}&name=Audio.Volume"
headers = {
  'Authorization': 'Bearer {{access_token}}'
}
response = requests.request("GET", url, headers=headers)
print(response.text.encode('utf8'))
```

Refer to the exhibit. A network engineer must automate a workflow to get device volume data from Endpoint xAPI-enabled devices. The engineer prepares a Python script to send the request by adding an access token and device ID. However, the request receives a status code of 401. Which action solves the problem?

A Access token must be changed with a valid one.

B Network connectivity between client and API must be fixed.

C Internal server problems that relate to code must be fixed.

D API endpoint must be restarted to serve again.

Issued to kamjunhao@gmail.com · October 17, 2026

Which benefit does CI/CD provide to the infrastructure?

A supports connectivity between network resources and external platforms

B supports the integration of network devices with external databases

C provides version control during application development

D enables frequent and reliable code deployments

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

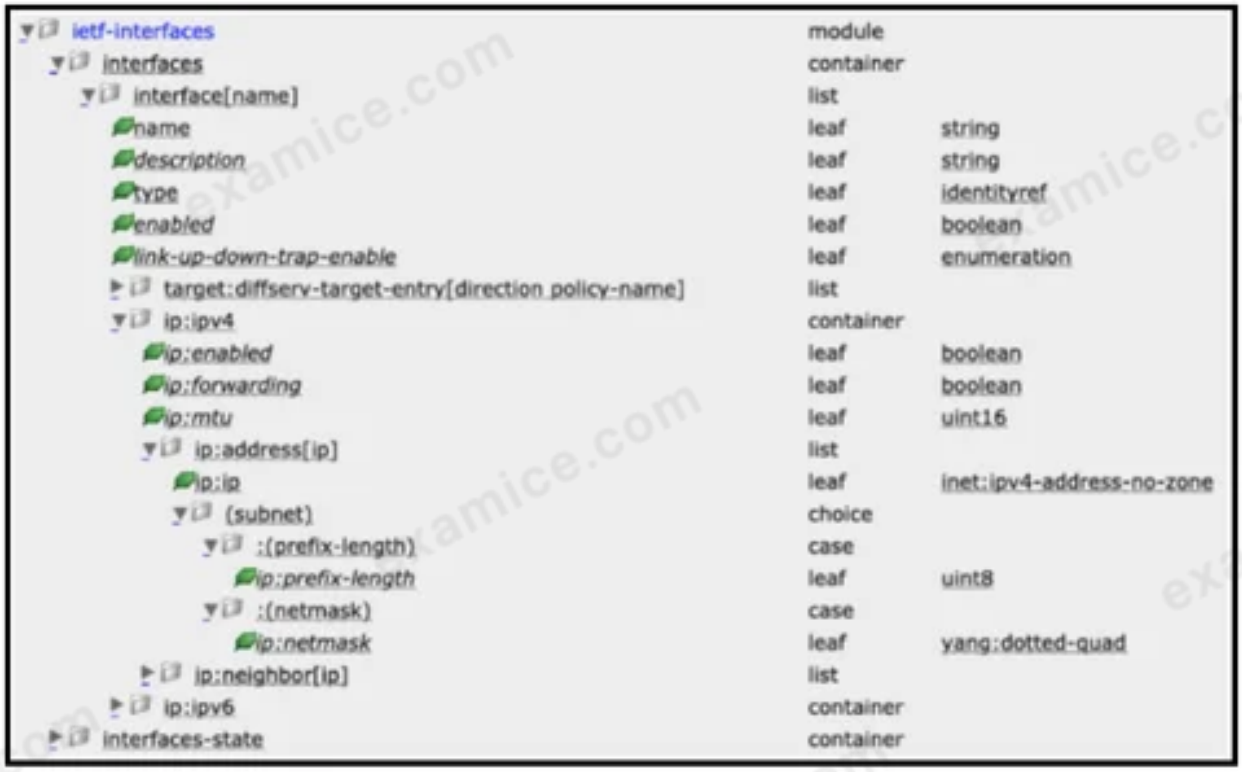

Refer to the exhibit. A new loopback34 must be created on a Cisco IOS XE router that has an IP address of 10.34.1.2/24. Drag and drop the code from the bottom onto the box where the code is missing to construct the Python script that configures the IP address on the interface according to the YANG data model of ietf-interfaces. Not all options are used.

loopback | interface | ietf-interfaces | ipv4 | address

netmask | subnet

QUESTION 494

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP -

Drag and drop the common API styles from the left onto the requirement on the right.

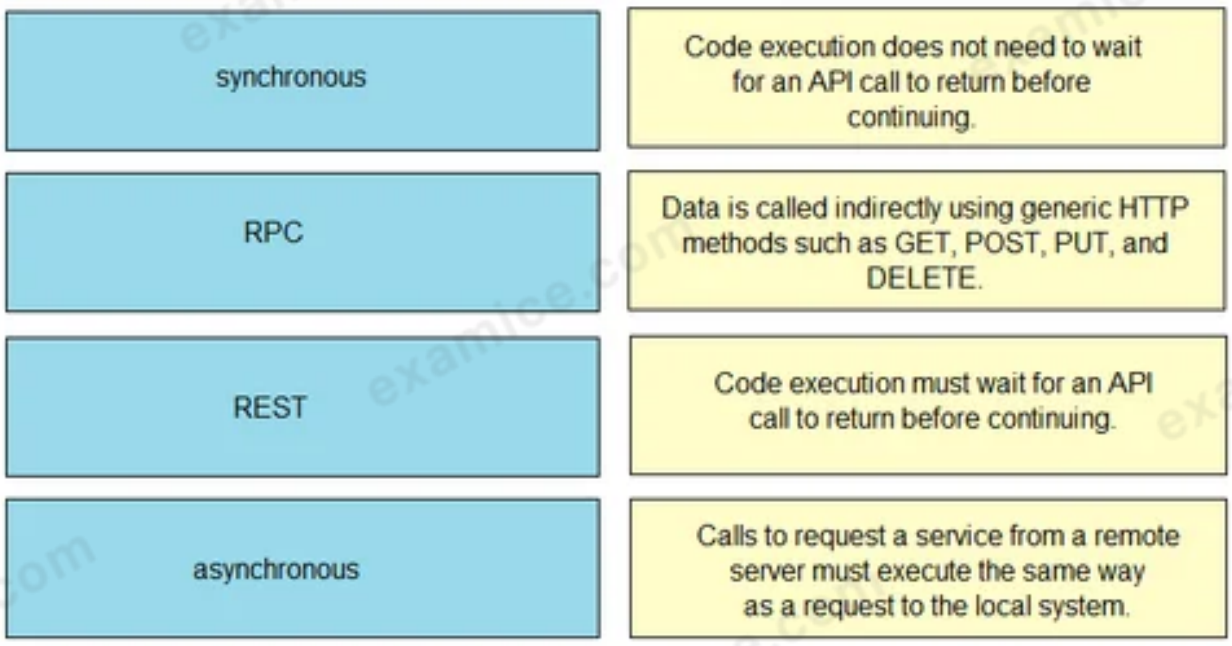

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of Agile software development compared to the Waterfall method?

A Agile method values comprehensive documentation whereas Waterfall focuses on working software.

B Agile delivers at the end of a linear process whereas in Waterfall each phase depends on the deliverables of the previous phase.

C In Agile, development iterations last from one to four weeks whereas the Waterfall method does not utilize iterations.

D In Agile, code is deployed to production immediately whereas in Waterfall deployment is processed gradually on each cycle.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a new feature and finds an old piece of code that must be discussed. The developer wants to find the original coders for the code to discuss the issue. Which Git command annotates the listing of the source file with the author that created or last edited a line?

A cat filename | git diff

B git log

C git blame filename

D git reflog

Personal copy · kamjunhao@gmail.com

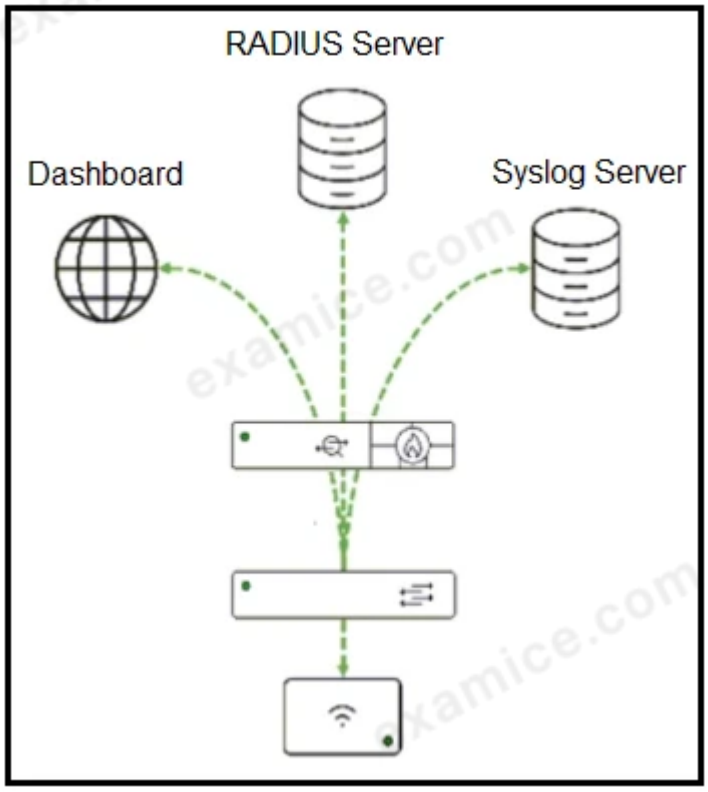

Refer to the exhibit. A Cisco Meraki network was recently installed. Which TCP port is used to gain access to the Meraki dashboard to complete the configuration?

A 22

B 23

C 443

D 8080

A developer must add an idempotent task to an Ansible playbook that configures a Cisco IOS device. HTTP traffic must be permitted from 192.168.1.1 to 192.168.1.5 host machine. Which code snippet must be used?

A
```
- ios_command:
    commands:
    - configure terminal
    - access-list 120 permit tcp host 192.168.1.1
    host 192.168.1.5 any any eq www
```

B
```
-ios_config:
    lines: access-list 120 permit tcp host
    192.168.1.1 host 192.168.1.5 any any eq www
```

C
```
-ios_config:
    lines: access-list 120 permit tcp host
    192.168.1.1 host 192.168.1.5 eq 80
```

D
```
- ios_command:
    mode: configure terminal
    args: access-list 120 permit tcp host 192.168.1.1
host 192.168.1.5 any any eq 80
```

```
FROM python:3.6
MAINTAINER User One (userone@domain.com)
EXPOSE 80
RUN pip3 install Flask
RUN pip3 install -r requirements.txt
COPY . /app
```

Refer to the exhibit. An engineer is creating a Dockerfile for an application to run on a container. Application is a web application build on the Python Flask framework. Which port of the Dockerfile provides desired reachability to the application from the outside of the container?

A RUN pip3 install Flask

B MAINTAINER User One (userone@domain.com)

C EXPOSE 80

D COPY ./app

Issued to kamjunhao@gmail.com · October 17, 2026

A development team needs to containerize an application named 'cust484705142'. A Dockerfile has been created and now the docker build command needs to be run using the current folder to find the Dockerfile, build the image and create a local repository named 'cust321453857-rep' that points to that image. Which command must be used?

A docker build -t cust321453857-rep -f Dockerfile

B docker build cust321453857-rep -f Dockerfile.txt

C docker build cust321453857-rep Dockerfile

D docker build -t cust321453857-rep Dockerfile.txt

Personal copy · kamjunhao@gmail.com

```
FROM ubuntu:18.04
COPY . /app
RUN make /app
CMD python /app/app.py
```

Refer to the exhibit. What is the result of running the Dockerfile?

A Copy the directory /app from the ubuntu:18.04 image, build it with make, and execute the application with the Python command.

B Copy the directory app from the current directory of the Docker client, execute the application with make, and after it runs, execute an additional application.

C Copy the directory app from the current directory of the Docker client, build it with make, and execute the application with the Python command.

D Copy the /app directory from the ubuntu:18.04 image, execute the application with make, and after it runs, execute an additional application.

DRAG DROP

- -

API Documentation:

Team body parameters:

name (required)

Room body parameters:

title(required), teamId(required)

Message body parameters:

roomId, parentId, toPersonId, toPersonEmail, text, markdown, files, attachments

People body parameters:

emails(required), displayName, firstName, lastName, avatar, orgId, roles, licenses

Refer to the exhibit. A script must create a new team, create a new space, send a message, and create a participant. Drag and drop the code snippets from the bottom onto the boxes in the code to complete the script. Not all options are used.

```
import requests

base_url = "https://webexapis.com/v1"
email = "admin@example.com"
name = "Admin"
header = {"key": "value"}

url =  "{}/{}".format(base_url, "/teams")
body =
team_id = requests.post(url, headers=header, data=body).json() ['id']

url =  "{}/{}".format(base_url, "/rooms")
body =
team_id = requests.post(url, headers=header, data=body).json() ['id']

url = "{}/{}".format(base_url, "/messages")
body =
requests.post{url, headers=header, data=body}

url = "{}/{}".format(base_url, "/people"}
body =
requests.post{url, headers=header, data=body}
```

```
{"emails": [email], "displayName": name}
```

```
{"name": "New example collaboration"}
```

```
{"roomId": room_id, "text": "New text"}
```

```
{"title": "New example collaboration"}
```

```
{"emails": [email], "name": name}
```

```
{"name": "newRoom", teamId": team_id}
```

```
{"title": "newRoom", "teamId": team_id}
```

Personal copy · kamjunhao@gmail.com

QUESTION 503

A developer is working on an existing feature that needs enhancing. The primary production branch for the application is 'prim4a3b8c6d80374' and the branch for working on the feature is 'feat145678909'. The developer needs to create a clone of the single branch used for the feature that only has commits included in the current line of history. Which Git command must be used?

A git clone [url] - -feat145678909 - -single-branch

B git clone [url] - -branch feat145678909 - -single

C git clone [url] - -single-branch feat145678909

D git clone [url] - -branch feat145678909 - -single-branch

QUESTION 504

Why should a code review process be used?

A It enables various software design implementations.

B It enables a consistent software design.

C It ensures that members of a team work in isolation.

D It ensures that whole software is secure.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer is responsible for several thousand network devices across many campus environments that are all connected to a common controller. Which action updates all devices with new security settings in this network?

A Get a list of all devices from the controller and use a CLI to change the settings on individual devices.

B Track a list of all devices on a spreadsheet and use a CLI to change the settings on individual devices.

C Get a list of all devices from the controller and use RESTCONF to set a YANG model on the devices.

D Track a list of all devices on a spreadsheet and use RESTCONF to set a YANG model on the devices.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which security platform rapidly analyzes files and suspicious behavior across an environment?

A Cisco Threat Grid

B Cisco Firepower

C Cisco ISE

D Cisco ASA

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer prepared the Dockerfile and already built a web application container with the image name: “myWebApp”. Requests made to the server public IP address on port 8080 must be redirected to port 80 on the container. The developer wants to start the container and access the Bash shell while the application serves the requests. Which command is used?

A
```
docker run -t -i myWebApp -p 8080:80 bash
```

B
```
docker cmd -t -i myWebApp -d 80:808 bash
```

C
```
docker start -t -i apache2 -p 8080:80 bash
```

D
```
docker exec -t -i apache2 -bash
```

Issued to kamjunhao@gmail.com · October 17, 2026

What is the impact on an application from having a large distance between a client device and a host server?

A latency

B increased bandwidth

C loss of connectivity

D jitter

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

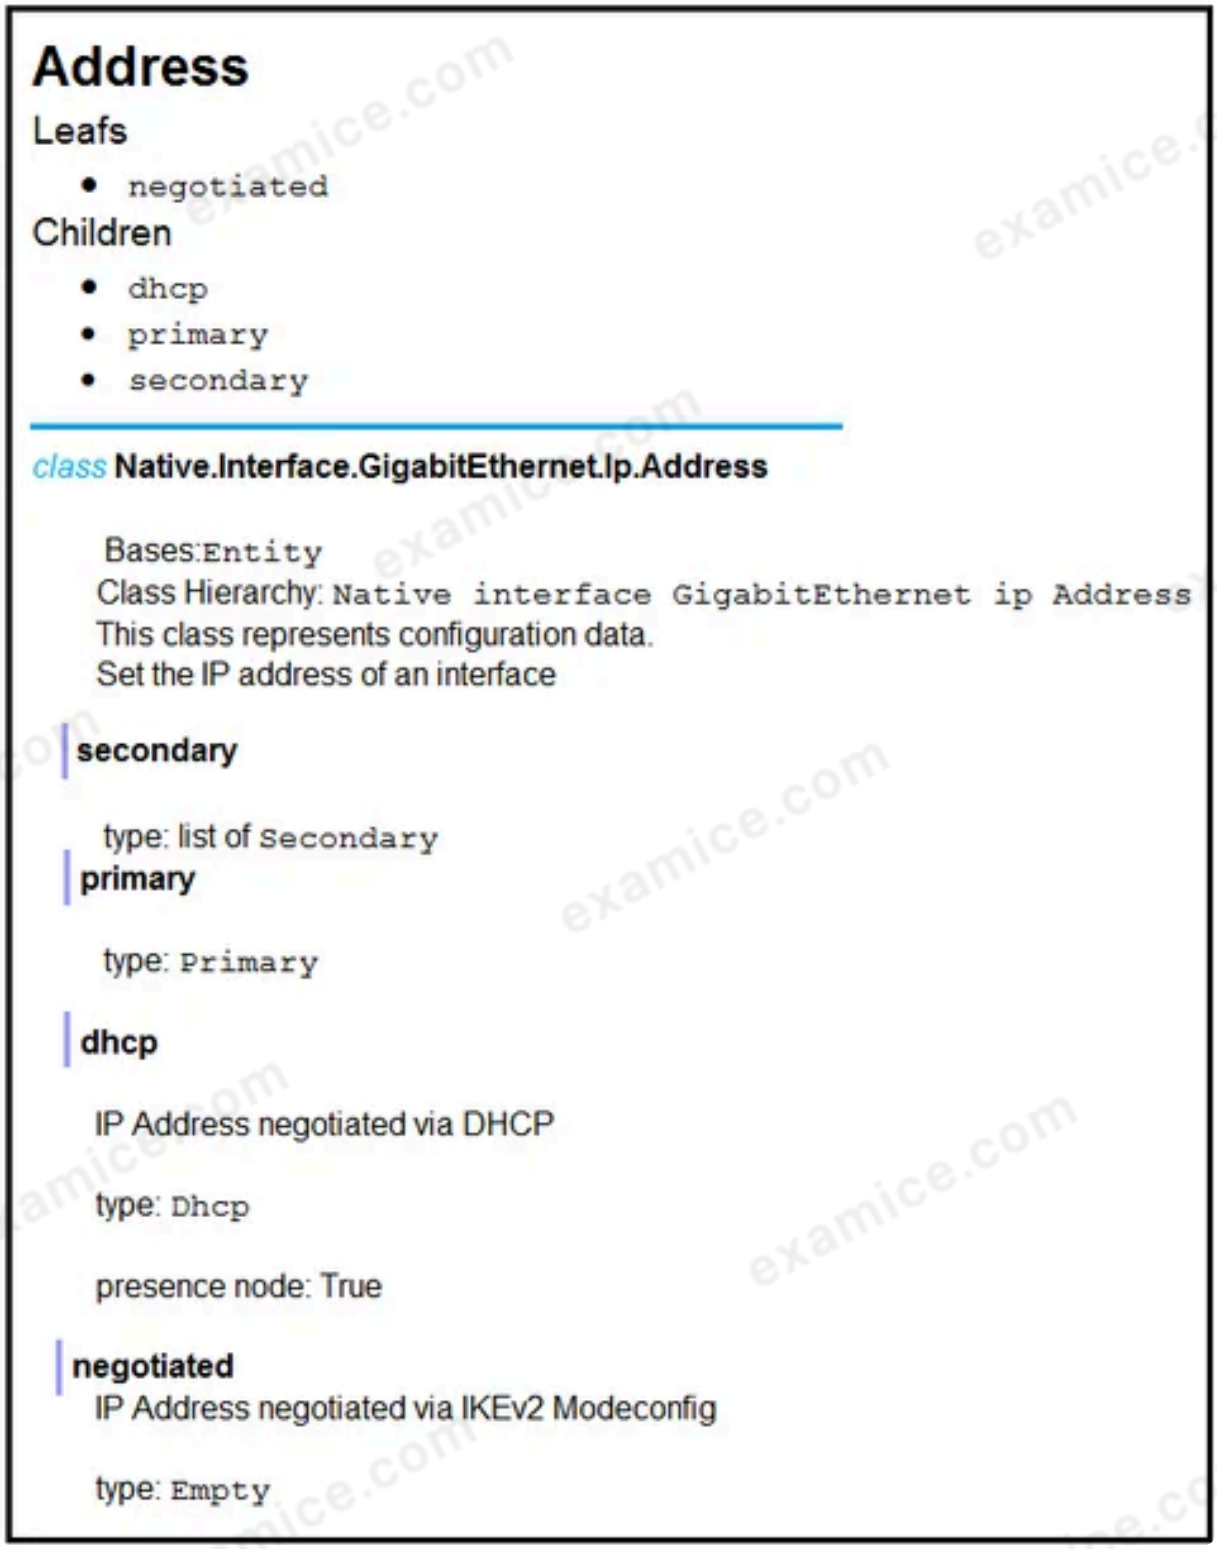

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to configure the GigabitEthernet 3 interface. Not all options are used.

```
from ydk.services import CRUDService
from ydk.providers import NetconfServiceProvider as nc
from ydk.models.cisco_ios_xe import Cisco_IOS_XE_native as model
ip = '10.10.20.48'
prtcl = 'ssh'
user = 'developer'
psw = 'P@s$W0rD'
port = 830
provider = nc(address=ip, port=port, username=user, password=psw, protocol=prtcl)
crud = CRUDService()

interface = [                                    ]

interface.name = '3'
interface.description = 'Interface Description'

[                                    ] = '172.16.10.10'

[                                    ] = '255.255.255.0'

[                                    ]
```

- `crud.update(provider, interface)`
- `model.Native.Interface.GigabitEthernet()`
- `crud.create(provider, interface)`
- `interface.ip.mask`
- `interface.ip.address.primary.address`
- `interface.ip.address.primary.mask`
- `interface.ip.address.virtual.mask`

Personal copy · kamjunhao@gmail.com

QUESTION 510

Issued to kamjunhao@gmail.com · October 17, 2026

What is a feature of Cisco Modeling Labs?

A Practice administration skills for exam certification.

B Automate simulations that connect to external networks.

C Design and test against virtual network equipment.

D Create and manage user groups to control lab access.

Personal copy · kamjunhao@gmail.com

QUESTION 511

Issued to kamjunhao@gmail.com · October 17, 2026

Which port does HTTP use by default?

A 22

B 80

C 430

D 443

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a branch called topic that was created from the master branch to add a new feature to the product. After making a few commits on the branch, the developer wants to compare the changes between the topic and the master branches. Which two Git commands are used? (Choose two.)

A git diff topic - -cached

B git diff topic...master

C git diff topic HEAD

D git diff topic-master

E git diff topic master

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is a capability of Cisco UCS Director?

A It is used to generate workflow reports on any hardware equipment in the network.

B It is used to create multistep workflows to automate large and repetitive tasks.

C It supports only hardware created by Cisco to ensure scalability across the network.

D It is a platform for monitoring and troubleshooting server-related issues.

Personal copy · kamjunhao@gmail.com

```
import requests
url = 'https://api.meraki.com/api/v0/networks/net1/httpServers'
headers = { 'Accept': '*/*' }
response = requests.get(url = URL, headers=HEADERS, verify=False, timeout=5)
```

Refer to the exhibit. A developer created a Python script by using the Cisco Meraki API. The solution must:

- Obtain a list of HTTP servers for a network named "net1".
- Print the response body if the HTTP status code is 200.
- Handle the timeout requests as exceptions, and print Timeout Error next to the exception to stdout.

Which block of code completes the script?

A
```
except requests.Timeout as e:
   print("Timeout Error: {}". Format(e))
if response.status_code ==200:
   print(response.text)
```

B
```
except Timeout as exception:
   print("Timeout Error")
if status_code == 200;
   print(response.text)
```

C
```
except requests Timeout:
   print("Timeout Error")
if response.status_code == 200;
   print(response)
```

D

```
except requests.Timeout as exception:
   print("Timeout Error: exception")
if response.status_code == 200:
   print(response)
```


QUESTION 515

What is a benefit of using a version control system?

A tracks changes to the files

B enforces change management controls

C centralizes binary files

D prevents code from being stored locally

QUESTION 516

What is a principle of test-driven development?

A write and run tests before writing new code

B write tests after adding new blocks of code

C run tests after writing new code

D write documentation for tests

QUESTION 517

DRAG DROP

- -

Drag and drop the protocols from the left onto the management technologies on the right that expose the protocols to network engineers.

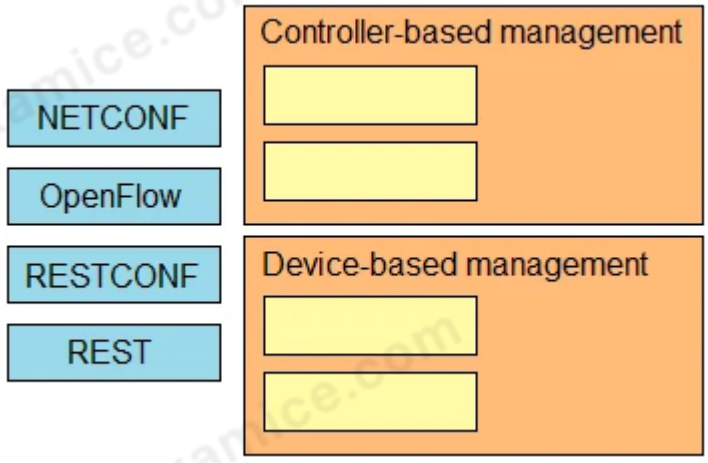

QUESTION 518

Issued to kamjunhao@gmail.com · October 17, 2026

Calling a REST API returns a 404 error. What does this code represent?

A A query parameter is missing.

B The URI being requested is incorrect.

C A header is missing.

D The payload is formatted incorrectly.

Personal copy · kamjunhao@gmail.com

QUESTION 519

Issued to kamjunhao@gmail.com · October 17, 2026

A developer prepares a Python application to monitor network performance on specific applications. The developer tests the code on a test environment but requires more use cases and wants the scripts to be improved for different networks. Which resource must be used to take advantage of open-source communities and contributors for the application?

A code exchange

B sandbox

C packet tracer

D learning labs

Personal copy · kamjunhao@gmail.com

QUESTION 520

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco network management platform should be used for integration with DevOps toolchains and third-party services in a service provider environment?

A Cisco NSO

B Cisco DNA Center

C Cisco ACI

D Cisco SD-WAN

Personal copy · kamjunhao@gmail.com

QUESTION 521

Issued to kamjunhao@gmail.com · October 17, 2026

Which unique identifier allows network traffic to be routed to a host?

A hostname

B network prefix

C IP address

D subnet mask

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which automation tool uses NEDs to abstract southbound interfaces?

A Chef

B Puppet

C Ansible

D Cisco NSO

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must investigate the problems on a web application and address them to related teams. The engineer verifies that the network farm serving the application is working properly and is accessible through the internal IP address and port. Each server has a public DNS name and public IP. While name resolutions from the outside network to the public IP address are working properly too, the engineer discovers that some servers are not accessible from the public Internet. Which problem type must be addressed as the cause for the case?

A internal network connectivity

B blocked transport block

C proxy

D NAT

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer is creating an API to automatically obtain specific zones from Cisco Meraki MV cameras. The data that is provided when the API runs must represent the current analytic zones that are configured on the cameras. The API must start automatically at 6 p.m. every day and save the data on a server for further processing. Which part of the HTTP request must be configured to meet these requirements?

A request body with Status Code set to "302"

B request body with Content-Type set to "application/xml"

C request header with Content-Type set to "application/json"

D request header with Content-Encoding set to "application/xml"

Personal copy · kamjunhao@gmail.com

A developer has created a three-tier web application for network device control and management. The application consists of multiple objects assigned for different functionalities. The architecture of the application is based on the Observer pattern. Which advantage does this pattern provide for the application design and architecture?

A Independent observers are updated automatically.

B It updates the state of dependent subjects directly.

C One observer can query the state of other subjects

D It decouples the subjects from the observers.

Which type of OWASP threat forges a malicious HTTP request into an application?

A Clickjacking

B SQL Injection

C XSS

D CSRF

QUESTION 527

Issued to kamjunhao@gmail.com · October 17, 2026

What is a difference between REST and RPC API styles?

A RPC uses HTML format and REST uses JSON format.

B RPC has a single style and REST has multiple styles

C RPC uses the POST operation to update and REST uses the PUT operation to update.

D RPC is stateful in nature and REST is stateless in nature.

Personal copy · kamjunhao@gmail.com

QUESTION 528

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool is able to create a network design that simulates a topology?

A Docker

B pyATS

C Cisco DevNet Sandbox

D CML

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which API has the capability to configure phone books and contacts in Cisco Unified Contact Center?

A AXL

B Cisco Webex Meetings

C Cisco Finesse

D Cisco Webex

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to create a new room within Webex Teams. Not all options are used.

Answer Area

```
import requests

def createRoom(roomName):
        url = "https://webexapis.com/v1/rooms"
        payload = {"          ": roomName}
        ________ = {
                "Content-Type": "application/x-www-form-urlencoded",
                "Authorization": TOKEN
        }
        requests.________("          ", url, data=payload, headers=headers)
```

headers	request	PUT
title	POST	data

QUESTION 531

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP status code is returned when a server is down for maintenance?

A 401

B 403

C 501

D 503

QUESTION 532

Issued to kamjunhao@gmail.com · October 17, 2026

What is the well-known port for HTTPS?

A 81

B 443

C 80

D 440

```
$ diff -u eth1.cfg eth1.cfg.backup
--- eth1.cfg  2021-02-16 15:26:03.000000000 +0000
+++ eth1.cfg.backup 2021-02-16 15:26:14.000000000 +0000
@@ -1 +1,2 @@
 IPADDR="192.168.1.20/32"
+ONBOOT=yes
+GATEWAY="192.168.1.254"
```

Refer to the exhibit. A network engineer changes the configuration of a device interface, and the device becomes unreachable. The engineer accesses the server console to review the differences with the backup file. Which change must be made in the eth1.cfg file to restore the original configuration?

A Remove the line GATEWAY="192.168.1.254".

B Remove the line IPADDR="192.168.1.20/32".

C Add lines ONBOOT=yes and GATEWAY="192.168.1.254".

D Add lines ONBOOT=yes and IPADDR="192.168.1.20/32".

QUESTION 534

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of organizing code into modules?

A improves compatibility with the hardware

B improves the user interface

C easier to work with the code

D easy to compile and test

Personal copy · kamjunhao@gmail.com

QUESTION 535

Issued to kamjunhao@gmail.com · October 17, 2026

A company wants to optimize the use of its existing compute resources by running multiple operating systems on a single Cisco UCS server. The company also wants to minimize new purchases for physical resources such as hard drives. The network connectivity between virtual hosts and the physical host needs to be bridged. Which deployment model type must be used?

A bare metal

B Docker

C container

D virtual machine

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A retail store is launching an online presence through their new application. The amount of end-user traffic on the application is expected to fluctuate depending on whether there are sales on or not. The application developer has decided to adopt an application-deployment model that allows them to leverage cloud bursting. Which deployment approach would allow cloud bursting?

A local infrastructure

B edge computing

C on-premises

D hybrid

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP status code means that the server cannot or will not process the request because of a perceived client error?

A 100

B 203

C 303

D 400

Personal copy · kamjunhao@gmail.com

```
import requests
import os
from dotenv import load_dotenv
load_dotenv()
def main():
    token = os.environ.get("api-token")
    url = f"https://192.168.190.42/dna/intent/api/v1/network-device"
    headers = {
        "Content-Type": "application/json",
        "Accept": "application/json",
        "X-auth-Token": token
    }
    response =  requests.get(url, headers=headers, verify=False).json()

    for device in response["response"]:
        print("{serial_number} retreived".format(serial_number=device['serialNumber']))

if __name__ == "__main__":
   main()
```

Refer to the exhibit. A developer created a Python script that is used by network engineers to retrieve information from Cisco DNA Center by using the Cisco DNA Center API. Which workflow does the Python script execute?

A Retrieve all the devices and serial numbers in Cisco DNA Center.

B Provision a new device in Cisco DNA Center.

C Retrieve all network information in Cisco DNA Center.

D Retrieve a specific device from Cisco DNA Center by using a serial number.

```
$ curl --connect-timeout 10 --key ./admin-key.pem --cert ./admin.pem https://
devnet.lab.com/
curl: (28) Connection timed out after 10000 milliseconds
```

Refer to the exhibit. A developer is using `cURL` to test connectivity to a webpage. The request times out after 10 seconds. The developer tested connectivity by using Ping and can open a TCP socket to the remote server by using Telnet. Other users confirm that they can access the webpage from their device. The developer has SSH access to the remote server and runs commands to troubleshoot. What causes the issue?

A Connectivity from the remote server back to the client is down.

B Firewall rules on the remote server block the client on port 443.

C Application-layer security features on the remote server block the connection.

D HTTPS proxy configured on the remote server blocks the connection.

Issued to kamjunhao@gmail.com · October 17, 2026

Which CI/CD component is used to store and track code changes during development?

A Artifactory

B Vault

C version control system

D ticketing system

Personal copy · kamjunhao@gmail.com

```
< rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0" message-id="">

<ok/>

</rpc-reply>

]]>]]
```

Refer to the exhibit. A network engineer wants to change the name of a device. The engineer submits a NETCONF request and receives a response. Which NETCONF request did the engineer submit?

A

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <new-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </new-config>
</rpc>
```

B

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <edits-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </edits-config>
</rpc>
```

C

```
<rpc xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <copy-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </copy-config>
</rpc>
```

D

```
<rpc mlns="urn:ietf:params:xml:ns:netconf:base:1.0"
message-id="">
  <edit-config>
    <target>
      <running/>
    </target>
    <config>
      <native xmlns="urn:ios">
        <hostname>CSSTORMY-TESTDEVICE</hostname>
      </native>
    </config>
  </edit-config>
</rpc>
```

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which service **must** be configured to provide time synchronization to the devices on a network to make it easier to correlate log events?

A DHCP

B SNMP

C NAT

D NTP

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A distributed application is under development and the interaction between the application and an API is being tested using the URL and port:

devasc468262987.com port 443

The requests that were sent to the server could not execute because the application was blocked by the firewall. Which protocol must be allowed by the firewall to fix the issue?

A SSH

B HTTP

C HTTPS

D FTP

Personal copy · kamjunhao@gmail.com

```
module future-industries-tech {
    yang-version "1";

    namespace "https://future-industries-tech.io/yang-future-industries-tech";
    prefix "future-industries-tech";

    identity AFFILIATION {
      description "To which technology that belongs to which group";
    }
    identity UNITED_REPUBLIC {
      base AFFILIATION;
      description "Affiliated to Republic City";
    }
    // this grouping will all data assigned to the piece of technology
    grouping mechanical-data {
        leaf name {
            type string;
        }
        leaf affiliation {
            type identityref {
                base future-industries-tech:AFFILIATION;
            }
        }
    }
    // this is the root object defined by the model
    container nation {
        list technology {
            // tag each piece of technology by its name
            key "name";

           uses mechanical-data;
        }
    }
}
```

Refer to the exhibit. A developer is creating a YANG file to design data with Python. Which code must be used for the tree of the YANG file?

A pyang -f tree future-industries-tech.yang

B pyang -i tree future-industries-tech.yang

C pyang -f leaf future-industries-tech.yang

D pyang tree future-industries-tech.yang

QUESTION 545

Issued to kamjunhao@gmail.com · October 17, 2026

Which data structure is created when parsing XML data in Python?

A item

B list

C library

D dictionary

Personal copy · kamjunhao@gmail.com

QUESTION 546

Issued to kamjunhao@gmail.com · October 17, 2026

What should be used to send real-time notifications to a third-party application when an event occurs in an SD-WAN deployment?

A loopback

B callback

C API

D webhook

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A network engineer developed an application that performs configuration automation. The engineer used the MVC model for the application design. It has a web interface for users to interact, collect configuration directives for specific devices, and communicate with network devices through REST-based APIs. What is the advantage of the model component in this scenario?

A It contains data and responds to state queries and updates.

B It keeps views and controllers updated during the execution.

C It defines main application behavior and contains functions to run.

D It renders the data for easy use by the remaining parts of the design.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

Drag and drop the characteristics from the left onto the software development methods on the right.

Answer Area

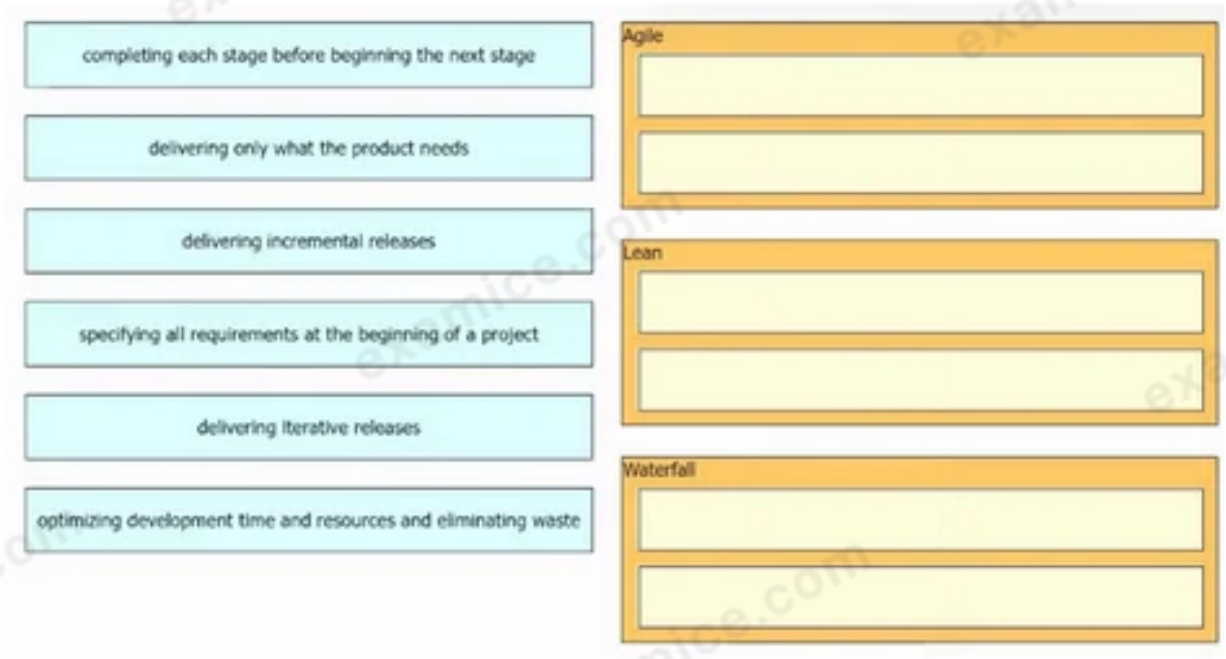

QUESTION 549

Issued to kamjunhao@gmail.com · October 17, 2026

What is impacted by the network bandwidth on an application?

A time taken for a data packet to travel between two endpoints

B number of data packets dropped during transmission

C consistency in the arrival of data packets between two endpoints

D rate of data transferred between two endpoints

Personal copy · kamjunhao@gmail.com

QUESTION 550

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of a model-driven approach for infrastructure automation?

A It automates the translation of a declarative language of the model into an actionable script.

B It enforces the generation and verification of all automation scripts through the modeling environment.

C It provides a small learning curve and helps system administrators with limited coding experience.

D It ensures that system administrators gain a good understanding of coding, and expand their experience and capabilities.

Personal copy · kamjunhao@gmail.com