Issued to kamjunhao@gmail.com · October 17, 2026

A REST API service requires basic authentication. A user's credentials are "ned/33662255" and the Base64 encoding of the credentials is "a2lsbGE6NDU4ODI5". Which requirement must be met for a request to be authenticated?

A The header must include:
Authorization: Basic a2lsbGE6NDU4ODI5

✓ CORRECT

B The payload must include:
Authorization: Basic a2lsbGE6NDU4ODI5

C The header must include:
username: ned,
password: 33662255

D The payload must include:
username: ned,
password: 33662255

SUGGESTED ANSWER

The suggested answer is A.

In a REST API service requiring basic authentication, the Base64 encoded credentials must be included in the Authorization header of the request. The header should be formatted as 'Authorization: Basic [Base64 encoded credentials]'. This ensures that the request is authenticated correctly by the server.

DRAG DROP

Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. Not all options are used.

```
import requests

data = {
    "id": 11,
    "summary": "Request summary"
}
response = [          ].post('https://todolist.example.com/tasks/', [          ])

if response.[          ] != 201:
    raise ApiError('POST /tasks/ {}'.format(response.status_code))

for item in [          ].json():
    print('{} {}'.format(item['id'], item['summary']))
```

json=data	items
requests	headers
response	status_code
status	

SUGGESTED ANSWER

```
import requests

data = {
    "id": 11,
    "summary": "Request summary"
}
response = [requests].post('https://todolist.example.com/tasks/', [json=data])

if response.[status_code] != 201:
    raise ApiError('POST /tasks/ {}'.format(response.status_code))

for item in [response].json():
    print('{} {}'.format(item['id'], item['summary']))
```

json=data	items
requests	headers
response	status_code
status	

What is a concept of test-driven development?

A Functions that validate the behavior of the product from the end user's perspective are written before any code is written.

B Business decision makers write tests to validate the product from the end user's perspective while the developer writes the code.

C One developer writes tests to validate the functionality of the code while another developer writes the code.

D Tests that validate the functionality of the code are written before any code is written. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Test-driven development (TDD) is a software development approach where tests that validate the functionality of the code are written before any code is written. This approach helps ensure that the code meets its requirements from the outset, leading to better-designed and more reliable software.

Issued to kamjunhao@gmail.com · October 17, 2026

Within a Bash shell, which command adds the current directory to the PATH without overwriting the current PATH for this shell and any subshells that are spawned from the current shell?

A export $PATH=PATH:$(pwd) ✓ CORRECT

B set PATH=$PATH:${pwd}

C export PATH=$PATH:$(pwc1)

D set PATH=PATH+$(pwd)

SUGGESTED ANSWER

The suggested answer is A.

To add the current directory to the PATH without overwriting the current PATH for this shell and any subshells, you use the export command in the correct format. The correct command should be 'export PATH=$PATH:$(pwd)'. This command appends the current directory, obtained via the 'pwd' (print working directory) command, to the existing PATH variable. The option that matches this command format correctly is A: 'export $PATH=PATH:$(pwd)'.

Issued to kamjunhao@gmail.com · October 17, 2026

Which tool simulates a network that runs Cisco equipment?

A Cisco Prime Infrastructure

B VMware

C Docker

D CML ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Cisco Modeling Labs (CML) is a tool specifically designed to simulate networks that run Cisco equipment. It makes use of real Cisco images to provide reliable models for network design, testing, and troubleshooting.

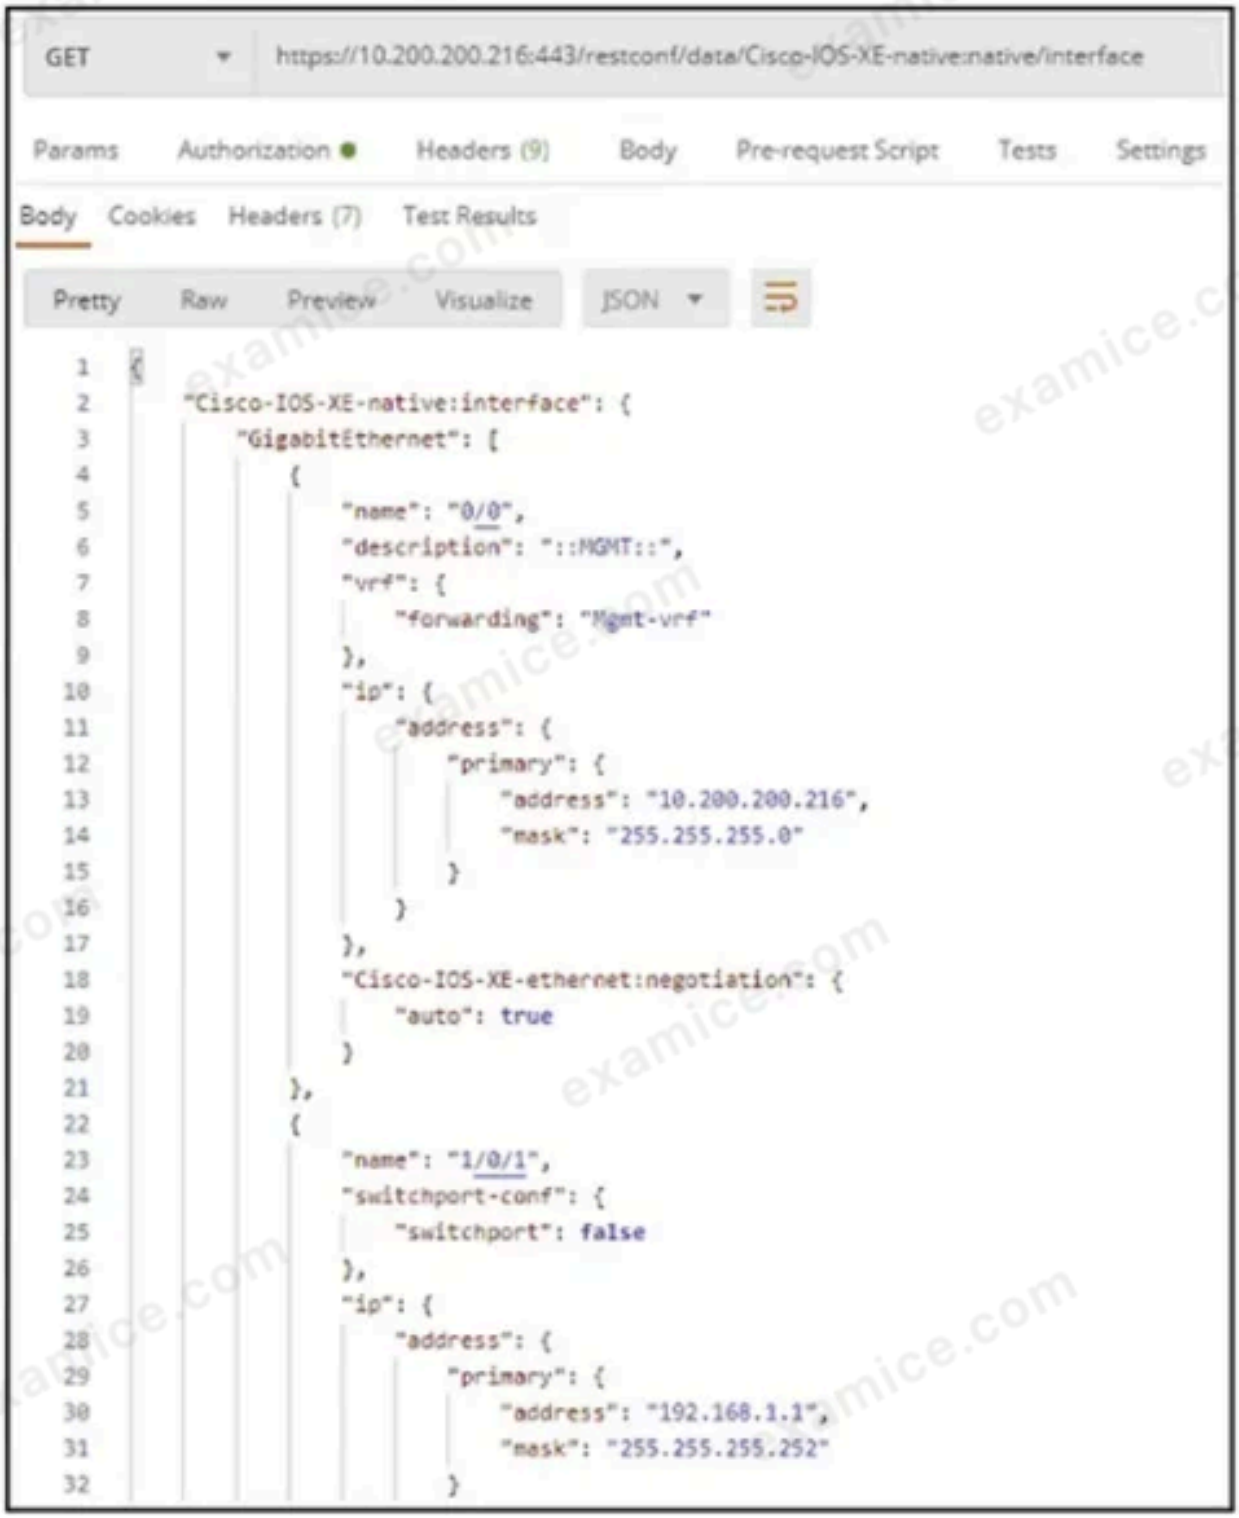

Refer to the exhibit. An administrator uses RESTCONF to retrieve the interface configuration of Gi1/0/1. Which URL path retrieves filtered information only for Gi1/0/1?

A `https://10.200.200.216:443/restconf/data/Cisco-IOS-XE-native:native/interface/GigabitEthernet=1%2F0%2F1`

B

```
http://10.200.200.216:80/restconf/data/Cisco-IOS-XE-native:native/interface/GigabitEthernet1&2F0%2F1
```

C

```
https://10.200.200.216:443/restconf/data/Cisco-IOS-XE-native:native/interface=GigabitEthernet1/0/1
```

✓ CORRECT

D

```
http://10.200.200.216:80 /restconf/data/Cisco-IOS-XE-native:native/interface/GigabitEthernet=1/0/1
```

SUGGESTED ANSWER

The suggested answer is C.

The correct URL path to retrieve filtered information specifically for Gi1/0/1 should use HTTPS as the protocol, the standard port for RESTCONF which is 443, and proper URL encoding for the interface name. Among the given options, this corresponds to 'https://10.200.200.216:443/restconf/data/Cisco-IOS-XE-native:native/interface=GigabitEthernet1/0/1' with the slashes properly encoded as %2F.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco network management platform facilitates data center automation across private or public clouds?

A Meraki Systems Manager

B Cisco DNA Center

C SD-WAN

D ACI Anywhere ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Cisco ACI Anywhere is the network management platform that facilitates data center automation across private or public clouds. It provides a consistent policy model and centralized management for data center networks, making it well-suited for hybrid environments.

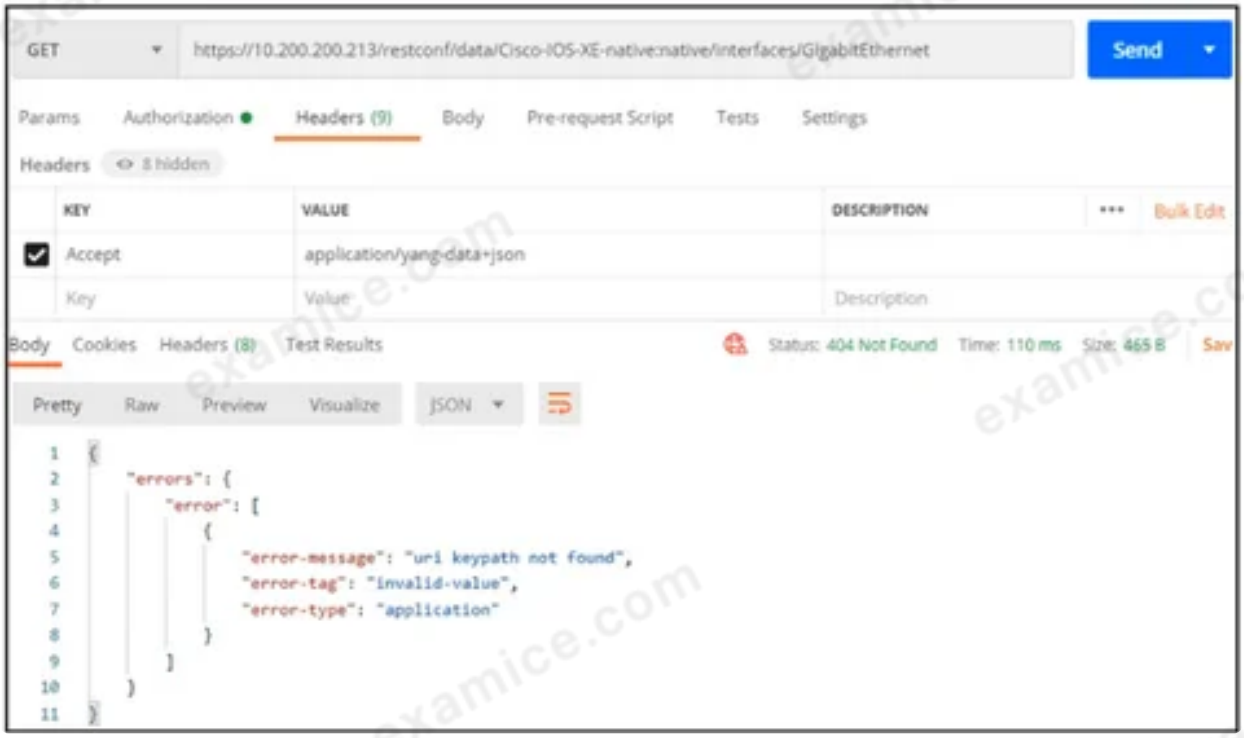

Refer to the exhibit. A developer is trying to collect data over RESTCONF API and prepares the request. The developer wants to get data in JSON format and with the IOS-XE-native model, but the request fails. Which HTTP part causes the failure?

A application value

B invalid URL ✓ CORRECT

C missing URI header path

D incorrect request type

SUGGESTED ANSWER

The suggested answer is B.

The HTTP 404 Not Found status code indicates that the requested resource could not be found. The error message also mentions 'uri keypath not found,' implying that the path specified in the URL is incorrect. The correct model or endpoint might be missing or misstated in the URL, leading to this error.

QUESTION 411

Issued to kamjunhao@gmail.com · October 17, 2026

A development team is using a version control system that has a centralized workflow. Which feature of the version control system ensures the integrity of the central repository?

A central common code versioning backup ✓ CORRECT

B built-in conflict resolution mechanism

C distributed nature of the version control system architecture

D tracked code changes of the developers

SUGGESTED ANSWER

The suggested answer is A.

In a version control system with a centralized workflow, the central repository's integrity is ensured through a central common code versioning backup. This backup helps prevent data loss and maintains a consistent state of the repository by providing a reliable way to restore the repository in case of any issues. This feature acts as a safety net, ensuring the central repository remains intact and reliable for all users.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two factors reduce the experience of an application? (Choose two.)

A source location

B traffic class

C packet loss ✓ CORRECT

D network latency ✓ CORRECT

E usage

SUGGESTED ANSWER

The suggested answer is C, D.

Packet loss and network latency are the two primary factors that typically reduce the experience of an application. Packet loss can result in incomplete data transfer, causing delays, buffering, or interruptions in service. Network latency, which is the delay before a transfer of data begins following an instruction for its transfer, can significantly affect the responsiveness and performance of an application, especially in real-time communications and interactive applications.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="109"
 xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
 <edit-config>
  <target>
   <running/>
  </target>
  <default-operation>none</default-operation>
  <config
   xmlns:xc="urn:ietf:params:xml:ns:netconf:base:1.0">
   <top
    xmlns="http://example.com/schema/1.2/config">
    <interface xc:operation="delete">
     <name>Ethernet0/0</name>
    </interface>
   </top>
  </config>
</edit-config></rpc>]]>]]>
```

Refer to the exhibit. A developer has created an XML-based configuration model for a Cisco switch that is going to configure the device using NETCONF. From which configuration is the Interface Ethernet 0/0 deleted when this script is executed?

A candidate

B startup

C current ✓ CORRECT

D base

SUGGESTED ANSWER

The suggested answer is C.

The XML-based configuration model shown in the exhibit indicates that the 'target' of the operation is the 'running' configuration (). In the context of NETCONF, this specifies that the changes will be applied to the current active configuration of the device. As the script is set to delete the interface Ethernet 0/0 from the 'running' configuration, this implies that the

deletion will occur from the current active configuration. Hence, the correct answer is 'current'.

QUESTION 414

Which CI/CD component allows for the storing of code packages and enables the testing of the same code that is running on the live system?

A Artifactory ✓ CORRECT

B Jira

C ITSM

D Git

SUGGESTED ANSWER

The suggested answer is A.

Artifactory is a CI/CD component used for storing code packages, including binaries, and it ensures that the same code version running in testing is also used in the live environment. This helps maintain consistency and reliability in the deployment process.

A development team needs to containerize an application named 'custapp4o3p2r6d3s6w7x6t9'. A Dockerfile has been created and now the docker build command must be run using the current folder to find the Dockerfile, build the image and create a local repository named 'custapp4d5c-repo' that points to that image. Which command must be used?

A docker build custapp4d5c-repo Dockerfile .

B docker build -t acustapp4d5c-repo Dockerfile.txt

C docker build custapp4d5c-repo -f Dockerfile.txt

D docker build -t custapp4d5c-repo -f Dockerfile . ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The correct command to build a Docker image and tag it for a local repository is 'docker build -t custapp4d5c-repo -f Dockerfile .'. The '-t' flag is used to tag the image with the specified name 'custapp4d5c-repo'. The '-f' flag is used to specify the Dockerfile, which is named 'Dockerfile' in this case. The final '.' indicates the current directory as the build context, meaning the Dockerfile is located in the current directory.

A web app must be accessible from computers and mobile devices. It must maintain the same data structure on both types of devices. What is the advantage of using the MVC design pattern for this app?

A to asynchronously update the graphical interface

B to define different algorithms for data manipulation

C to separate the logic of the graphic interface of the different devices ✓ CORRECT

D to have only one instance of the objects that contain the data

SUGGESTED ANSWER

The suggested answer is C.

The MVC (Model-View-Controller) design pattern is designed to separate an application into three core components: the Model, which handles the data and business logic; the View, which manages the display and presentation; and the Controller, which handles user input. This separation is beneficial, especially in an application that needs to be accessible from both computers and mobile devices, as it allows the logic of the graphic interface to be managed separately for different devices. This means that even if the views (or interfaces) differ across devices, the underlying data structure (Model) can remain consistent and coherent.

DRAG DROP

- -

Drag and drop the first four stages of a DevOps toolchain from the left into the order on the right to create a new complex product. Not all options are used.

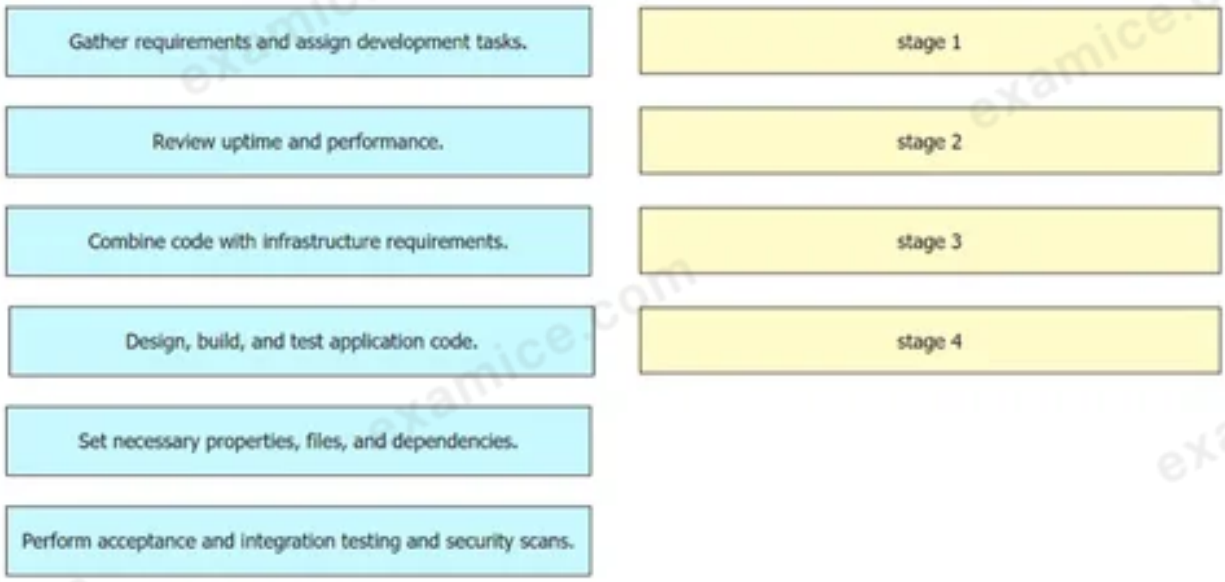

SUGGESTED ANSWER

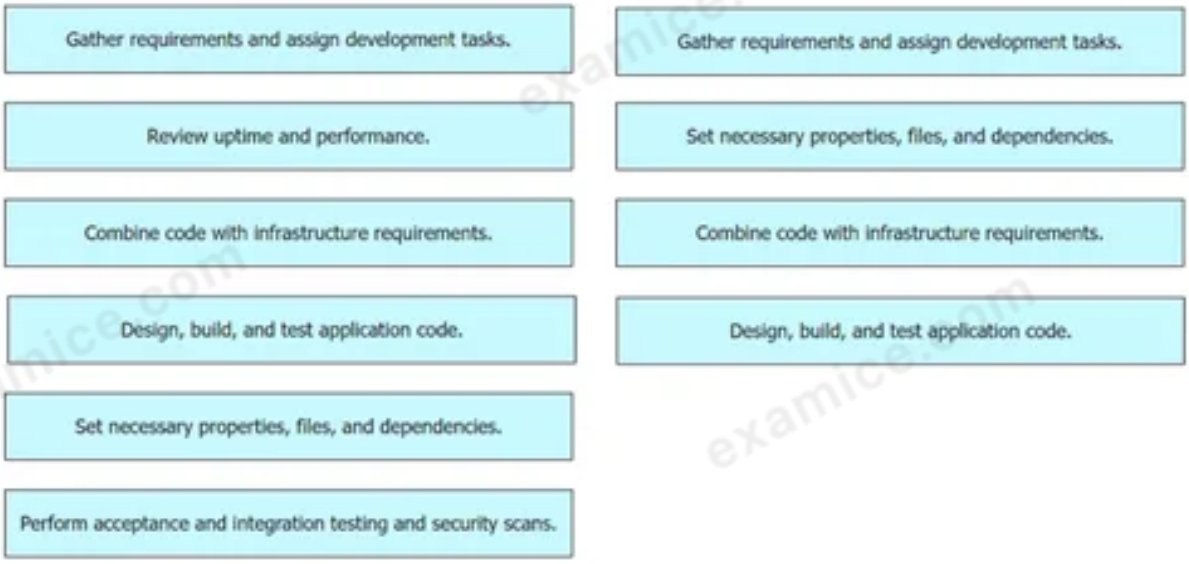

What is the purpose of a router in a network?

A to provide wireless connectivity to a LAN

B to filter harmful incoming traffic on a network

C to connect multiple networks ✓ CORRECT

D to implement network high availability

SUGGESTED ANSWER

The suggested answer is C.

A router's primary purpose in a network is to connect multiple networks, facilitating communication between them by directing data packets to their appropriate destinations. While some routers also provide additional features such as wireless connectivity or basic firewall functions, these are not their main functions.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of edge architecture? (Choose two.)

A device authentication

B secure access

C service deployment ✓ CORRECT

D offline support ✓ CORRECT

E data management

SUGGESTED ANSWER

The suggested answer is C, D.

Edge architecture provides the benefit of service deployment because it allows for the quick and efficient deployment of services at or near the data source, reducing latency and improving response times. Additionally, offline support is a benefit because edge devices can continue operating independently with local data processing and storage, even when network connectivity is intermittent or unavailable, ensuring continuous operations.

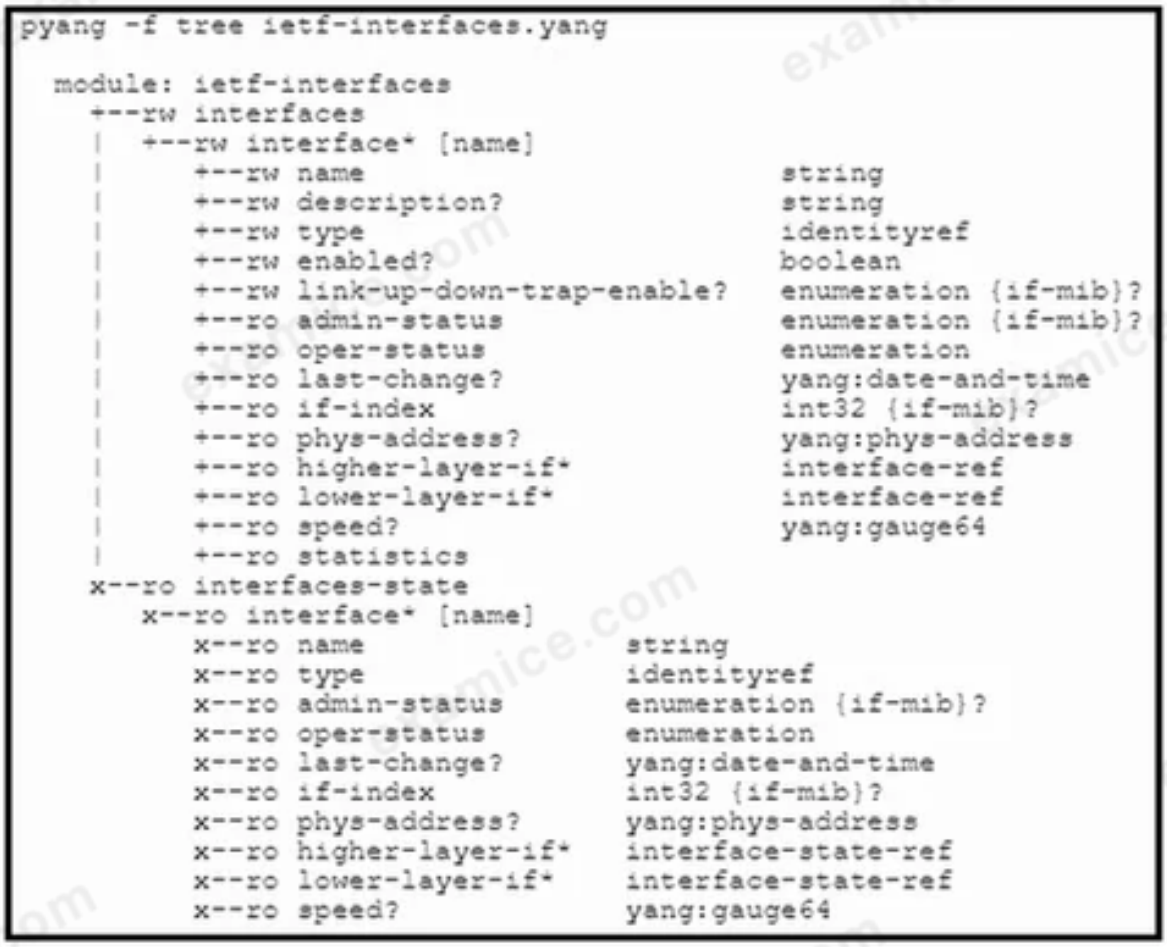

```
pyang -f tree ietf-interfaces.yang

  module: ietf-interfaces
    +--rw interfaces
    |  +--rw interface* [name]
    |     +--rw name                          string
    |     +--rw description?                  string
    |     +--rw type                          identityref
    |     +--rw enabled?                      boolean
    |     +--rw link-up-down-trap-enable?     enumeration {if-mib}?
    |     +--ro admin-status                  enumeration {if-mib}?
    |     +--ro oper-status                   enumeration
    |     +--ro last-change?                  yang:date-and-time
    |     +--ro if-index                      int32 {if-mib}?
    |     +--ro phys-address?                 yang:phys-address
    |     +--ro higher-layer-if*              interface-ref
    |     +--ro lower-layer-if*               interface-ref
    |     +--ro speed?                        yang:gauge64
    |     +--ro statistics
    x--ro interfaces-state
       x--ro interface* [name]
          x--ro name                string
          x--ro type                identityref
          x--ro admin-status        enumeration {if-mib}?
          x--ro oper-status         enumeration
          x--ro last-change?        yang:date-and-time
          x--ro if-index            int32 {if-mib}?
          x--ro phys-address?       yang:phys-address
          x--ro higher-layer-if*    interface-state-ref
          x--ro lower-layer-if*     interface-state-ref
          x--ro speed?              yang:gauge64
```

Refer to the exhibit. Which type of YANG object is “interfaces”?

A subitem

B container ✓ CORRECT

C item

D node

SUGGESTED ANSWER

The suggested answer is B.

In YANG, a 'container' is used to group related nodes together within a subtree structure. It does not have a value of its own but contains other nodes, which can be of various types such as leaves, lists, containers, and leaf-lists. The 'interfaces' object in the exhibit is acting

as a grouping mechanism for related nodes such as 'interface', 'name', 'description', and other properties related to network interfaces, which fits the definition of a container.

QUESTION 421

Which protocol is associated with the management plane on a network device?

A ARP

B ICMP

C BGP

D SSH ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

SSH (Secure Shell) is associated with the management plane on a network device. It is a protocol used to securely access and manage network devices remotely, ensuring that administrators can configure and monitor the devices without the risk of interception or tampering. Other protocols listed, such as ARP (Address Resolution Protocol), ICMP (Internet Control Message Protocol), and BGP (Border Gateway Protocol), are associated with different planes or functions within network operations.

DRAG DROP

-

Drag and drop the code from the bottom onto the box where the code is missing to retrieve the RESTCONF running configuration for an interface named TwentyFiveGigabitEthernet 1/1/2. Not all options are used.

SUGGESTED ANSWER

getpass | return | from | import | dict() | text | json

Personal copy · kamjunhao@gmail.com

What is a benefit of organizing code into modules?

A better maintainability ✓ CORRECT

B simplified development

C compatibility with REST APIs

D reduced development costs

SUGGESTED ANSWER

The suggested answer is A.

One of the primary benefits of organizing code into modules is better maintainability. Modules allow for separation of concerns; each module can focus on a specific part of the application's functionality. This separation makes the codebase easier to understand, test, and modify, which directly contributes to better maintainability. Simplified development and reduced development costs can be indirect benefits, but the most salient and direct benefit is improved maintainability. Compatibility with REST APIs is not inherently related to code modularity.

examice.com

DRAG DROP

- -

```
def formatted_name(first_name, last_name):
        full_name = first_name + ' ' + last_name
    return full_name.title()
```

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing in the Python unittest to verify whether the function returns the correct values. Not all options are used.

```
import [          ]
from name_function [          ] formatted_name

class NamesTestCase(unittest.TestCase):

    def_test_first_last name(self):
        result = [          ] ("User", "Name")
        self.assertEqual( [          ] , "User Name")
```

unit | unittest | import | export | formatted_name

name | result

SUGGESTED ANSWER

```
import [ unittest ]
from name_function [ import ] formatted_name

class NamesTestCase(unittest.TestCase):

    def_test_first_last name(self):
        result = [ export ] ("User", "Name")
        self.assertEqual( [ formatted_name ] , "User Name")
```

unit | unittest | import | export | formatted_name

name | result

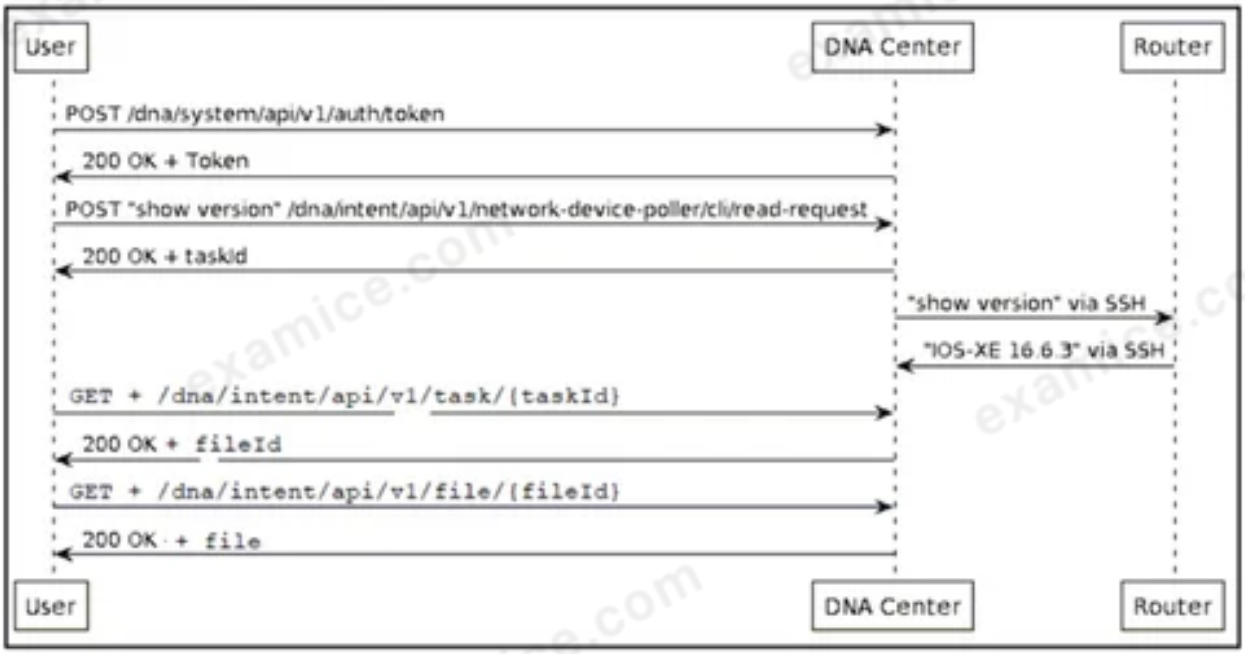

Refer to the exhibit. What is the result of the API sequence diagram?

A export of the authenticated user on the device

B text file that contains the authentication token

C export of the Cisco IOS XE configuration file

D text file that contains the string IOS-XE 16.6.3 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The result of the API sequence diagram is a text file that contains the string IOS-XE 16.6.3. The sequence shows a series of API calls starting with obtaining an authentication token, followed by making a request to execute the 'show version' command on the device via SSH. The command's output, which includes the IOS version (IOS-XE 16.6.3), is captured and returned as a file. This file is retrieved through subsequent GET requests, ultimately resulting in a text file containing the string 'IOS-XE 16.6.3' being sent back to the user.

Issued to kamjunhao@gmail.com · October 17, 2026

Which plane is used to enable routing on a network-connected device?

A management

B data

C control ✓ CORRECT

D forwarding

SUGGESTED ANSWER

The suggested answer is C.

The control plane is responsible for making decisions about where traffic is sent. The control plane is in charge of routing decisions, managing the routing table, and exchanging route information with other network devices. This is what enables routing on a network-connected device.

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that allows an engineer to retrieve interface data. Not all options are used.

```
01 import requests, json
02
03 device = {
04    "ip": "ios-xe-mgmt-latest.cisco.com",
05    "username": "***", "password": "***",
06    "port": "9443",
07 }
08
09 headers = {
10     "              " : "application/yang-data+json",
11     "Content-Type" : "application/yang-data+json",
12 }
13
14 module = "ietf-interfaces:interfaces"
15 url = f"https://{              }:{device['port']}/restconf/data/{module}"
16
17 requests.packages.urllib3.disable_warnings()
18 response = requests.get(url, headers=headers, auth=(device['username'],
19                                                     device['password']),
20                         verify=False).json()
21
22 interfaces = response['ietf-interfaces:interfaces']['              ']
23
24 for interface in              :
25    if bool(interface['ietf-ip:ipv4']):
26       print(f"{interface['name']} -- {interface['description']} -- "
27             f"{interface['ietf-ip:ipv4']['address'][0]['ip']}")
```

interface | interfaces | devices | ipaddress | Accept | Encoding | device['ip]

SUGGESTED ANSWER

```
01 import requests, json
02
03 device = {
04    "ip": "ios-xe-mgmt-latest.cisco.com",
05    "username": "***", "password": "***",
06    "port": "9443",
07 }
08
09 headers = {
10     "   Encoding   " : "application/yang-data+json",
11     "Content-Type" : "application/yang-data+json",
12 }
13
14 module = "ietf-interfaces:interfaces"
15 url = f"https://{   ipaddress   }:{device['port']}/restconf/data/{module}"
16
17 requests.packages.urllib3.disable_warnings()
18 response = requests.get(url, headers=headers, auth=(device['username'],
19                                                     device['password']),
20                         verify=False).json()
21
22 interfaces = response['ietf-interfaces:interfaces']['  device['ip']  ']
23
24 for interface in    devices    :
25    if bool(interface['ietf-ip:ipv4']):
26       print(f"{interface['name']} -- {interface['description']} -- "
27             f"{interface['ietf-ip:ipv4']['address'][0]['ip']}")
```

interface | interfaces | devices | ipaddress | Accept | Encoding | device['ip]

Issued to kamjunhao@gmail.com · October 17, 2026

While delivering a product, a team spends a lot of time installing dependencies to maintain the development and test environments. Both environments must be identical. Which action improves the delivery?

A Use an Ansible playbook to install the dependencies.

B Pack everything into the released product.

C Use containers to keep the environment consistent. ✓ CORRECT

D Pre-install the product into a virtual machine.

SUGGESTED ANSWER

The suggested answer is C.

Using containers to keep the environment consistent is the best approach. Containers ensure that the development and test environments are identical by packaging the application and its dependencies together. This approach eliminates the discrepancies that might arise from different configurations and dependency versions, thereby improving the delivery process.

Issued to kamjunhao@gmail.com · October 17, 2026

Which process does a developer use to import a string and convert the file into a Python data structure?

A parsing ✓ CORRECT

B exploding

C serializing

D translating

SUGGESTED ANSWER

The suggested answer is A.

The correct process a developer uses to import a string and convert the file into a Python data structure is parsing. Parsing is the act of analyzing a string or file and converting it into a language- or machine-readable structure. This is a fundamental process in programming for handling data serialization, communication protocols, and many other tasks.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the IANA-assigned TCP port for NETCONF over SSH?

A 21

B 22

C 830 ✓ CORRECT

D 8443

SUGGESTED ANSWER

The suggested answer is C.

NETCONF over SSH uses the IANA-assigned TCP port 830. This protocol is used for network management and configuration, and port 830 is specifically designated for this purpose.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a feature of a MAC address?

A It consists of 38 bits.

B It consists of 12 hexadecimal numbers. ✓ CORRECT

C It consists of 6 hexadecimal numbers.

D It consists of 24 bits.

SUGGESTED ANSWER

The suggested answer is B.

A MAC address consists of 12 hexadecimal numbers. Each pair of hexadecimal digits represents a byte, and thus the entire MAC address is 48 bits long (6 bytes). The hexadecimal digits can range from 0-9 and A-F, making up the 12 hexadecimal number string.

Issued to kamjunhao@gmail.com · October 17, 2026

Which TCP port is used by default for HTTPS?

A 53

B 80

C 143

D 443 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The default TCP port for HTTPS is 443. HTTPS (Hypertext Transfer Protocol Secure) is the secure version of HTTP, used on the web for secure communication over a computer network. Port 443 is the standard port for HTTPS traffic.

What is a capability of the AXL API?

A It adds a user to a collaboration space to share information and files.

B It allows a meeting to be created with users that do not belong to same organization.

C It collects information about system, cluster, and database settings.

D It executes SQL commands in Cisco Unified Communications Manager. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The AXL (Administrative XML) API is primarily used to interact with the Cisco Unified Communications Manager (CUCM) for administrative purposes. One of its key capabilities is executing SQL commands to access and manipulate the data within the CUCM database, allowing administrators to insert, retrieve, update, and remove configuration data.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two commands create a new branch in a Git repository? (Choose two.)

A git branch ✓ CORRECT

B git checkout

C git checkout

D git branch

E git checkout -b ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is A, E.

In Git, creating a new branch can be achieved through two primary commands: "git branch ", which simply creates a new branch without switching to it, and "git checkout -b ", which creates a new branch and also switches to it immediately. Therefore, the correct commands for creating a new branch are those listed in options A and E.

DRAG DROP

- -

Get Network Connectivity Monitoring Destinations

HTTP REQUEST

GET /networks/{networkId}/connectivityMonitoringDestinations

AUTHORIZATION

In addition to the path URL, an Authorization header must be added to every API request with the following format.

JSON

```
{
  "X-Cisco-Meraki-API-Key": "<Meraki_API_Key>"
}
```

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing in the Cisco Meraki code to obtain the connectivity testing destinations for an MX network. Not all options are used.

```
import requests

base_url = "https://api.meraki.com/api/v0"
network_id = "N_12345678910"
api_key = "6bec40cf957de430a6f1f2baa056b99a4fac9ea0"

response = requests. [          ] (base_url + "/networks/" +
[          ], "/connectivityMonitoringDestinations",
  headers={"X-Cisco-Meraki-API-Key": [          ],
  "Content-Type": "application/json",
  " [          ]": "application/json"})
```

post	get	network_id	api_key	api_token
Encoding	Accept			

SUGGESTED ANSWER

post | get | network_id | api_key | api_token

Encoding | Accept

Personal copy · kamjunhao@gmail.com

```
import csv
import json
import requests

headers = {'Content-type': 'application/json', 'Accept': 'text/plain'}

response = requests.post('https://httpbin.org')

with open("rovers.csv", "r", encoding='utf-8-sig') as f:
    reader = csv.DictReader(f)
    rovers = list(reader)
    print(rovers)

url = 'https://httpbin.org/put'

json_object = json.dumps(countries, indent=4)
print(json_object)

r = requests.put(url, data=json_object)

print(r.headers)

print(url)

print(r.status_code)

try:
    r = requests.get('https://httpbin.org/get')
    r.raise_for_status()
except requests.exceptions.HTTPError as err:
    raise SystemExit(err)
```

Refer to the exhibit. An astronomer creates a Python script named makeexoplanetapi.py to import external data for comparison with the department data. The astronomer changes the script after a discussion with another astronomer. Which code snippet shows a unified diff of the script?

A

```
--- makeexoplanetapi.py 2020-12-20 19:30:32
+++ makeexoplanetapi.py 2020-12-20 19:30:32
@@ -1,49 +1,59 @@-
          -response = requests.post
                      ('https://httpbin.org')
+app = flask.Flask(__name__)
+app.config['DEBUG'] = True
-with open("planets_exo.csv", "r", encoding='utf-8-
sig') as f:
+with open("exo_api.csv", "r", encoding='utf-8-sig')
as f:
+    exo = list(reader)
+    print(exo)
```

✓ CORRECT

B

```
--- makeexoplanetapi.py  2020-12-20 19:30:32
+++ makeexoplanetapi.py  2020-12-20 19:30:32
!! -1,49 +1,59 !!
{sub}response = requests.post('https://httpbin.org')
{add}app = flask.Flask(__name__)
{add}app.config['DEBUG'] = True
{sub}with open("planets_exo.csv", "r", encoding='utf
{sub}8{sub}sig') as f:
{add}with open("exo_api.csv", "r", encoding='utf{sub}8
{sub}sig') as f:
{add}  ex= list(reader)
{add}    print(exo)
```

C

```
--- makeexoplanetapi.py  20-12-20 19:30:32
+++ makeexoplanetapi.py  2020-12-20 19:30:32
~~~ -1,79 +1,87 ~~~
~response = requests.post('https://httpbin.org')
*app = flask.Flask(__name__)
*app.config['DEBUG'] = True
~with open("planets_exo.csv", "r", encoding='utf-8-
sig') as f:
*with open("exo_api.csv", "r", encoding='utf-8-sig') as
f:
 ~    exo = list(reader)
~     print(exo)
```

D

```
--- exoplanetsapi.py  2020-12-20 19:30:32
+++ exoplanetsapi.py  2020-12-20 19:30:32
@@ -1,49 +1,59 @@
~response = requests.post('https://httpbin.org')
*app = flask.Flask(__name__)
*app.config['DEBUG'] = True
~with open("planets_exo.csv", "r", encoding='utf-8-
sig') as f:
*with open("exo_api.csv", "r", encoding='utf-8-sig')
as f:
~  exo = list(reader)
~    printexo)
```

SUGGESTED ANSWER

The suggested answer is A.

The unified diff format in the code snippet shows changes with lines starting with '+' for additions and '-' for deletions. The diff format also shows a unified context with the lines before and after the changes. Option A correctly demonstrates these conventions by showing the removal of the request.post statement and the addition of the Flask application setup along with the modification of file reading and printing statements.

Personal copy · kamjunhao@gmail.com

QUESTION 437

Issued to kamjunhao@gmail.com · October 17, 2026

A company plans to develop an application by using Cisco APIs. The application must use code repositories approved by Cisco. The development team wants to make use of community-supported, open-source code. Which resource should be used?

A Cisco DevNet Code Exchange ✓ CORRECT

B Cisco TAC

C Cisco DevNet Sandbox

D Cisco DevNet Learning Labs

SUGGESTED ANSWER

The suggested answer is A.

To develop an application using Cisco APIs with community-supported, open-source code, the appropriate resource is the Cisco DevNet Code Exchange. This platform is specifically designed to provide access to a variety of code repositories, including those that are community-supported and open-source, and are approved by Cisco for use in development.

Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

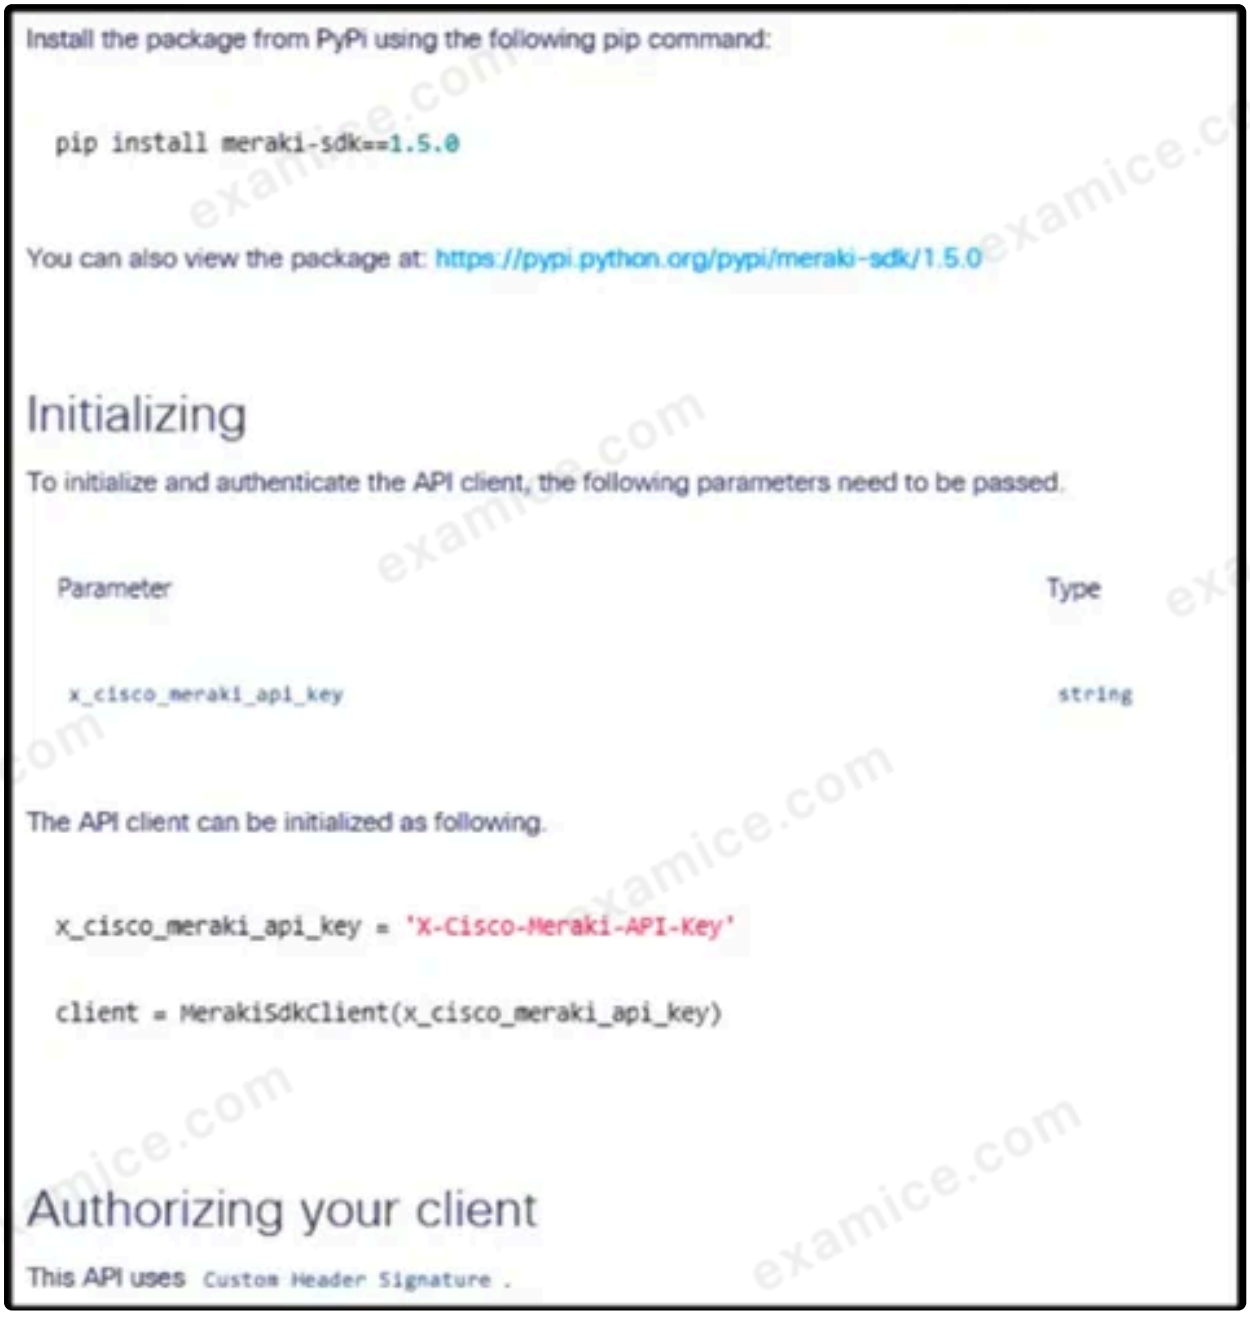

Refer to the exhibit. Drag and drop the code snippets from the bottom into the blanks in the Python code to import the Cisco Meraki library and set the API key for authorization.

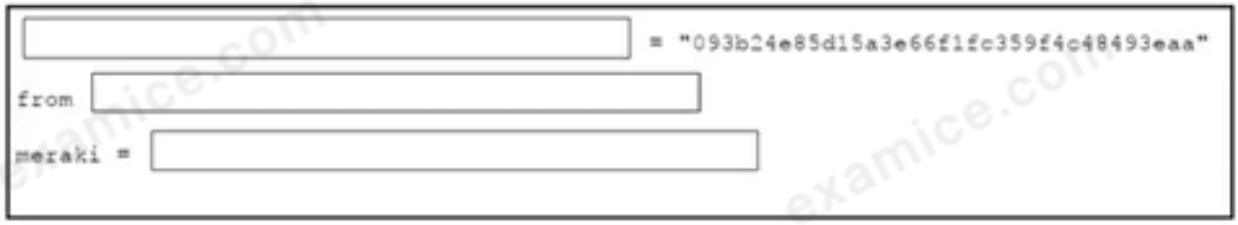

meraki_dashboard_api.meraki import Meraki

Meraki(x_cisco_meraki_api_key)

x_cisco_meraki_api_key

SUGGESTED ANSWER

meraki_dashboard_api.meraki import Meraki

Meraki(x_cisco_meraki_api_key)

x_cisco_meraki_api_key

Package updates from a local server are failing to download. The same updates work when a much slower external repository is used. The server has the configuration:

- hostname: devbox111012120
- IP: 192.168.1.51
- Mask: 255.255.255.0

Why are local updates failing?

A The Internet is down at the moment, which causes the local server to not be able to respond.

B The Internet connection is too slow.

C The server is running out of disk space.

D The update utility is trying to use a proxy to access the internal resource. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

If package updates from a local server are failing to download but work with an external repository, it is likely that the issue is related to the local setup rather than internet connectivity or server performance. The update utility might be configured to use a proxy for accessing network resources. When configured incorrectly or unnecessarily, the proxy setting can interfere with accessing the internal (local) resource, causing the updates to fail on the local server. External repositories would not be affected by this misconfiguration, leading to successful updates from an external source.

Issued to kamjunhao@gmail.com · October 17, 2026

Which HTTP response code is returned from a successful REST API call to create a new resource?

A 201 ✓ CORRECT

B 204

C 302

D 429

SUGGESTED ANSWER

The suggested answer is A.

The correct HTTP response code for a successful REST API call to create a new resource is 201. This response code indicates that the request has been fulfilled and has resulted in one or more new resources being created. Other codes like 204 indicate no content, 302 indicates a redirect, and 429 indicates too many requests.

```
import requests
import os
from dotenv import load_dotenv
import json
load_dotenv()
def main(token):
    url = f"https://172.19.3.22/dna/intent/api/v1/network-device"
    headers = {
        "Content-Type": "application/json",
        "Accept": "application/json",
        "X-auth-Token": token
    }
    response =  requests.get(url, headers=headers, verify=False).json()
    for device in response["response"]:
        print("{serial_number}
        retreived".format(serial_number=device['serialNumber']))
def auth():
    url = "https://172.19.3.22/dna/system/api/v1/auth/token"
    headers = {
        'Authorization': 'Basic jzgVYFG35743MEJKG=='
    }
    r=requests.[          ]
    return r.json()['Token']
if __name__ == "__main__":
    token = auth()
    main(token)
```

Refer to the exhibit. A software engineer needs to collect data about devices that are registered in Cisco DNA Center using the API. Before collecting the data, the engineer must obtain a token and authenticate with the API. To automate the procedure, a Python script is used. Which code snippet must be placed onto the blank in the code?

A get(uri,headers = headers,data={}, verify-True)

B post(uri,headers=headers,data={}, verify=False) ✓ CORRECT

C get(uri,headers= headers,data={}, verify=False)

D post(uri,headers=headers,data={"Basic"}, verify=False)

SUGGESTED ANSWER

The suggested answer is B.

To obtain a token from an API, a POST request must be used to send authentication credentials. The method post(uri, headers=headers, data={}, verify=False) correctly aligns with the required action in the blank of the code. Here, 'uri' is the endpoint, 'headers'

contains necessary headers such as the authorization, 'data' can include additional data if required (though it's empty here), and 'verify=False' avoids SSL certificate verification.

QUESTION 442

A developer needs to create an application with these requirements:

- decouples from the underlying infrastructure
- runs application on any cloud or on-premises provider

Which deployment type must be used for this application?

A bare metal

B hyperconverged

C container ✓ CORRECT

D virtual machine

SUGGESTED ANSWER

The suggested answer is C.

Containers are the ideal deployment type for an application that needs to be decoupled from the underlying infrastructure and run on any cloud or on-premises provider. Containers provide a consistent environment for application deployment and execution, making it easier to port the application across different environments without needing to worry about underlying infrastructure differences.

```
---
- name: Server Provisioning
  hosts: server

  vars:
     packages: ['pip', 'git', ' vim']

  tasks:
     - name: Packages
       apt: name={{ item }} state=latest
       with_items: "{{ packages }}"
```

Refer to the exhibit. An engineer develops an Ansible playbook to perform tasks that automate the provisioning of a server. What occurs on the server after the playbook is run?

A The Vim, Git, and Pip packages are removed.

B The Vim, Git, and Pip packages are backed up.

C Only the Vim package is installed as the most recent package.

D The most relevant versions of the Vim, Git, and Pip packages are installed. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The Ansible playbook specifies that the 'apt' module should be used with the 'state=latest' parameter for the packages listed in the 'packages' variable. This means that the most recent versions of the Vim, Git, and Pip packages will be installed on the server. Therefore, after running the playbook, the latest versions of these packages will be installed.

Issued to kamjunhao@gmail.com · October 17, 2026

Which network component enables communication between broadcast domains?

A router ✓ CORRECT

B firewall

C switch

D load balancer

SUGGESTED ANSWER

The suggested answer is A.

A router is the network component that enables communication between broadcast domains. Broadcast domains are usually segmented by routers, as they do not forward broadcast traffic by default. This segmentation allows routers to manage and route traffic between different network segments or subnets, effectively enabling communication between them.

Issued to kamjunhao@gmail.com · October 17, 2026

What type of efficiency is achieved by using model-driven programmability for infrastructure automation?

A Apply configuration changes across devices using the same model. ✓ CORRECT

B Implement infrastructure components using a single platform.

C Collect logging information using a single model across the infrastructure.

D Configure the infrastructure using a multi-interface API.

SUGGESTED ANSWER

The suggested answer is A.

Model-driven programmability for infrastructure automation achieves efficiency by enabling configuration changes to be applied across multiple devices using the same model. This standardization reduces the complexity and time required to manage and implement changes across various devices, leading to improved operational efficiency and consistency.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer prepares an API to be used by administrators. API requires username and password to be verified for validated access to data, however username-password combination of users must not be sent to the API service itself. Authentication and authorization will be provided over the same mechanism. Which authentication mechanism must be used by the API service?

A OAuth Authentication

B Digest Access Authentication ✓ CORRECT

C Basic Authentication

D API Key Authentication

SUGGESTED ANSWER

The suggested answer is B.

Digest Access Authentication should be used by the API service. This method enhances security by avoiding the transmission of passwords in clear text. It employs a challenge-response mechanism that uses a cryptographic hash function, ensuring that passwords are never sent directly over the network, thus satisfying the requirement that the username-password combination must not be sent to the API service.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

A developer creates a REST API that runs on a load balancer for clients to query information about stocks. The data in the back-end database is updated every 15 minutes, but clients are polling the API every 2 minutes. The developer needs to reduce the load on the database without making changes to the client side. Which constraint must the engineer address?

A The load balancer is not configured to use memcached as the primary back end.

B Use of Cache-Control headers and max-age validation is not enforced. ✓ CORRECT

C Request throttling on the load balancer database is not enabled.

D Dynamic IP deny listing, which allows requests every 15 minutes, is not configured.

SUGGESTED ANSWER

The suggested answer is B.

What are two advantages of the MVC design pattern? (Choose two.)

A It represents the visualization of data contained with a model.

B It allows filtering of a set of objects using different criteria.

C It controls the data flow into a model object and updates a view whenever data changes. ✓ CORRECT

D It separates low-level data accessing operations from high-level business services. ✓ CORRECT

E It builds a final object through a step-by-step approach.

SUGGESTED ANSWER

The suggested answer is C, D.

examice.com

```
- meraki_device:
    auth_key: cisco23456
    org_name: Acme
    net_name: AcmeNet
    serial: st22f35
    state: "{{ item }}"
  with_items:
    - query
    - absent
  delegate_to: localhost
```

Refer to the exhibit. A security team observes an attack that originates from a Cisco Meraki device. To mitigate the attack, the team requests that the engineering team remove the device from the network. The security team also requests information about the device, such as its name and location. Which tool must the engineering team use to meet the requirements by using tasks?

A cURL

B Postman

C Ansible ✓ CORRECT

D Puppet

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a characteristic of a VLAN?

A associated with IP address subnetworks ✓ CORRECT

B consist of physically segmented LANs

C users access data from different VLANs

D associated with MAC address subnetworks

SUGGESTED ANSWER

The suggested answer is A.

A characteristic of a VLAN (Virtual LAN) is that it is associated with IP address subnetworks. VLANs allow network administrators to group hosts together even if they are not on the same physical network switch. By doing so, devices within the same VLAN can communicate with each other as if they were on the same physical network, and VLANs are typically associated with logical network subnets, which are defined by IP addresses.

DRAG DROP

-

An engineer must configure devices over Cisco DNA Center. A repository already exists that contains scripts to communicate with Cisco DNA Center over APIs. The engineer wants to add their own scripts to the same repository. Drag and drop the actions from the left into the order on the right to clone a Git repository named DNA.

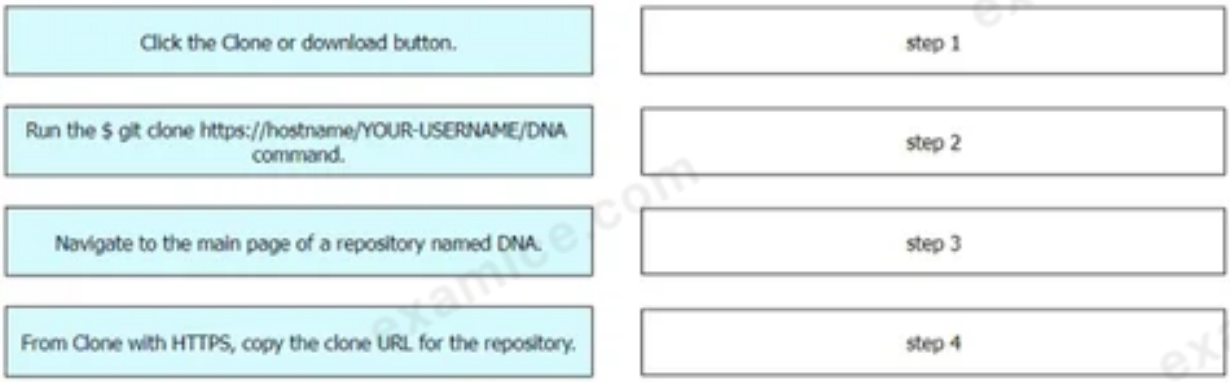

SUGGESTED ANSWER

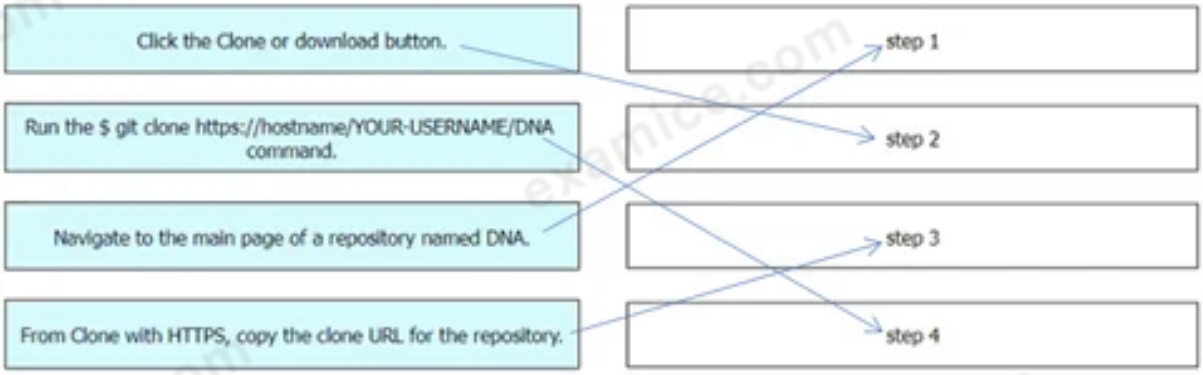

Issued to kamjunhao@gmail.com · October 17, 2026

Which response code family is returned when further action must be taken to complete the request?

A 2xx

B 3xx ✓ CORRECT

C 4xx

D 5xx

SUGGESTED ANSWER

The suggested answer is B.

3xx status codes indicate redirection messages, which means that further action must be taken by the user agent to complete the request. This could involve redirection to a different resource or additional steps to fulfill the request.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform enables the management of Cisco UCS, Cisco HyperFlex, Pure Storage, and Cisco Network Insights from a single platform?

A Cisco UCS Manager

B Cisco Intersight ✓ CORRECT

C Cisco HyperFlex

D Cisco UCS Director

SUGGESTED ANSWER

The suggested answer is B.

Cisco Intersight is the correct platform that enables the management of Cisco UCS, Cisco HyperFlex, Pure Storage, and Cisco Network Insights from a single platform. Cisco UCS Manager is primarily focused on managing Cisco UCS servers, while Cisco HyperFlex is a hyperconverged infrastructure solution. Cisco UCS Director provides orchestration and management capabilities, but it is not the unified platform that includes the diverse range of technologies mentioned in the question.

DRAG DROP

- -

Drag and drop the steps from the left into the order on the right to create a test-driven development cycle. Some options are used more than once.

SUGGESTED ANSWER

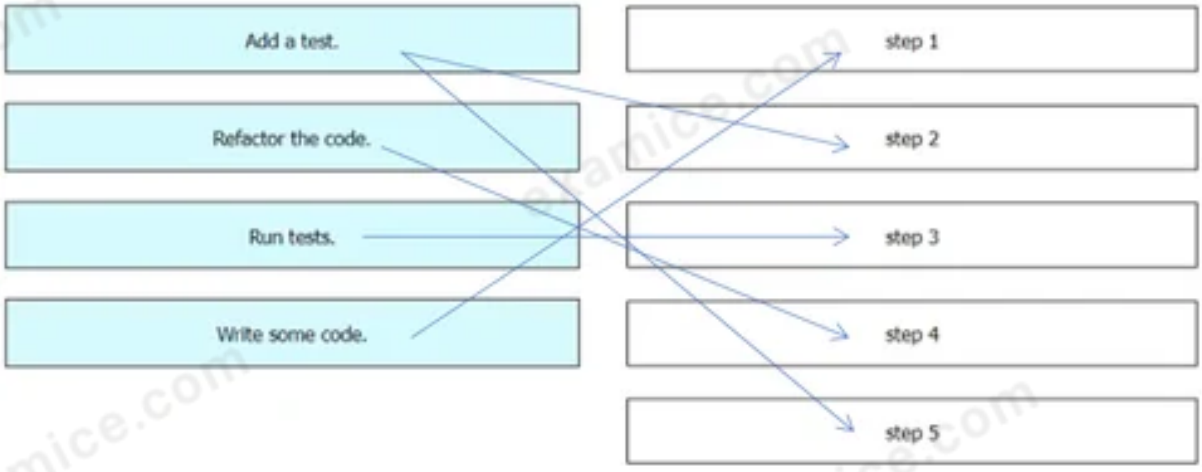

Issued to kamjunhao@gmail.com · October 17, 2026

A customer is building a new DevOps business. The customer plans to deploy a modern version control system that supports multiple branches. Then the customer will aim to integrate into a CI/CD pipeline for automated provisioning and agile development. What should the customer use first for the version control system?

A Cisco ACI

B Jenkins

C GitHub ✓ CORRECT

D Ansible

SUGGESTED ANSWER

The suggested answer is C.

For a modern version control system that supports multiple branches and integrates into a CI/CD pipeline for automated provisioning and agile development, GitHub is the appropriate choice. GitHub is widely used for version control and collaboration and seamlessly integrates with various CI/CD tools for continuous integration and delivery. Cisco ACI, Jenkins, and Ansible serve different purposes such as network automation, CI/CD pipeline management, and IT automation respectively, but they do not serve as version control systems.

Issued to kamjunhao@gmail.com · October 17, 2026

```
find ${PWD} -type d -name __pycache__ -exec rm -r {} +
```

Refer to the exhibit. A development team is creating a Python application. After several days of work, a developer notices several pycache folders and creates a Bash script to clean up the folders. What being automated by the Bash script?

A Recursively delete all the __pycache__ folders. ✓ CORRECT

B Find all the empty __pycache__ folders and delete them.

C Delete all the files in the __pycache__ folders.

D Find all the files named PWD and delete them.

SUGGESTED ANSWER

The suggested answer is A.

Issued to kamjunhao@gmail.com · October 17, 2026

Which type of OWASP threat uses malicious scripts that are injected into otherwise benign and trusted websites?

A brute force

B man-in-the-middle

C XSS ✓ CORRECT

D SQL injection

SUGGESTED ANSWER

The suggested answer is C.

Cross-Site Scripting (XSS) is a type of attack where malicious scripts are injected into otherwise benign and trusted websites. This type of threat exploits vulnerabilities in web applications which allow the attacker to send malicious script to another user, generally browser-side scripts like JavaScript.

Personal copy · kamjunhao@gmail.com

Refer to the exhibit. The sequence diagram shows a RESTful API call. Which step and response will represent the behavior of the REST API call to be synchronous?

A POST/discovery/ when there is a slot available and get the response from the POST call with the discovery details.

B GET/discovery/ when the discovery is finished and get the response from the GET call with the discovery requirements. ✓ CORRECT

C POST/discovery?discoveryid= when the discovery is created and get the response from the POST call with the discovery details.

D PUT/discovery/ when the discovery is created and get the response of the discovery when it is updated.

SUGGESTED ANSWER

The suggested answer is B.

The behavior of a synchronous REST API call is that the client makes a request and waits for the server to process it and respond immediately with the required data. In this context, GET /discovery/ when the discovery is finished and getting the response from the GET call with

the discovery requirements represents a synchronous operation. This is because the client initiates a GET request and receives the discovery data in the response, completing the interaction in a single call without additional steps. Therefore, option B correctly represents synchronous behavior.

QUESTION 459

How do the processes used by the Agile methodology compare with the processes used by the Lean methodology?

A Agile concentrates on optimizing the development process, and Lean concentrates on optimizing the production process. ✓ CORRECT

B Agile and Lean concentrate on optimizing the production process.

C Agile and Lean concentrate on optimizing the development process.

D Agile concentrates on optimizing the production process, and Lean concentrates on optimizing the development process.

SUGGESTED ANSWER

The suggested answer is A.

Agile primarily focuses on optimizing the development process, especially in software development, by emphasizing iterative development, customer collaboration, and flexibility. Lean, on the other hand, aims to optimize the overall production process by eliminating waste, reducing lead times, and improving efficiency across different domains.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a new feature named ‘feat434370483’ in a branch. A file named ‘devasc321345515.jpg’ has accidentally been staged. The developer needs to remove this so that the commit is performed and branches are merged. Which Git command must be used to unstage the file?

A get delete HEAD devasc321345515.jpg

B get reset HEAD devasc321345515.jpg ✓ CORRECT

C git remove HEAD devasc321345515.jpg

D git revert HEAD devasc321345515.jpg

SUGGESTED ANSWER

The suggested answer is B.

To unstage a file that has been accidentally staged in Git, the appropriate command is 'git reset HEAD '. This command removes the file from the staging area, preventing it from being included in the next commit. Therefore, 'git reset HEAD devasc321345515.jpg' is the correct command to use.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two advantages of model-driven programmability as compared to traditional network management? (Choose two.)

A standardized transport protocol

B better performance

C better visibility and control ✓ CORRECT

D device abstraction ✓ CORRECT

E access to more routing features

SUGGESTED ANSWER

The suggested answer is C, D.

Model-driven programmability offers the advantages of better visibility and control as well as device abstraction. Better visibility and control allows administrators to manage and monitor the network more effectively, while device abstraction simplifies management by allowing the same operations to be performed on different device types using the same model.

Which cloud-based security solution is focused on DNS resolution?

A Cisco AMP

B Cisco Meraki Dashboard

C Cisco DNA Center

D Cisco Umbrella ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Cisco Umbrella is a cloud-based security solution that focuses on DNS resolution. It serves as the first line of defense against internet threats by blocking requests to malicious domains and IPs before a connection is made. This preventive measure protects against malware, phishing, and other web-based threats by leveraging DNS inspection and filtering.

examice.com

```
sme@cisco:~/cisco/logs$ mkdir backup; [          ] do cp $file ./backup;
done
```

Refer to the exhibit. An engineer needs to construct a Bash command to create a new backup folder and then copy all files from the current folder to the backup folder. Which code snippet must be placed on the blank in the code?

A `for file in $ (cd);`

B `for file in $ (ls);` ✓ CORRECT

C `for files in $ (ls);`

D `for file in files;`

SUGGESTED ANSWER

The suggested answer is B.

The command sequence needs to iterate over all files in the current directory and copy them to the backup folder. The correct syntax for looping over all files in a directory in Bash is by using 'for file in $(ls);'. This will obtain a list of all files and then proceed with the 'cp $file ./backup;' command for each of them. Therefore, the correct code snippet is 'for file in $(ls);'.

The API documentation has this requirement for a REST API request:

“For methods that accept request parameters, the platform accepts either application/json or application/x-www-form-urlencoded content types and currently only supports returning data in application/json format”.

Which field returns content in the required format?

A `Accept: application/xml; q=0.5, application/json` ✓ CORRECT

B `Content-Type: application/json`

C `Content-Type : application/xml; q=0.5, application/json`

D `Expect: application/json`

SUGGESTED ANSWER

The suggested answer is A.

The correct option is the 'Accept' header, which specifies the media types that are acceptable for the response. According to the requirement, the platform only supports returning data in application/json format. The 'Accept' header in option A includes 'application/json', indicating that the client accepts JSON responses.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer checks the performance of a web application. The application is in the local data center and used a REST-based API. Based on the API logs, it is discovered that many users abandon API requests. Also, the response is taking too long to get back. What is the reason for this issue?

A Token-based authentication is disabled.

B Pagination is not implemented. ✓ CORRECT

C Rate limiting is not implemented.

D Token-based authentication is enabled.

SUGGESTED ANSWER

The suggested answer is B.

The reason for the issue is that pagination is not implemented. When dealing with large datasets, a lack of pagination can lead to long response times because the server is trying to send back too much data in a single response. This can overwhelm both the server and the client, causing delays that may lead users to abandon their requests. Implementing pagination helps to break down the data into smaller, more manageable chunks, which improves the performance and responsiveness of the API.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which network device forwards packets between networks?

A router ✓ CORRECT

B load balancer

C firewall

D switch

SUGGESTED ANSWER

The suggested answer is A.

A router is the network device that forwards packets between networks. It uses routing tables and protocols to decide the best path for forwarding the packets to their destination. A load balancer distributes network or application traffic across multiple servers, a firewall monitors and controls network traffic for security, and a switch connects devices within a single network, not between different networks.

```
1 import requests
2 url= 'https://cisco.devnet.com/rest'
3
```

Refer to the exhibit. A developer creates a Python script to query a REST API by using an HTTP GET request. The remote server will authorize the request only if it includes HTTP Basic Auth parameters. The username is admin and the password is devnet123. Which line of code needs to be placed on the snippet where the code is missing?

A `requests.get(url, auth= ('admin', 'devnet123'))` ✓ CORRECT

B `requests.get(url, auth=HTTPDigestAuth('admin', 'devnet123'))`

C `requests.get(url, auth=HTTPBasicAuth('admin': 'devnet123'))`

D `requests.get(url, 'admin', 'devnet123')`

SUGGESTED ANSWER

The suggested answer is A.

To make an HTTP GET request including HTTP Basic Auth parameters, the 'requests.get' function can directly accept the 'auth' parameter with a tuple containing the username and password. Therefore, the correct line of code is 'requests.get(url, auth=('admin', 'devnet123')).

```
--- file2.py    2020-09-26 15:27:49.000000000 -0600
+++ file1.py    2020-09-26 15:27:11.000000000 -0600
@@ -14,7 +14,7 @@
 USERNAME = '<USERNAME>' # Example USERNAME = 'devnetuser'
 PASSWORD = '<PASSWORD>' # Example PASSWORD = 'Cisco123!'

-
+auth = HTTPBasicAuth(USERNAME, PASSWORD)

 # URLs
 DEVICES_URL = '/dna/intent/api/v1/network-device'
@@ -23,7 +23,7 @@

 def get_dnac_jwt_token():
     response = requests.post(BASE_URL + AUTH_URL,
-                             auth=HTTPBasicAuth(USERNAME, PASSWORD),
+                             auth=auth,
                              verify=False)
     token = response.json()['Token']
     return token
@@ -89,8 +89,9 @@
         'destIP': dst_ip_address,
         'inclusions': [
             'INTERFACE-STATS',
+            'DEVICE-STATS',
             'ACL-TRACE',
-            'DEVICE-STATS'
+            'QOS-STATS'
         ],
         'protocol': 'icmp'
     }
```

Refer to the exhibit. An engineer is comparing two files by using the unified diff format. What is determined by the content in the file2.py file?

A Line 93 of file.py is 'DEVICE-STATS'.

B Line 92 of file2.py is 'DEVICE-STATS'.

C Line 16 of file2.py is auth=HTTPBasicAuth(USERNAME, PASSWORD). ✓ CORRECT

D Line 17 of file2.py is auth = HTTPBasicAuth(USERNAME, PASSWORD).

SUGGESTED ANSWER

The suggested answer is C.

The diff output shows the changes between file1.py and file2.py. Lines prefixed with a plus (+) were added, and lines prefixed with a minus (-) were removed. The change at line 16 shows that auth = HTTPBasicAuth(USERNAME, PASSWORD) was added to file2.py. Therefore, line 16 of file2.py contains auth = HTTPBasicAuth(USERNAME, PASSWORD).

QUESTION 469

Issued to kamjunhao@gmail.com · October 17, 2026

What is the reason for an HTTP 404 code returned from a REST API request?

A The requested URL exists, but the HTTP method is not applicable.

B The requested resource is not found. ✓ CORRECT

C The request was missing or had an invalid authentication token.

D The request was successful, but nothing is in the response body.

SUGGESTED ANSWER

The suggested answer is B.

An HTTP 404 code indicates that the requested resource is not found. This means that the server could not find what was requested, either because the endpoint does not exist or the resource has been deleted.

Issued to kamjunhao@gmail.com · October 17, 2026

An existing application is accessible from an external IP address. Which device or service must be configured to make the application accessible through a URL by using a domain name?

A reverse proxy

B DNS ✓ CORRECT

C firewall

D load balancer

SUGGESTED ANSWER

The suggested answer is B.

To make an application accessible through a URL using a domain name, a DNS (Domain Name System) must be configured. DNS translates domain names into IP addresses, allowing users to access the application via a memorable domain name instead of an IP address.

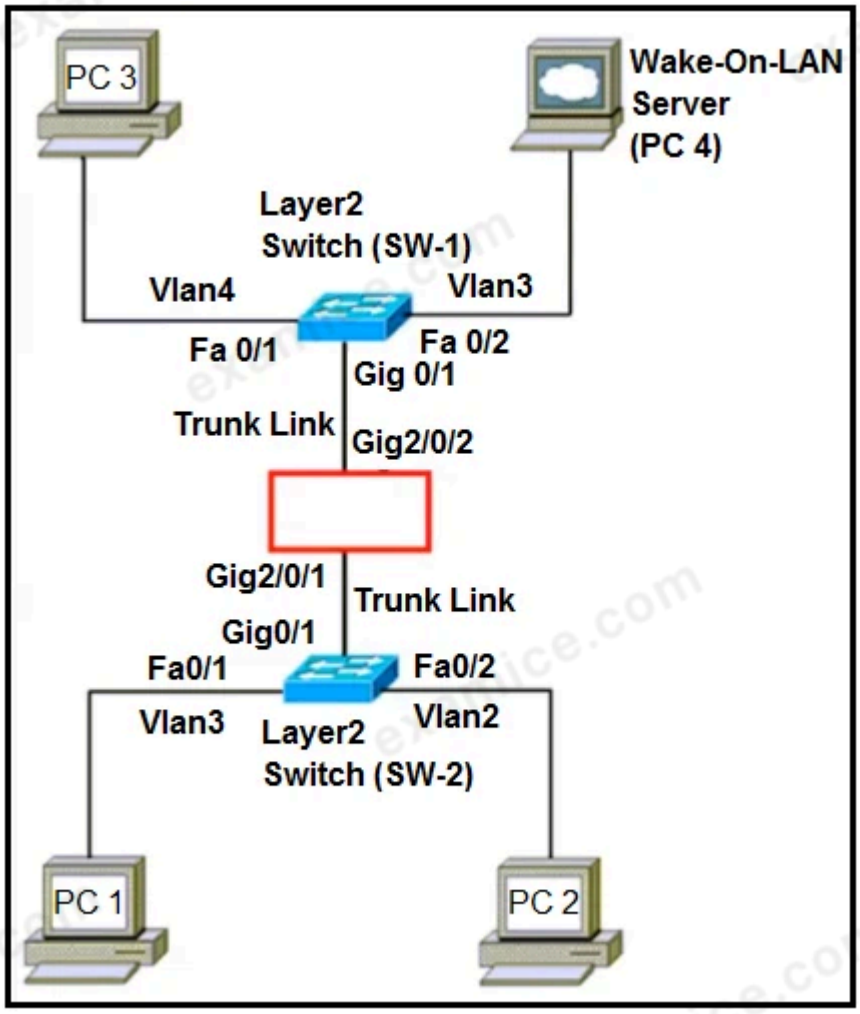

Refer to the exhibit. Which device should be used to interconnect the hosts?

A load balancer

B VPN gateway

C Layer 2 switch

D Layer 3 switch ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To interconnect hosts in different VLANs, a Layer 3 switch is necessary. A Layer 3 switch performs routing functions between VLANs, allowing devices in separate VLANs to

communicate with each other. Layer 2 switches can interconnect hosts within the same VLAN but cannot route traffic between different VLANs. Thus, a Layer 3 switch is the appropriate device to be used to interconnect the hosts across different VLANs.

QUESTION 472

What is the main purpose of a code review?

A to identify and review errors with the team ✓ CORRECT

B to detect logical errors

C to ensure that all code is checked in simultaneously

D to provide the technical lead visibility into all code

SUGGESTED ANSWER

The suggested answer is A.

The main purpose of a code review is to identify and review errors with the team. This practice helps maintain code quality by catching mistakes early, ensuring adherence to coding standards, and facilitating knowledge sharing among team members.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Python data type resembles JSON data structures?

A list

B dictionary ✓ CORRECT

C string

D tuple

SUGGESTED ANSWER

The suggested answer is B.

The Python data type that most closely resembles JSON data structures is the dictionary. JSON (JavaScript Object Notation) is a lightweight data interchange format that stores data in a key-value pair format, which is directly analogous to the Python dictionary type. Python dictionaries and JSON objects both use a structure of keys and values, making dictionaries the correct answer in this context.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of organizing code into classes, methods, functions, and modules? (Choose two.)

A improves readability ✓ CORRECT

B improves reusability ✓ CORRECT

C improves parallelism

D improves performance

E decreases complexity

SUGGESTED ANSWER

The suggested answer is A, B.

Organizing code into classes, methods, functions, and modules improves readability because it structures the code in a way that is easier to understand and maintain. It also improves reusability by allowing developers to reuse these components across different parts of the project or even in other projects, thereby reducing the need to rewrite code.

```
1 import unittest
2 from webexteamssdk import WebexTeamsAPI
3
4
5 def send_message (text) :
6    api = WebexTeamsAPI ()
7    message = api.messages.create(toPersonEmail= 'johndoe@example.com', text=text)
8    return message.text
9
10
11 class TestMessage (unittest.TestCase) :
12   def test message (self) :
13
14
15 if _name_ == '_main_':
16   unittest.main ()
```

Refer to the exhibit. Which code should be added at the snippet to perform a unit test?

A
```
self.assertIsInstance (send_message ("hello"),
                       "hello", "Should be the same")
```

B
```
self.assertIs (send_message ("hello"),
          "hello", "Should be the same")
```

C
```
self.assertCompare (send_message ("hello"),
                    "hello", "Should be the same")
```

D
```
self.assertEqual (send_message ("hello"),
                  "hello", "Should be the same")
```

✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

In the context of unit testing in Python using the unittest module, the correct method to check if the returned value of a function matches the expected value is self.assertEqual(a, b,

msg). Here, send_message('hello') should return 'hello', and self.assertEqual checks for this equality. Option D matches this requirement correctly.

QUESTION 476

A development team must find a cloud deployment model to scale its new product to external and internal users. The team is small and the data is massive. The team wants high flexibility and higher security. Which application deployment model should the team use?

A hybrid cloud ✓ CORRECT

B edge

C public cloud

D private cloud

SUGGESTED ANSWER

The suggested answer is A.

The hybrid cloud model combines both public and private cloud environments, providing the flexibility of public cloud with the security of private cloud. This allows the team to manage massive amounts of data efficiently while maintaining a high level of security. Hybrid cloud supports scalability for both internal and external users, making it the most suitable choice for the team's needs.

DRAG DROP

- -

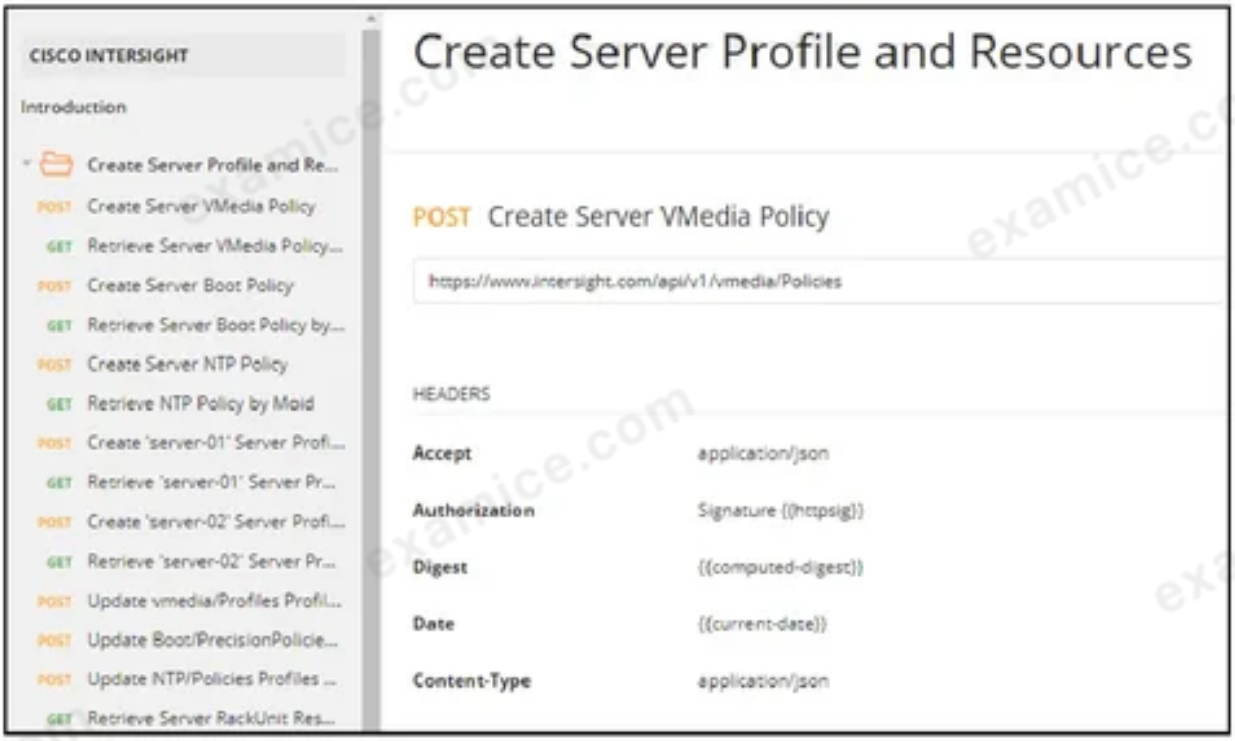

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script by using the Cisco SDK. Not all options are used.

SUGGESTED ANSWER

```
import sys, json, argparse
from intersight.intersight_api_client import IntersightApiClient
from intersight.apis import asset_device_registration_api, asset_device_claim_api

if __name__ == "__main__":
    result = dict(changed=False)

    api_instance = IntersightApiClient(
        host=intersight_api_params['api_base_uri'],
        private_key=intersight_api_params['api_private_key_file'],
        api_key_id=intersight_api_params['                    '],
    )
    api_handle = asset_device_registration_api.AssetDeviceRegistrationApi(                )

    kwargs = dict(                ="ConnectionStatus eq 'Connected'")
    api_result = api_handle.asset_device_registrations_get(**kwargs)
    for device in api_result.results:
        if device.device_ip_address[0] == args.hostname:
            api_handle = asset_device_claim_api.AssetDeviceClaimApi(api_instance)
            api_handle.asset_device_claims_moid_delete(moid=device.device_claim.moid)
            result['changed'] = True
            break
    print(json.dumps(result))
```

api_key_id

api_instance

filter

api_instance | filter | api_key_id | args

device | api_base_uri

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

An application developer deploys several applications on the same server. The environment runs on a single operating system and allows the developer to bind dependencies with the application code. Which environment has the code been developed in?

A bare metal server

B virtual machine

C container ✓ CORRECT

D Linux server

SUGGESTED ANSWER

The suggested answer is C.

The environment described allows the developer to bind dependencies with the application code and runs multiple applications on the same server, which indicates the use of a container. Containers are lightweight virtualization environments that allow the bundling of application code with its dependencies, ensuring consistency across different environments. Unlike virtual machines, containers share the same operating system kernel but maintain isolated environments for each application.

Issued to kamjunhao@gmail.com · October 17, 2026

How do JSON and XML compare?

A The syntax of JSON contains tags, elements, and attributes whereas XML objects are collections of key-value pairs.

B JSON objects are an ordered set of element attributes whereas XML arrays are an unordered set of key-value pairs.

C The syntax of XML contains tags, elements, and attributes whereas JSON objects are collections of key-value pairs. ✓ CORRECT

D JSON arrays are an unordered set of key-value pairs whereas XML objects are an ordered set of element attributes.

SUGGESTED ANSWER

The suggested answer is C.

The syntax of XML contains tags, elements, and attributes whereas JSON objects are collections of key-value pairs. XML is structured with elements defined by tags, and attributes provide additional information about elements. JSON represents data as key-value pairs, often nested, making it lightweight and easier to read and write compared to XML.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco compute management platform is a premises based solution that Automates and Orchestrates Cisco and non-Cisco infrastructure?

A UCS Manager

B Cisco Integrated Management Controller

C UCS Director ✓ CORRECT

D Cisco Intersight

SUGGESTED ANSWER

The suggested answer is C.

DRAG DROP

- -

Drag and drop the steps from the left into the order on the right to implement a CI/CD toolchain. Not all options are used.

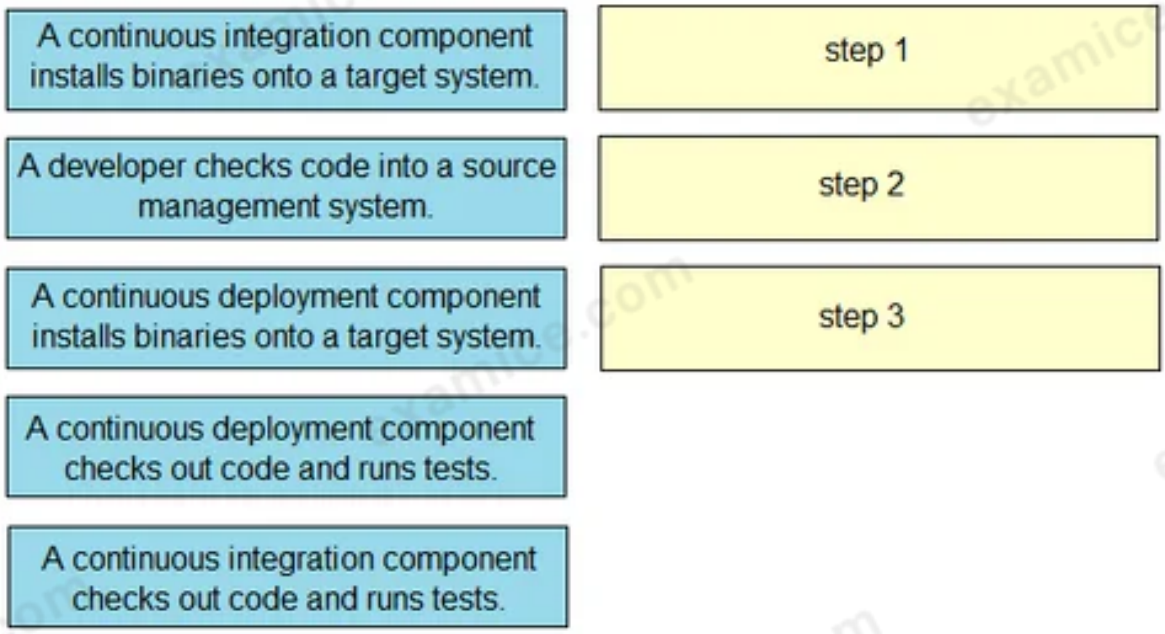

SUGGESTED ANSWER

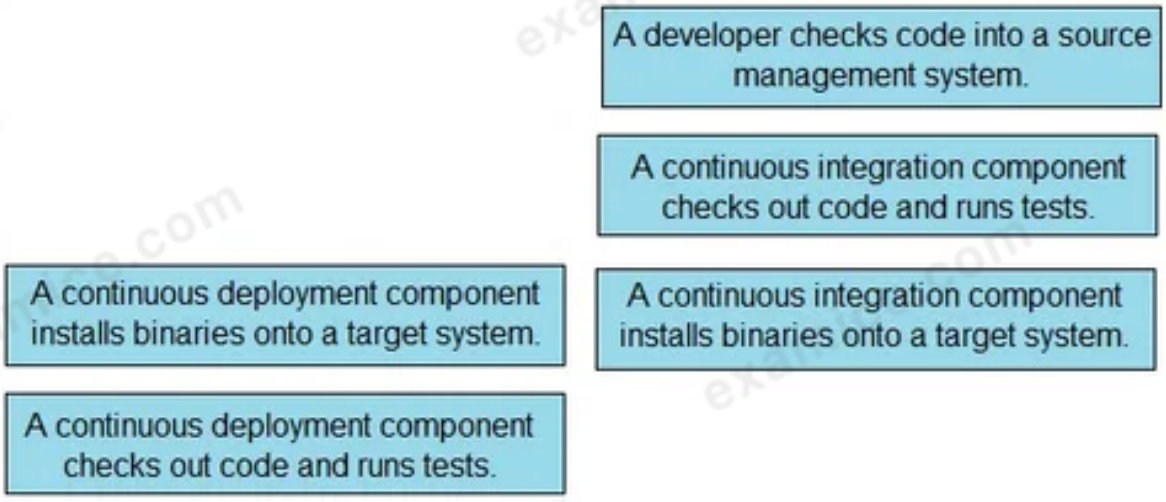

DRAG DROP

- -

```
[[ $1 = '' ]] && BRANCH="master" || BRANCH=$1

SSH_KEY_PATH="key.pem"
SERVER="remote_username@remote_host"
DEST_FOLDER="path_to_project_folder"
PARAMS="BRANCH=\"$BRANCH\" DEST_FOLDER=\"$DEST_FOLDER\""

ssh -i $SSH_KEY_PATH $SERVER $PARAMS 'bash -i'  <<-'ENDSSH'
    cd $DEST_FOLDER

    git stash
    git pull
    git checkout $BRANCH
    git pull origin $BRANCH

    rm -rf node_modules/
    npm install

    pm2 stop app_name
    pm2 start app_name
    pm2 save
    pm2 list

    exit
ENDSSH
```

Refer to the exhibit. A developer is responsible for managing an application. The developer wants to deploy the new version of the application on the test environment whenever it is released. To automate this workflow, the developer writes a bash script. Drag and drop the deployment steps from the left into the order on the right to identify the workflow that is automated by the script.

connects to the server	step 1
installs the application	step 2
restarts the application	step 3
creates variables for remote execution	step 4
places a new application version on the server	step 5

SUGGESTED ANSWER

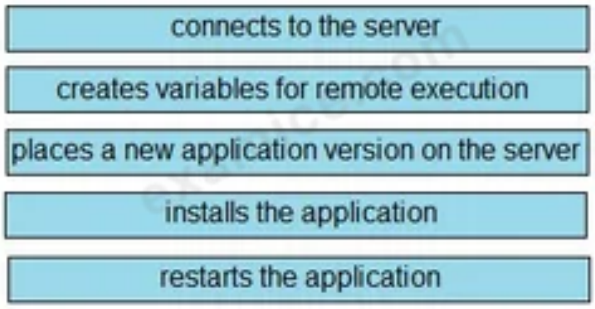

QUESTION 483

Issued to kamjunhao@gmail.com · October 17, 2026

When changes are made to the same file across two branches, which git status is shown when the branches are combined?

A unmerged ✓ CORRECT

B uncommitted

C conflict

D branched

SUGGESTED ANSWER

The suggested answer is A.

When changes are made to the same file across two branches and those branches are combined, the status shown in git is 'unmerged'. This indicates that there are unmerged paths, meaning there are conflicts that need to be resolved before the merge can be completed. After resolving the conflicts, the files can be marked as resolved and committed.

DRAG DROP

```
commit ac40974fe81b5cf2be9adadecca37d92159ca917 (HEAD ->
example_branch, origin/example_branch)
Author: John Smith <john.smith@example.com>
Date:   Mon Dec 16 09:00:00 2019

    commit message

commit 0b20aeb8940b845562ac7e291727155be2488cf4
Author: John Smith <john.smith@example.com>
Date:   Mon Dec 15 09:00:00 2019

    initial commit
```

Refer to the exhibit. Running the git merge example_branch command results in an error due to conflicts. The exhibit shows the output of the git log command on a branch named example_branch. Drag and drop the code from the bottom into the order to resolve the conflicts and merge example_branch into the remote master branch.

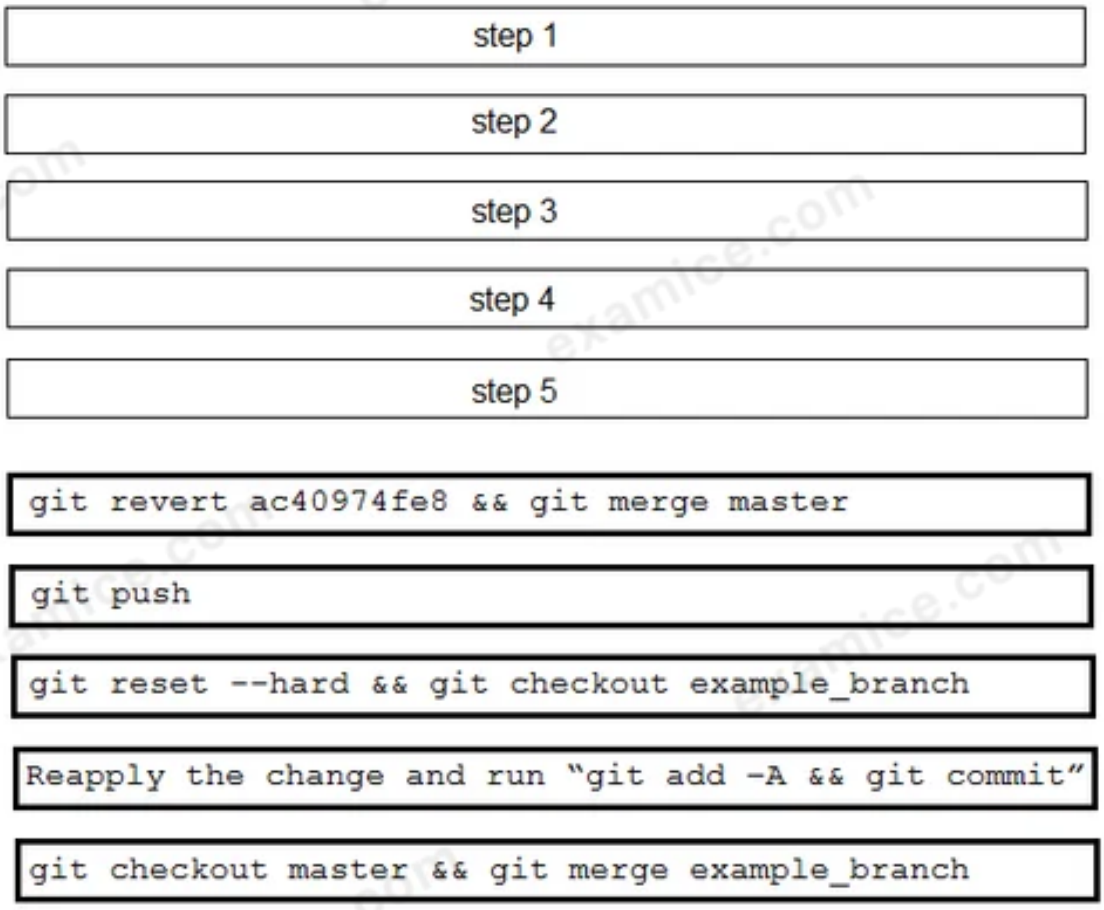

SUGGESTED ANSWER

```
git revert ac40974fe8 && git merge master
```

```
git push
```

```
git reset --hard && git checkout example_branch
```

```
Reapply the change and run "git add -A && git commit"
```

```
git checkout master && git merge example_branch
```

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is an advantage of the Agile software development method as compared to Waterfall?

A. In Agile the development teams deliver the whole project at once, and in Waterfall the project is delivered in phases.

B. In Agile the customer involvement is limited to the requirement collection phase, and in Waterfall the customer is involved in all development phases.

C. In Agile every aspect of development is continually revisited, and in Waterfall the revision takes place in another project. ✓ CORRECT

D. In Agile each development team works independently, and in Waterfall the development team collaborate.

SUGGESTED ANSWER

The suggested answer is C.

Agile software development allows for continuous revisiting and adjusting of every aspect of the development process, enabling more flexibility and adaptability to changes. In contrast, the Waterfall method follows a linear and sequential approach where each phase must be completed before moving on to the next, and revisions typically occur in a separate project.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of using version control? (Choose two.)

A. It enables multiple team members to work on the same project simultaneously. ✓ CORRECT

B. It provides a complete long-term change history of every file of an application. ✓ CORRECT

C. It improves code availability by distributing the data across different machines.

D. It provides automation of the build and deployment process out of the box.

E. It executes tests and reveals compilation errors before the code is committed.

SUGGESTED ANSWER

The suggested answer is A, B.

Using version control enables multiple team members to work on the same project simultaneously, which facilitates collaboration and efficient parallel development. Additionally, it provides a complete long-term change history of every file in an application, allowing for the tracking of changes, reverting to previous versions, and understanding the evolution of the project.

Issued to kamjunhao@gmail.com · October 17, 2026

A system administrator works with a software development department to implement code to production. The administrator wants to review the code to be implemented and not do it automatically. The code must be ready for production and should be implemented by the administrator without additional intervention from the development team. Which DevOps concept does this scenario represent?

A continuous deployment

B continuous testing

C continuous integration

D continuous delivery ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a difference between device-level and controller-level infrastructure management?

A Device-level management uses NETCONF, whereas controller-level management does not support NETCONF to automate the infrastructure.

B Controller-level management uses APIs to simplify the developer experience, whereas device-level management uses traditional management protocols. ✓ CORRECT

C Controller-level management is more widely supported because it is standards-based, whereas device-level management is proprietary to each vendor.

D Controller-level management exposes northbound, southbound, eastbound, and westbound APIs, easing integration with other technologies, whereas device-level management does not use a controller-based API.

SUGGESTED ANSWER

The suggested answer is B.

Controller-level management uses APIs to simplify the developer experience, whereas device-level management uses traditional management protocols. This distinction highlights how controller-level management modernizes and simplifies interactions with network infrastructure through APIs, compared to the older, more manual protocols used at the device level.

Issued to kamjunhao@gmail.com · October 17, 2026

What are the two benefits of edge computing architecture? (Choose two.)

A run applications

B centralized implementation

C event logging

D node distribution ✓ CORRECT

E complex event processing ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D, E.

Edge computing architecture provides two main benefits: node distribution and complex event processing. Node distribution refers to the ability to distribute data processing tasks across various nodes closer to the source of the data, which reduces latency and improves response times. Complex event processing allows for the analysis and handling of data streams in real-time, leading to more efficient data processing and decision-making capabilities. Therefore, these two benefits are essential components of edge computing.

```
{
    "ietf-interfaces:interfaces": {
        "interface": [
            {
                "name": "GigabitEthernet1",
                "description": "Network interface",
                "type": "iana-if-type:ethernetCsmacd",
                "enabled": true,
                "ietf-ip:ipv4": {
                    "address": [
                        {
                            "ip": "10.10.20.48",
                            "netmask": "255.255.255.0"
                        }
                    ]
                }
            },
            {
                "name": "GigabitEthernet2",
                "description": "Network Interface",
                "type": "iana-if-type:ethernetCsmacd",
                "enabled": false,
                "ietf-ip:ipv4": {}
            },
            {
                "name": "GigabitEthernet3",
                "description": "Network Interface",
                "type": "iana-if-type:ethernetCsmacd",
                "enabled": false,
                "ietf-ip:ipv4": {}
            }
        ]
    }
}
```

Refer to the exhibit. What are two results of running the RESTCONF query? (Choose two.)

A GigabitEthernet1 becomes shut down.

B Interfaces are created as containers.

C GigabitEthernet2 becomes shut down. ✓ CORRECT

D Descriptions for two interfaces are applied. ✓ CORRECT

E The module left-interfaces:interfaces is created.

SUGGESTED ANSWER

The suggested answer is C, D.

Running the RESTCONF query results in the configurations specified in the JSON payload being applied to the network interfaces. GigabitEthernet2 will be shut down as indicated by its 'enabled' state set to false, and descriptions for GigabitEthernet1 and GigabitEthernet2 will be applied as specified in the JSON payload.

Personal copy · kamjunhao@gmail.com

```
import requests
url = "https://webexapis.com/v1/xapi/status?deviceId={{_deviceId}}&name=Audio.Volume"
headers = {
  'Authorization': 'Bearer {{access_token}}'
}
response = requests.request("GET", url, headers=headers)
print(response.text.encode('utf8'))
```

Refer to the exhibit. A network engineer must automate a workflow to get device volume data from Endpoint xAPI-enabled devices. The engineer prepares a Python script to send the request by adding an access token and device ID. However, the request receives a status code of 401. Which action solves the problem?

A Access token must be changed with a valid one. ✓ CORRECT

B Network connectivity between client and API must be fixed.

C Internal server problems that relate to code must be fixed.

D API endpoint must be restarted to serve again.

SUGGESTED ANSWER

The suggested answer is A.

A status code of 401 indicates that the request is unauthorized. This typically means that there is an issue with the credentials provided for authentication. In this case, the access token included in the headers is likely invalid or expired. Therefore, to resolve the problem, the access token must be replaced with a valid one.

Issued to kamjunhao@gmail.com · October 17, 2026

Which benefit does CI/CD provide to the infrastructure?

A supports connectivity between network resources and external platforms

B supports the integration of network devices with external databases

C provides version control during application development

D enables frequent and reliable code deployments ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

CI/CD enables frequent and reliable code deployments by automating the integration and deployment processes. This reduces the time-consuming manual steps, minimizes errors, and ensures that changes can be deployed more frequently and consistently. As a result, it significantly enhances the efficiency and reliability of the software delivery pipeline, leading to improved software quality and faster time to market.

DRAG DROP

- -

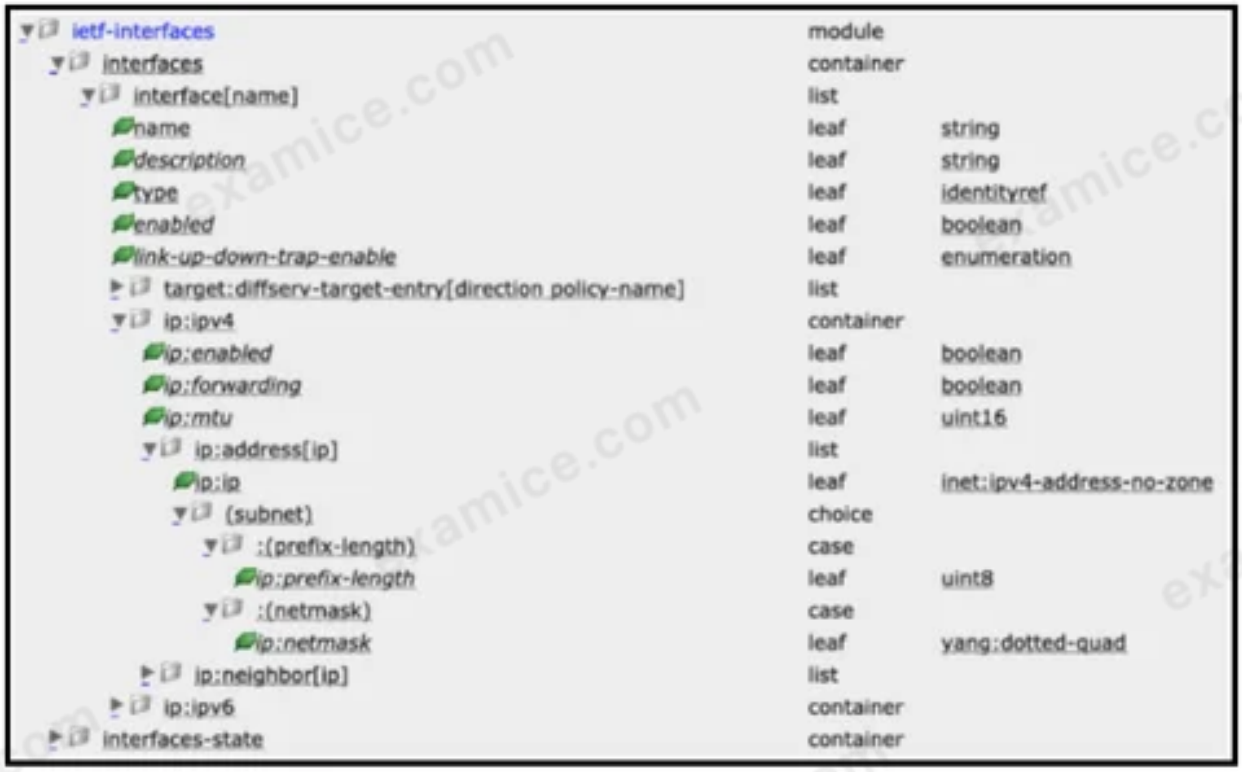

Refer to the exhibit. A new loopback34 must be created on a Cisco IOS XE router that has an IP address of 10.34.1.2/24. Drag and drop the code from the bottom onto the box where the code is missing to construct the Python script that configures the IP address on the interface according to the YANG data model of ietf-interfaces. Not all options are used.

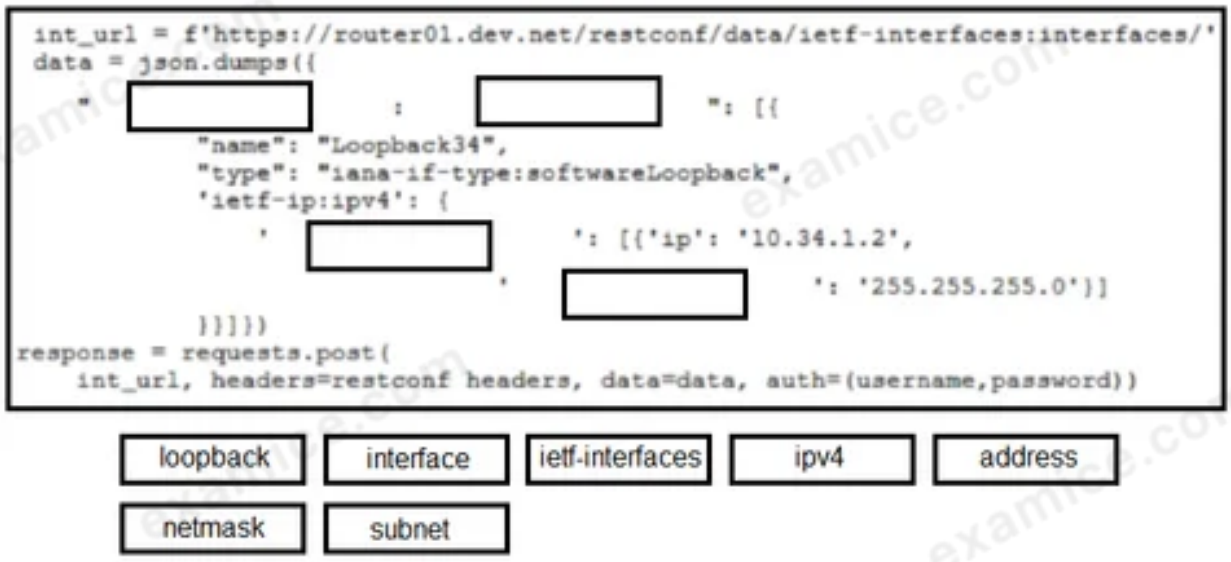

SUGGESTED ANSWER

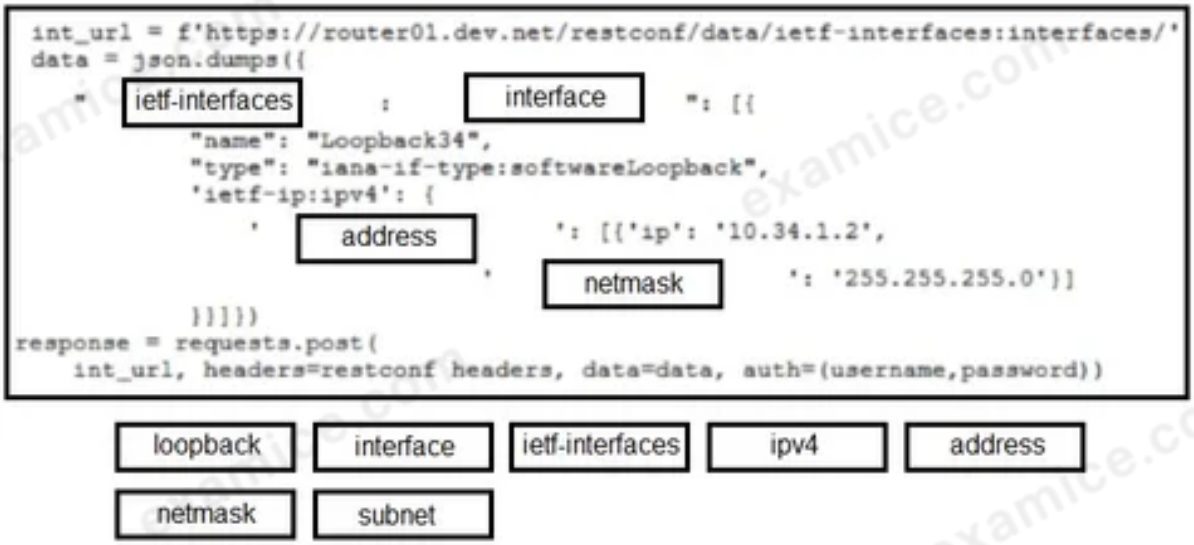

loopback | interface | ietf-interfaces | ipv4 | address

netmask | subnet

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the common API styles from the left onto the requirement on the right.

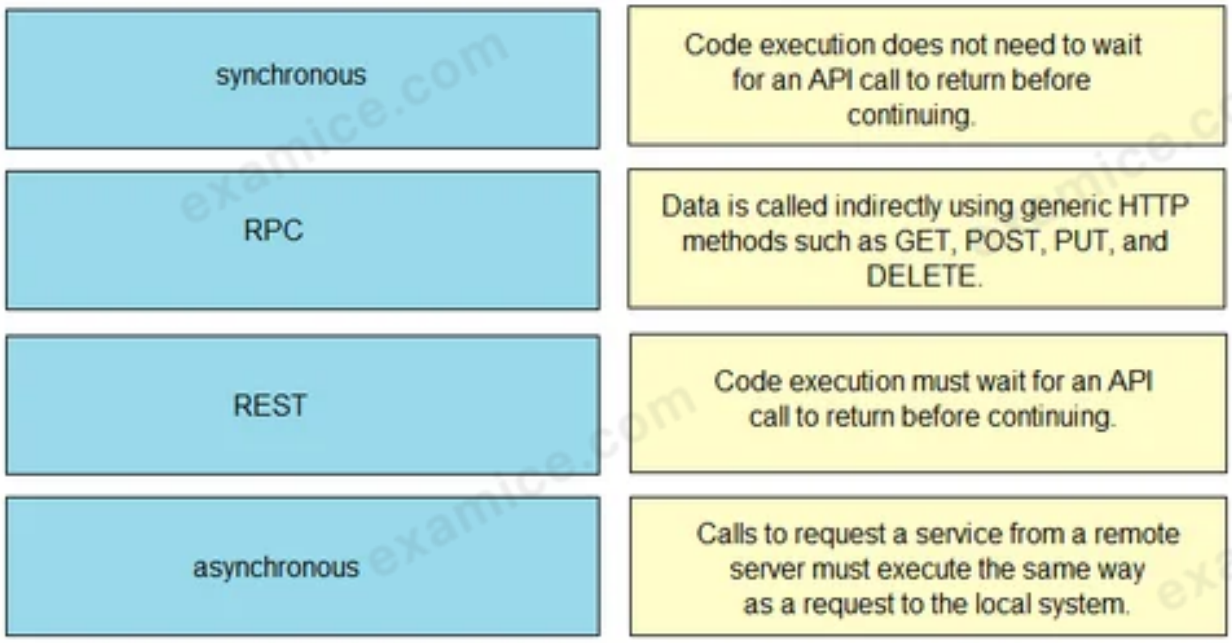

SUGGESTED ANSWER

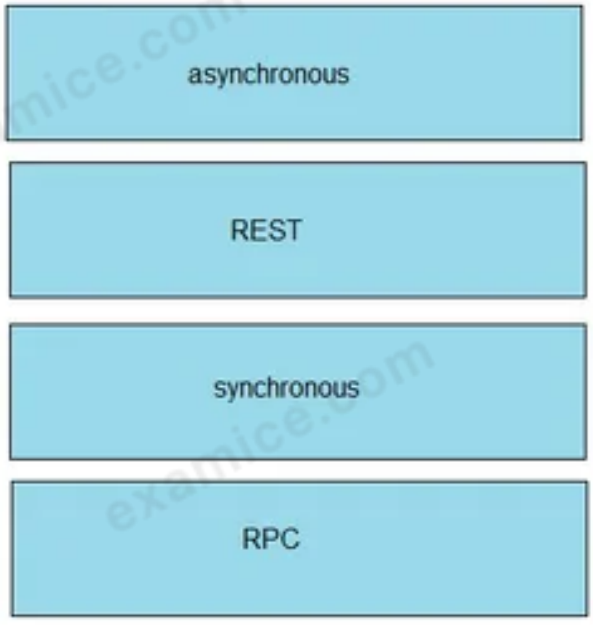

What is a characteristic of Agile software development compared to the Waterfall method?

A Agile method values comprehensive documentation whereas Waterfall focuses on working software.

B Agile delivers at the end of a linear process whereas in Waterfall each phase depends on the deliverables of the previous phase.

C In Agile, development iterations last from one to four weeks whereas the Waterfall method does not utilize iterations. ✓ CORRECT

D In Agile, code is deployed to production immediately whereas in Waterfall deployment is processed gradually on each cycle.

SUGGESTED ANSWER

The suggested answer is C.

Agile software development is characterized by iterative development, where development iterations typically last from one to four weeks. Each iteration involves a complete development cycle: design, coding, and testing. In contrast, the Waterfall method follows a linear and sequential approach without iterations, where each phase depends on the deliverables of the previous phase and progresses through a series of phases such as requirements, design, implementation, verification, and maintenance.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer is working on a new feature and finds an old piece of code that must be discussed. The developer wants to find the original coders for the code to discuss the issue. Which Git command annotates the listing of the source file with the author that created or last edited a line?

A cat filename | git diff

B git log

C git blame filename ✓ CORRECT

D git reflog

SUGGESTED ANSWER

The suggested answer is C.

The command 'git blame filename' annotates each line in the source file with the author and the commit information of the last edit. This allows the developer to identify who made changes to specific lines, which is useful for discussions about the code.

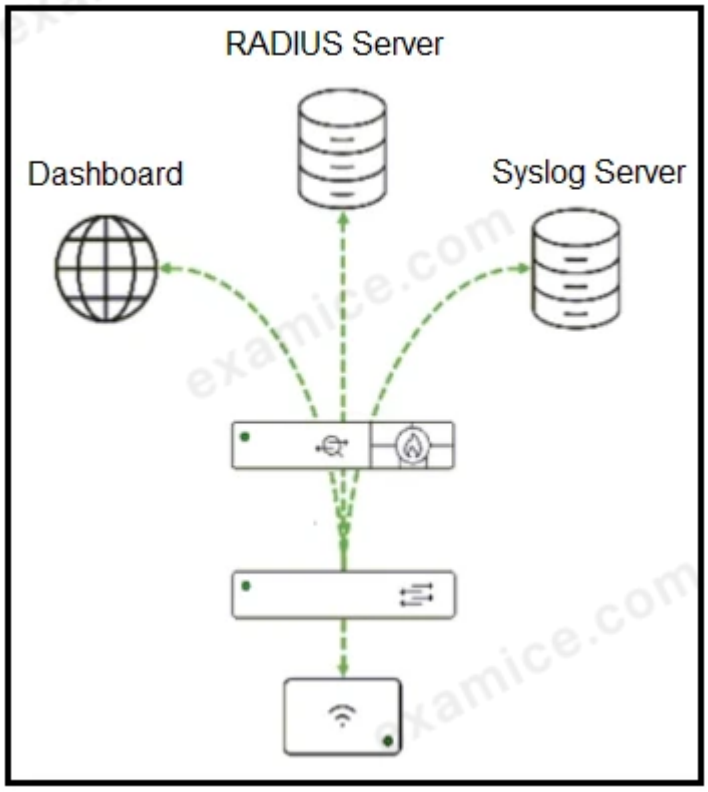

Refer to the exhibit. A Cisco Meraki network was recently installed. Which TCP port is used to gain access to the Meraki dashboard to complete the configuration?

A 22

B 23

C 443 ✓ CORRECT

D 8080

SUGGESTED ANSWER

The suggested answer is C.

The Cisco Meraki dashboard is accessed via a web interface, which commonly uses HTTPS protocol. The standard port for HTTPS is TCP port 443. Therefore, to access the Meraki dashboard and complete the configuration, TCP port 443 is used.

QUESTION 498

Issued to kamjunhao@gmail.com · October 17, 2026

A developer must add an idempotent task to an Ansible playbook that configures a Cisco IOS device. HTTP traffic must be permitted from 192.168.1.1 to 192.168.1.5 host machine. Which code snippet must be used?

A
```
- ios_command:
    commands:
    - configure terminal
    - access-list 120 permit tcp host 192.168.1.1
    host 192.168.1.5 any any eq www
```

B
```
-ios_config:
    lines: access-list 120 permit tcp host
    192.168.1.1 host 192.168.1.5 any any eq www
```

C ✓ CORRECT
```
-ios_config:
    lines: access-list 120 permit tcp host
    192.168.1.1 host 192.168.1.5 eq 80
```

D
```
- ios_command:
    mode: configure terminal
    args: access-list 120 permit tcp host 192.168.1.1
host 192.168.1.5 any any eq 80
```

SUGGESTED ANSWER

The suggested answer is C.

To permit HTTP traffic, the correct ACL (Access Control List) statement should permit TCP traffic on port 80. The correct option uses 'eq 80' explicitly indicating port 80, which is the standard port for HTTP traffic. This ensures that only HTTP traffic is permitted from 192.168.1.1 to 192.168.1.5. The other options are either syntactically incorrect or do not explicitly specify port 80.

QUESTION 499

Issued to kamjunhao@gmail.com · October 17, 2026

```
FROM python:3.6
MAINTAINER User One (userone@domain.com)
EXPOSE 80
RUN pip3 install Flask
RUN pip3 install -r requirements.txt
COPY . /app
```

Refer to the exhibit. An engineer is creating a Dockerfile for an application to run on a container. Application is a web application build on the Python Flask framework. Which port of the Dockerfile provides desired reachability to the application from the outside of the container?

A RUN pip3 install Flask

B MAINTAINER User One (userone@domain.com)

C EXPOSE 80 ✓ CORRECT

D COPY ./app

SUGGESTED ANSWER

The suggested answer is C.

Issued to kamjunhao@gmail.com · October 17, 2026

A development team needs to containerize an application named 'cust484705142'. A Dockerfile has been created and now the docker build command needs to be run using the current folder to find the Dockerfile, build the image and create a local repository named 'cust321453857-rep' that points to that image. Which command must be used?

A docker build -t cust321453857-rep -f Dockerfile ✓ CORRECT

B docker build cust321453857-rep -f Dockerfile.txt

C docker build cust321453857-rep Dockerfile

D docker build -t cust321453857-rep Dockerfile.txt

SUGGESTED ANSWER

The suggested answer is A.

```
FROM ubuntu:18.04
COPY . /app
RUN make /app
CMD python /app/app.py
```

Refer to the exhibit. What is the result of running the Dockerfile?

A Copy the directory /app from the ubuntu:18.04 image, build it with make, and execute the application with the Python command.

B Copy the directory app from the current directory of the Docker client, execute the application with make, and after it runs, execute an additional application.

C Copy the directory app from the current directory of the Docker client, build it with make, and execute the application with the Python command. ✓ CORRECT

D Copy the /app directory from the ubuntu:18.04 image, execute the application with make, and after it runs, execute an additional application.

SUGGESTED ANSWER

The suggested answer is C.

The Dockerfile provided executes the following steps: it uses the Ubuntu 18.04 image as its base, copies the contents of the current directory from the Docker client to the /app directory in the container, runs the make command to build or compile the application in the /app directory, and finally runs the Python application located in /app/app.py.

DRAG DROP

- -

API Documentation:

Team body parameters:

name (required)

Room body parameters:

title(required), teamId(required)

Message body parameters:

roomId, parentId, toPersonId, toPersonEmail, text, markdown, files, attachments

People body parameters:

emails(required), displayName, firstName, lastName, avatar, orgId, roles, licenses

Refer to the exhibit. A script must create a new team, create a new space, send a message, and create a participant. Drag and drop the code snippets from the bottom onto the boxes in the code to complete the script. Not all options are used.

```
import requests

base_url = "https://webexapis.com/v1"
email = "admin@example.com"
name = "Admin"
header = {"key": "value"}

url =  "{}/{}".format(base_url, "/teams")
body =
team_id = requests.post(url, headers=header, data=body).json() ['id']

url =  "{}/{}".format(base_url, "/rooms")
body =
team_id = requests.post(url, headers=header, data=body).json() ['id']

url = "{}/{}".format(base_url, "/messages")
body =
requests.post{url, headers=header, data=body}

url = "{}/{}".format(base_url, "/people"}
body =
requests.post{url, headers=header, data=body}
```

```
{"emails": [email], "displayName": name}
```

```
{"name": "New example collaboration"}
```

```
{"roomId": room_id, "text": "New text"}
```

```
{"title": "New example collaboration"}
```

```
{"emails": [email], "name": name}
```

```
{"name": "newRoom", teamId": team_id}
```

```
{"title": "newRoom", "teamId": team_id}
```

SUGGESTED ANSWER

```
import requests

base_url = "https://webexapis.com/v1"
email = "admin@example.com"
name = "Admin"
header = {"key": "value"}

url =  "{}/{}".format(base_url, "/teams")
body = {"name": "New example collaboration"}
team_id = requests.post(url, headers=header, data=body).json() ['id']

url =  "{}/{}".format(base_url, "/rooms")
body = {"title": "New example collaboration"}
team_id = requests.post(url, headers=header, data=body).json() ['id']

url = "{}/{}".format(base_url, "/messages")
body = {"roomId": room_id, "text": "New text"}
requests.post{url, headers=header, data=body}

url = "{}/{}".format(base_url, "/people"}
body = {"emails": [email], "name": name}
requests.post{url, headers=header, data=body}
```

```
{"emails": [email], "displayName": name}
```

```
{"name": "newRoom", teamId": team_id}
```

```
{"title": "newRoom", "teamId": team_id}
```

Personal copy · kamjunhao@gmail.com

A developer is working on an existing feature that needs enhancing. The primary production branch for the application is 'prim4a3b8c6d80374' and the branch for working on the feature is 'feat145678909'. The developer needs to create a clone of the single branch used for the feature that only has commits included in the current line of history. Which Git command must be used?

A git clone [url] - -feat145678909 - -single-branch

B git clone [url] - -branch feat145678909 - -single

C git clone [url] - -single-branch feat145678909

D git clone [url] - -branch feat145678909 - -single-branch ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To clone a specific branch along with its line of commit history, the correct Git command is 'git clone [url] --branch feat145678909 --single-branch'. The --branch option specifies the branch to clone, and the --single-branch option ensures that only the specified branch is cloned along with its commits.

Issued to kamjunhao@gmail.com · October 17, 2026

Why should a code review process be used?

A It enables various software design implementations.

B It enables a consistent software design. ✓ CORRECT

C It ensures that members of a team work in isolation.

D It ensures that whole software is secure.

SUGGESTED ANSWER

The suggested answer is B.

A code review process should be used to enable a consistent software design. This ensures that code adheres to the established guidelines and standards of the team, improves code quality, and makes code maintenance easier. It helps catch bugs early, encourages best practices, and promotes knowledge sharing among team members. This leads to a more cohesive and reliable codebase.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer is responsible for several thousand network devices across many campus environments that are all connected to a common controller. Which action updates all devices with new security settings in this network?

A Get a list of all devices from the controller and use a CLI to change the settings on individual devices.

B Track a list of all devices on a spreadsheet and use a CLI to change the settings on individual devices.

C Get a list of all devices from the controller and use RESTCONF to set a YANG model on the devices. ✓ CORRECT

D Track a list of all devices on a spreadsheet and use RESTCONF to set a YANG model on the devices.

SUGGESTED ANSWER

The suggested answer is C.

In a network managed by a common controller with several thousand devices, the most efficient way to update security settings is to use a centralized approach like RESTCONF to set a YANG model on the devices. RESTCONF is a protocol that uses HTTP methods to access data defined in YANG, which makes it possible to programmatically manage network devices. Using a list of devices from the controller ensures that all devices are accounted for and updated simultaneously. In contrast, using a spreadsheet and manually updating each device via CLI is inefficient and prone to errors.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which security platform rapidly analyzes files and suspicious behavior across an environment?

A Cisco Threat Grid ✓ CORRECT

B Cisco Firepower

C Cisco ISE

D Cisco ASA

SUGGESTED ANSWER

The suggested answer is A.

Cisco Threat Grid rapidly analyzes files and suspicious behavior across an environment. It combines advanced sandboxing with threat intelligence to protect organizations from malware, making it the most appropriate platform for this purpose among the options provided.

A developer prepared the Dockerfile and already built a web application container with the image name: “myWebApp”. Requests made to the server public IP address on port 8080 must be redirected to port 80 on the container. The developer wants to start the container and access the Bash shell while the application serves the requests. Which command is used?

A `docker run -t -i myWebApp -p 8080:80 bash` ✓ CORRECT

B `docker cmd -t -i myWebApp -d 80:808 bash`

C `docker start -t -i apache2 -p 8080:80 bash`

D `docker exec -t -i apache2 -bash`

SUGGESTED ANSWER

The suggested answer is A.

To start the Docker container and access the Bash shell while mapping the host's port 8080 to the container's port 80, the correct command is to use 'docker run' with the appropriate flags. The command 'docker run -t -i myWebApp -p 8080:80 bash' serves this purpose. It specifies the image name 'myWebApp', maps port 8080 on the host to port 80 on the container, and provides interactive terminal access to Bash within the container.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the impact on an application from having a large distance between a client device and a host server?

A latency ✓ CORRECT

B increased bandwidth

C loss of connectivity

D jitter

SUGGESTED ANSWER

The suggested answer is A.

The impact on an application from having a large distance between a client device and a host server is primarily increased latency. Latency refers to the time it takes for data to travel from the client to the server and back, and a larger distance introduces more delay. Increased bandwidth, loss of connectivity, and jitter can be influenced by other factors, but the direct consequence of a long physical distance is higher latency.

DRAG DROP

- -

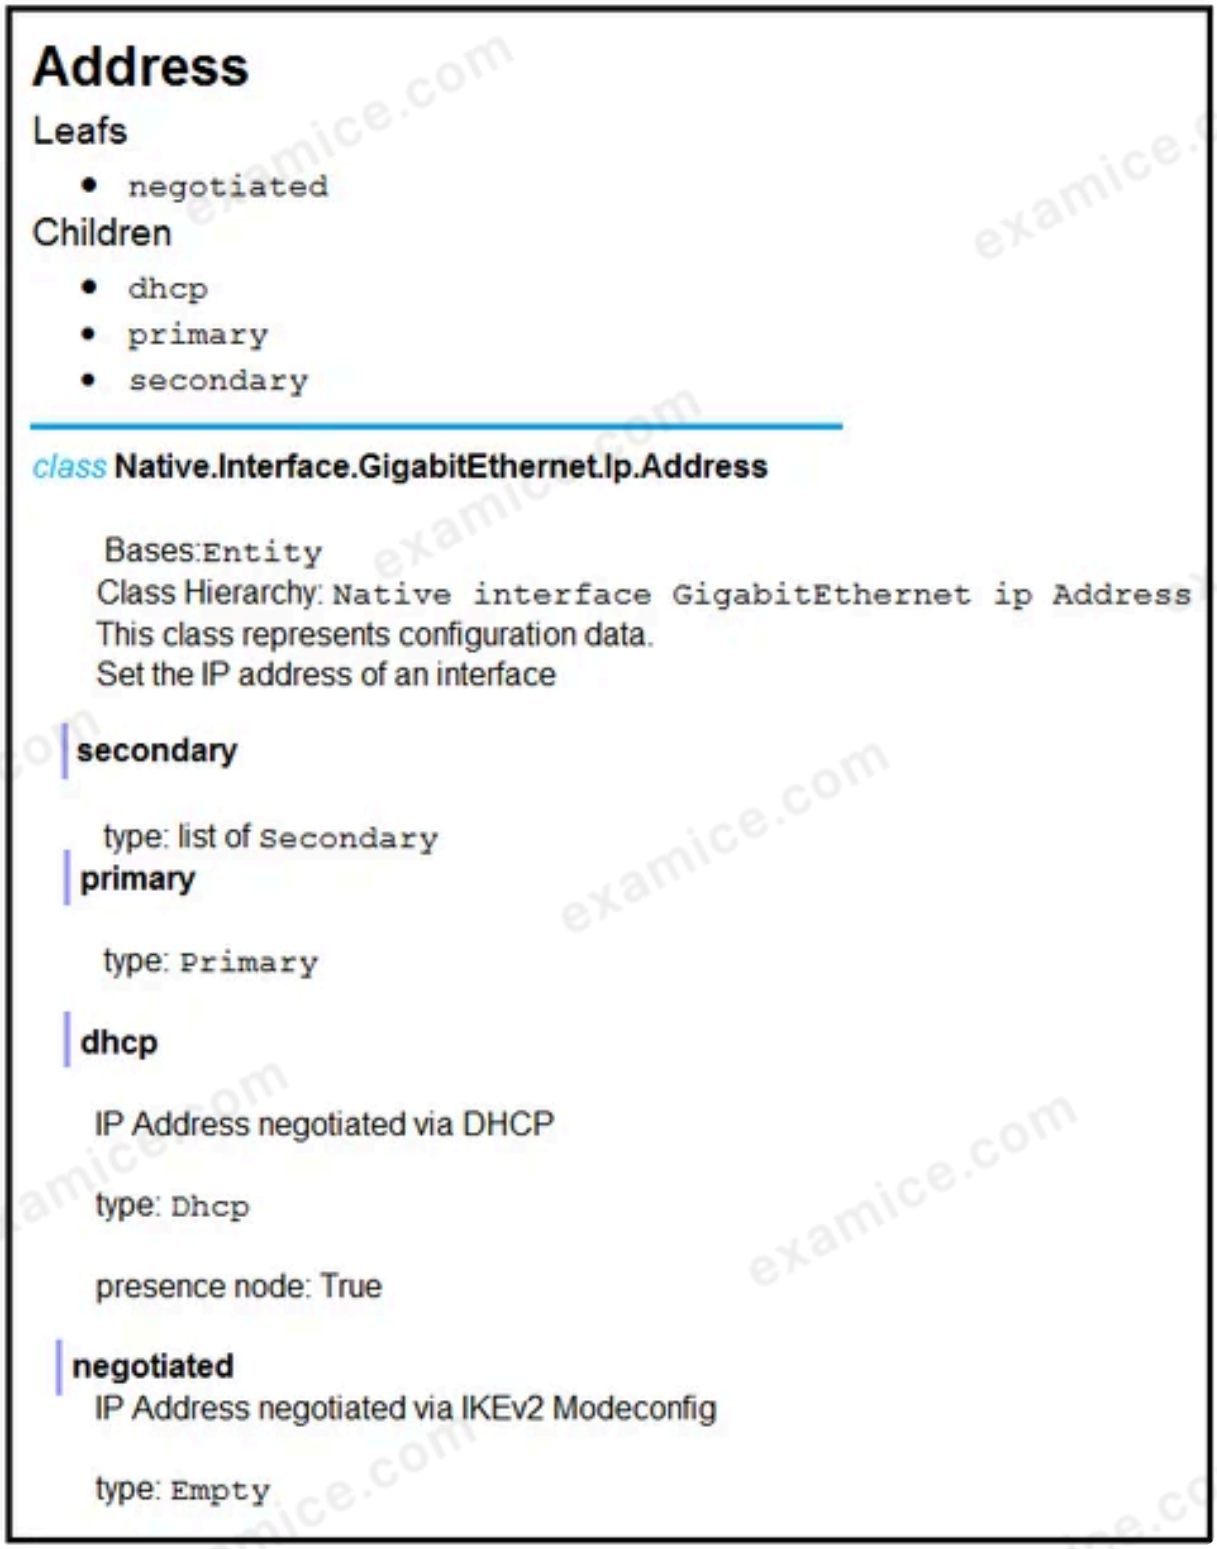

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to configure the GigabitEthernet 3 interface. Not all options are used.