

백엔드 4일차 실습과제_P172 홍은비

! 리팩토링

1-1. User DELETE (삭제)

DELETE/api/users/{id} 사용자 삭제

ID로 사용자를 삭제합니다

Parameters

Name	Description
id required	
integer(\$int64)	4
(path)	

ExecuteClear

Responses

Curl

curl -X 'DELETE' \n'http://localhost:8080/api/users/4' \n-H 'accept: */*'

Request URL

http://localhost:8080/api/users/4

Server response

Code	Details
204	Response headers

connection: keep-alive
date: Thu,30 Jul 2026 08:29:32 GMT
keep-alive: timeout=60

Responses

Code	Description	Links
200	OK	No links

1-2. User GET 전체 조회

GET/api/users 전체 사용자 조회

등록된 모든 사용자를 조회합니다

Parameters

No parameters

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8080/api/users' \n-H 'accept: */*'

Request URL

http://localhost:8080/api/users

Server response

Code	Details
200	Response body

[{"id": 1, "username": "user1", "password": "password1", "email": "user1@example.com", "balance": 1000000}, {"id": 2, "username": "user2", "password": "password2", "email": "user2@example.com", "balance": 2000000}, {"id": 3, "username": "user3", "password": "password3", "email": "user3@example.com", "balance": 3000000}]

Response headers

connection: keep-alive
content-type: application/json
date: Thu,30 Jul 2026 08:28:14 GMT
keep-alive: timeout=60
transfer-encoding: chunked

Responses

Code	Description	Links
200	OK	No links

Media type

/

Controls Accept header.

Example Value | Schema

[{"id": 0, "username": "string", "password": "string", "email": "string", "balance": 0}]

백엔드 4일차 실습과제_P172 홍은비

1

2-1. Stock PUT (수정)

PUT

/api/stocks/{id} 주식 수정

ID로 주식 정보를 수정합니다

Parameters

Cancel

Reset

Name	Description
id required	
integer(int64)	2
(path)	

Request body required

application/json

```
{  "id": 2,  "code": "000660",  "name": "SK 하이닉스",  "currentPrice": 120000,  "previousPrice": 98000}
```

Execute

Clear

Responses

Curl

```
curl -X 'PUT' \  "http://localhost:8080/api/stocks/2" \  -H 'accept: */*' \  -H 'Content-Type: application/json' \  -d '{  "id": 2,  "code": "000660",  "name": "SK 하이닉스",  "currentPrice": 120000,  "previousPrice": 98000}'
```

Request URL

http://localhost:8080/api/stocks/2

Server response

Code	Details
200	Response body <pre>{ "id": 2, "code": "000660", "name": "SK 하이닉스", "currentPrice": 120000, "previousPrice": 98000}</pre> Response headers connection: keep-alivecontent-type: application/jsondate: Thu, 30 Jul 2026 08:32:08 GMTkeep-alive: timeout=60transfer-encoding: chunked

Responses

Code	Description	Links
200	OK	No links

Media type

/

Control Accept header

Example Value | Schema

```
{  "id": 0,  "code": "string",  "name": "string",  "currentPrice": 0,  "previousPrice": 0}
```

2-2. Stock DELETE (삭제)

DELETE

/api/stocks/{id} 주식 삭제

ID로 주식을 삭제합니다

Parameters

Cancel

Name	Description
id required	
integer(int64)	13
(path)	

ExecuteClear

Responses

Curl

```
curl -X 'DELETE' \  "http://localhost:8080/api/stocks/13" \  -H 'accept: */*' 
```

Request URL

http://localhost:8080/api/stocks/13


Server response

Code	Details
204	Response headers connection: keep-alivedate: Thu, 30 Jul 2026 08:34:41 GMTkeep-alive: timeout=60


Responses

Code	Description	Links
200	OK	No links


2-3. Stock GET by Code (코드로 조회)

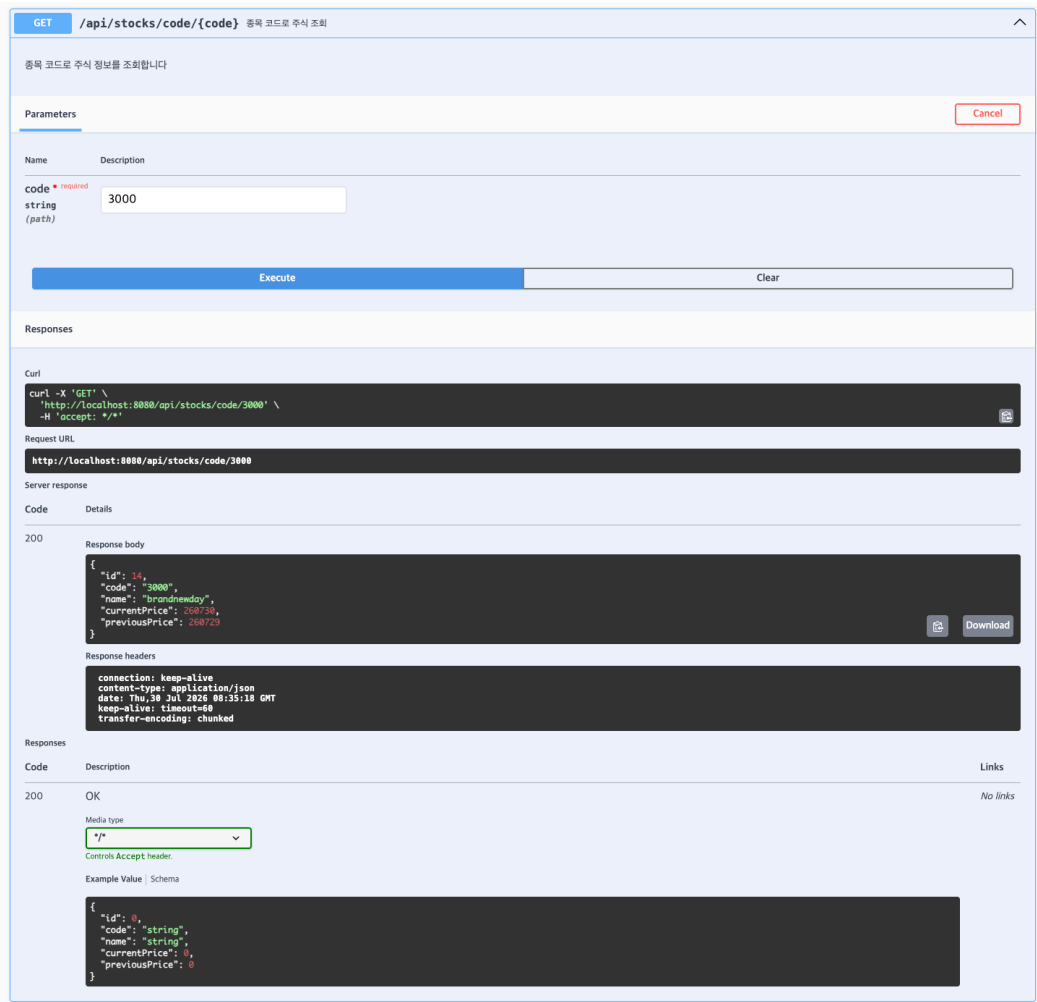


3-1. Transaction GET by ID (거래 상세 조회) --> Read-Only

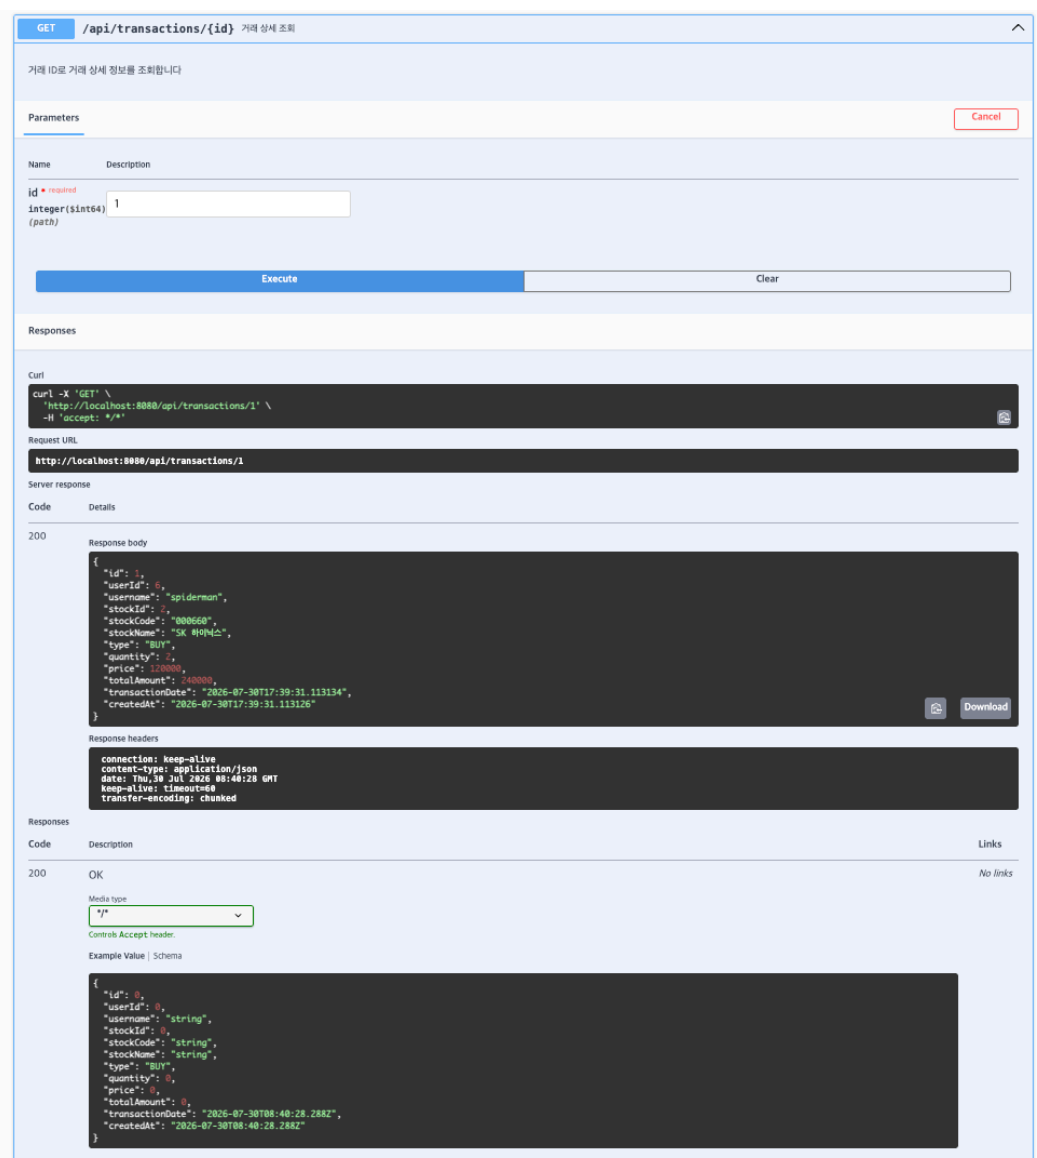

3-2. Transaction POST /trade (주식 매매 실행)

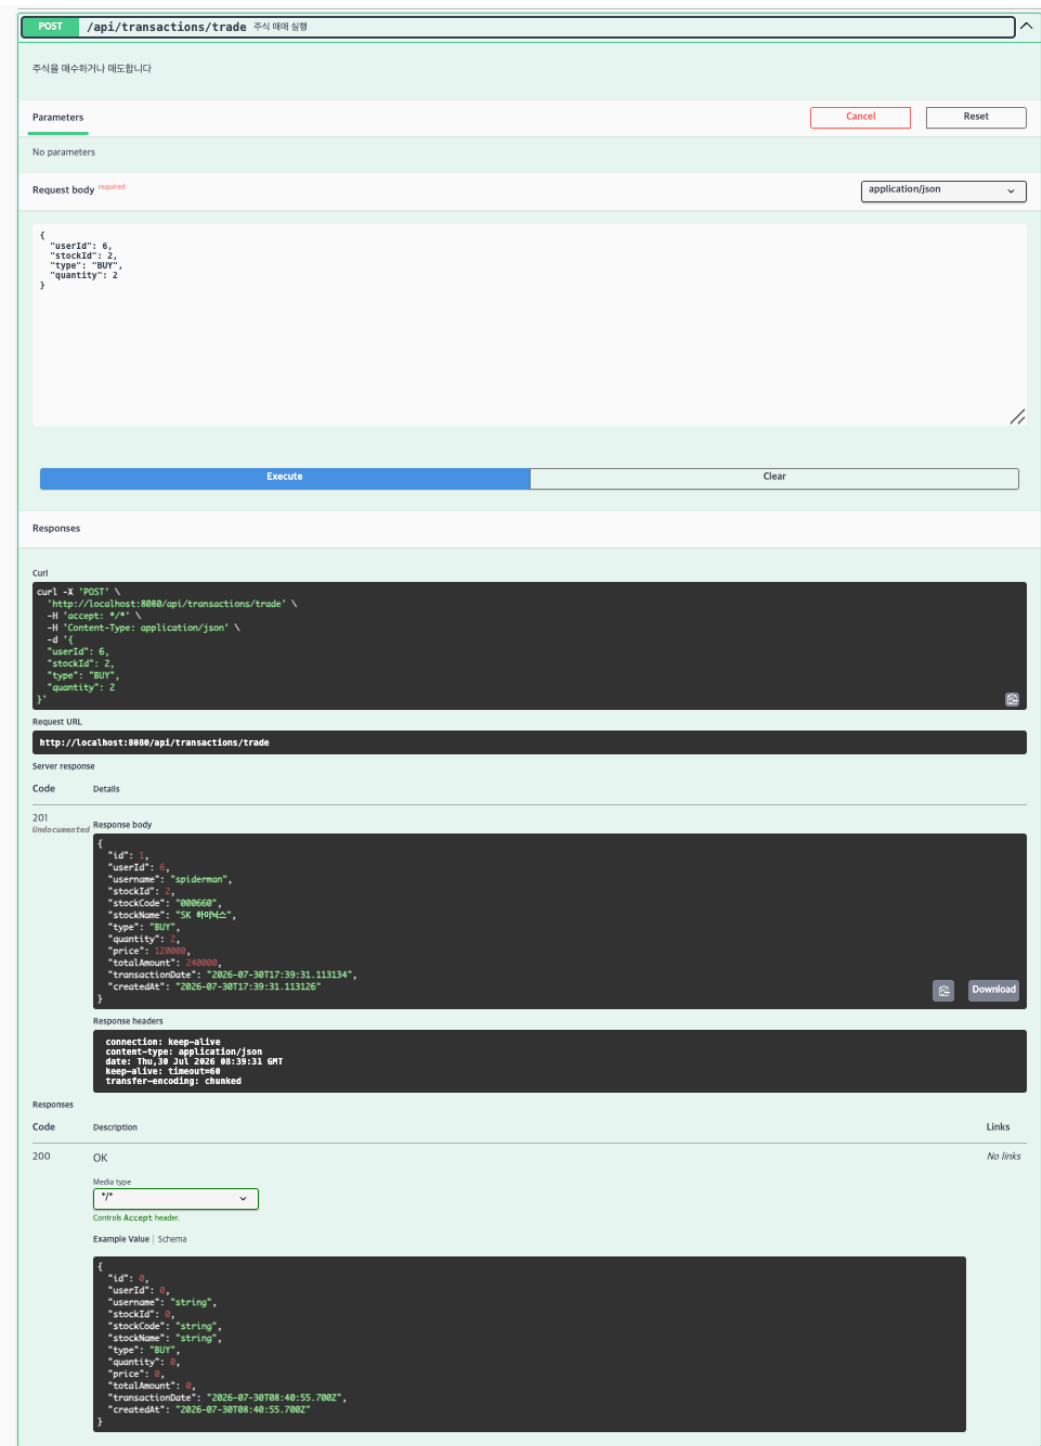


3-3. Portfolio GET 특정 주식

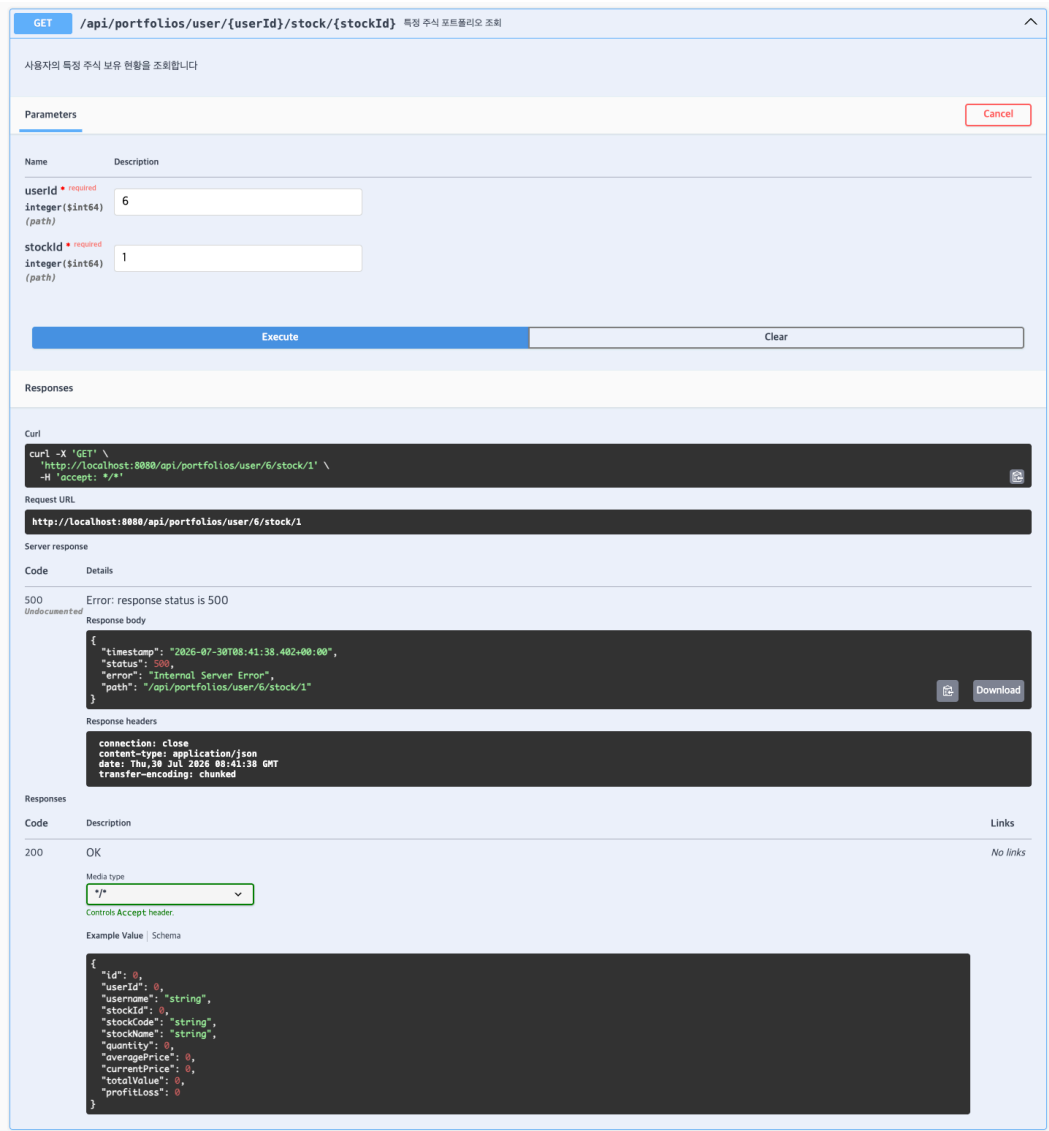


! 분석/고급 기능 5개 추가 개발

1. Analysis 포트폴리오 평가 손익 조회

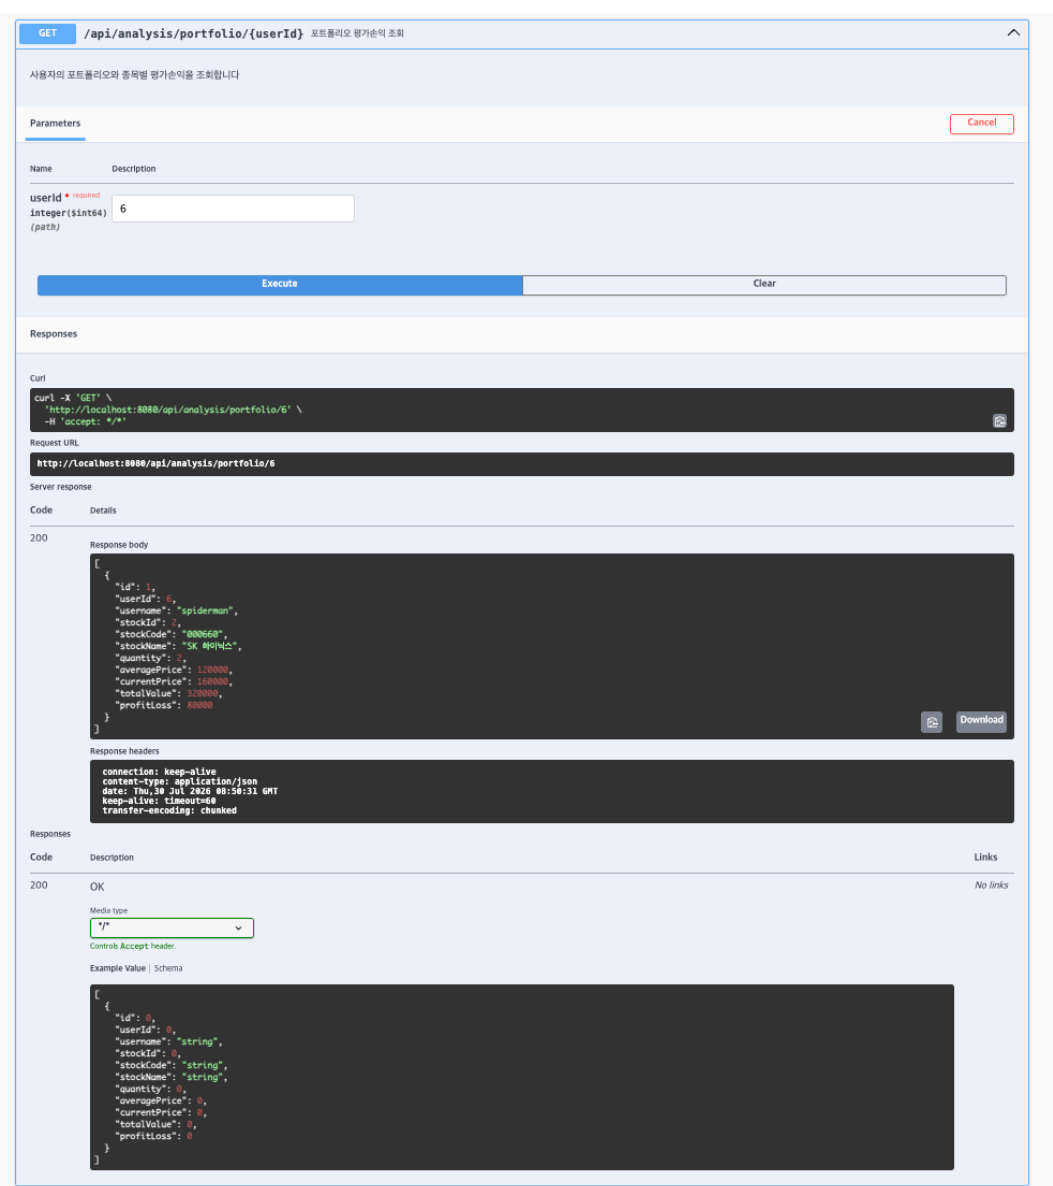

2. Analysis 거래 내역 상세 조회

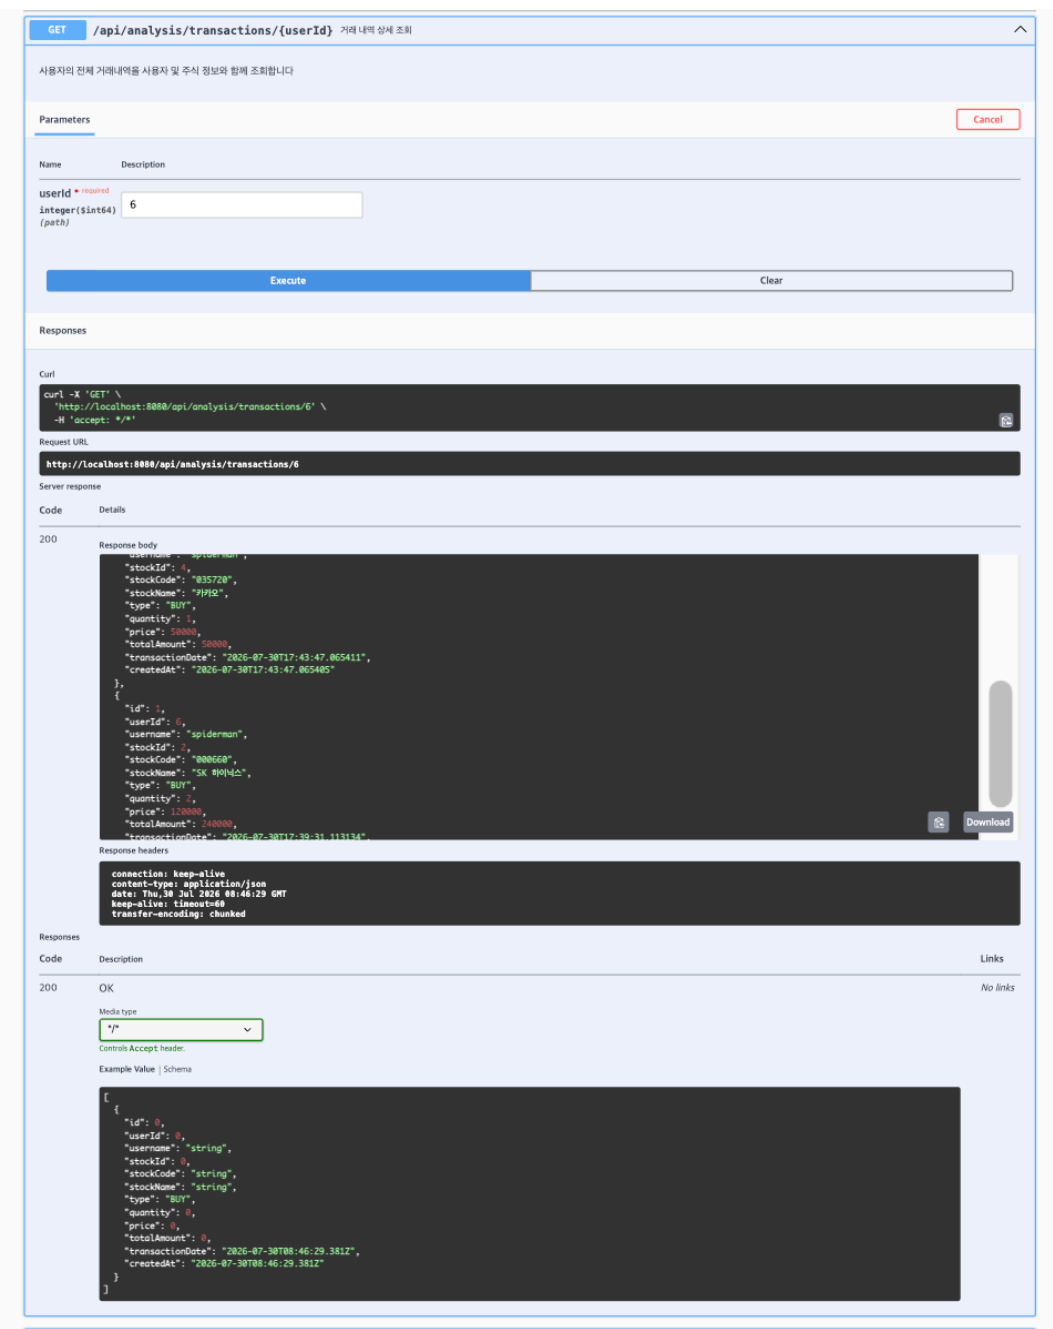

3. Analysis 특정 주식 거래 내역 조회

GET

/api/analysis/transactions/{userId}/stock/{stockId}

특정 주식 거래 내역 조회

사용자의 특정 주식 매수-매도 내역을 조회합니다

Parameters

Cancel

Name	Description
userId required	
integer(int64)	
(path)	
stockId required	
integer(int64)	
(path)	

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8080/api/analysis/transactions/6/stock/4' \n-H 'accept: */*'

Request URL

http://localhost:8080/api/analysis/transactions/6/stock/4

Server response

Code

Details

200

Response body

```
{
  "stockId": 4,
  "stockCode": "835720",
  "stockName": "7919",
  "type": "SELL",
  "quantity": 1,
  "price": 50000,
  "totalAmount": 50000,
  "transactionDate": "2026-07-30T17:44:51.059457",
  "createdAt": "2026-07-30T17:44:51.059445"
},
{
  "id": 0,
  "userId": 6,
  "username": "spiderman",
  "stockId": 4,
  "stockCode": "835720",
  "stockName": "7919",
  "type": "BUY",
  "quantity": 1,
  "price": 50000,
  "totalAmount": 50000,
  "transactionDate": "2026-07-30T17:43:47.065411",
  "createdAt": "2026-07-30T17:43:47.065405"
}

```

Response headers

```
connection: keep-alive
content-type: application/json
date: Thu, 30 Jul 2025 08:46:04 GMT
keep-alive: timeout=60
transfer-encoding: chunked

```

Responses

Code	Description	Links
200	OK	No links

Media type

Control Accept header

Example Value | Schema

```
{
  "id": 0,
  "userId": 6,
  "username": "string",
  "stockId": 4,
  "stockCode": "string",
  "stockName": "string",
  "type": "string",
  "quantity": 1,
  "price": 0,
  "totalAmount": 0,
  "transactionDate": "2026-07-30T08:46:04.6932",
  "createdAt": "2026-07-30T08:46:04.6932"
}

```

4. Analysis 총 자산 조회

GET

/api/analysis/assets/{userId}

총 자산 조회

사용자의 현금과 보유 주식 평가금액을 합산하여 조회합니다

Parameters

Cancel

Name	Description
userId required	
integer(int64)	
(path)	

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8080/api/analysis/assets/6' \n-H 'accept: */*'

Request URL

http://localhost:8080/api/analysis/assets/6

Server response

Code

Details

200

Response body

```
{
  "userId": 6,
  "totalAssets": 430000
}

```

Response headers

```
connection: keep-alive
content-type: application/json
date: Thu, 30 Jul 2025 08:53:20 GMT
keep-alive: timeout=60
transfer-encoding: chunked

```

Responses

Code	Description	Links
200	OK	No links

Media type

Control Accept header

Example Value | Schema

```
{
  "additionalProp1": {},
  "additionalProp2": {},
  "additionalProp3": {}
}

```

5. Analysis 총 수익률 조회

백엔드 4일차 실습과제_P172 홍은비

6

GET

/api/analysis/return-rate/{userId} 총 수익률 조회

사용자가 보유한 전체 주식의 총수익률을 조회합니다

Parameters

Cancel

Name	Description
userId required	
integer(int64)	
(path)	

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8080/api/analysis/return-rate/6' \n-H 'accept: */*'

Request URL

http://localhost:8080/api/analysis/return-rate/6

Server response

Code

Details

200

Response body

{\n "totalReturnRate": 33.33333333333333,\n "userId": 6\n}

Response headers

connection: keep-alive\ncontent-type: application/json\ndate: Thu, 18 Jul 2024 08:49:36 GMT\nkeep-alive: timeout=60\ntransfer-encoding: chunked

Responses

Code	Description	Links
200	OK	No links

Media type

/

Controls Accept header.

Example Value | Schema

{\n "additionalProp1": {},\n "additionalProp2": {},\n "additionalProp3": {}\n}

! 개인 기능

투자 성과 종합 조회

GET

/api/analysis/performance/{userId} 투자 성과 종합 조회

실현손익, 평가손익, 총손익과 전체 수익률을 조회합니다

Parameters

Cancel

Name	Description
userId required	
integer(int64)	
(path)	

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8080/api/analysis/performance/4' \n-H 'accept: */*'

Request URL

http://localhost:8080/api/analysis/performance/4

Server response

Code

Details

200

Response body

{\n "userId": 4,\n "realizedProfit": 15000,\n "unrealizedProfit": 8000,\n "totalProfit": 23000,\n "totalInvestment": 250000,\n "returnRate": 9.238769238769232\n}

Response headers

connection: keep-alive\ncontent-type: application/json\ndate: Thu, 18 Jul 2024 08:53:33 GMT\nkeep-alive: timeout=60\ntransfer-encoding: chunked

Responses

Code	Description	Links
200	OK	No links

Media type

/

Controls Accept header.

Example Value | Schema

{\n "userId": 4,\n "realizedProfit": 0,\n "unrealizedProfit": 0,\n "totalProfit": 0,\n "totalInvestment": 0,\n "returnRate": 0\n}

백엔드 4주차 실습과제_P172 홍은비

7