Problem report for:

Rubik-Italic[wght].ttf

sha1: 74e646840b79c3360750bc44ce01f0ae8f13cf3b
Family name: Rubik
Version: Version 2.300;gftools[0.9.30]

Legend:

- ► Contour start point and direction
- ● Contour start point when the first two points overlap
- ► Contour start point in contours with wrong direction
- ● Suggested new contour start point

peh_alefMaksuraar

tolerance: 0.73

contour_order

”

midway interpolation

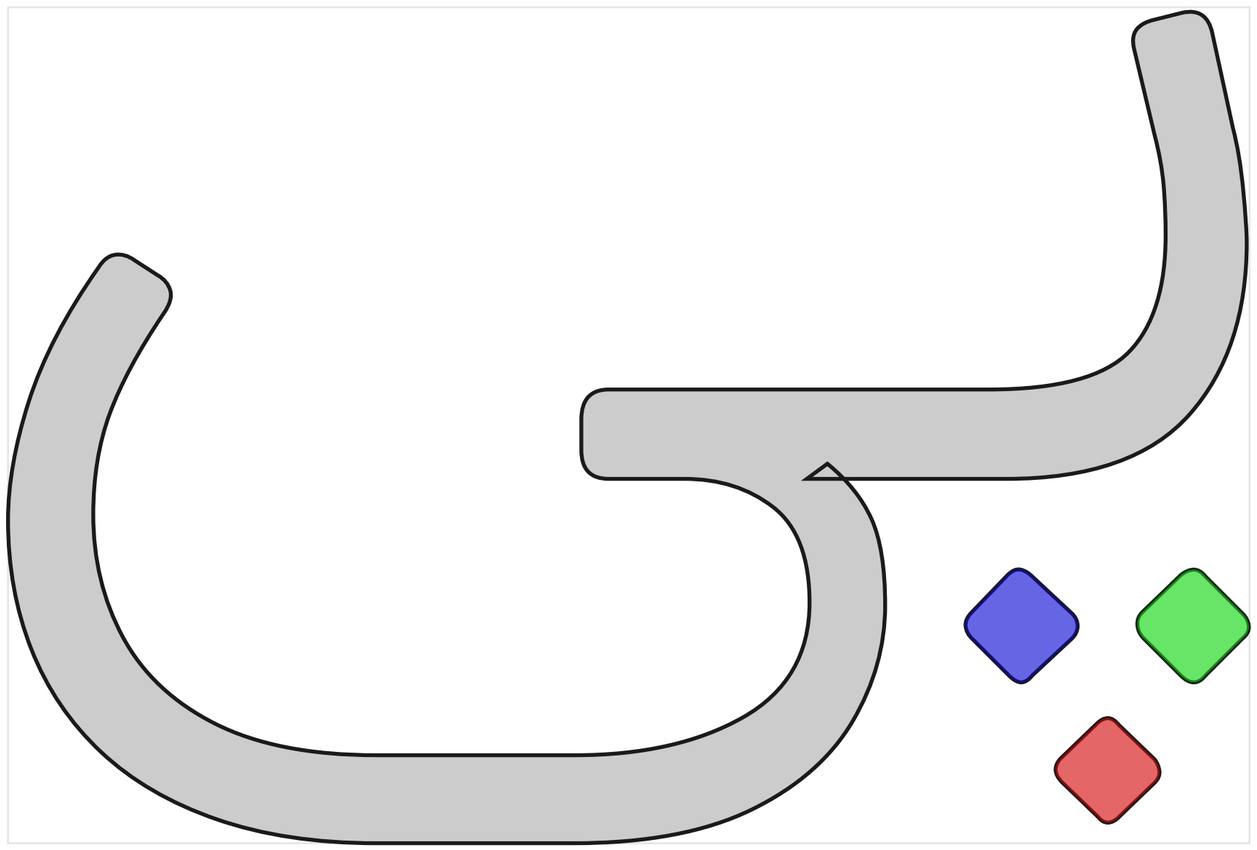

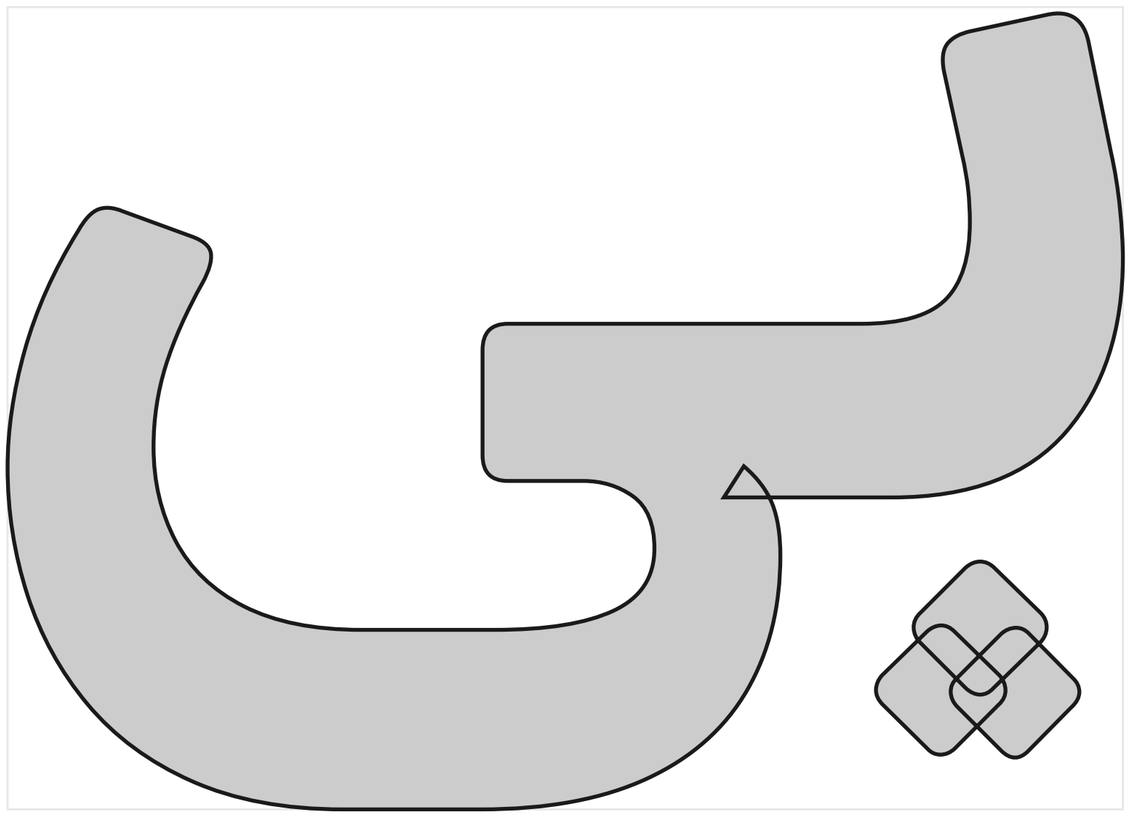

’wght=900.0’

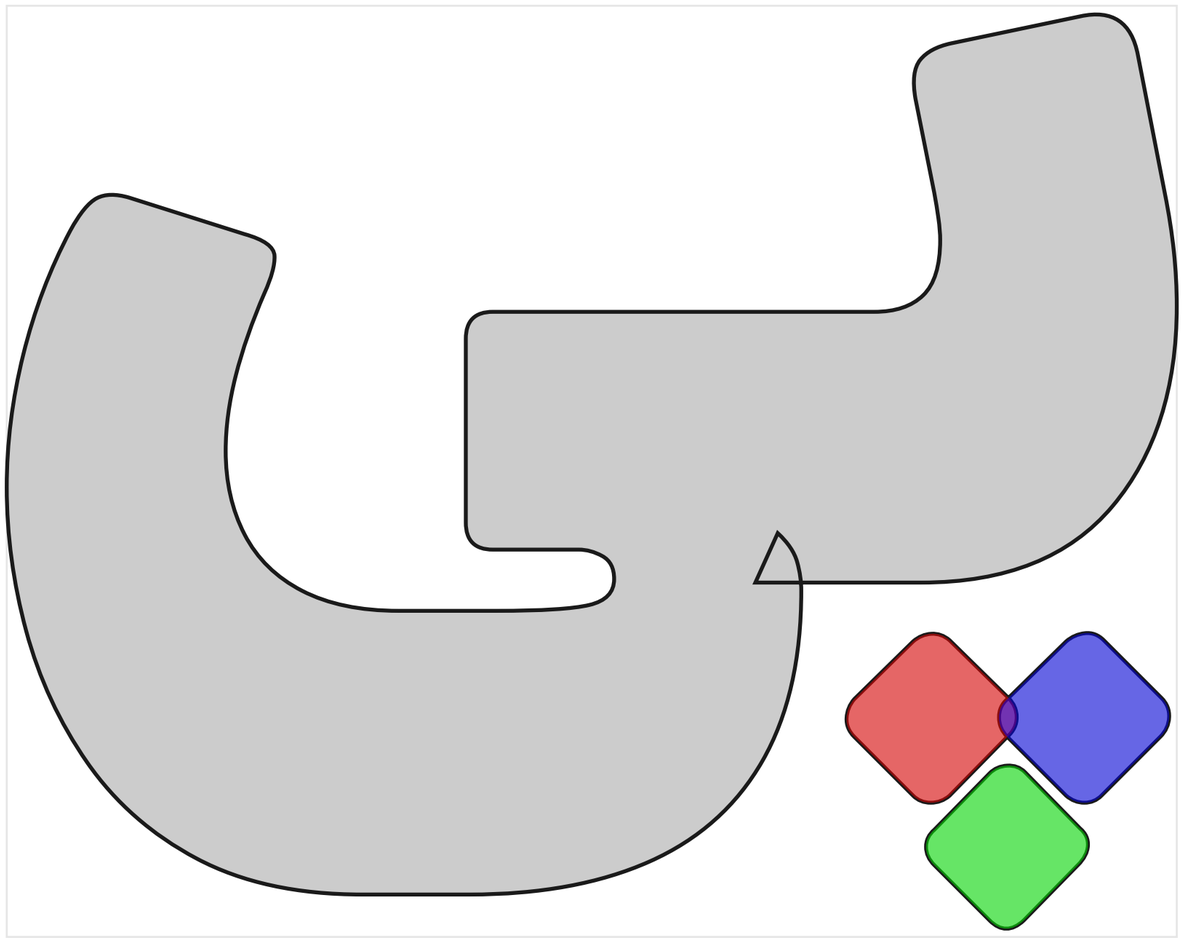

proposed fix

peh_noonar.fina

tolerance: 0.81

contour_order

”

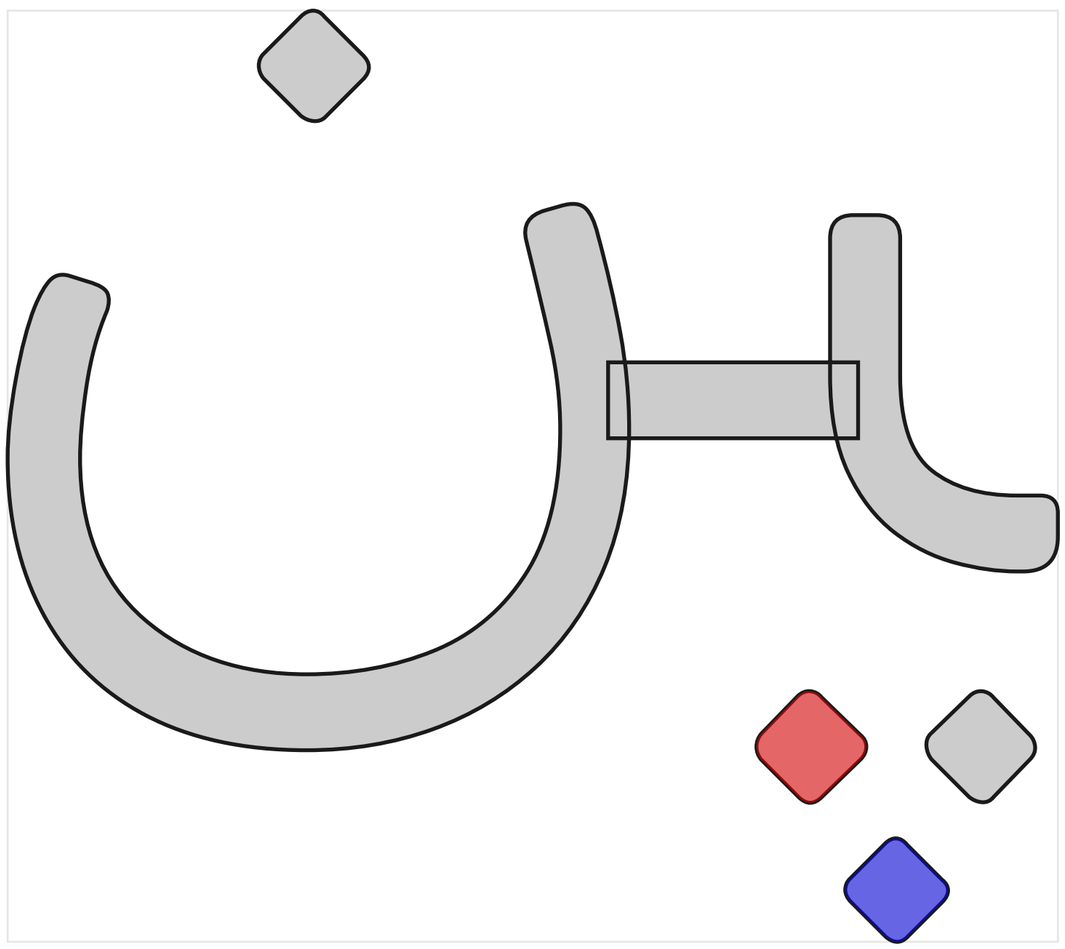

midway interpolation

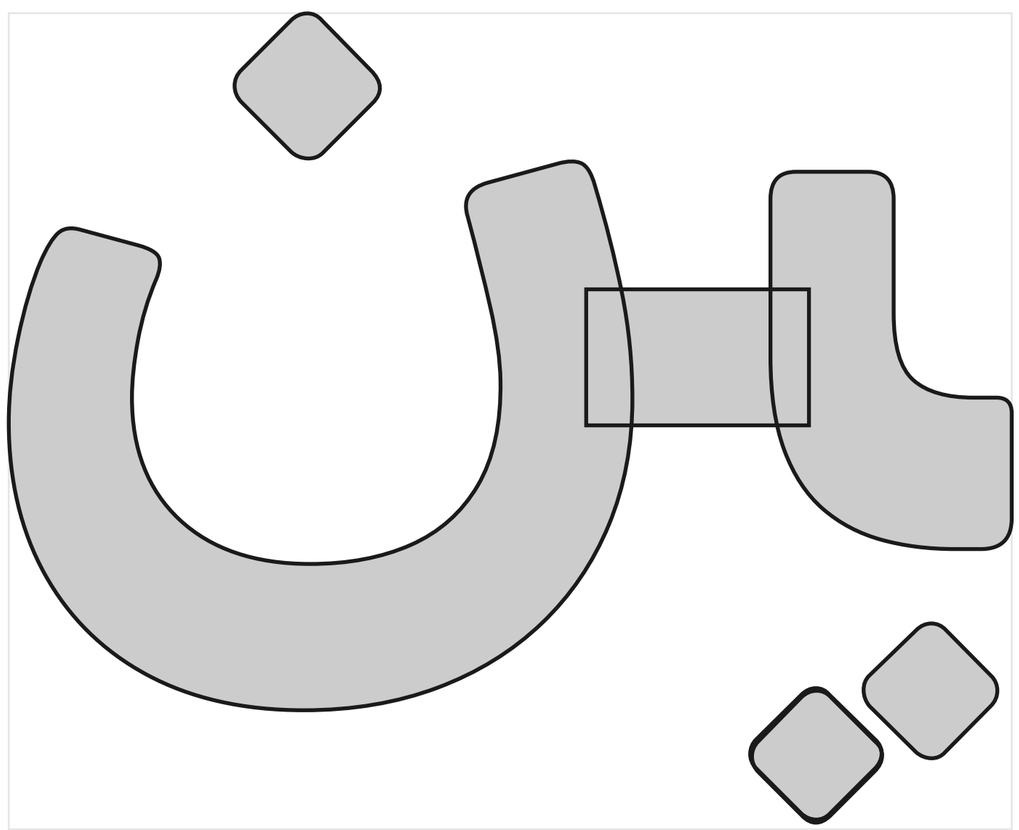

’wght=900.0’

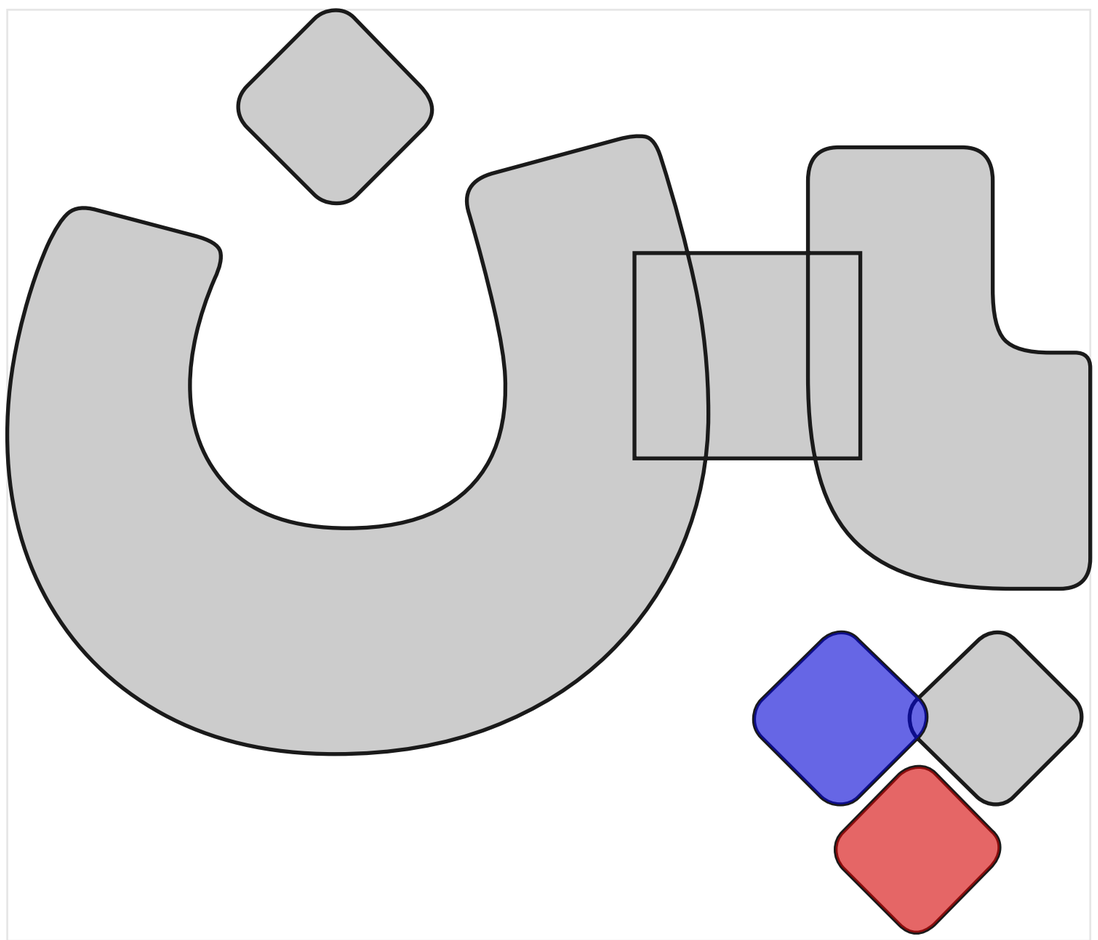

proposed fix

peh_rehar.fina

tolerance: 0.77

contour_order

”

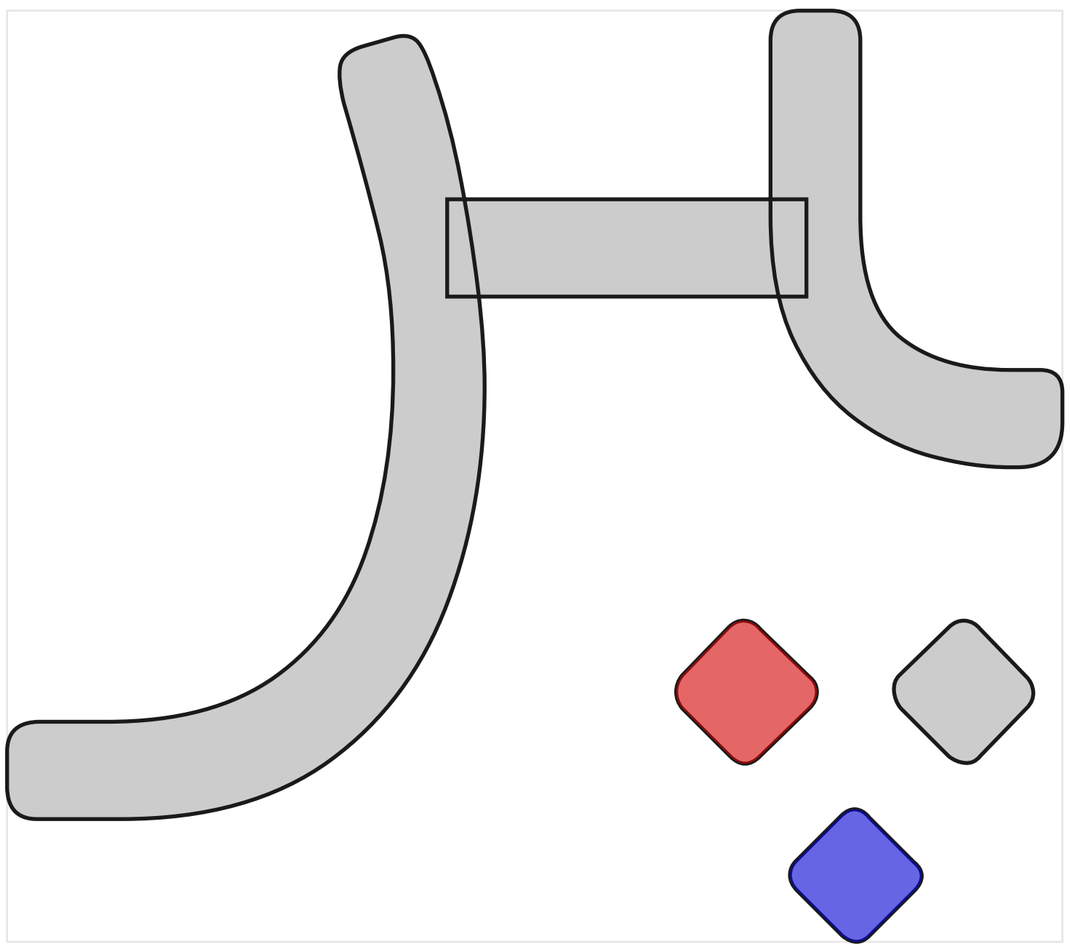

midway interpolation

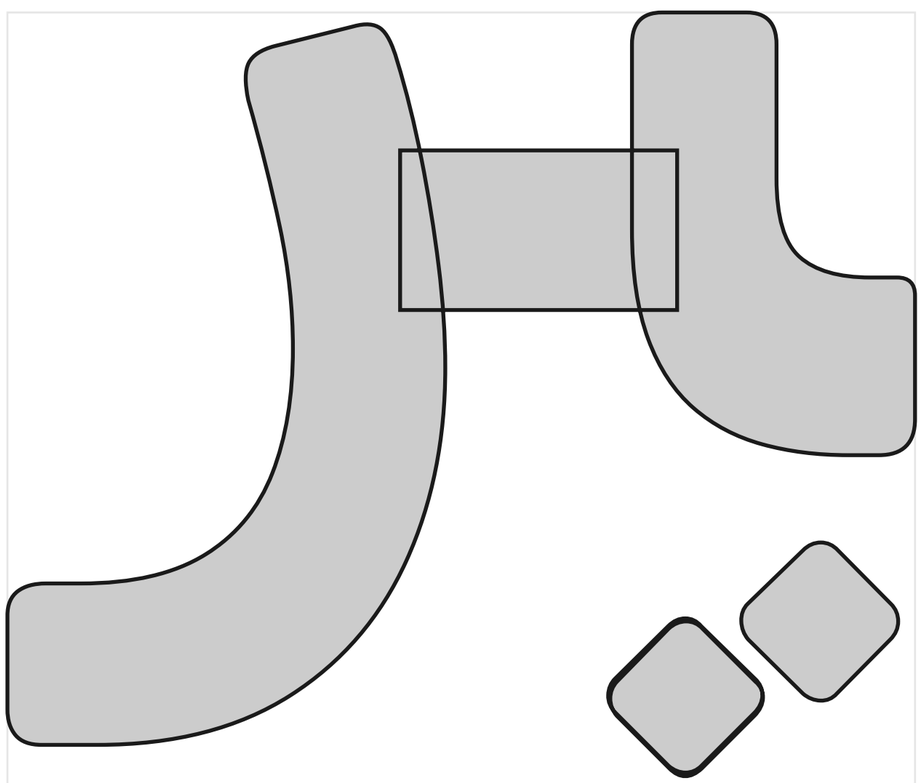

’wght=900.0’

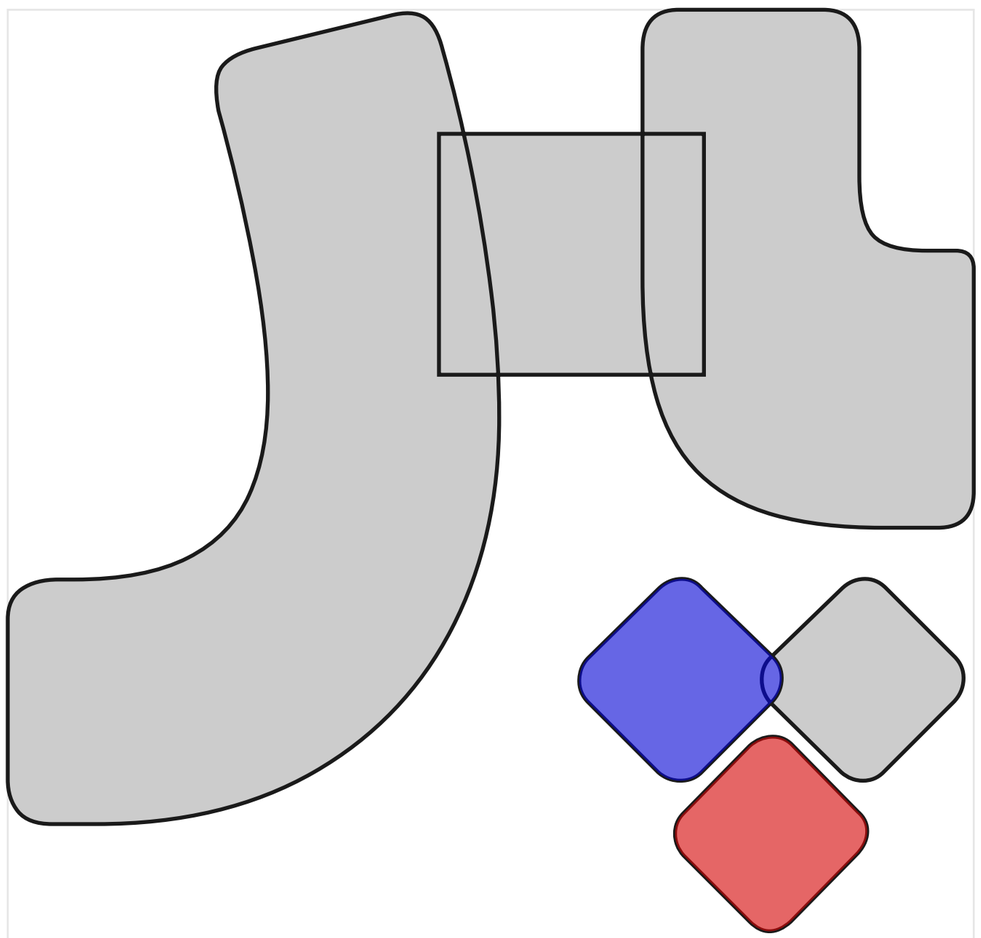

proposed fix

peh_yehHamzaabovear

tolerance: 0.73

contour_order

”

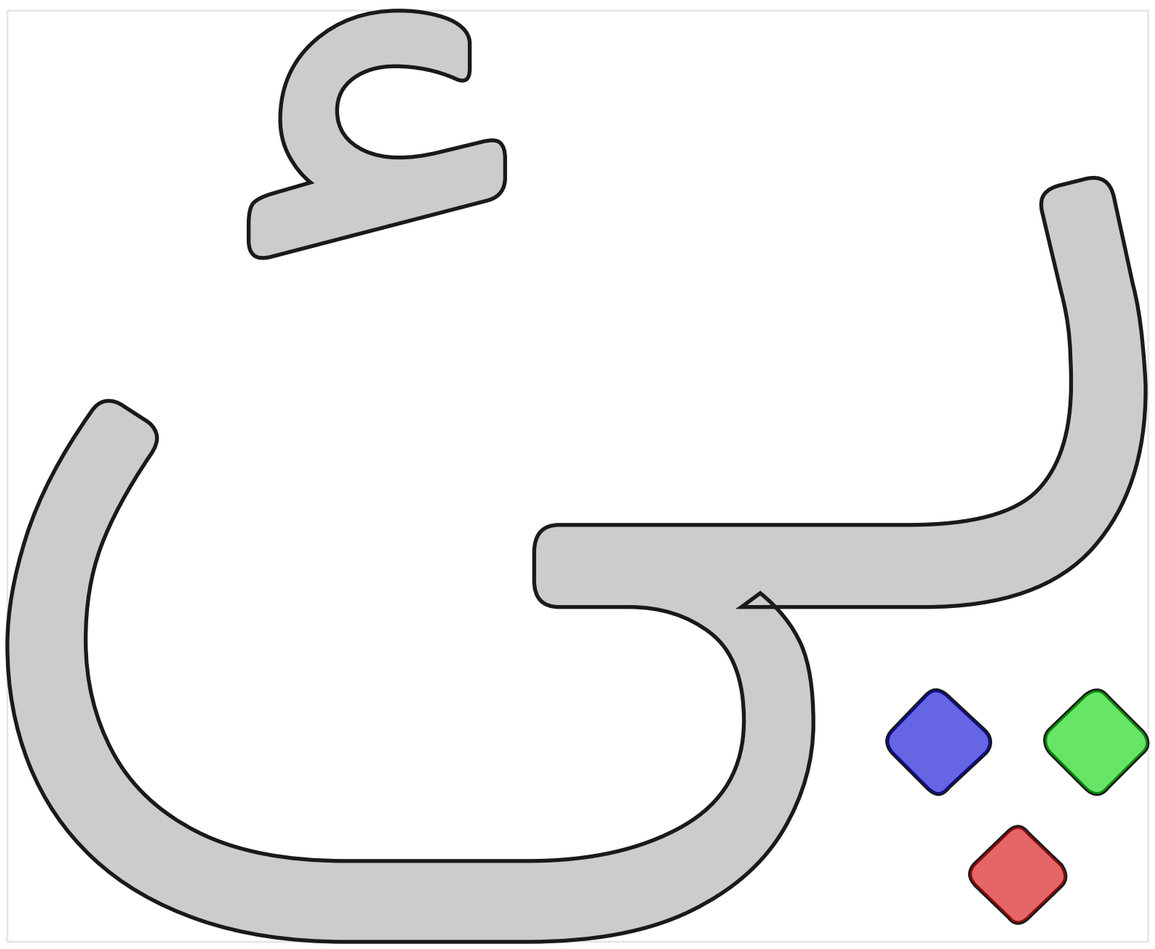

midway interpolation

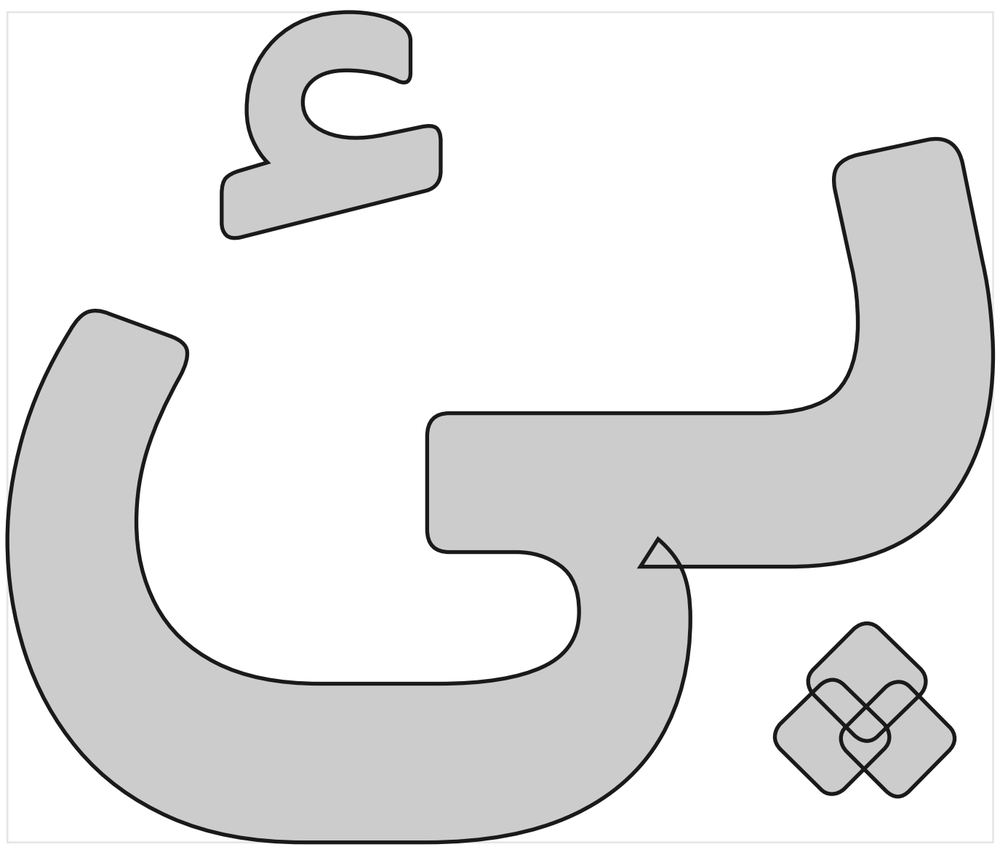

’wght=900.0’

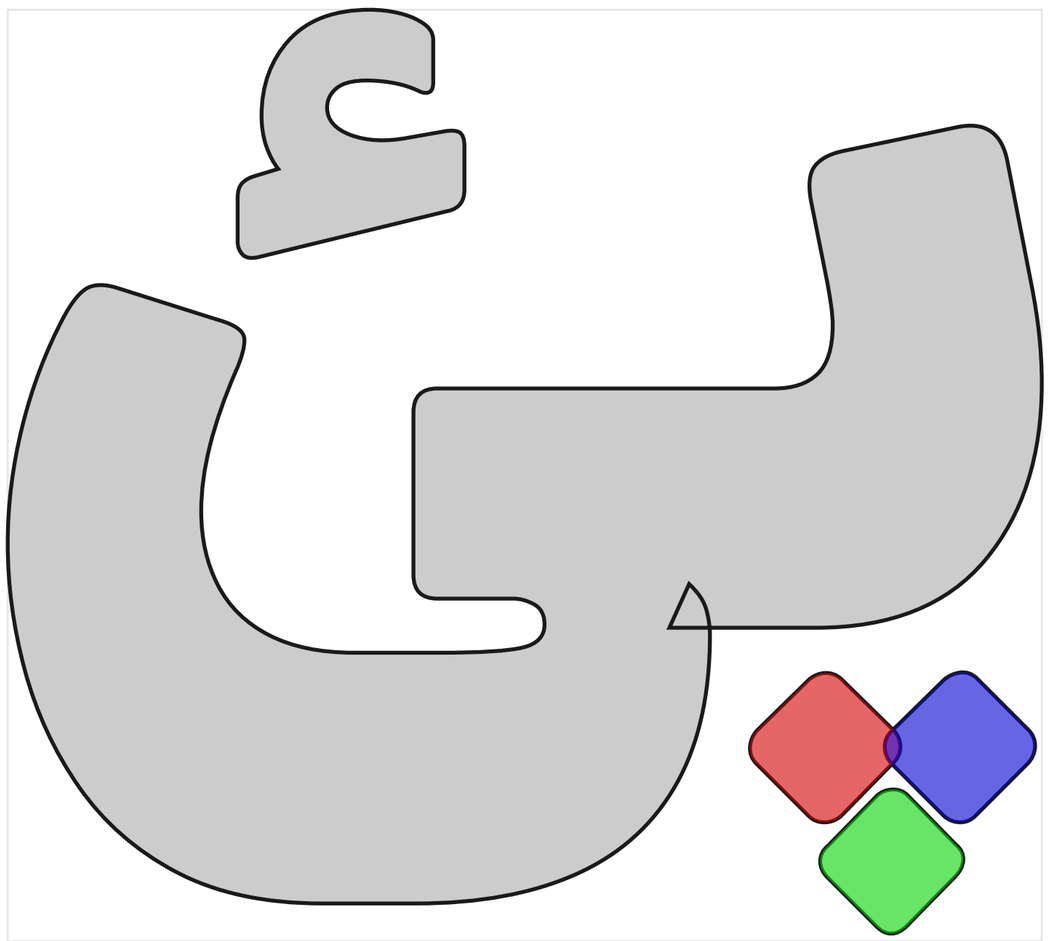

proposed fix

peh_yehar

tolerance: 0.75

contour_order

”

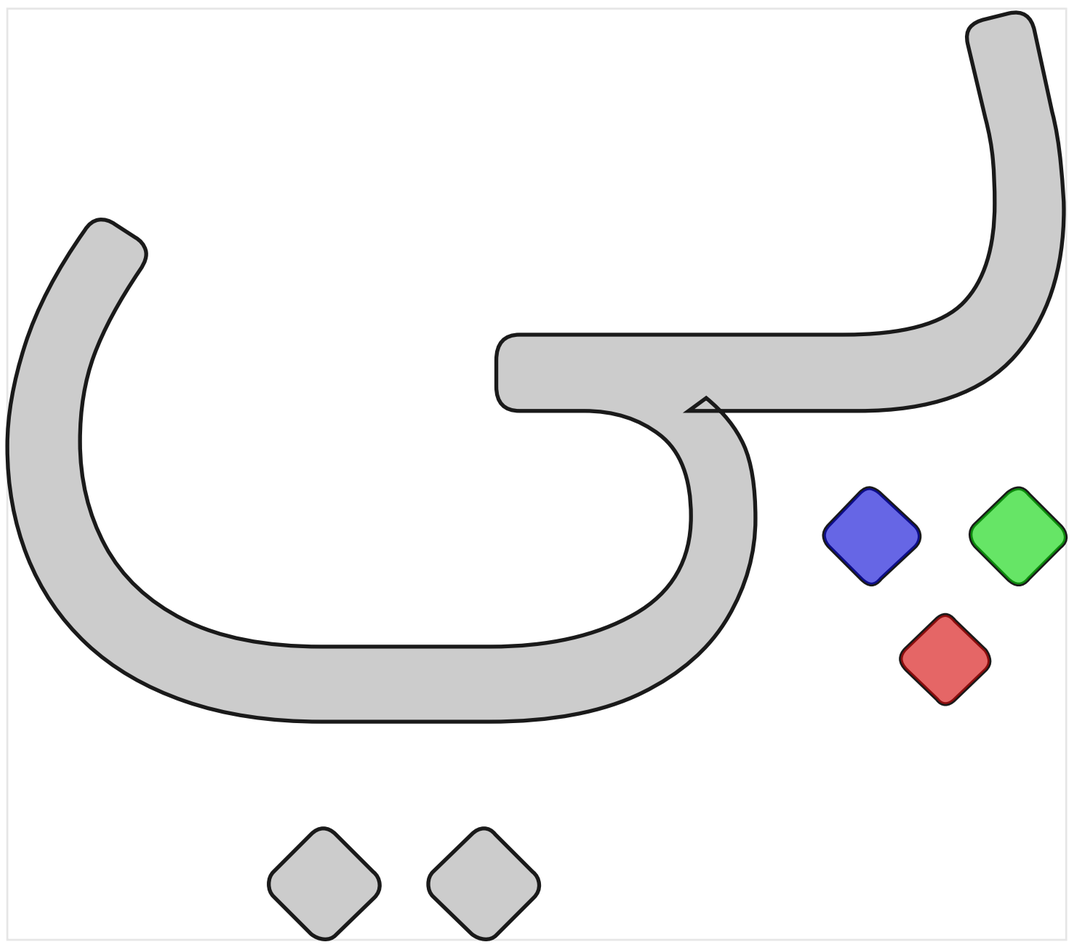

midway interpolation

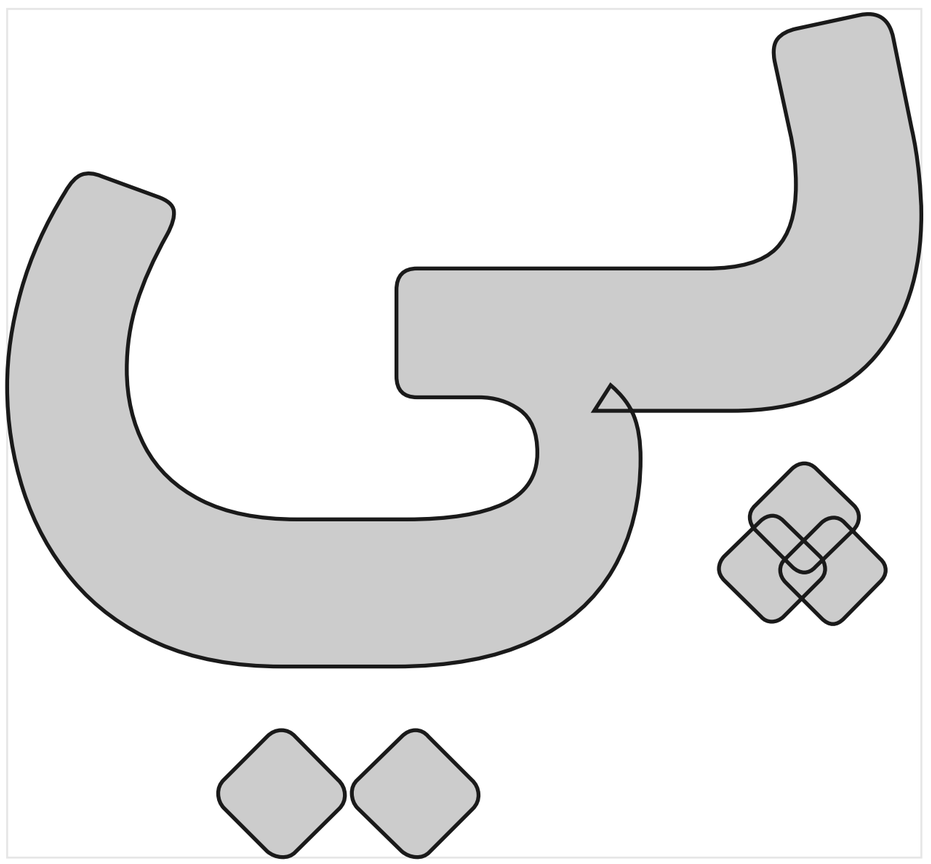

’wght=900.0’

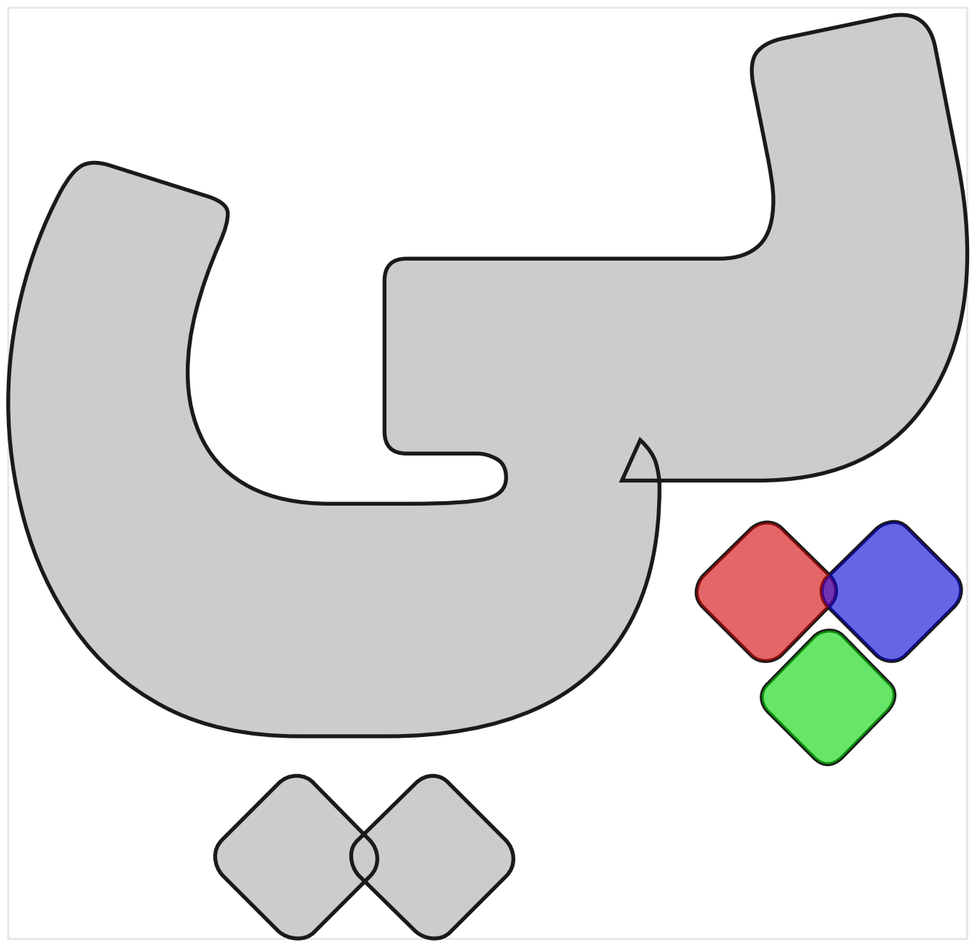

proposed fix

peh_zainar.fina

tolerance: 0.80

contour_order

”

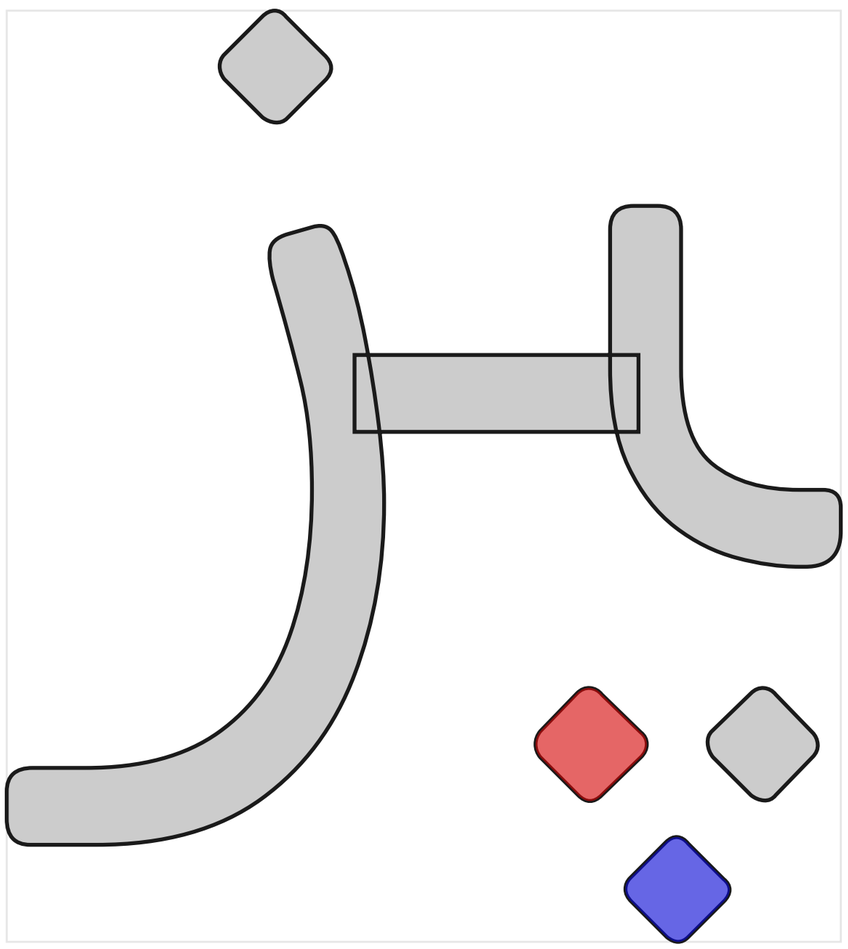

midway interpolation

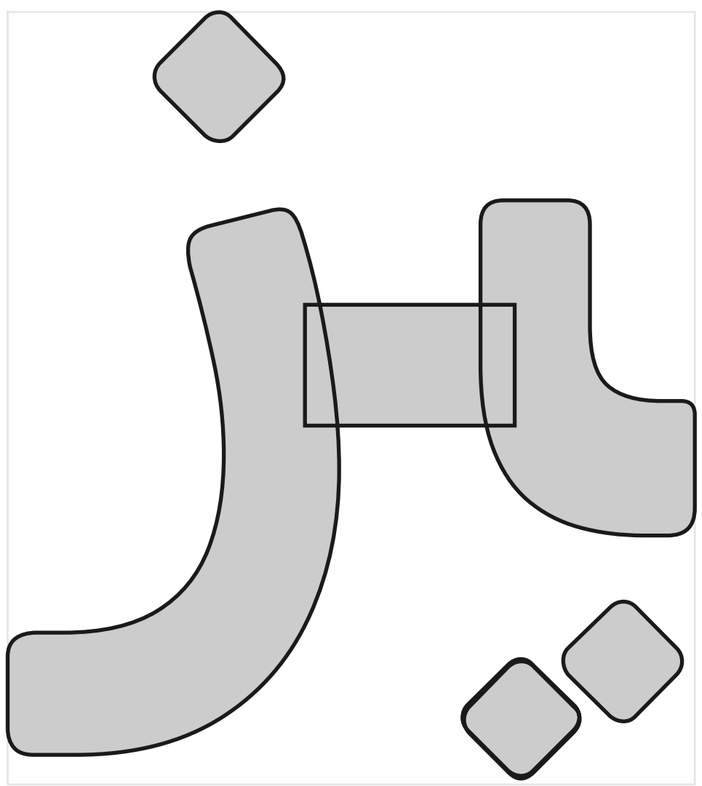

’wght=900.0’

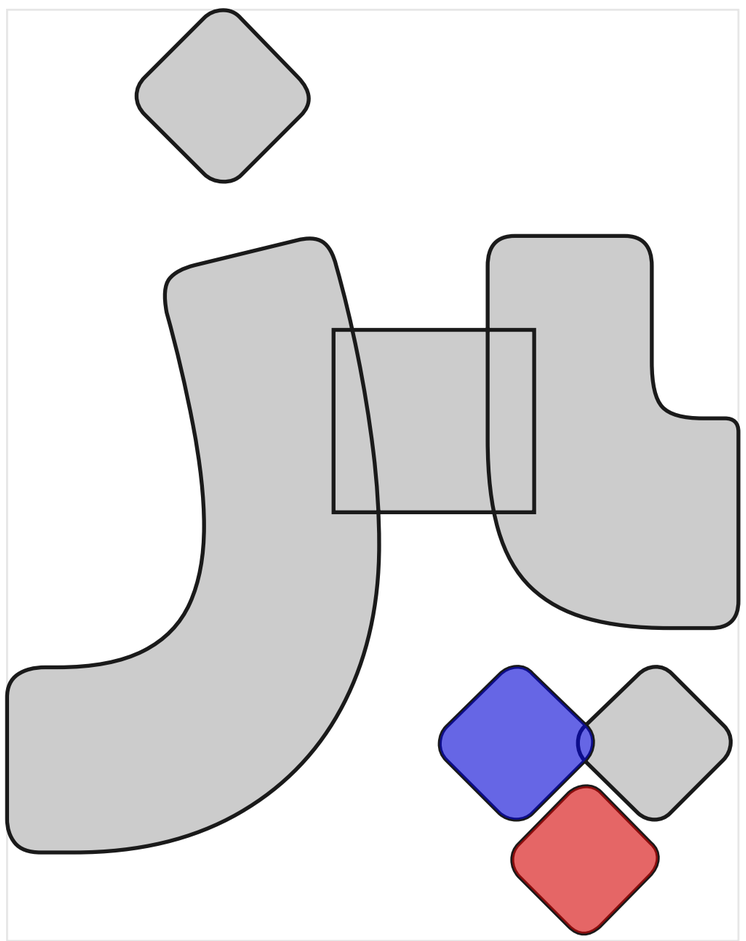

proposed fix

theh_yehHamzaabovear

tolerance: 0.67

contour_order

”

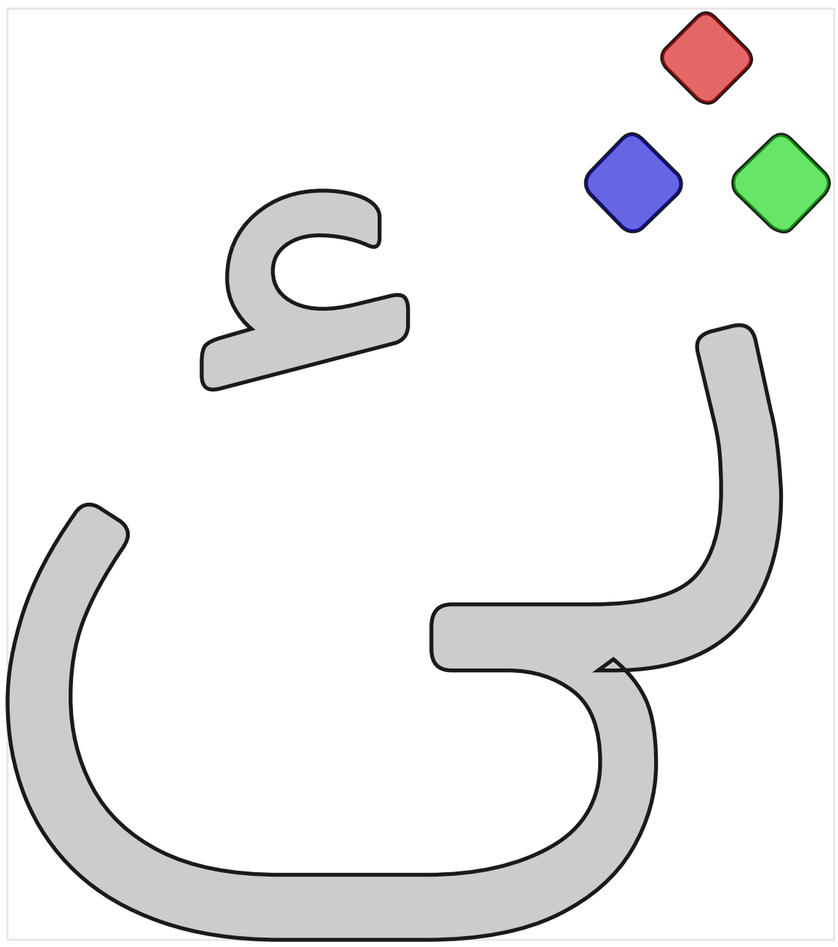

midway interpolation

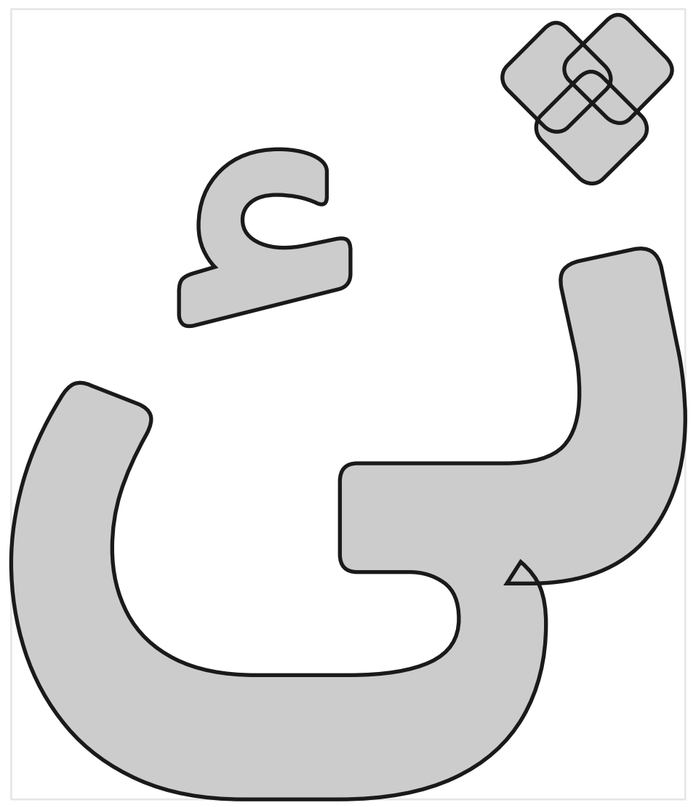

’wght=900.0’

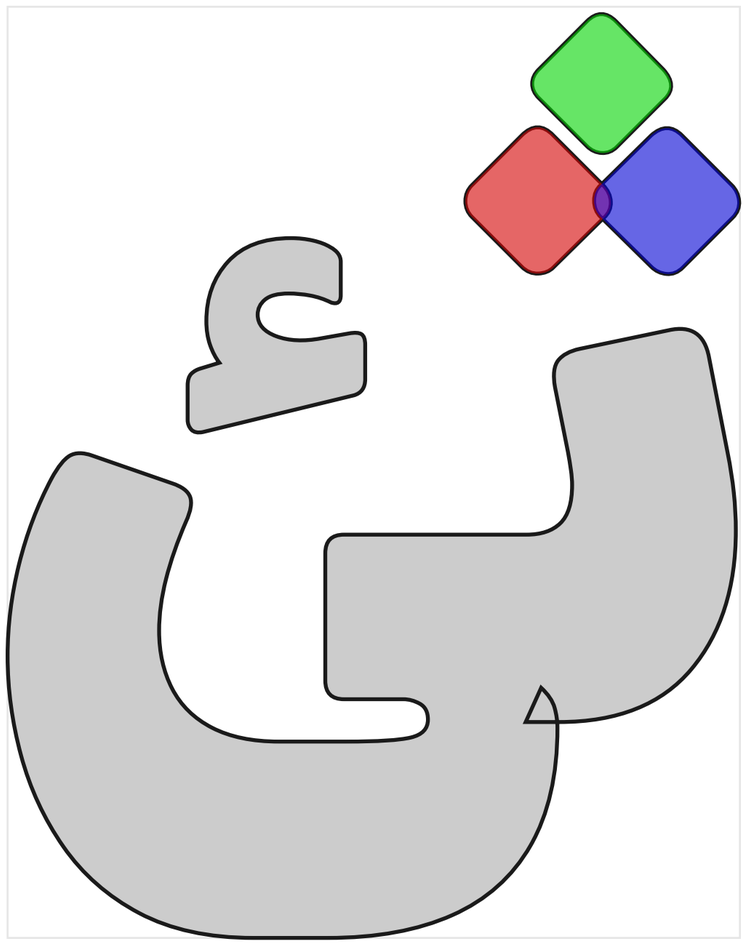

proposed fix

¯_(ツ)_/¯

threedotsdownabovear

tolerance: 0.08

contour_order, wrong_start_point

”

midway interpolation

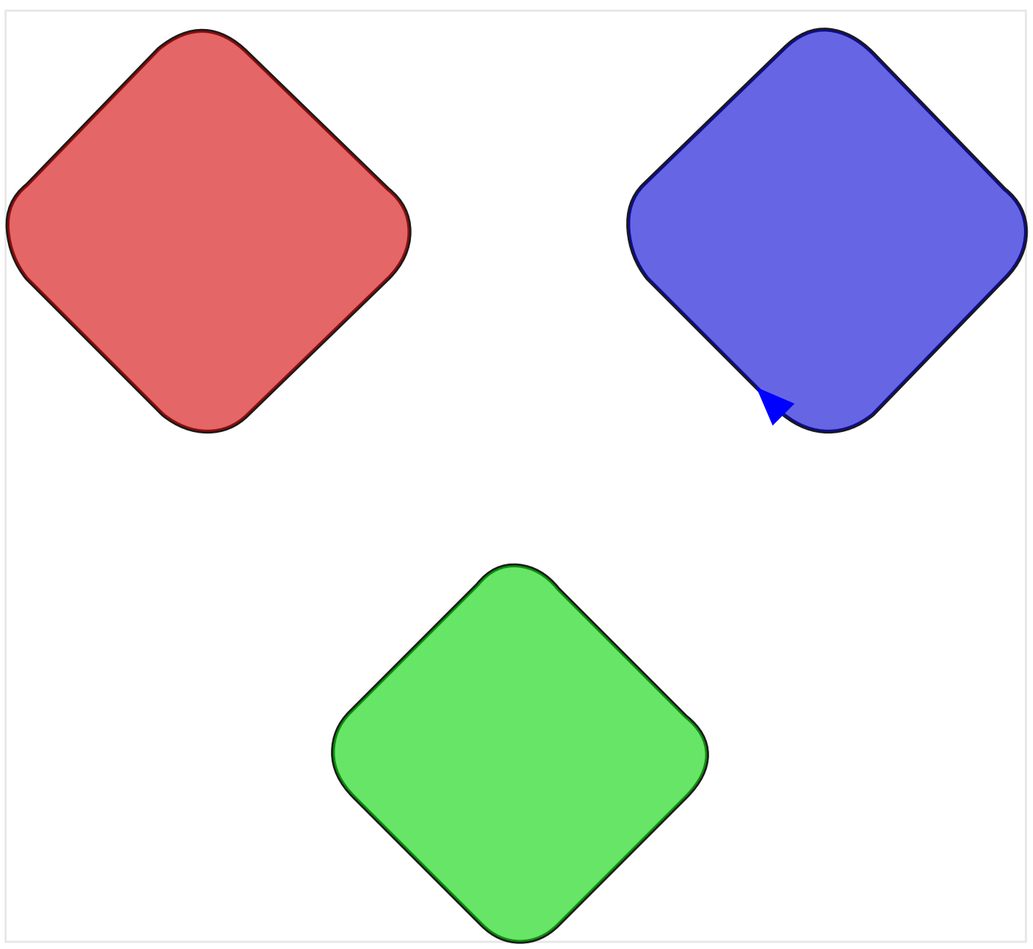



’wght=900.0’

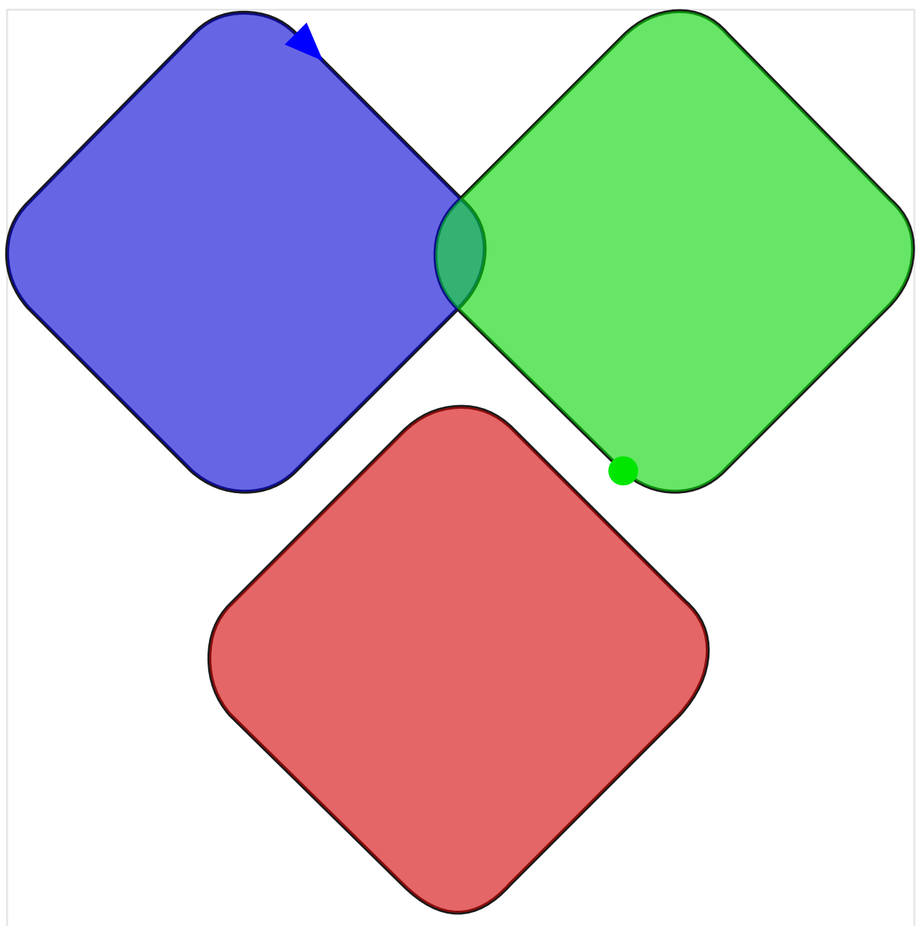

proposed fix

twodotsverticalabovear

tolerance: 0.24

contour_order

”

midway interpolation

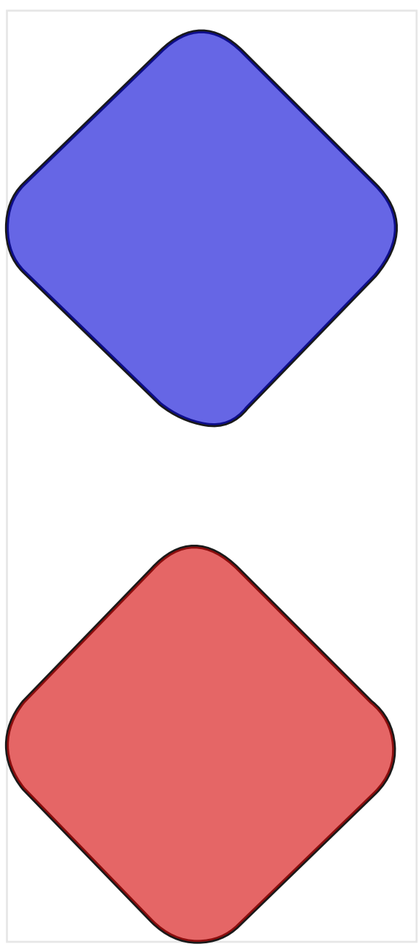

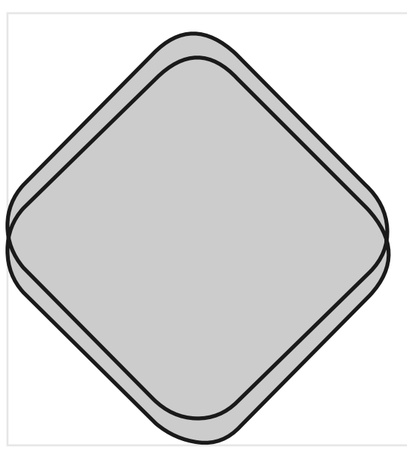

’wght=900.0’

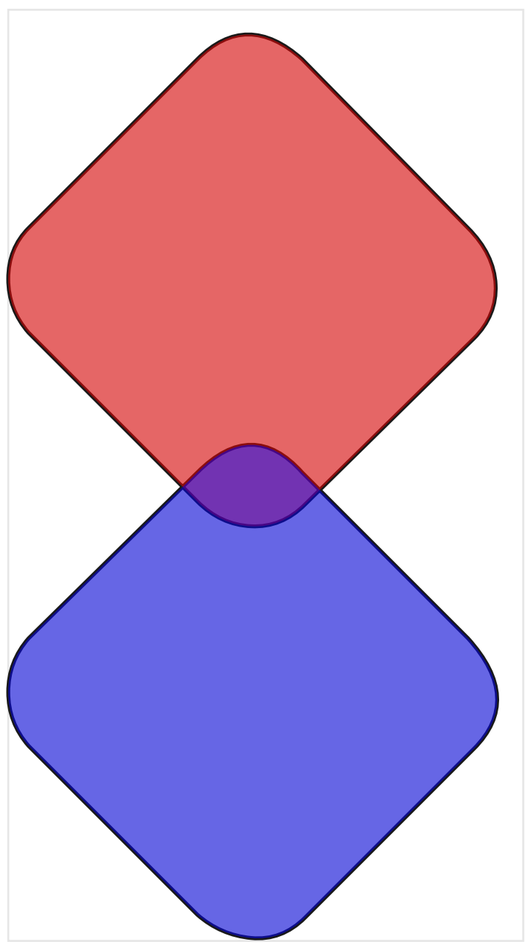

proposed fix

uniFC13

tolerance: 0.66

contour_order

”

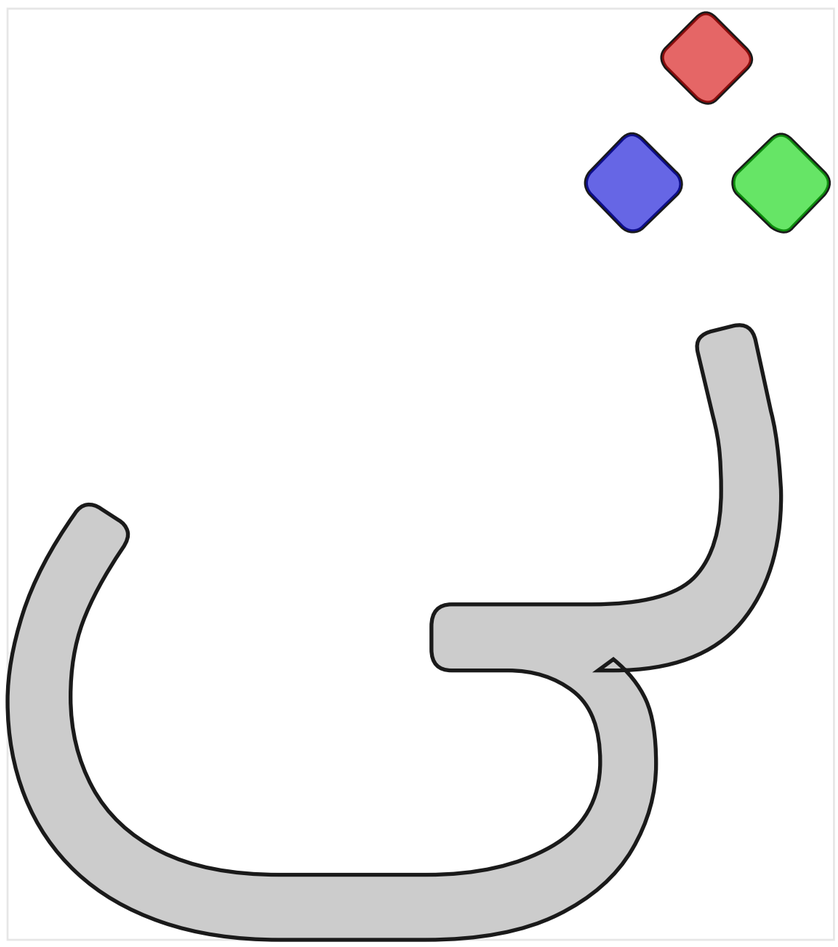

midway interpolation

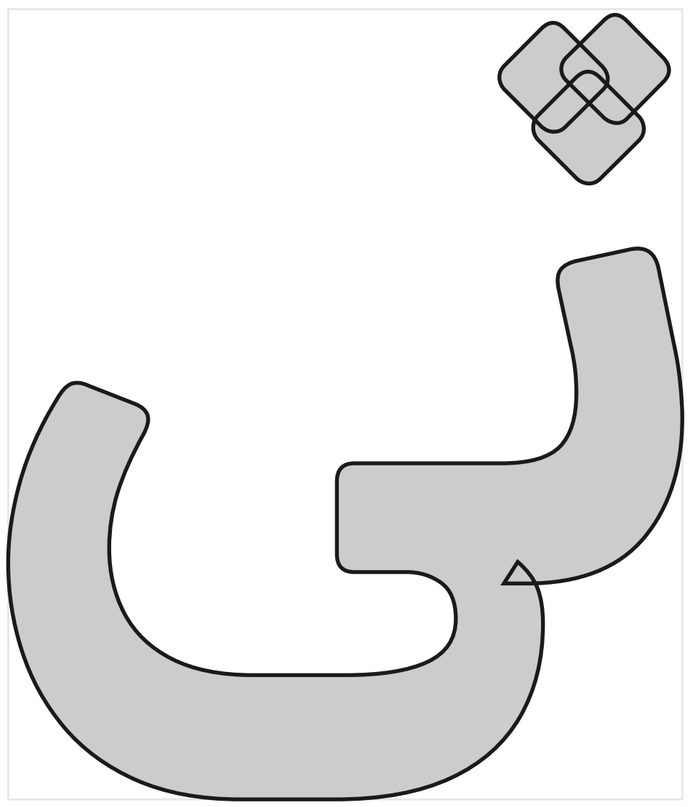

’wght=900.0’

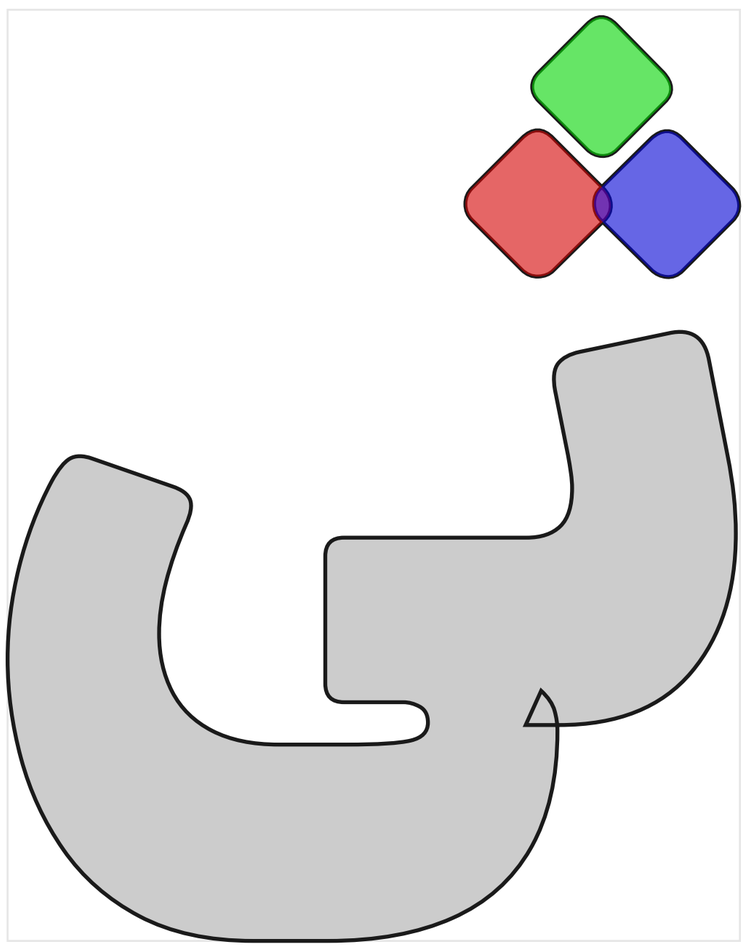

proposed fix

uniFC14

tolerance: 0.69

contour_order

”

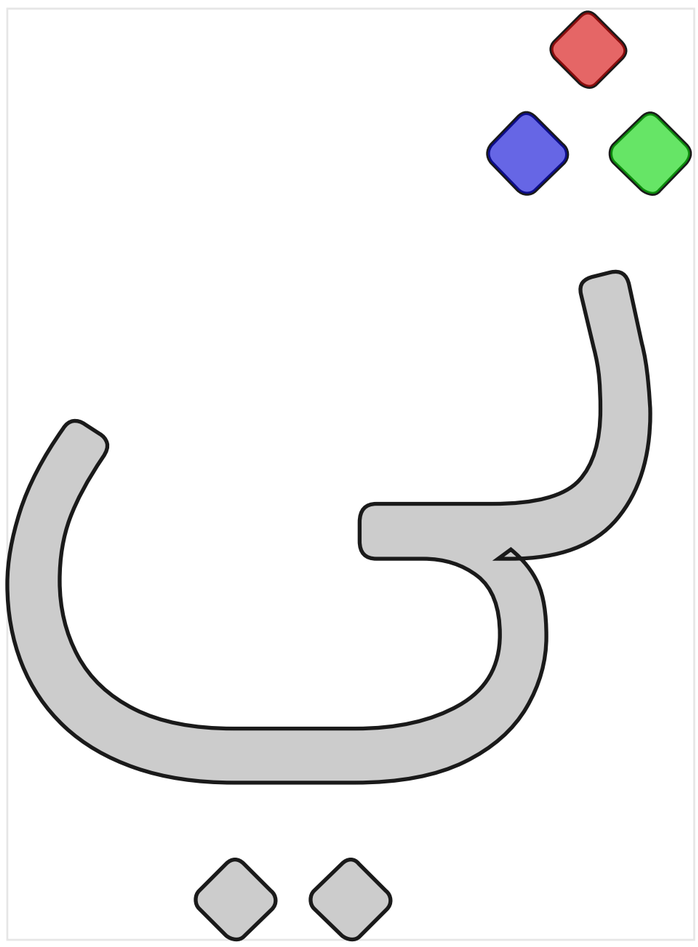

midway interpolation

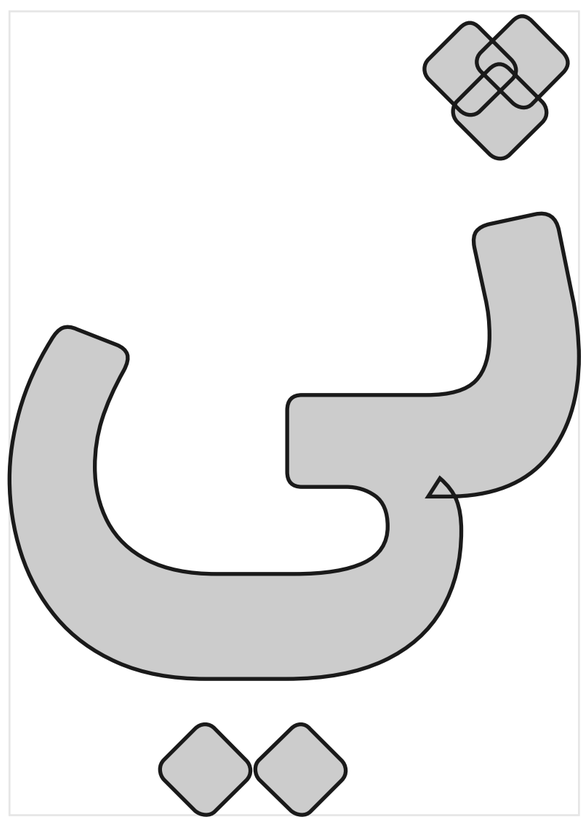

’wght=900.0’

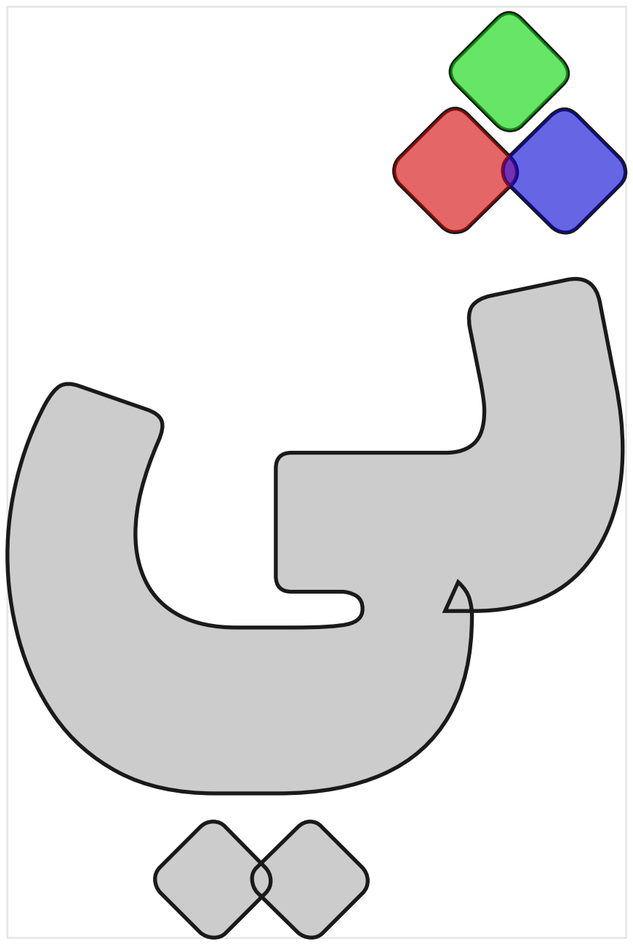

proposed fix

uniFC6D

tolerance: 0.11

contour_order

”

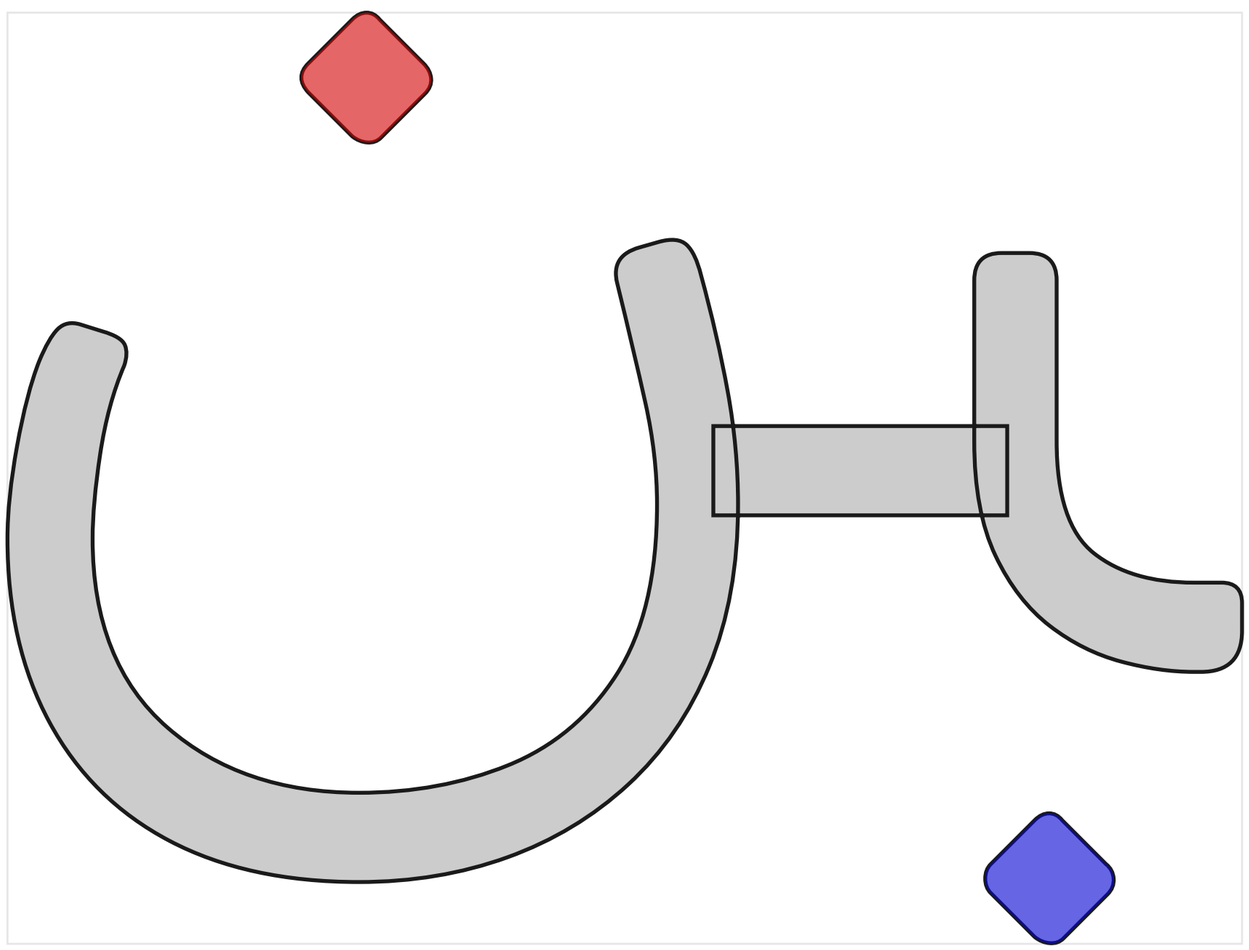

midway interpolation

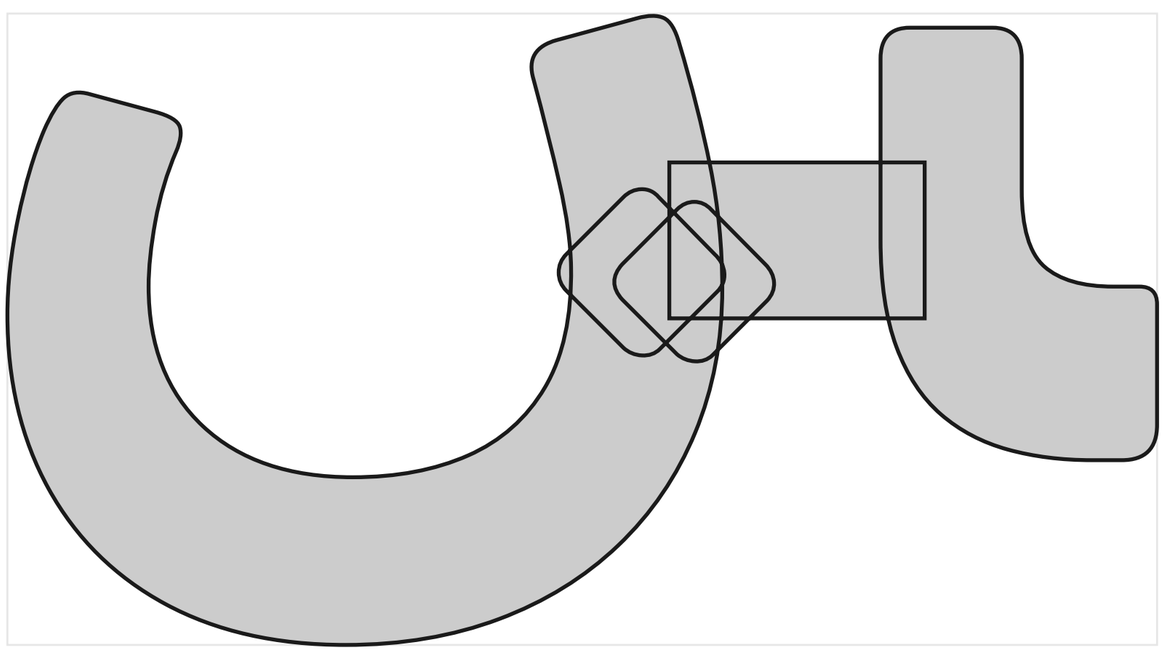

’wght=900.0’

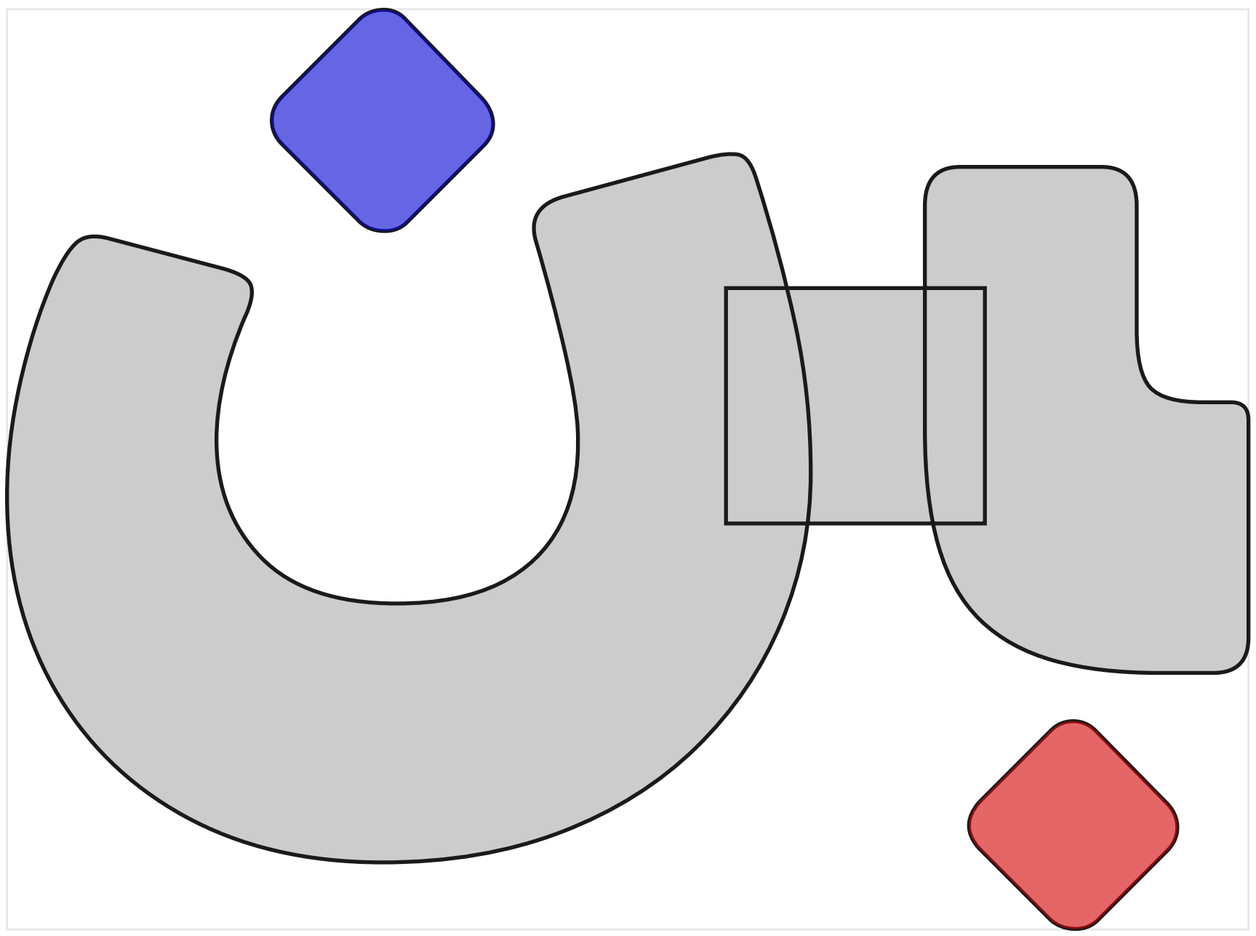

proposed fix

uniFD1E

tolerance: 0.19

contour_order

”

midway interpolation

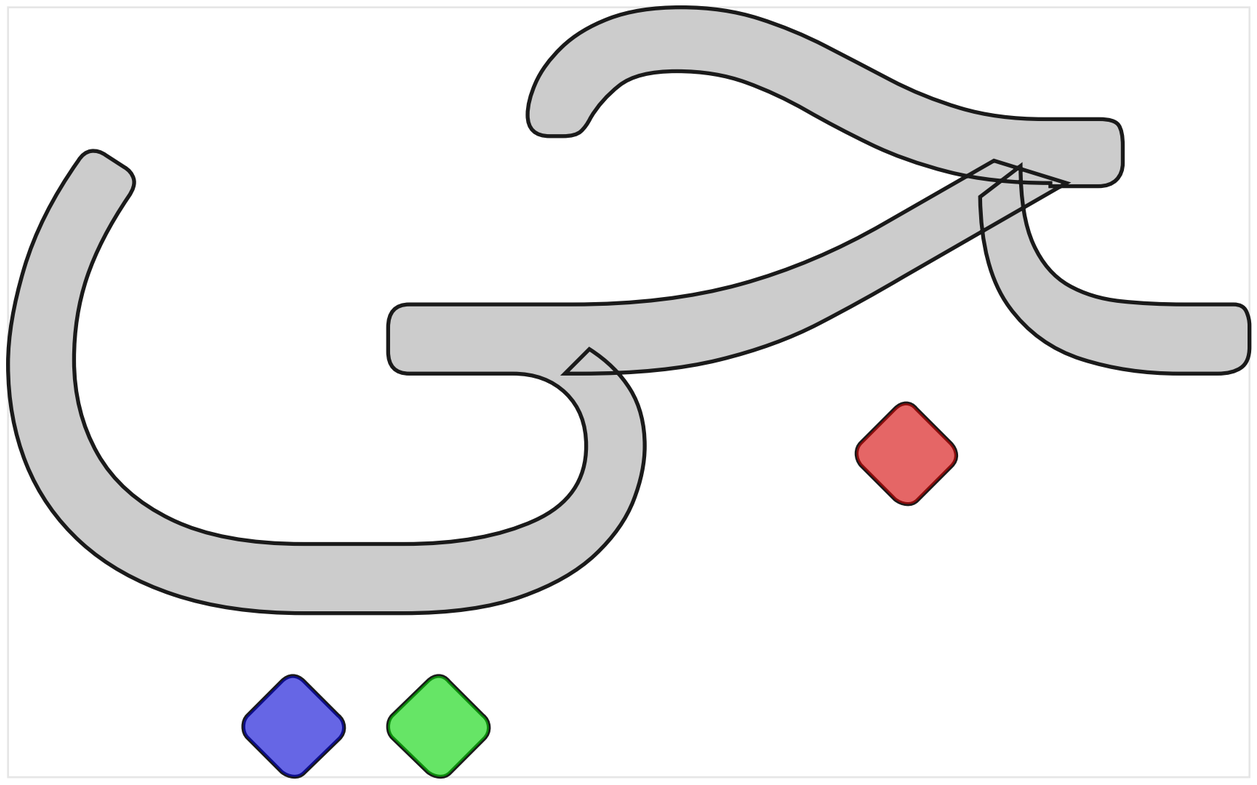

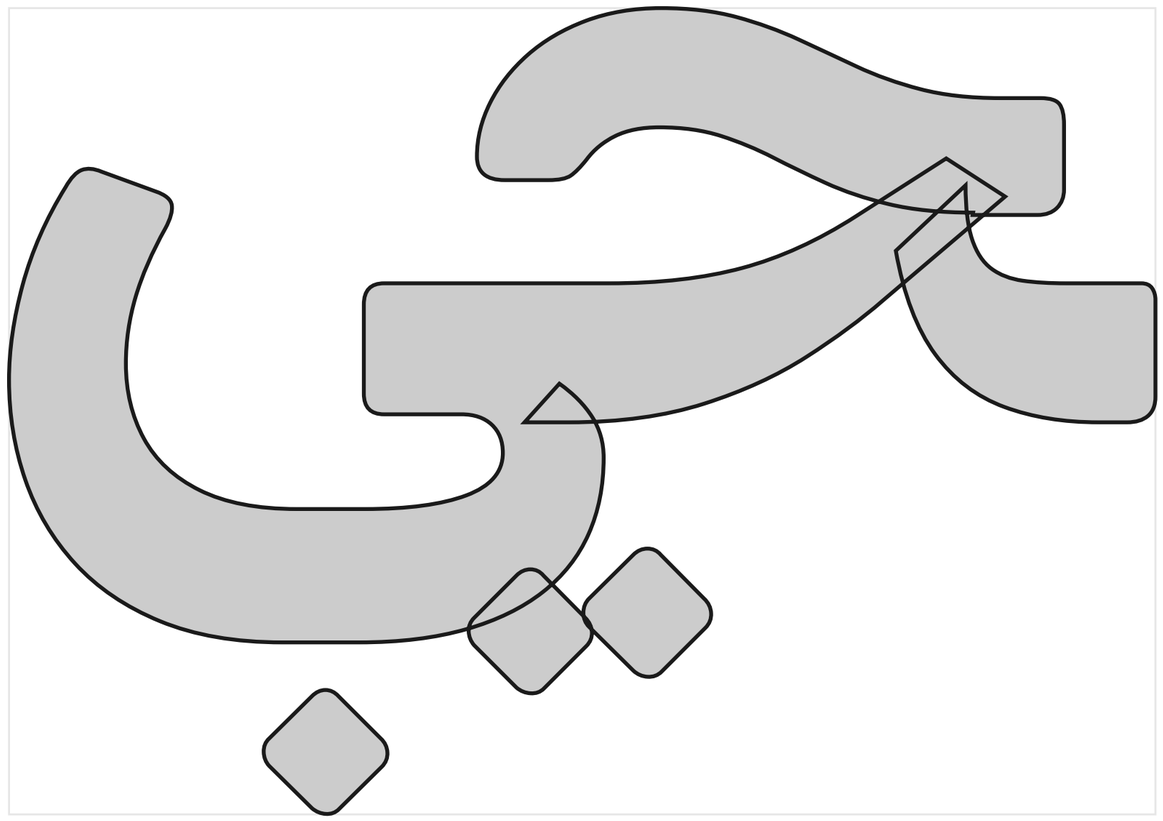

’wght=900.0’

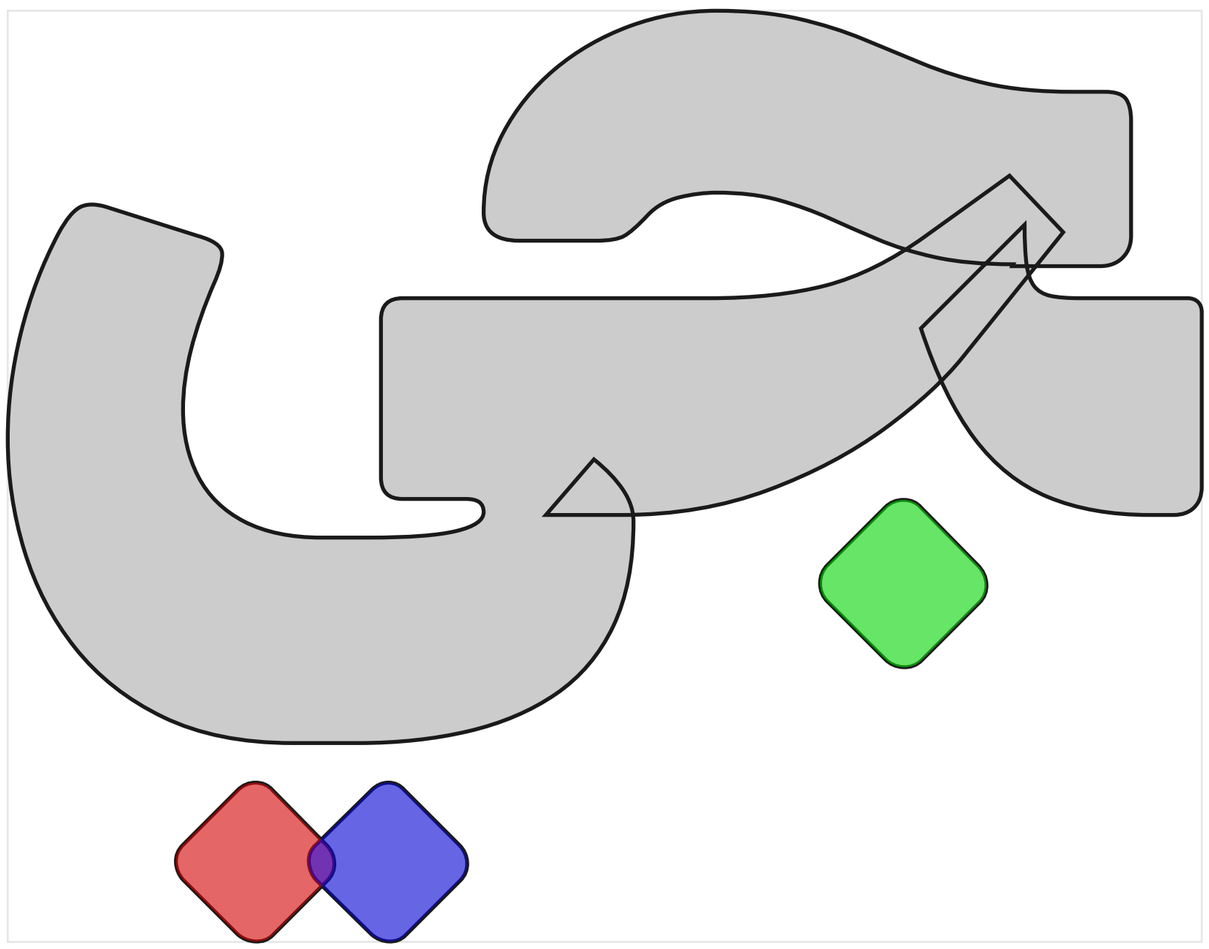
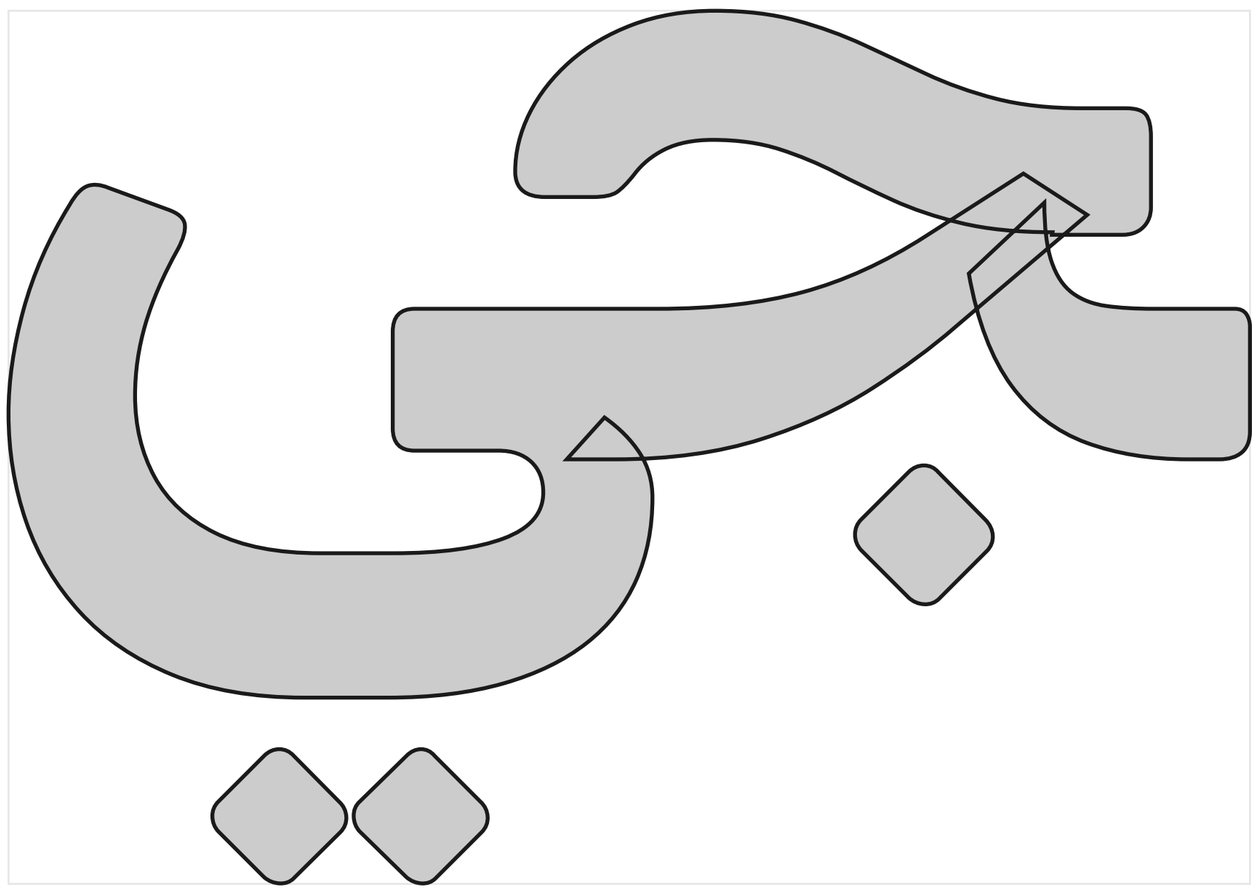
proposed fix