

# From Neural Networks to Reasoning Machines

Inherent Limitations of Deep Neural Networks

# State of Deep Neural Networks

- The Good


- Best solution available for image, speech and language recognition
- Training using models is automated and it is much easier than developing algorithms

- The Bad

- Fragile as demonstrated by Panda/Gibbon example
- Requires a lot of training data. A child picks up the concept of an elephant with one picture.

- The Ugly

- DNNs Perform very badly in novel situations that were not explicitly trained for.

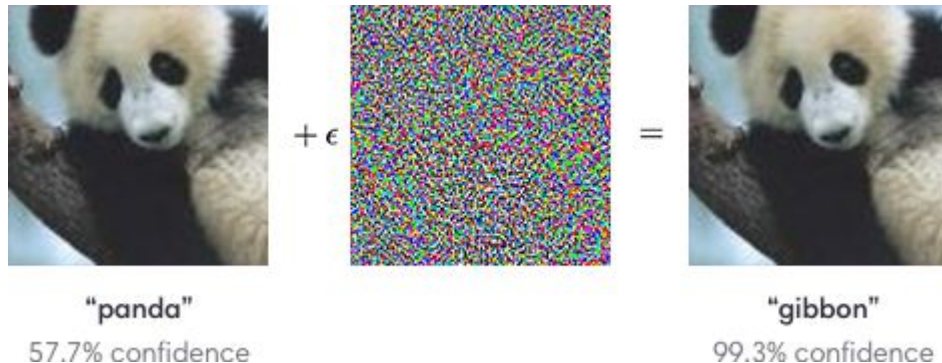

# Perception and Reasoning, Comparison of Humans and Dogs

- Dogs

- Nature's statisticians
- Unlike some robots dogs do not run into solid objects, even if they had never encountered the objects and the environment before.

- Dogs cannot project that the leash will get caught in tree/lamp posts if the post is between them and the human


- No amount of training will fix this because their reasoning machinery is not equipped with the necessary tools. It is also unlikely to achieve this machinery with DNNs.

- Humans

- Not as good of statisticians as dogs
- They have the ability to project mental models into future.

- By projecting the trajectory of the leash, they can foresee that the leash will get caught in tree/lamp.

Projections made by automatic system, but, since dogs cannot do that, it is very specialized and cannot be achieved by a general statistical DNN.

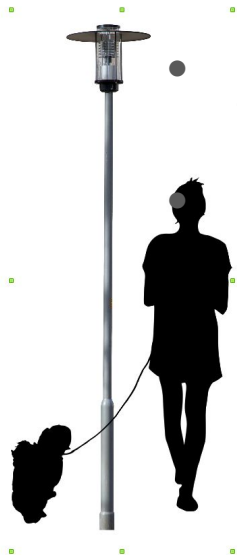

# Modeling of the environment

- Our brain recreates the environment like a holodeck.
  - When we perceive our surrounding we create a duplicate of the external objects in our consciousness. I.e., we recognize solid objects and mentally recreate them.
  - We can recreate the same model when we recall the past or create one when we are dreaming or imagining.
- .The model has many dimensions
  - Geometry
  - Solid/liquid/gas
  - Rigid/soft, temperature
  - Movement/speed



# Reasoning

- Consciousness reasons by creating models and applies physical laws and rules that the modeled objects obey. Examples:
  - Two solid objects cannot occupy the same space. A dog knows that it should not collide with solid objects. As long as it correctly perceives solid objects in its environment it will not run into them. This manner of perception is very similar to ML classification plus attribute like the dimensions, or, coordinates of the solid objects.
  - Human drivers project the position of their cars and moving solid objects in the environment and they can detect if these solid objects are going to collide. Once a collision is detected they try to solve avoiding collisions by using different alternatives in their skillset such as changing the speed of their car or swerving and changing the direction of their movement.
  - The fact that humans and dogs have different reasoning capabilities shows that there are machinery involved in their reasoning in addition to simple neural networks at work.

# Using Models to Process Language

Consider the two sentences “The pen is in the box” and “the box is in the pen”

Humans can resolve this using the models for different meanings of pen. Try searching for “pen in the box”.




- Writing pen is a solid object
- Box has empty space
- Pen can get into the box



- Box is inside a space
- Animal pen has space
- Box can get into an animal pen

# Using Models to Classify Images

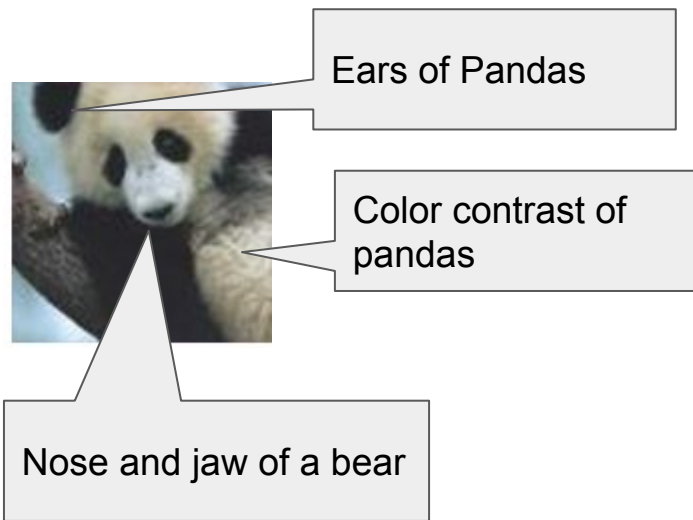

Humans construct models of objects by extracting its salient parts.

Next they break the objects they see into parts and match against the models they have constructed.

Their mental model of animal species resembles a tree classifier.

This hybrid approach makes human classification to need less sample data, few elephants and less prone to noise (panda/gibbon) confusion.

# Summary

- Reasoning can be achieved by applying rules such as the laws of physics involving solid objects. Humans do it all the time.
- This can be applied to avoiding collisions, understanding language and classification as it was demonstrated in earlier examples.
- The first step is the current approach to machine learning, i.e., classification or recognition. Recognition is richer than simple classification, e.g., the space that the body of a solid object occupies.
- Next, apply rules such as laws of physics to the recognized objects and simulate their dynamics.