Atlas project architecture

How the UI, three agents, and demo repos connect

Three specialist agents (no fourth agent)

Data on disk

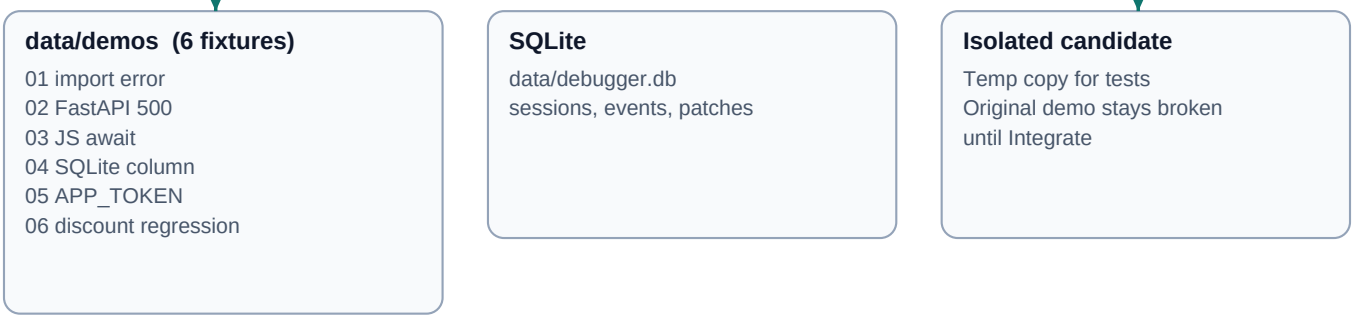

- LLM: mock (offline) or openai / openrouter / ollama with real keys. Mock is not a silent fallback for a failed live provider.
- Embeddings for local demo runs: hash (no large model). Original demo files are not rewritten until you authorize integration.
- GitHub clone by URL is supported. There is no GitHub OAuth and no automatic push to production.

Repair workflow

What happens after you paste a demo bug in the UI

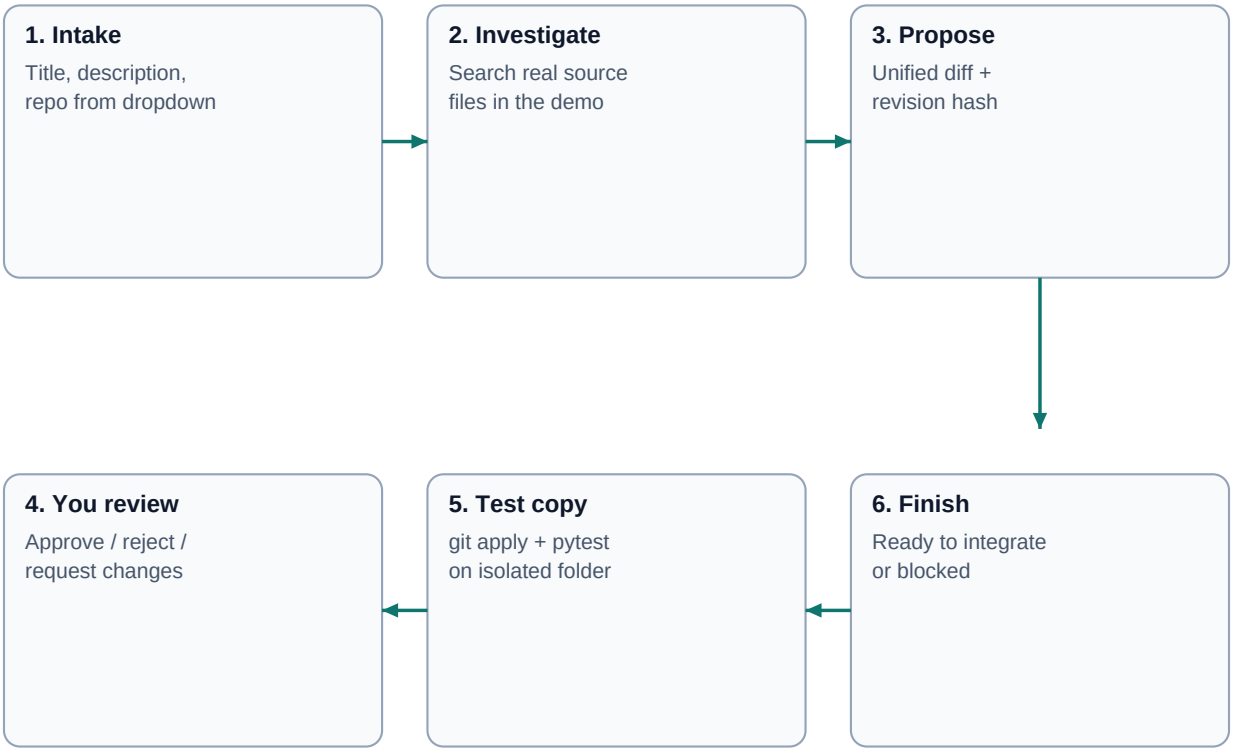

Decision outcomes

Code missing

BLOCKED
Defect target not found.
No code modifications possible.

Tests fail 3 times

BLOCKED
Repair iteration limit.
Start a New session.

Tests pass

READY_FOR_INTEGRATION
Original project unchanged
until you authorize copy-in.

How to use a demo

1. API: python -m uvicorn app.api.main:app --host 127.0.0.1 --port 8000
2. UI: cd frontend then npm run dev → http://localhost:5173
3. New session. Pick a data/demos folder. Paste title/description from that demo's BUG_REPORT.md.
4. Investigate. Read the diff. Approve only that patch revision.
5. If the session is already BLOCKED, do not retry it — open New session.

Demo 1 expected patch: from greeter import greet → from greeting import greet