


Laboratory work #2

Bakytzhan Bekassyl

Creating tables:

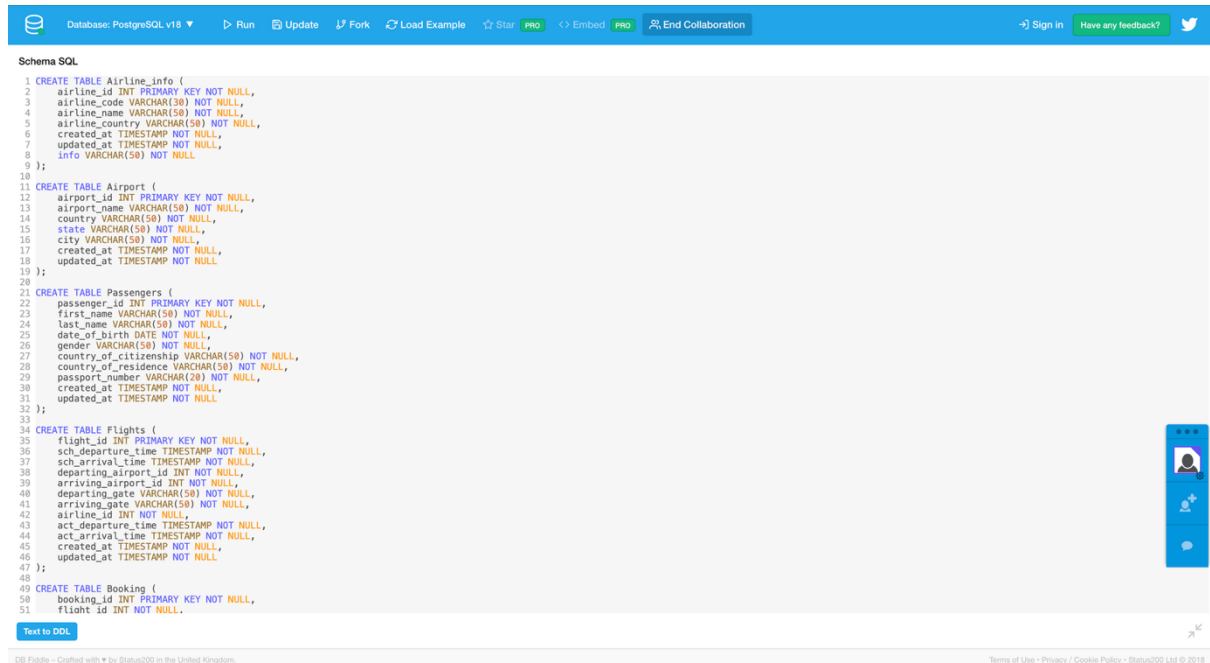

The screenshot shows a PostgreSQL SQL editor interface. The top bar includes the PostgreSQL logo, the database name 'Database: PostgreSQL v19', and various action buttons like 'Run', 'Update', 'Fork', 'Load Example', 'Star', 'Embed', and 'End Collaboration'. There are also links for 'Sign in' and 'Have any feedback?'. The main area is titled 'Schema SQL' and contains the following SQL code:

```
1 CREATE TABLE Airline_info (  
2     airline_id INT PRIMARY KEY NOT NULL,  
3     airline_code VARCHAR(30) NOT NULL,  
4     airline_name VARCHAR(50) NOT NULL,  
5     airline_country VARCHAR(50) NOT NULL,  
6     created_at TIMESTAMP NOT NULL,  
7     updated_at TIMESTAMP NOT NULL,  
8     info VARCHAR(50) NOT NULL  
9 );  
10  
11 CREATE TABLE Airport (  
12     airport_id INT PRIMARY KEY NOT NULL,  
13     airport_name VARCHAR(50) NOT NULL,  
14     country VARCHAR(50) NOT NULL,  
15     state VARCHAR(50) NOT NULL,  
16     city VARCHAR(50) NOT NULL,  
17     created_at TIMESTAMP NOT NULL,  
18     updated_at TIMESTAMP NOT NULL  
19 );  
20  
21 CREATE TABLE Passengers (  
22     passenger_id INT PRIMARY KEY NOT NULL,  
23     first_name VARCHAR(50) NOT NULL,  
24     last_name VARCHAR(50) NOT NULL,  
25     date_of_birth DATE NOT NULL,  
26     gender VARCHAR(50) NOT NULL,  
27     country_of_citizenship VARCHAR(50) NOT NULL,  
28     country_of_residence VARCHAR(50) NOT NULL,  
29     passport_number VARCHAR(20) NOT NULL,  
30     created_at TIMESTAMP NOT NULL,  
31     updated_at TIMESTAMP NOT NULL  
32 );  
33  
34 CREATE TABLE Flights (  
35     flight_id INT PRIMARY KEY NOT NULL,  
36     sch_departure_time TIMESTAMP NOT NULL,  
37     sch_arrival_time TIMESTAMP NOT NULL,  
38     departing_airport_id INT NOT NULL,  
39     arriving_airport_id INT NOT NULL,  
40     departing_gate VARCHAR(50) NOT NULL,  
41     arriving_gate VARCHAR(50) NOT NULL,  
42     airline_id INT NOT NULL,  
43     act_departure_time TIMESTAMP NOT NULL,  
44     act_arrival_time TIMESTAMP NOT NULL,  
45     created_at TIMESTAMP NOT NULL,  
46     updated_at TIMESTAMP NOT NULL  
47 );  
48  
49 CREATE TABLE Booking (  
50     booking_id INT PRIMARY KEY NOT NULL,  
51     flight_id INT NOT NULL,
```

At the bottom of the editor, there is a 'Text to DDL' button and a small icon of a person. The footer of the page contains the text 'DB Fiddle - Crafted with ♥ by Status200 in the United Kingdom.' and a link to 'Terms of Use - Privacy / Cookie Policy - Status200 Ltd © 2018'.

Changes:

```
ALTER TABLE Airline_info RENAME TO Airline;  
ALTER TABLE Booking RENAME COLUMN price TO ticket_price;  
ALTER TABLE Flights ALTER COLUMN departing_gate TYPE TEXT;  
ALTER TABLE Airline DROP COLUMN info;
```

Foreign keys:

```
104 ALTER TABLE Airline_info RENAME TO Airline;
105 ALTER TABLE Booking RENAME COLUMN price TO ticket_price;
106 ALTER TABLE Flights ALTER COLUMN departing_gate TYPE TEXT;
107 ALTER TABLE Airline DROP COLUMN info;
108
109
110 ALTER TABLE Security_check ADD CONSTRAINT fk_seccheck_passenger
111     FOREIGN KEY (passenger_id) REFERENCES Passengers(passenger_id);
112
113 ALTER TABLE Booking ADD CONSTRAINT fk_booking_passenger
114     FOREIGN KEY (passenger_id) REFERENCES Passengers(passenger_id);
115
116 ALTER TABLE Baggage_check ADD CONSTRAINT fk_baggagecheck_passenger
117     FOREIGN KEY (passenger_id) REFERENCES Passengers(passenger_id);
118
119 ALTER TABLE Baggage_check ADD CONSTRAINT fk_baggagecheck_booking
120     FOREIGN KEY (booking_id) REFERENCES Booking(booking_id);
121
122 ALTER TABLE Baggage ADD CONSTRAINT fk_baggage_booking
123     FOREIGN KEY (booking_id) REFERENCES Booking(booking_id);
124
125 ALTER TABLE Boarding_pass ADD CONSTRAINT fk_boardingpass_booking
126     FOREIGN KEY (booking_id) REFERENCES Booking(booking_id);
127
128 ALTER TABLE Booking_flight ADD CONSTRAINT fk_bookingflight_booking
129     FOREIGN KEY (booking_id) REFERENCES Booking(booking_id);
130
131 ALTER TABLE Booking_flight ADD CONSTRAINT fk_bookingflight_flight
132     FOREIGN KEY (flight_id) REFERENCES Flights(flight_id);
133
134 ALTER TABLE Flights ADD CONSTRAINT fk_flights_departing_airport
135     FOREIGN KEY (departing_airport_id) REFERENCES Airport(airport_id);
136
137 ALTER TABLE Flights ADD CONSTRAINT fk_flights_arriving_airport
138     FOREIGN KEY (arriving_airport_id) REFERENCES Airport(airport_id);
139
140 ALTER TABLE Flights ADD CONSTRAINT fk_flights_airline
141     FOREIGN KEY (airline_id) REFERENCES Airline(airline_id);
```

Text to DDL