

FirstKnitR

Charlie

2/1/2022

Newlines in RStudio are done by adding two spaces to the end of a line.

Things you can do in RMD:

Bold

Italics

Bold/Italics

Headers must have a **blank line** before in order to work.

Header 1

Header 2

Header 3

You can go up to Header 6... I think you see the pattern!

A hyperlink <https://unsplash.com/s/photos/llama>

More RMD features using the
[RMD Cheat Sheat](#)

Embedded R code


You can embed R code and output in this document using `26, 32, 29, 17, 18, 28, 35, 34, 40, 27` everything between the apostrophes is treated as script. So, you can also output the average temp 50.6584699. You can use anything from your script!

Including Plots

You can also embed plots, for example:

Humidity vs. Temperature

Lansing, Michigan: 2016

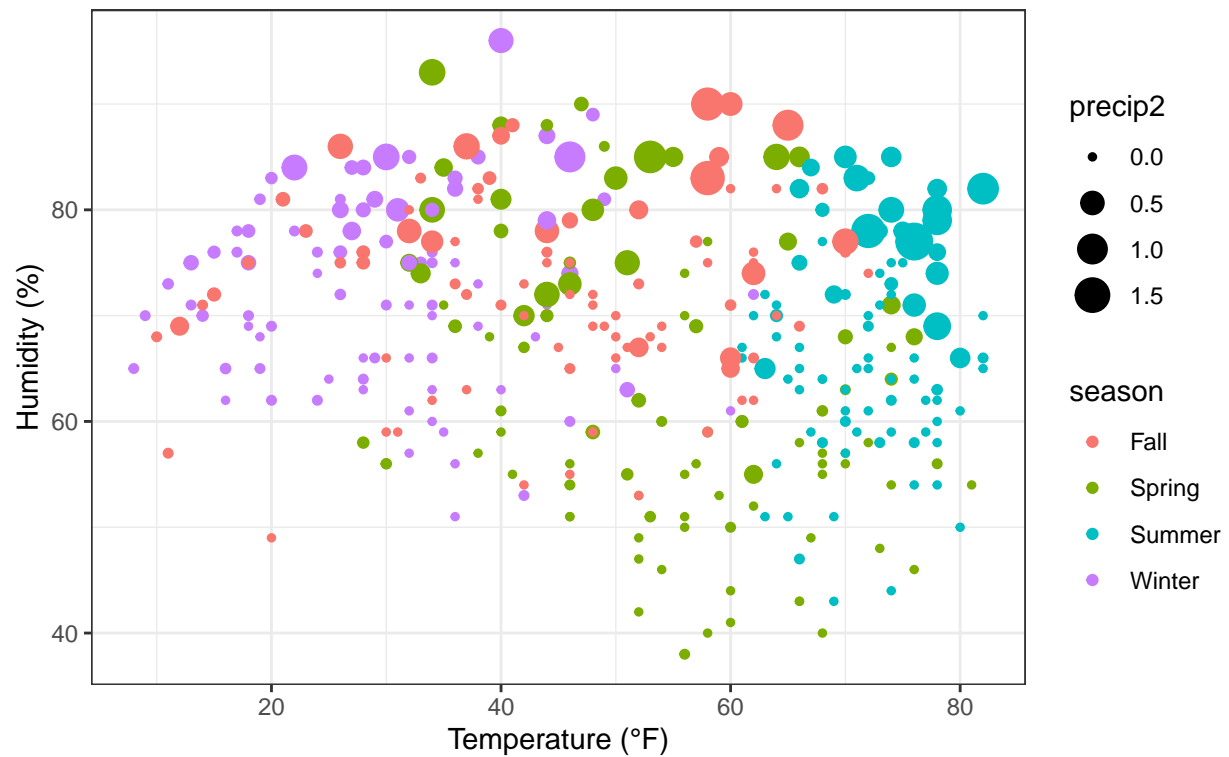

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.