



VIT[®]

Vellore Institute of Technology

(Deemed to be University under section 3 of UGC Act, 1956)

Assessment-1

- Agile Development Process and Devops Lab

FACULTY NAME: SWETA BHATTACHARYA

NAME: Hema Balaji.R

REG NO: 23MIS0449

Use appropriate Git Commands to Execute the following case studies in


VS Code

Case Study 1: New Project Version Control Setup

Scenario: You are assigned to develop a Library Management System. Before coding, your team decides to enable version control.

Tasks:

- Create a project folder and open it in VS Code
- Initialize a Git repository
- Create a Python file and track it using Git
- Commit the initial version

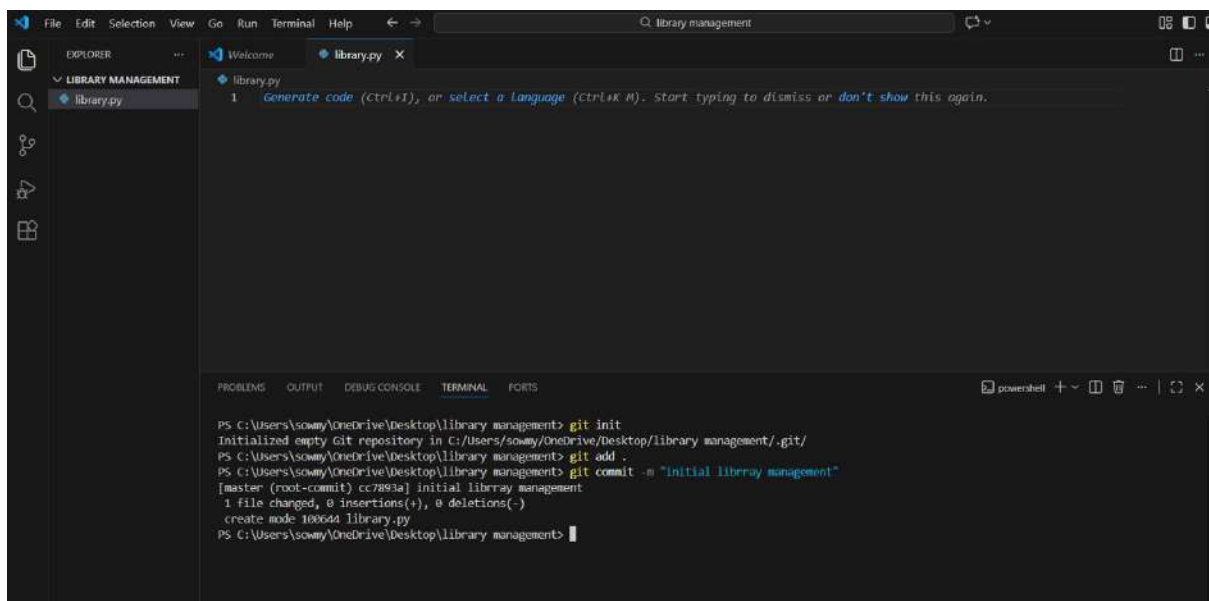

The screenshot shows the Visual Studio Code interface. The Explorer sidebar on the left shows a folder named 'LIBRARY MANAGEMENT' containing a file 'library.py'. The main editor area shows the 'library.py' file with a single line of text: 'Generate code (Ctrl+I), or select a Language (Ctrl+K M). Start typing to dismiss or don't show this again.' The bottom panel shows the TERMINAL with the following commands and output:


```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git init
Initialized empty Git repository in C:/Users/sowmy/OneDrive/Desktop/library management/.git/
PS C:\Users\sowmy\OneDrive\Desktop\library management> git add .
PS C:\Users\sowmy\OneDrive\Desktop\library management> git commit -m "Initial librray management"
[master (root-commit) cc7893a] initial librray management
1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 library.py
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 2: Tracking Daily Code Changes

Scenario: You are working on a Student Registration Module. You make small updates daily and need to record them.

Tasks:

- Modify an existing file
- Check file differences
- Stage and commit changes
- View commit history

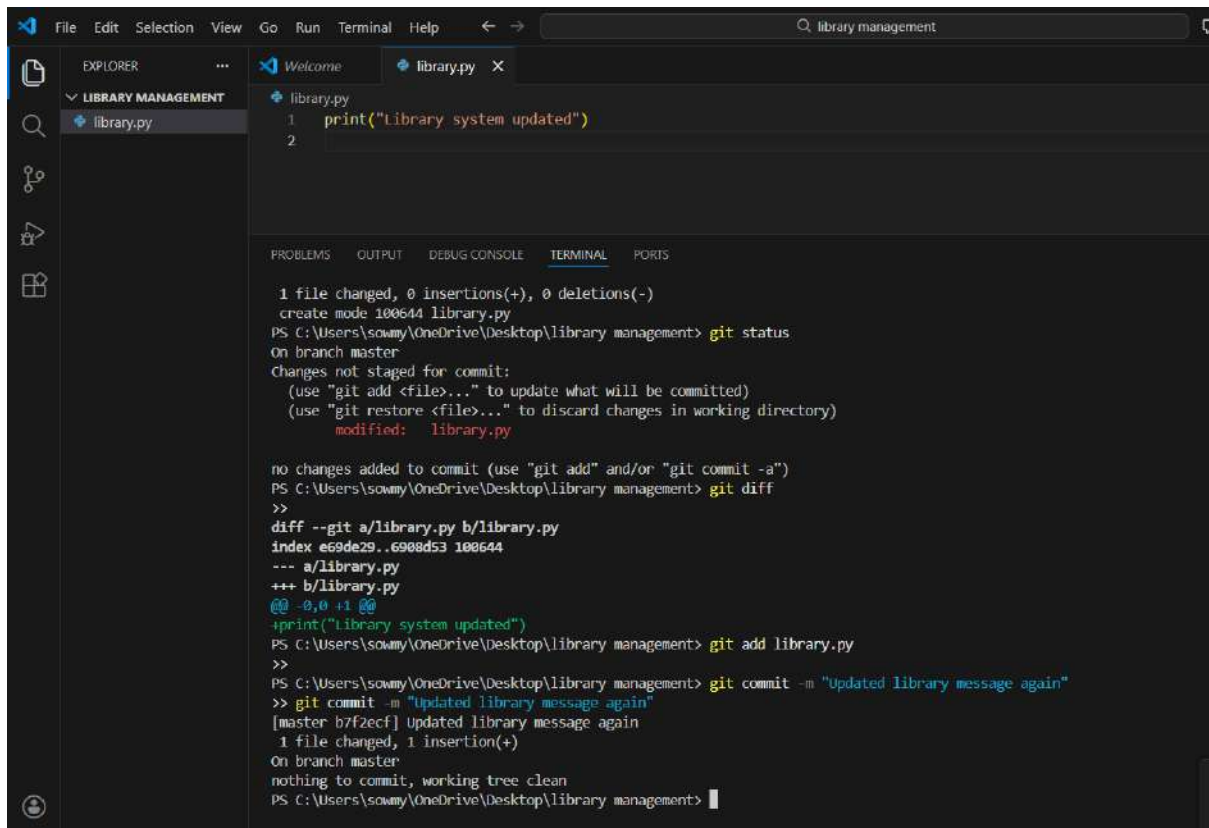

The screenshot shows the Visual Studio Code interface. The Explorer sidebar on the left shows a project named 'LIBRARY MANAGEMENT' with a file 'library.py'. The main editor window displays the content of 'library.py', which contains a single line of Python code: `print("Library system updated")`. Below the editor, the TERMINAL tab is active, showing a series of Git commands and their outputs in a Windows PowerShell environment. The commands include `git status`, `git diff`, `git add library.py`, and `git commit -m "Updated library message again"`. The output shows that the file was added to the index, staged for commit, and then committed to the 'master' branch.

```
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 library.py
PS C:\Users\sowmy\OneDrive\Desktop\library management> git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   library.py


no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\sowmy\OneDrive\Desktop\library management> git diff
>>
diff --git a/library.py b/library.py
index e69de29..6908d53 100644
--- a/library.py
+++ b/library.py
@@ -0,0 +1 @@
+print("Library system updated")
PS C:\Users\sowmy\OneDrive\Desktop\library management> git add library.py
>>
PS C:\Users\sowmy\OneDrive\Desktop\library management> git commit -m "Updated library message again"
>> git commit -m "Updated library message again"
[master b7f2ecf] Updated library message again
1 file changed, 1 insertion(+)
On branch master
nothing to commit, working tree clean
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 3: Feature Development Using Branches

Scenario: A new Login feature must be developed without disturbing main code.

Tasks:

- Create a new branch
- Add login-related code
- Commit changes
- Switch between branches

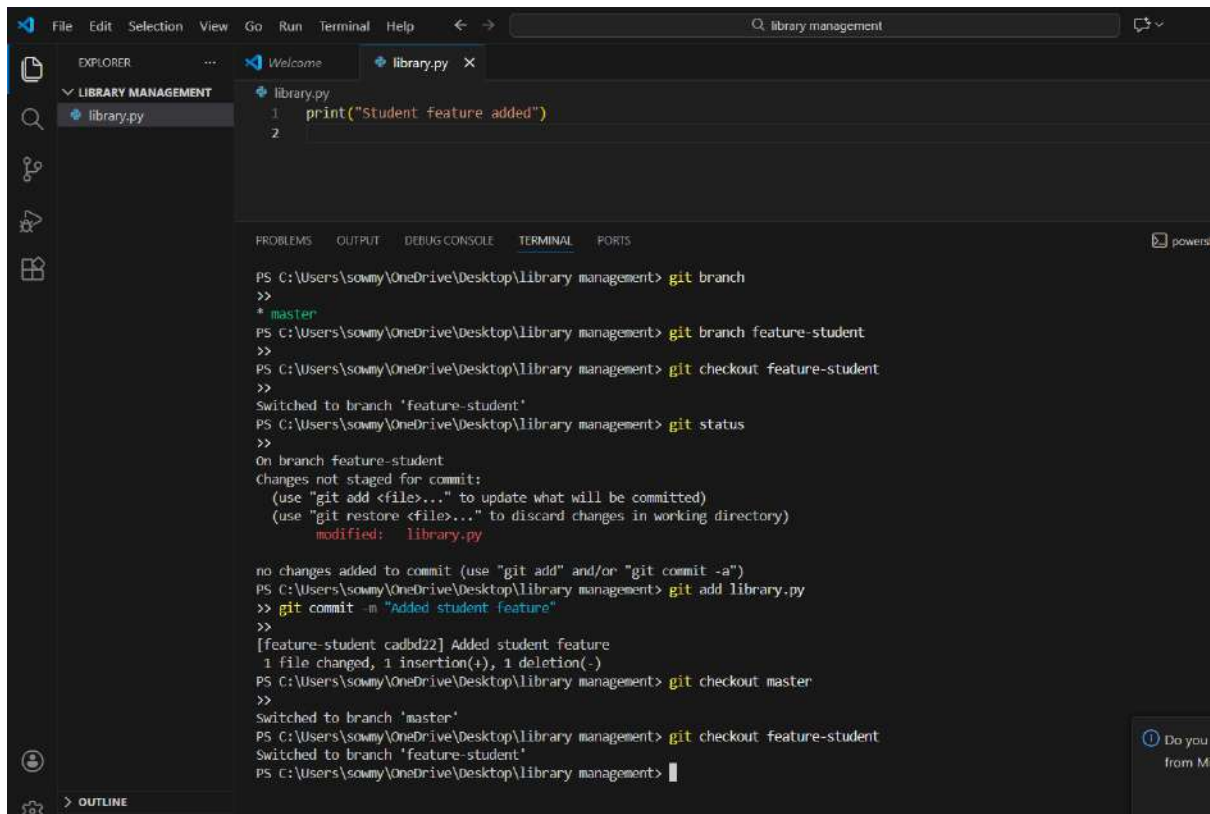

The screenshot shows the Visual Studio Code interface. The Explorer pane on the left shows a project named 'LIBRARY MANAGEMENT' with a file 'library.py'. The code editor displays the content of 'library.py', which contains two lines of Python code: `1 print("Student feature added")` and `2`. The Terminal pane at the bottom shows a series of Git commands and their output in a PowerShell prompt. The commands executed are: `git branch`, `git branch feature-student`, `git checkout feature-student`, `git status`, `git add library.py`, `git commit -m "Added student feature"`, `git checkout master`, and `git checkout feature-student`. The output shows the creation of the 'feature-student' branch, switching to it, adding the file, committing the changes, and switching back to the 'feature-student' branch.

```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git branch
>>
* master
PS C:\Users\sowmy\OneDrive\Desktop\library management> git branch feature-student
>>
PS C:\Users\sowmy\OneDrive\Desktop\library management> git checkout feature-student
>>
Switched to branch 'feature-student'
PS C:\Users\sowmy\OneDrive\Desktop\library management> git status
>>
On branch feature-student
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   library.py


no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\sowmy\OneDrive\Desktop\library management> git add library.py
>> git commit -m "Added student feature"
>>
[feature-student cadbd22] Added student feature
1 file changed, 1 insertion(+), 1 deletion(-)
PS C:\Users\sowmy\OneDrive\Desktop\library management> git checkout master
>>
Switched to branch 'master'
PS C:\Users\sowmy\OneDrive\Desktop\library management> git checkout feature-student
Switched to branch 'feature-student'
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 4: Merging Feature into Main Code

Scenario: The login feature is tested and approved.

Tasks:

- Switch to main branch
- Merge feature branch
- Verify merged content

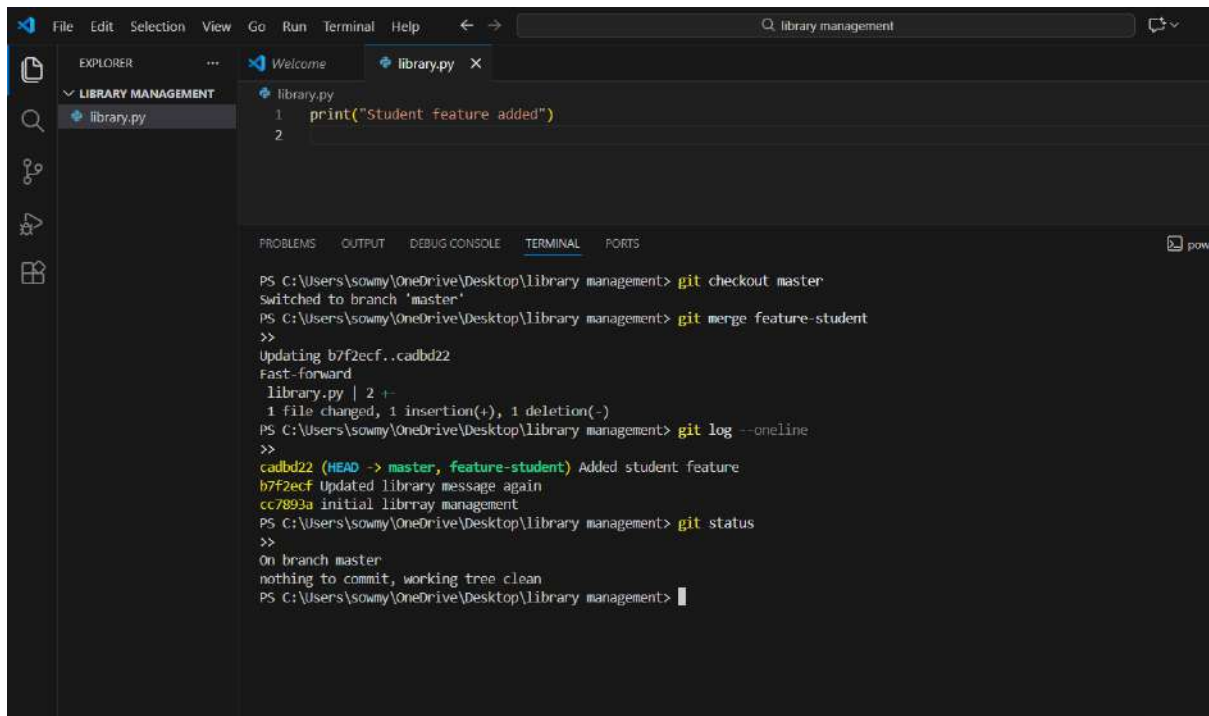

The screenshot shows the Visual Studio Code interface with a file explorer on the left showing a folder named 'LIBRARY MANAGEMENT' containing a file 'library.py'. The file is open in the editor, showing two lines of Python code: `print("Student feature added")`. The terminal window at the bottom displays the following commands and output:


```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git checkout master
Switched to branch 'master'
PS C:\Users\sowmy\OneDrive\Desktop\library management> git merge feature-student
>>
Updating b7f2ecf..cadbd22
Fast-forward
 library.py | 2 +-
 1 file changed, 1 insertion(+), 1 deletion(-)
PS C:\Users\sowmy\OneDrive\Desktop\library management> git log --oneline
>>
cadbd22 (HEAD -> master, feature-student) Added student feature
b7f2ecf Updated library message again
cc7893a initial librray management
PS C:\Users\sowmy\OneDrive\Desktop\library management> git status
>>
On branch master
nothing to commit, working tree clean
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 5: Working with Remote Repository

Scenario: The project must be shared using GitHub.

Tasks:

- Create remote repository
- Add remote origin
- Push code to GitHub

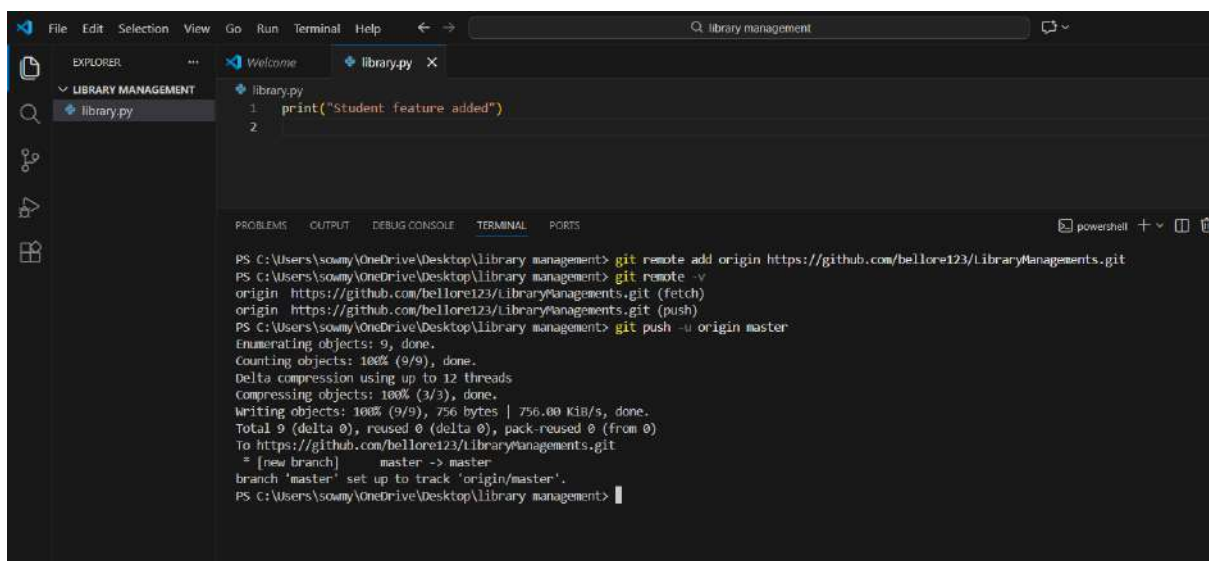

The screenshot shows the Visual Studio Code interface with the same file explorer and editor as the previous image. The terminal window displays the following commands and output:


```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git remote add origin https://github.com/bellor123/LibraryManagements.git
PS C:\Users\sowmy\OneDrive\Desktop\library management> git remote -v
origin https://github.com/bellor123/LibraryManagements.git (fetch)
origin https://github.com/bellor123/LibraryManagements.git (push)
PS C:\Users\sowmy\OneDrive\Desktop\library management> git push -u origin master
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (9/9), 756 bytes | 756.00 KiB/s, done.
Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/bellor123/LibraryManagements.git
 * [new branch] master -> master
branch 'master' set up to track 'origin/master'.
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 6: Undoing Mistakes

Scenario: A file is modified incorrectly.


Tasks:

- View file changes
- Discard uncommitted changes

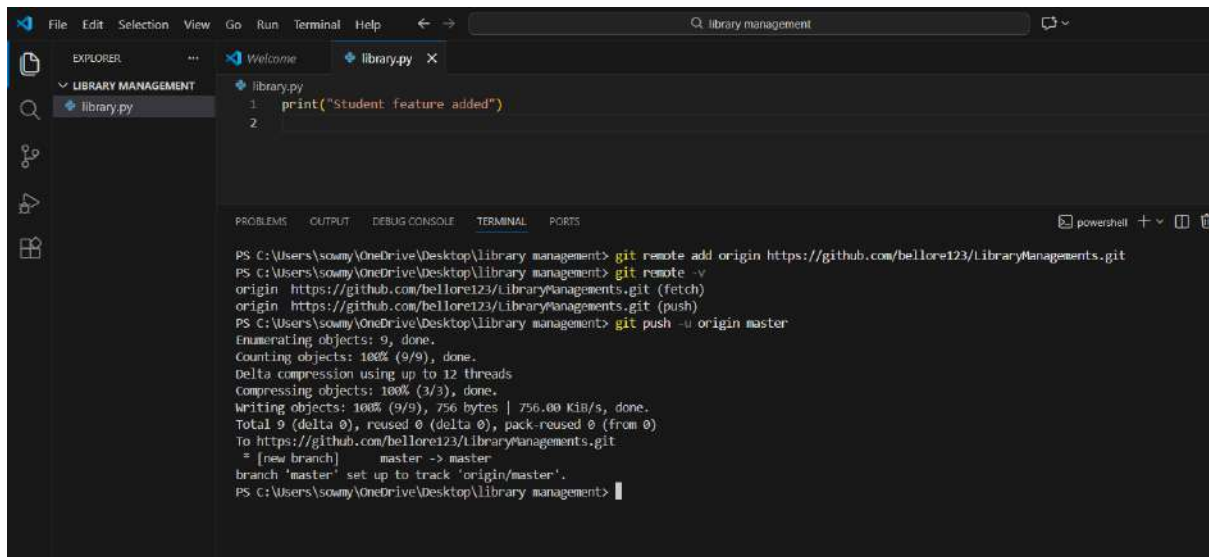

The screenshot shows the Visual Studio Code interface with a file explorer on the left showing a project named 'LIBRARY MANAGEMENT' containing a file 'library.py'. The main editor window shows the 'library.py' file with two lines of code: `1 print("Student feature added")` and `2`. The bottom panel shows the 'TERMINAL' tab with a PowerShell session. The terminal output shows the following commands and their results:

```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git remote add origin https://github.com/bellore123/LibraryManagements.git
PS C:\Users\sowmy\OneDrive\Desktop\library management> git remote -v
origin https://github.com/bellore123/LibraryManagements.git (fetch)
origin https://github.com/bellore123/LibraryManagements.git (push)
PS C:\Users\sowmy\OneDrive\Desktop\library management> git push -u origin master
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (9/9), 756 bytes | 756.00 KiB/s, done.
Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/bellore123/LibraryManagements.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

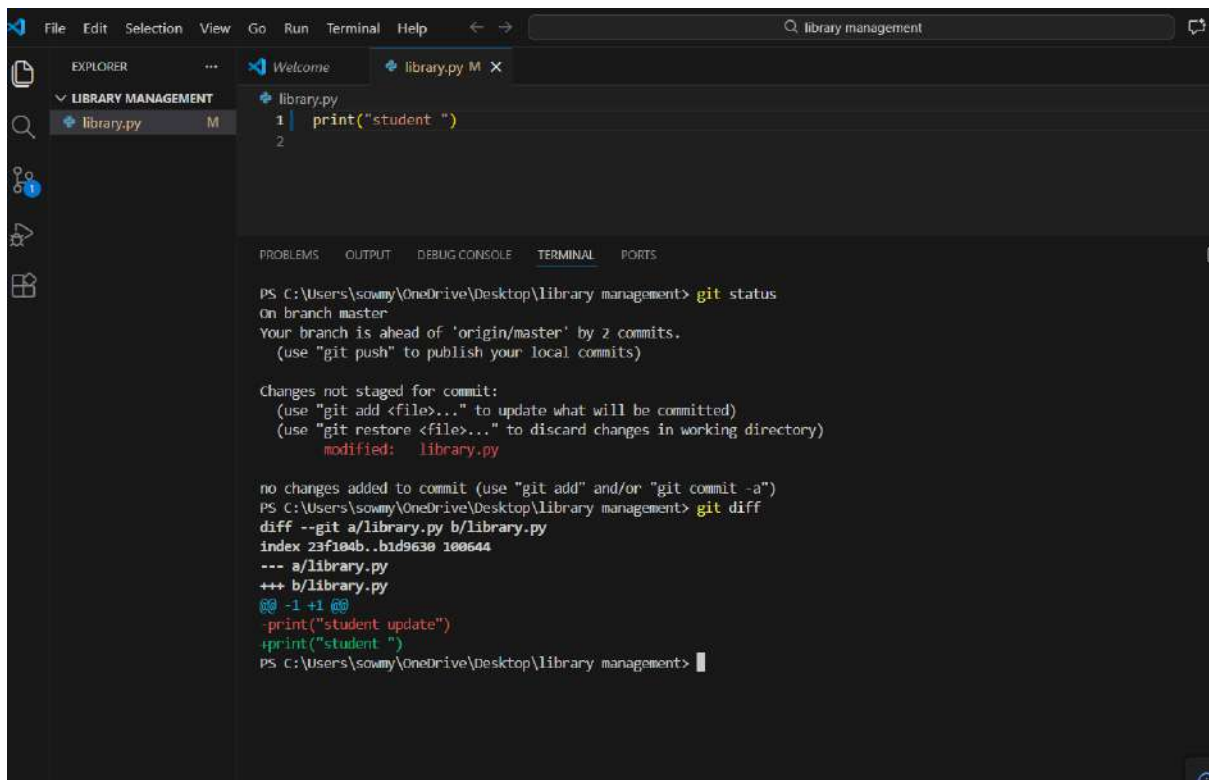

The screenshot shows the Visual Studio Code interface with the 'library.py' file open in the editor. The file content is `1 print("student ")` and `2`. The bottom panel shows the 'TERMINAL' tab with a PowerShell session. The terminal output shows the following commands and their results:

```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git status
On branch master
Your branch is ahead of 'origin/master' by 2 commits.
(use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   library.py

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\sowmy\OneDrive\Desktop\library management> git diff
diff --git a/library.py b/library.py
index 23f104b..b1d9630 100644
--- a/library.py
+++ b/library.py
@@ -1,1 @@
-print("Student feature added")
+print("student ")
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 7: Handling Merge Conflicts

Scenario: Two developers edited the same file.

Tasks:

- Merge branches
- Resolve conflicts
- Commit resolved changes


```
File Edit Selection View Go Run Terminal Help  
EXPLORER  
LIBRARY MANAGEMENT  
library.py  
library.py  
1 print("student update")  
2  
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS  
PS C:\Users\sowmy\OneDrive\Desktop\library management> git branch  
feature-student  
* master  
PS C:\Users\sowmy\OneDrive\Desktop\library management>  
PS C:\Users\sowmy\OneDrive\Desktop\library management> git merge feature-student  
>>  
Already up to date.  
PS C:\Users\sowmy\OneDrive\Desktop\library management> git status  
>>  
On branch master  
Your branch is ahead of 'origin/master' by 2 commits.  
(use "git push" to publish your local commits)  
  
nothing to commit, working tree clean  
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 8: Ignoring Unwanted Files

Scenario: Log and temporary files should not be tracked.

Tasks:

- Create .gitignore file
- Add ignore patterns

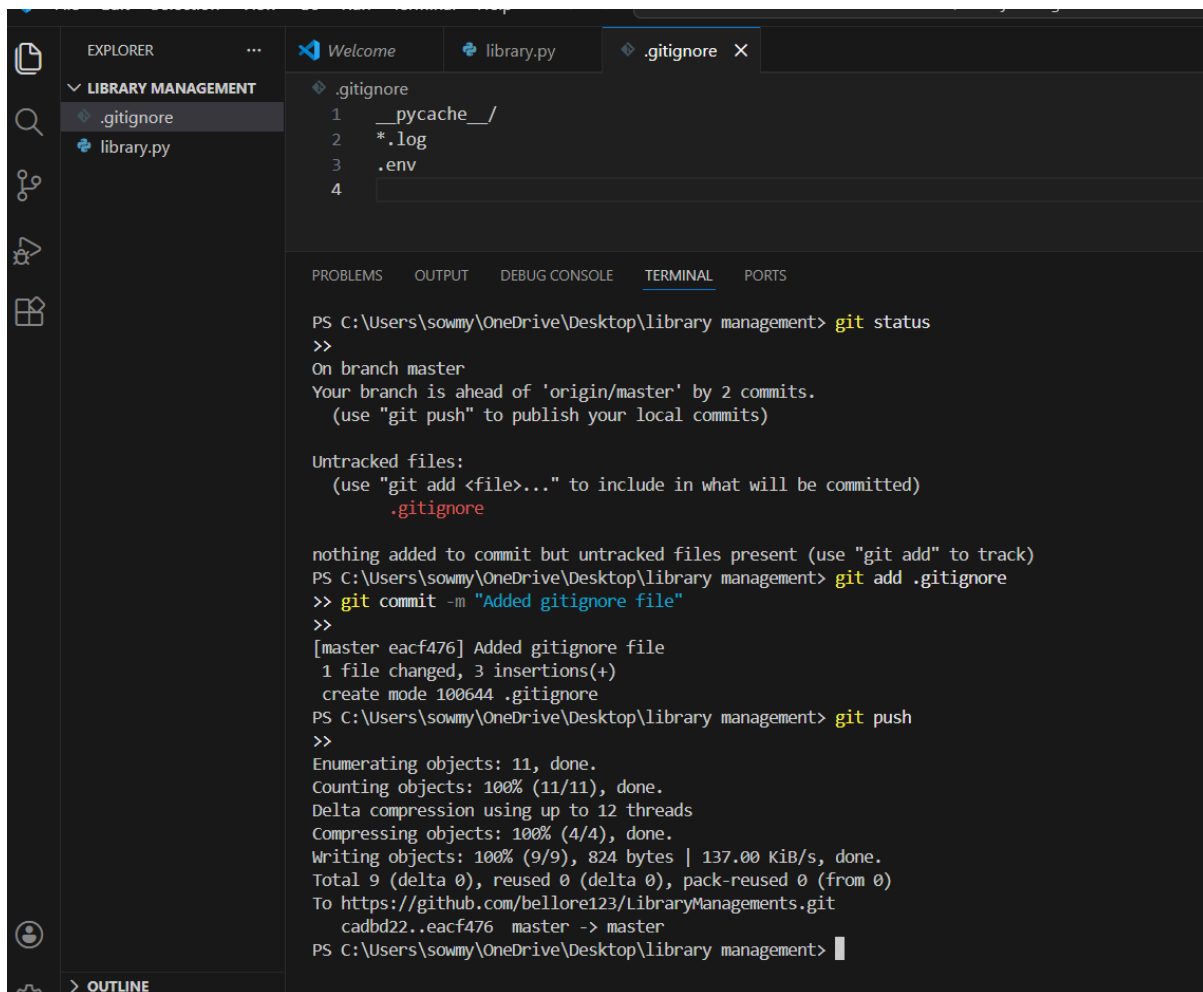

The screenshot shows a Visual Studio Code editor interface. The Explorer sidebar on the left shows a project named 'LIBRARY MANAGEMENT' with files '.gitignore' and 'library.py'. The main editor area has a tab for '.gitignore' which contains the following content:

```
1 __pycache__/  
2 *.log  
3 .env  
4
```

Below the editor, the TERMINAL panel is active, displaying the output of several git commands executed in a PowerShell prompt at the path 'C:\Users\sowmy\OneDrive\Desktop\library management':


```
PS C:\Users\sowmy\OneDrive\Desktop\library management> git status  
>>  
On branch master  
Your branch is ahead of 'origin/master' by 2 commits.  
(use "git push" to publish your local commits)  
  
Untracked files:  
(use "git add <file>..." to include in what will be committed)  
      .gitignore  
  
nothing added to commit but untracked files present (use "git add" to track)  
PS C:\Users\sowmy\OneDrive\Desktop\library management> git add .gitignore  
>> git commit -m "Added gitignore file"  
>>  
[master eacf476] Added gitignore file  
 1 file changed, 3 insertions(+)  
 create mode 100644 .gitignore  
PS C:\Users\sowmy\OneDrive\Desktop\library management> git push  
>>  
Enumerating objects: 11, done.  
Counting objects: 100% (11/11), done.  
Delta compression using up to 12 threads  
Compressing objects: 100% (4/4), done.  
Writing objects: 100% (9/9), 824 bytes | 137.00 KiB/s, done.  
Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)  
To https://github.com/bellore123/LibraryManagements.git  
   cadbd22..eacf476  master -> master  
PS C:\Users\sowmy\OneDrive\Desktop\library management>
```

Case Study 9: Collaborating with Team

Scenario: A teammate pushed new changes.

Tasks:

- Fetch latest changes
- Pull updates
- Resolve conflicts if any

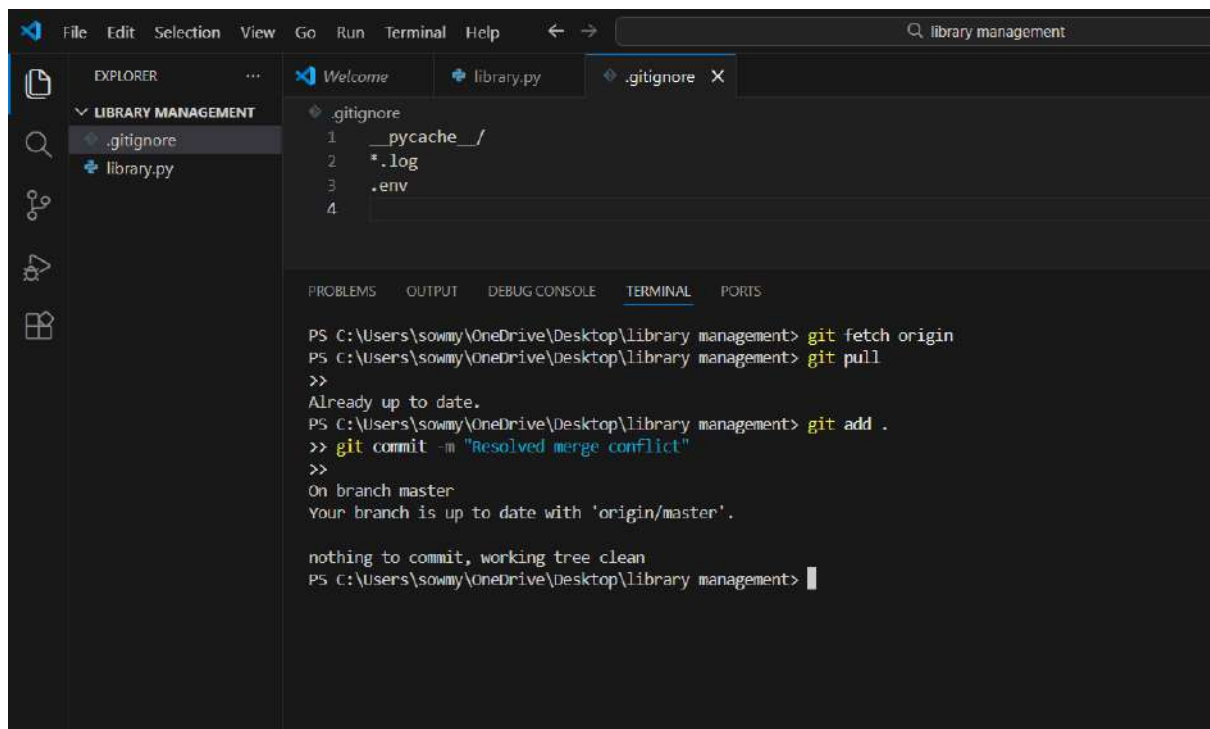


Case Study 10: Final Project Release

Scenario:

Project is ready for final submission.

Tasks:

- Review commit history
- Push final code
- Prepare release version

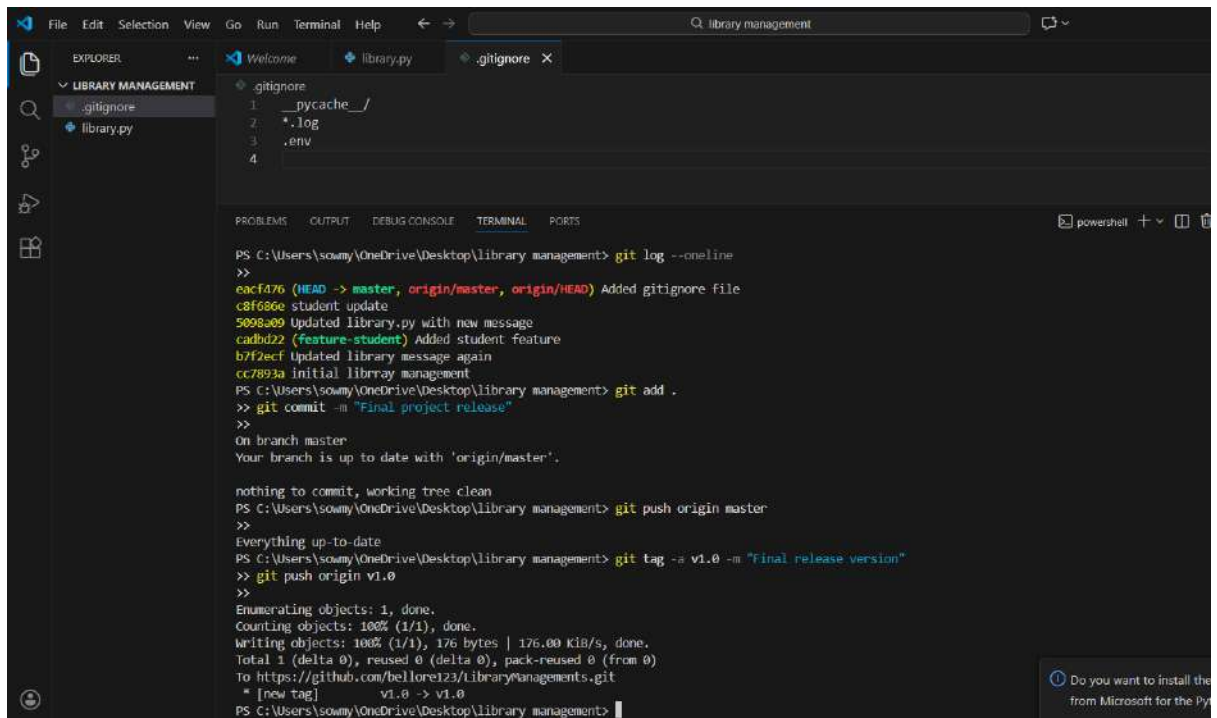


The screenshot shows the Visual Studio Code interface with a terminal window open. The Explorer pane on the left shows the 'LIBRARY MANAGEMENT' folder containing '.gitignore' and 'library.py'. The terminal window displays the following commands and output:

```
PS C:\Users\soumy\OneDrive\Desktop\library management> git log --oneline
>>
eacf476 (HEAD -> master, origin/master, origin/HEAD) Added gitignore file
c8f686e student update
5098a09 Updated library.py with new message
cadbd22 (feature-student) Added student feature
b7f2ecf Updated library message again
cc7893a Initial library management
PS C:\Users\soumy\OneDrive\Desktop\library management> git add .
>> git commit -m "Final project release"
>>
On branch master
Your branch is up to date with 'origin/master'.

nothing to commit, working tree clean
PS C:\Users\soumy\OneDrive\Desktop\library management> git push origin master
>>
Everything up-to-date
PS C:\Users\soumy\OneDrive\Desktop\library management> git tag -a v1.0 -m "Final release version"
>> git push origin v1.0
>>
Enumerating objects: 1, done.
Counting objects: 100% (1/1), 176 bytes | 176.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/bellor123/LibraryManagements.git
 * [new tag]         v1.0 -> v1.0
PS C:\Users\soumy\OneDrive\Desktop\library management>
```

A notification bubble in the bottom right corner asks: "Do you want to install the... from Microsoft for the Py...".

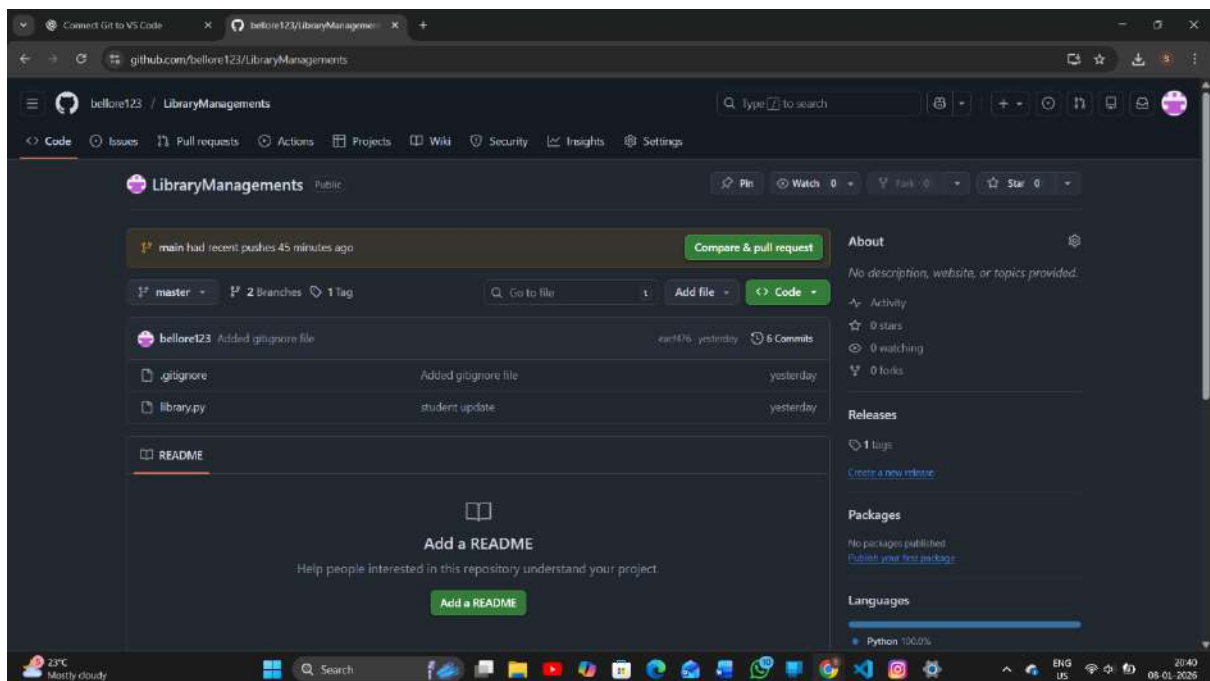

Python programs

Question 1.

A website requires the users to input username and password to register. Write a program to check the validity of password input by users.

Following are the criteria for checking the password:

1. At least 1 letter between [a-z]
2. At least 1 number between [0-9]
1. At least 1 letter between [A-Z]
3. At least 1 character from [\$#@]
4. Minimum length of transaction password: 6
5. Maximum length of transaction password: 12

Your program should accept a sequence of comma separated passwords and will check them according to the above criteria. Passwords that match the criteria are to be printed, each separated by a comma.

Example

If the following passwords are given as input to the program:

ABd1234@1,a F1#,2w3E*,2We3345

Then, the output of the program should be:

ABd1234@1

The screenshot shows the Visual Studio Code editor with a file named `pass.py` open. The code is a Python script that prompts the user for a password and checks if it meets certain criteria (length between 6 and 12, contains at least one letter, one digit, and one special character). If the password is valid, it is added to a list and printed.

```
1 import re
2
3 passwords = input().split(',')
4
5 valid_passwords = []
6
7 for pwd in passwords:
8     if (6 <= len(pwd) <= 12 and
9         re.search("[a-z]", pwd) and
10        re.search("[A-Z]", pwd) and
11        re.search("[0-9]", pwd) and
12        re.search("[!@#$%^&*~]", pwd)):
13         valid_passwords.append(pwd)
14
15 print(", ".join(valid_passwords))
16
```

The terminal shows the execution of the script:

```
PS C:\Users\Somy\OneDrive\Desktop> py pass.py
Ald1234@,a F1@,2dR*,2he345
Ald1234@
PS C:\Users\Somy\OneDrive\Desktop>
```

The screenshot shows the Visual Studio Code editor with a file named `name.py` open. The code is a Python script that prompts the user for a line of input and splits it into a tuple of (name, age, height). It then prints the tuple.

```
1 records = []
2
3 while True:
4     line = input()
5     if not line:
6         break
7     name, age, height = line.split(",")
8     records.append((name, age, height))
9
```

The terminal shows the execution of the script and the subsequent git commands:

```
PS C:\Users\Somy\OneDrive\Desktop> git init
Initialized empty Git repository in C:\Users\Somy\OneDrive\Desktop\af.git/
PS C:\Users\Somy\OneDrive\Desktop> git add .
PS C:\Users\Somy\OneDrive\Desktop> git commit -m "pass.py"
[master (root commit) 58f3092] pass.py
1 file changed, 15 insertions(+)
create mode 100644 pass.py
PS C:\Users\Somy\OneDrive\Desktop> git remote add origin https://github.com/bellor123/sturdy-spoon.git
PS C:\Users\Somy\OneDrive\Desktop> git remote -v
origin https://github.com/bellor123/sturdy-spoon.git (fetch)
origin https://github.com/bellor123/sturdy-spoon.git (push)
PS C:\Users\Somy\OneDrive\Desktop> git branch -m main
PS C:\Users\Somy\OneDrive\Desktop> git push -u origin main
Enumerating objects: 3, done.
Enumerating objects: 3, done.
Counting objects: 100% (1/1), done.
Delta compression using up to 32 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 382 bytes | 382.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/bellor123/sturdy-spoon.git
 * [new branch] main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\Somy\OneDrive\Desktop>
```

Question 2.

You are required to write a program to sort the (name, age, height) tuples by ascending order where

name is string, age and height are numbers. The tuples are input by console. The sort criteria is:

- 1: Sort based on name;
- 2: Then sort based on age;
- 3: Then sort by score.

The priority is that name > age > score.

If the following tuples are given as input to the program:

Tom,19,80

John,20,90


Jony,17,91

Jony,17,93

Json,21,85

Then, the output of the program should be:

[('John', '20', '90'), ('Jony', '17', '91'), ('Jony', '17', '93'), ('Json', '21', '85'), ('Tom', '19', '80')]

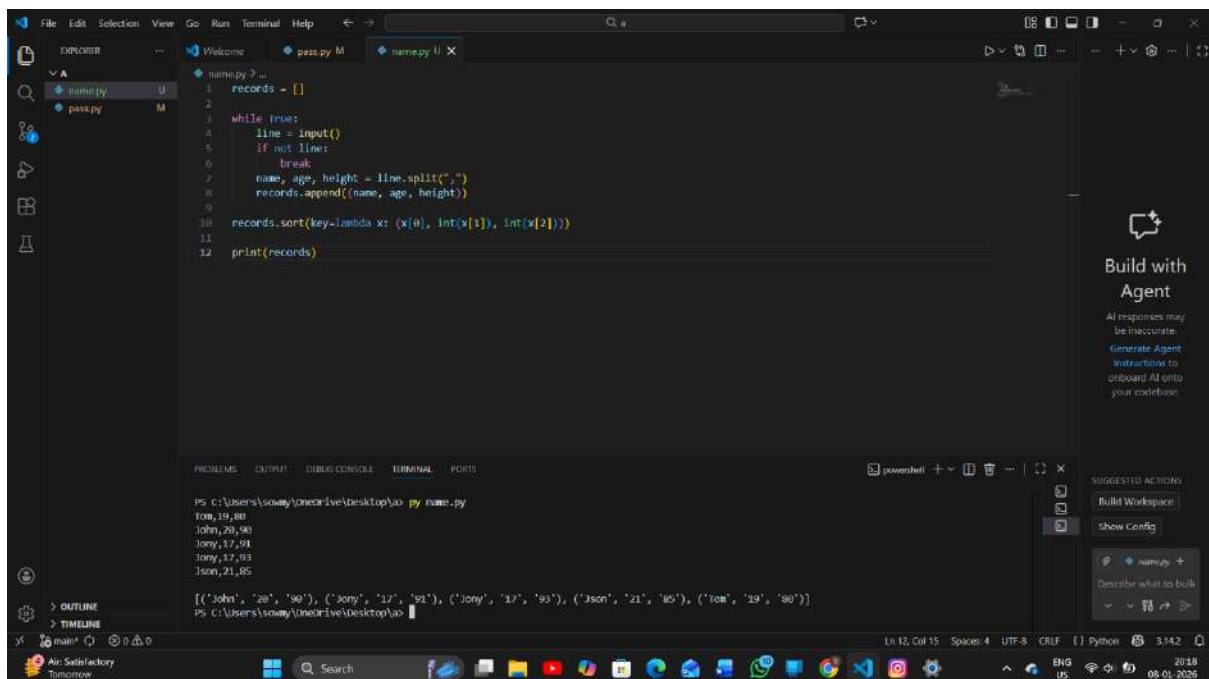


The screenshot shows a Visual Studio Code editor with a Python file named `name.py`. The code in the editor is as follows:

```
1 records = []
2
3 while True:
4     line = input()
5     if not line:
6         break
7     name, age, height = line.split(",")
8     records.append((name, age, height))
9
10 records.sort(key=lambda x: (x[0], int(x[1]), int(x[2])))
11
12 print(records)
```

The terminal at the bottom shows the execution of the script. It prompts for input, which is provided as `Tom,19,80`, `John,20,90`, `Jony,17,91`, `Jony,17,93`, and `Json,21,85`. The output of the program is:

```
[('John', '20', '90'), ('Jony', '17', '91'), ('Jony', '17', '93'), ('Json', '21', '85'), ('Tom', '19', '80')]
```

The status bar at the bottom indicates the file is `name.py` at line 12, column 15, with 4 spaces, using UTF-8 encoding and CR/LF line endings. The Python version is 3.14.2.

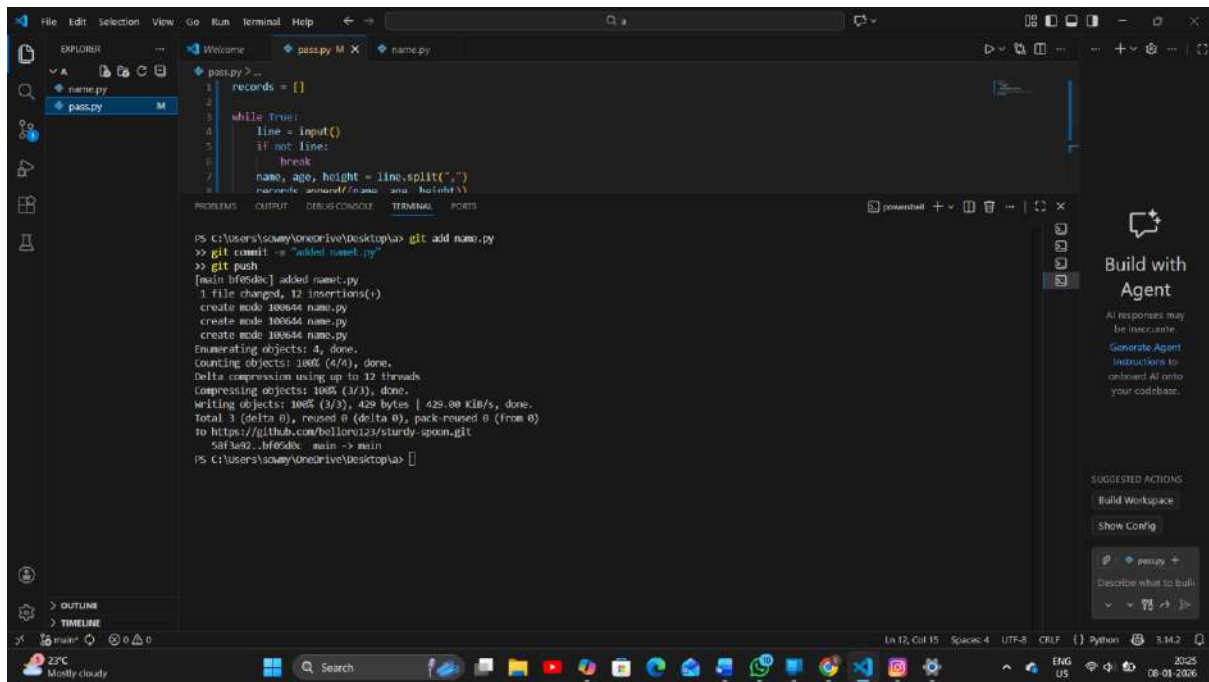


Question 3:

An electricity board calculates charges based on usage.

Write a program that:

- Takes number of units consumed
- Calculates bill:
 - o First 100 units → ₹2/unit
 - o Next 100 units → ₹3/unit
 - o Remaining → ₹5/unit
- Displays total bill

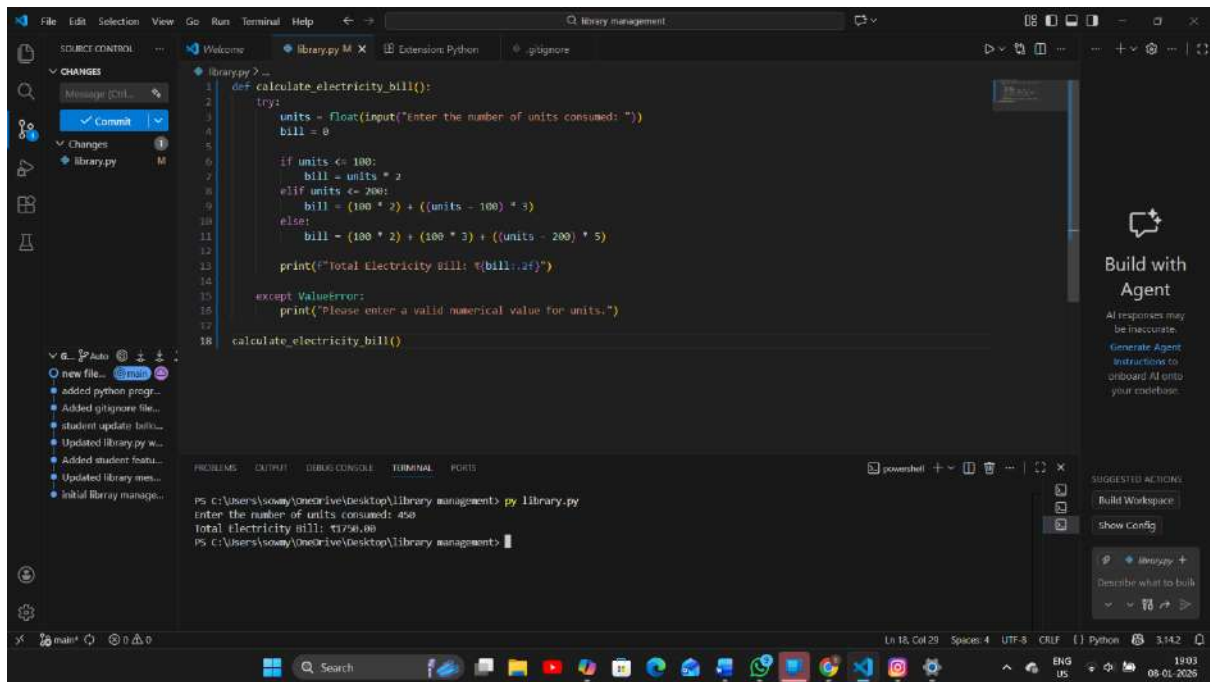

OPEN EDITORS

- Welcome
- x a.py M
- AS
- a.py M

```

1 def calculate_electricity_bill():
2     try:
3         units = float(input("Enter the number of units consumed: "))
4         bill = 0
5
6         if units <= 100:
7             # All units at ₹2
8             bill = units * 2
9         elif units <= 200:
10            # First 100 at ₹2, next (units-100) at ₹3
11            bill = (100 * 2) + ((units - 100) * 3)
12        else:
13            # First 100 at ₹2, next 100 at ₹3, remaining at ₹5
14            bill = (100 * 2) + (100 * 3) + ((units - 200) * 5)
15
16        print(f"Total Electricity Bill: ₹{bill:.2f}")
17
18    except ValueError:
19        print("Please enter a valid numerical value for units.")
20
21 calculate_electricity_bill()
22

```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```

PS C:\Users\batch1\Desktop\as> git init
Initialized empty Git repository in C:/Users/batch1/Desktop/as/.git/
PS C:\Users\batch1\Desktop\as> git add .
PS C:\Users\batch1\Desktop\as> git commit -m "initial commit"
[master (root-commit) 882dba6] initial commit
PS C:\Users\batch1\Desktop\as> git commit -m "initial commit"
[master (root-commit) 882dba6] initial commit
1 file changed, 21 insertions(+)
create mode 100644 a.py
1 file changed, 21 insertions(+)
create mode 100644 a.py
PS C:\Users\batch1\Desktop\as> git remote add origin https://github.com/bellore123/p
PS C:\Users\batch1\Desktop\as> git remote add origin https://github.com/bellore123/p
PS C:\Users\batch1\Desktop\as> git remote -v
origin https://github.com/bellore123/py.git (fetch)
origin https://github.com/bellore123/py.git (fetch)
origin https://github.com/bellore123/py.git (push)
PS C:\Users\batch1\Desktop\as> git branch -m main
PS C:\Users\batch1\Desktop\as> git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 24 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 523 bytes | 523.00 KiB/s, done.

```




> OUTLINE
> TIMELINE

Question 4:

An ATM machine allows withdrawals only if sufficient balance is available.

Write a program that:

- Stores a user's balance
- Takes withdrawal amount as input
- Checks:
 - o Amount must be a multiple of 100
 - o Balance must be sufficient
- Deducts amount and displays updated balance

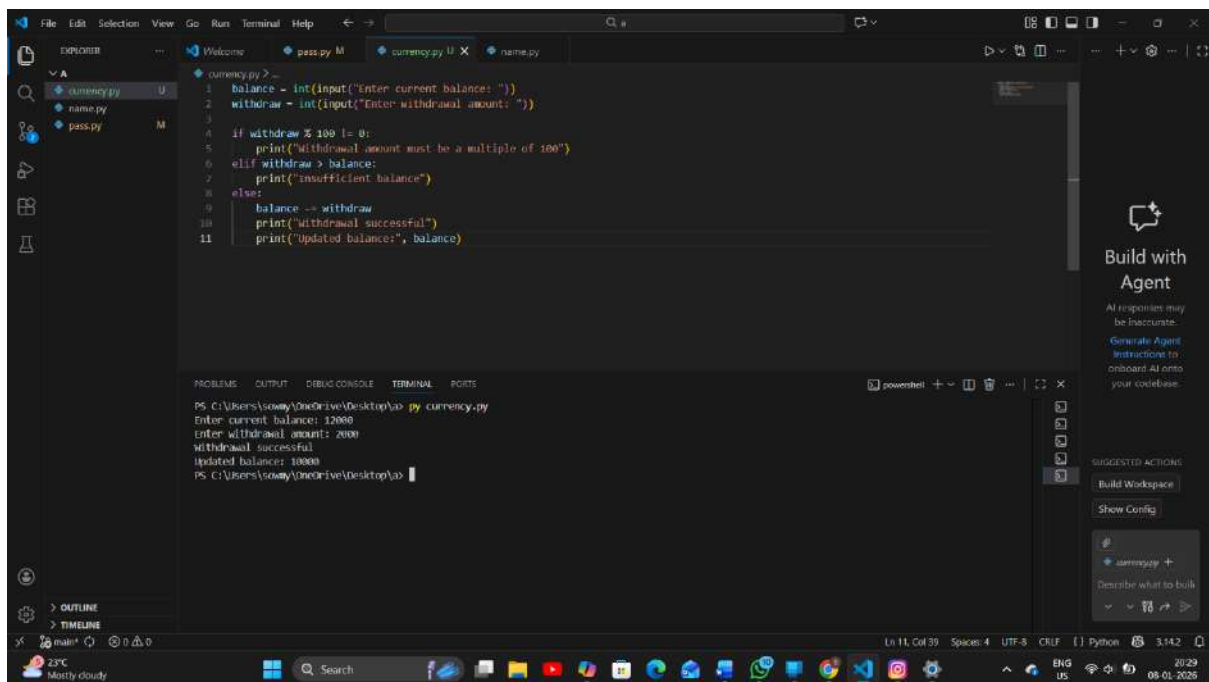

```
File Edit Selection View Go Run Terminal Help
currency.py U
name.py
pass.py M


1 balance = int(input("Enter current balance: "))
2 withdraw = int(input("Enter withdrawal amount: "))
3
4 if withdraw % 100 != 0:
5     print("Withdrawal amount must be a multiple of 100")
6 elif withdraw > balance:
7     print("insufficient balance")
8 else:
9     balance -= withdraw
10    print("Withdrawal successful")
11    print("Updated balance:", balance)

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\sowmya\OneDrive\Desktop> python currency.py
Enter current balance: 12000
Enter withdrawal amount: 2000
Withdrawal successful
Updated balance: 10000
PS C:\Users\sowmya\OneDrive\Desktop>
```

Build with Agent
AI responses may be inaccurate.
Generate Agent instructions to onboard AI onto your codebase.

SUGGESTED ACTIONS
Build Workspace
Show Config
currency +
Describe what to build

23°C Mostly Cloudy
Search
Ln 11, Col 39 Spaces: 4 UTF-8 CRLF Python 3.14.2
20:29 08-01-2025

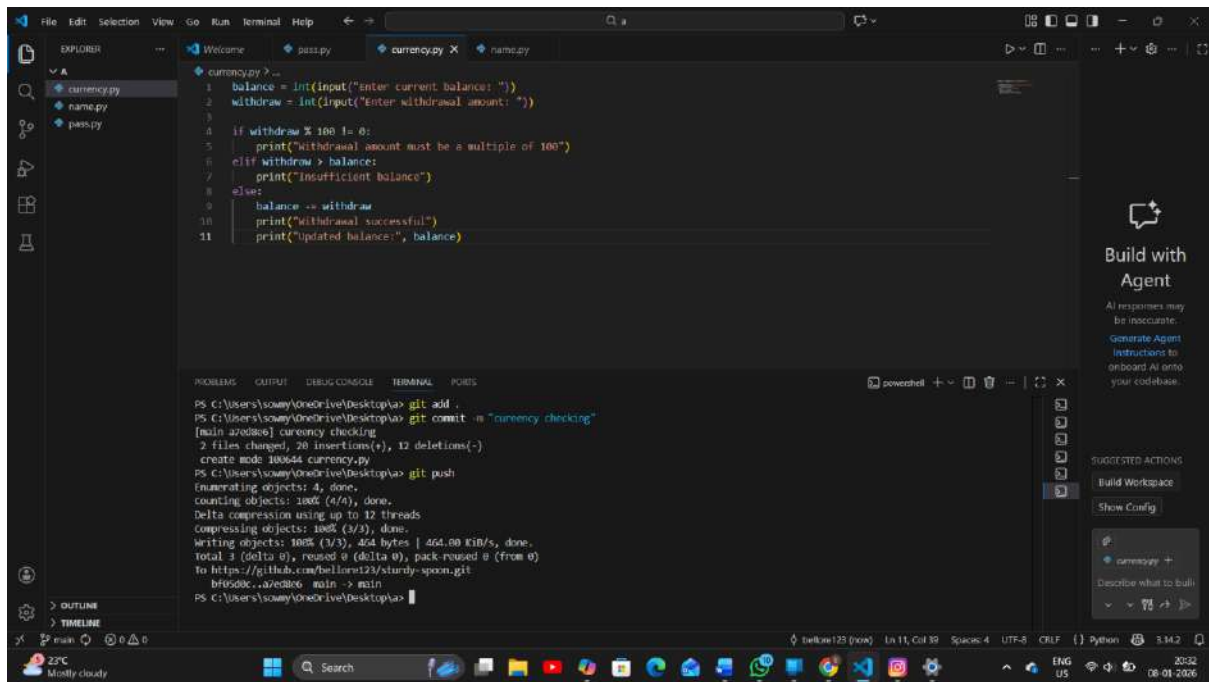

Question 5:

A company calculates monthly salary based on basic pay.

Write a program that:

- Accepts basic salary
- Calculates:
 - o HRA = 20% of basic
 - o DA = 10% of basic
 - o Tax = 5% of total salary
- Displays net salary

```
File Edit Selection View Go Run Terminal Help
Welcome | pass.py | currency.py | tax.py | name.py

EXPLORER
  A
  ├── currency.py
  ├── name.py
  ├── pass.py
  └── tax.py

1 basic = float(input("Enter basic salary: "))
2
3 hra = basic * 0.20
4 da = basic * 0.10
5 gross_salary = basic + hra + da
6 tax = gross_salary * 0.05
7 net_salary = gross_salary - tax
8
9 print("Net Salary:", net_salary)

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\soumy\OneDrive\Desktop> python tax.py
Enter basic salary: 122222
Net Salary: 150944.17
PS C:\Users\soumy\OneDrive\Desktop>

SUGGESTED ACTIONS
Build Workspace
Show Config
Describe what to build
```

```
File Edit Selection View Go Run Terminal Help
Welcome | pass.py | currency.py | tax.py | name.py

EXPLORER
  A
  ├── currency.py
  ├── name.py
  ├── pass.py
  └── tax.py

1 basic = float(input("Enter basic salary: "))
2
3 hra = basic * 0.20
4 da = basic * 0.10
5 gross_salary = basic + hra + da
6 tax = gross_salary * 0.05
7 net_salary = gross_salary - tax
8
9 print("Net Salary:", net_salary)

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\soumy\OneDrive\Desktop> git add .
PS C:\Users\soumy\OneDrive\Desktop> git commit -m "tax"
[main 336009] tax
1 file changed, 9 insertions(+)
 create mode 100644 tax.py
PS C:\Users\soumy\OneDrive\Desktop> git push
Enumerating objects: 4, done.
counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
compressing objects: 100% (3/3), done.
writing objects: 100% (3/3), 393 bytes | 106.00 KiB/s, done.
total 3 (delta 1), reused 0 (delta 0), pack reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/belloret2/sturdy-spoon.git
 a7e886..336009 main -> main
PS C:\Users\soumy\OneDrive\Desktop>

SUGGESTED ACTIONS
Build Workspace
Show Config
Describe what to build
```

