



VIT[®]
Vellore Institute of Technology
(Deemed to be University under section 3 of UGC Act, 1956)

Agile Development Process and Devops

Lab

ASSESSMENT-4

DOCKER

NAME : Hema Balaji.R

Reg_NO : 23MIS0449


Slot: L49+L50

COURSE CODE : ISWE406P


Faculty : SWETA BHATTACHARYA

1. Create a repository in GIT and create the following files:


- index.html
- Dockerfile
- Deployment.yaml

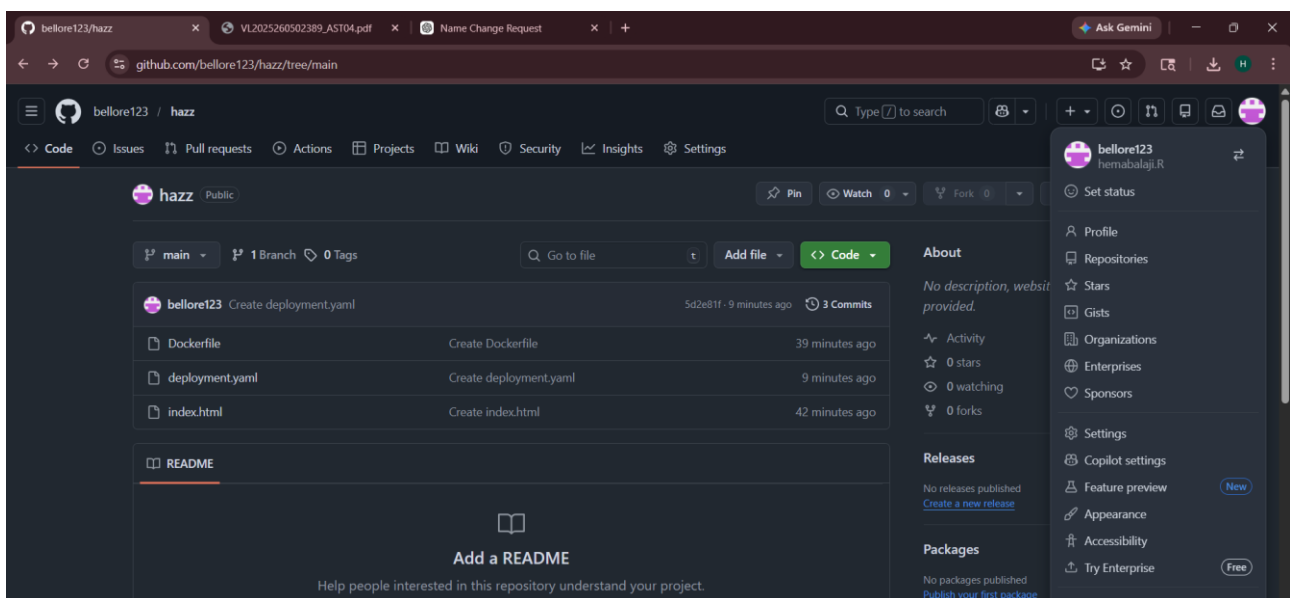


- index.html


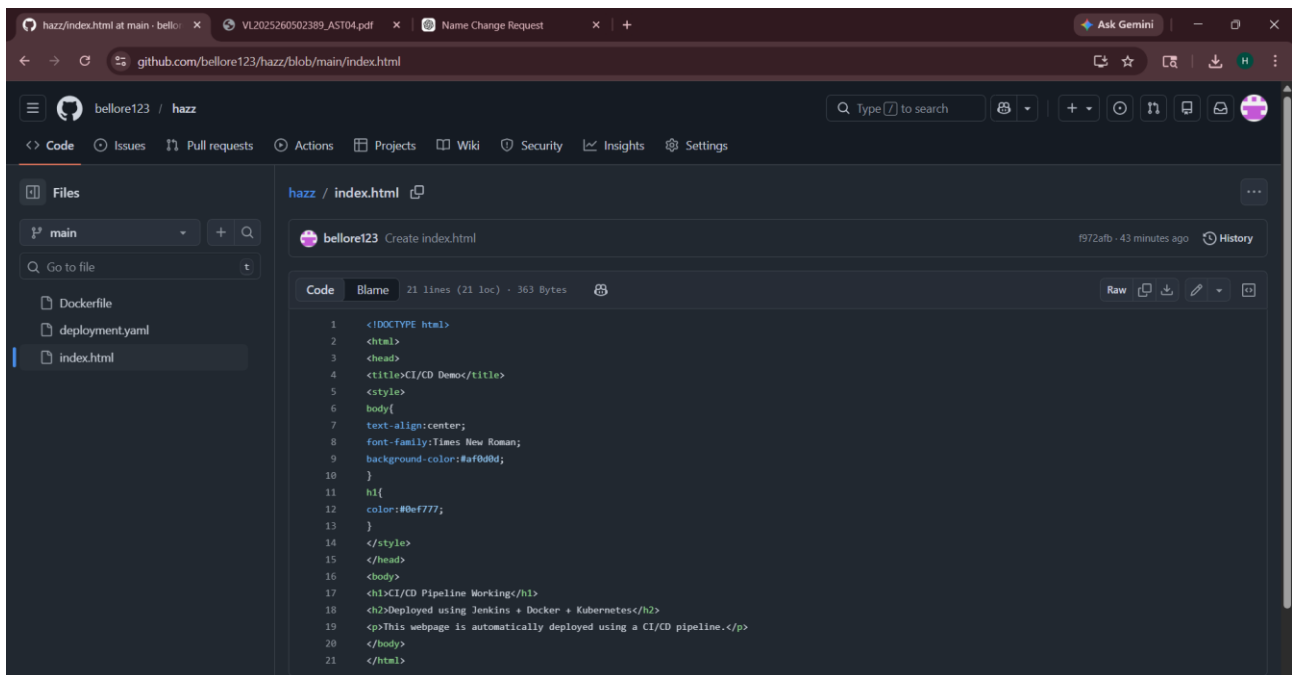


Dockerfile:

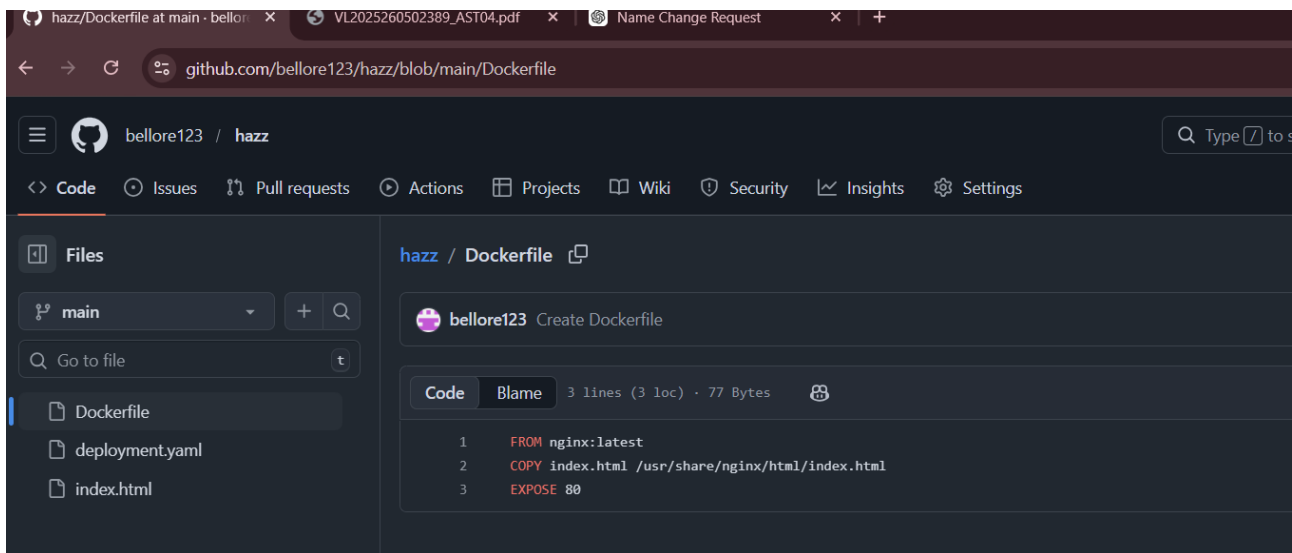

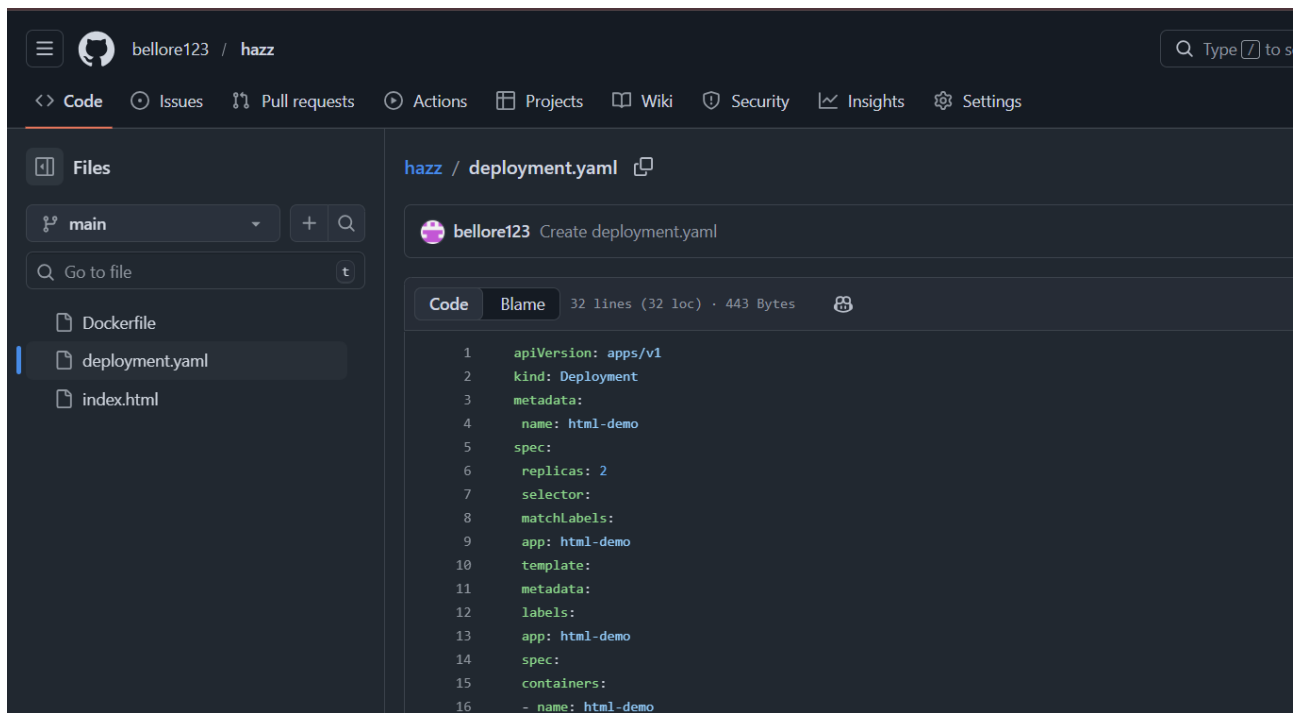

2. Enable Kubernetes

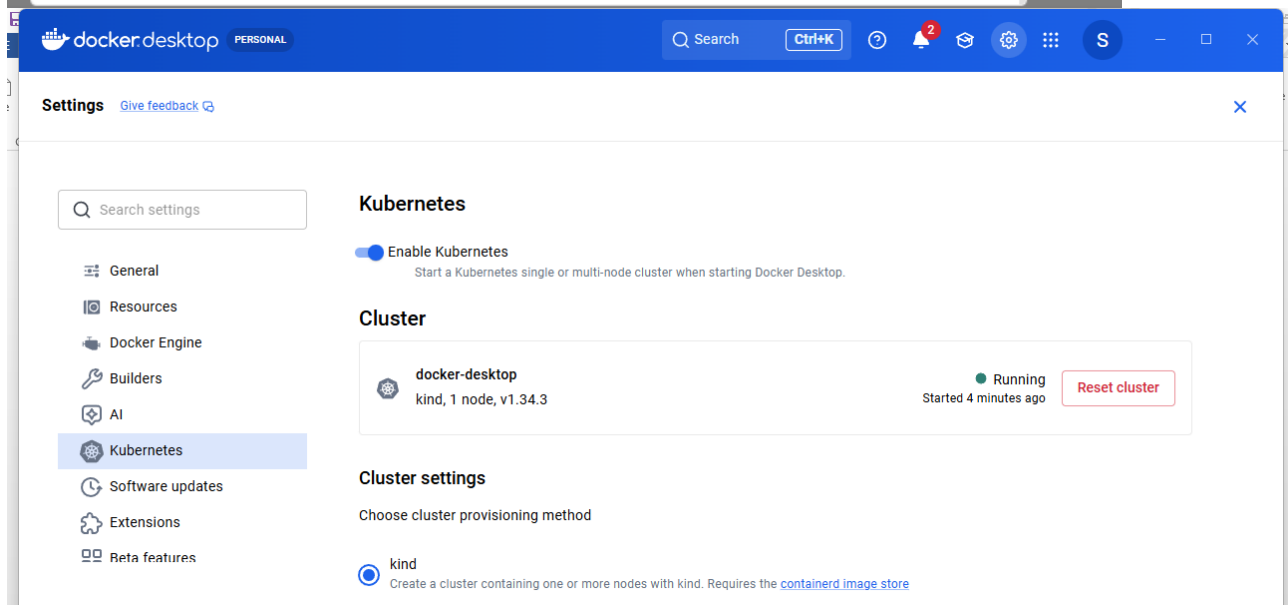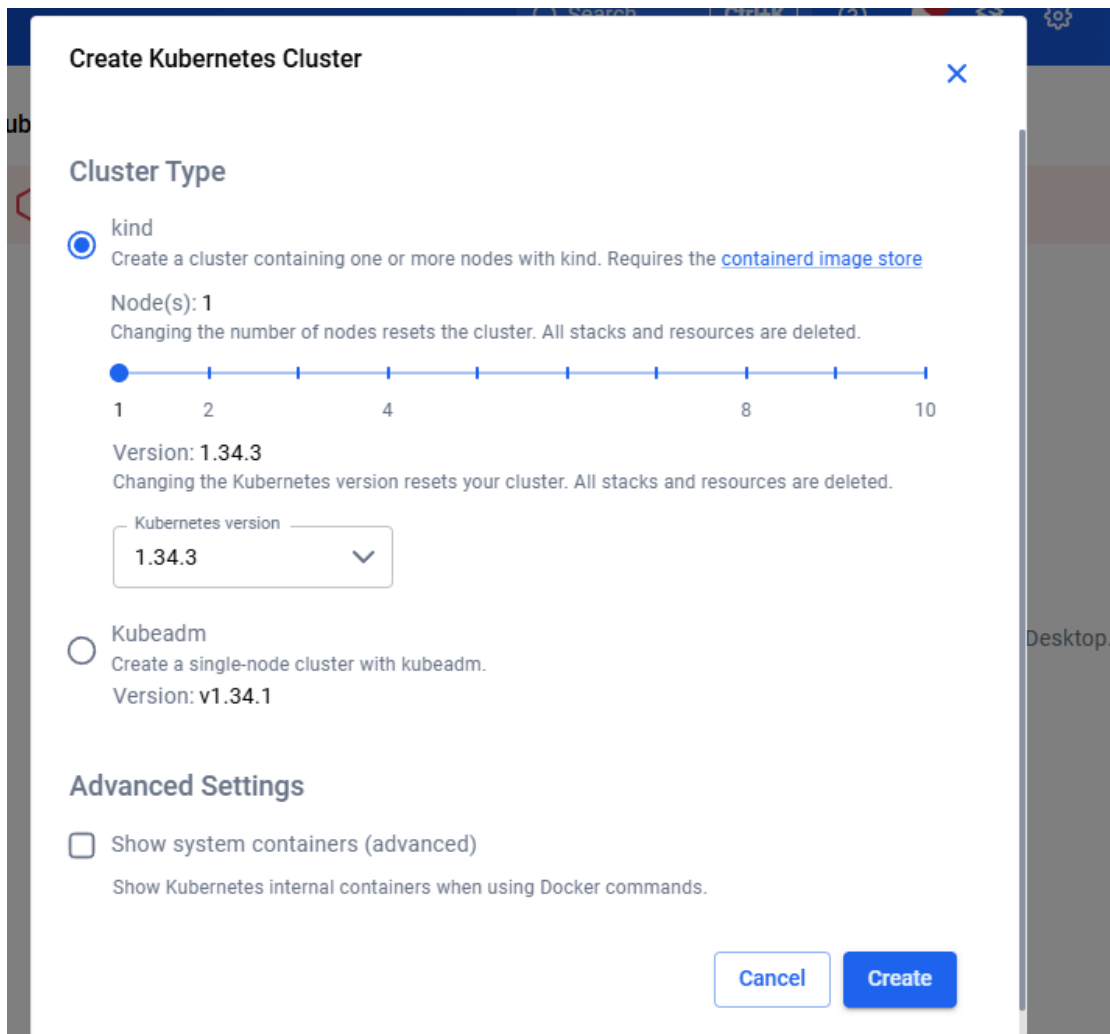

3. Open Jenkins In Jenkins Setting --> Credentials New Credentials – User name: , password , ID:, Description
New Credentials – Secret – Browse C: User->Administrator-->.kube

Credentials



haz114***** (docker 1)

System - Global - dockerhub - docker 1



config ("credentials added")

System - Global - kubeconfig - "credentials added"



Stores scoped to Jenkins

Create New Item -> Pipeline

New Item

Enter an item name

docker

Select an item type



Pipeline

Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.



Freestyle project

Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.



Multi-configuration project

Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.



Folder

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.



Multibranch Pipeline

Creates a set of Pipeline projects according to detected branches in one SCM repository.

OK

Run the Build:

Jenkins / doc_ker1

Status

</> Changes

► Build Now

⚙️ Configure

🗑️ Delete Pipeline

🔍 Full Stage View

★ Favorite

🌐 Open Blue Ocean

📁 Stages

✎ Rename

❓ Pipeline Syntax

Builds > ...

Today

🟢 #2 8:16 PM

🔴 #1 8:08 PM

🟢 doc_ker1

Stage View

	Clone Code	Build Docker Image	Push Image	Deploy to Kubernetes
Average stage times: (full run time: ~28s)	3s	7s	13s	2s
#2 Mar 26 20:16 No Changes	2s	5s	13s	3s
#1 Mar 26 20:08 No Changes	3s	9s	13s	1s failed

Permalinks

- Last build (#2), 4 min 5 sec ago
- Last stable build (#2), 4 min 5 sec ago
- Last successful build (#2), 4 min 5 sec ago
- Last failed build (#1), 11 min ago
- Last unsuccessful build (#1), 11 min ago
- Last completed build (#2), 4 min 5 sec ago

- Status
- Changes
- Console Output
- Edit Build Information
- Delete build "#3"
- Timings
- Git Build Data
- Pipeline Overview
- Open Blue Ocean
- Restart from Stage
- ↻

👍 #3 (Mar 26, 2026, 8:41:50 PM)



Started by user [HEMA BALAJI.R](#)



This run spent:

- 65 ms waiting;
- 30 sec build duration;
- 30 sec total from scheduled to completion.



Revision: c349cbdf7c22da8e4e5c2e50986d0cae8ae44494

Repository: <https://github.com/sanjalgood4444-pixel/Docker.git>

- refs/remotes/origin/main



Changes:

1. Update index.html ([details / githubweb](#))

- Open Blue Ocean
- Restart from Stage
- ≈

- refs/remotes/origin/main



Changes:

1. Update index.html ([details](#) / [githubweb](#))

Containers [Give feedback](#)

Container CPU usage ⓘ

0.00% / 400% (4 CPUs available)

Container memory usage ⓘ

9.14MB / 4.63GB


[Show charts](#)

Q Search

☐ Only show running containers

☐	Na...	Container ID	Image	Port(s)	CPU (%)	Last	Actions
☐	 haz_mclean	bedb0b45d7a6	haz144/	30010:80 	0%	1 mi	   

UPDATED INDEX.HTML:

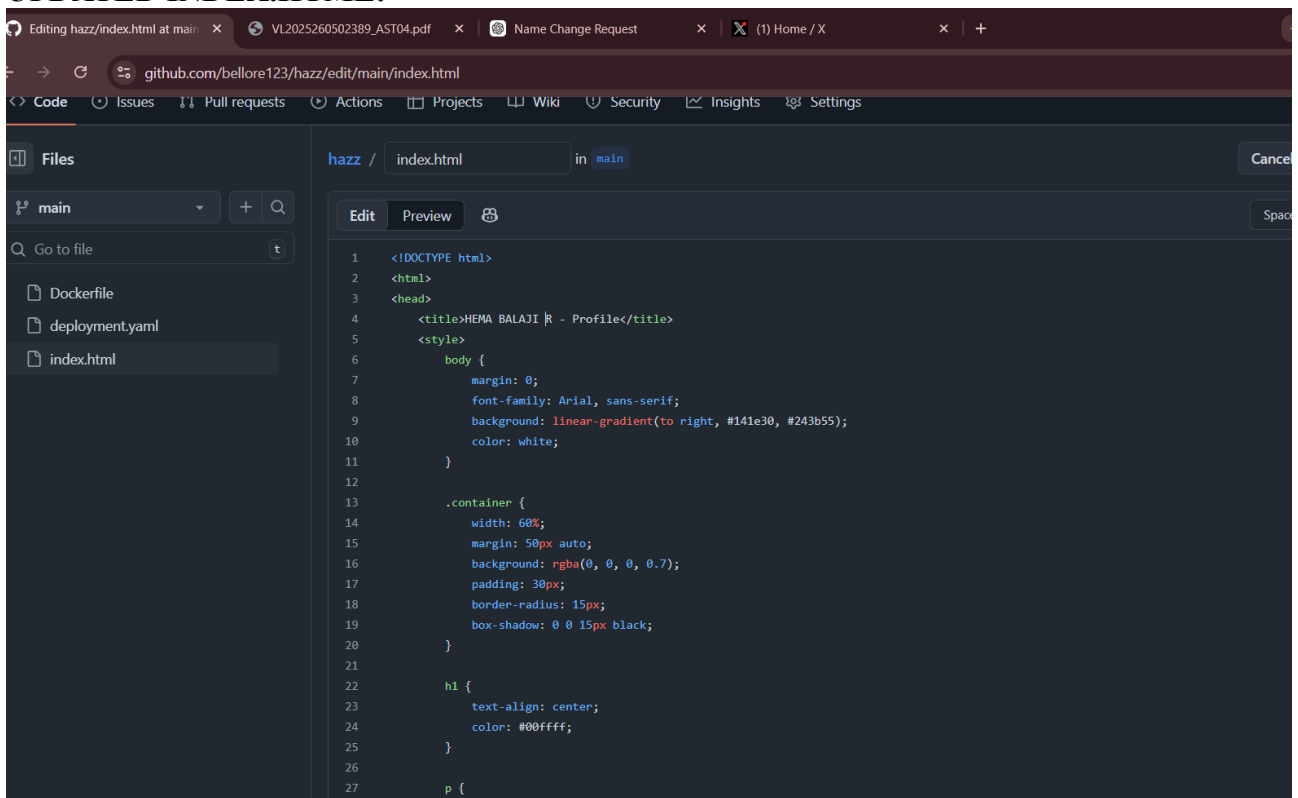

The screenshot shows a web browser window with multiple tabs. The active tab is 'github.com/bellore123/hazz/edit/main/index.html'. The browser's address bar shows the URL. Below the browser window, there is a dark-themed code editor interface. The left sidebar shows a file explorer with 'main' selected, and a list of files: 'Dockerfile', 'deployment.yaml', and 'index.html'. The main editor area shows the 'index.html' file being edited. The code is as follows:

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>HEMA BALAJI K - Profile</title>
5   <style>
6     body {
7       margin: 0;
8       font-family: Arial, sans-serif;
9       background: linear-gradient(to right, #141e30, #243b55);
10      color: white;
11    }
12
13    .container {
14      width: 60%;
15      margin: 50px auto;
16      background: rgba(0, 0, 0, 0.7);
17      padding: 30px;
18      border-radius: 15px;
19      box-shadow: 0 0 15px black;
20    }
21
22    h1 {
23      text-align: center;
24      color: #00ffff;
25    }
26
27    p {
```

Localhost:30010:

