


Car class — stack, heap, and method area

```
Car car = new Car();   car2 = car;   car.start();
```

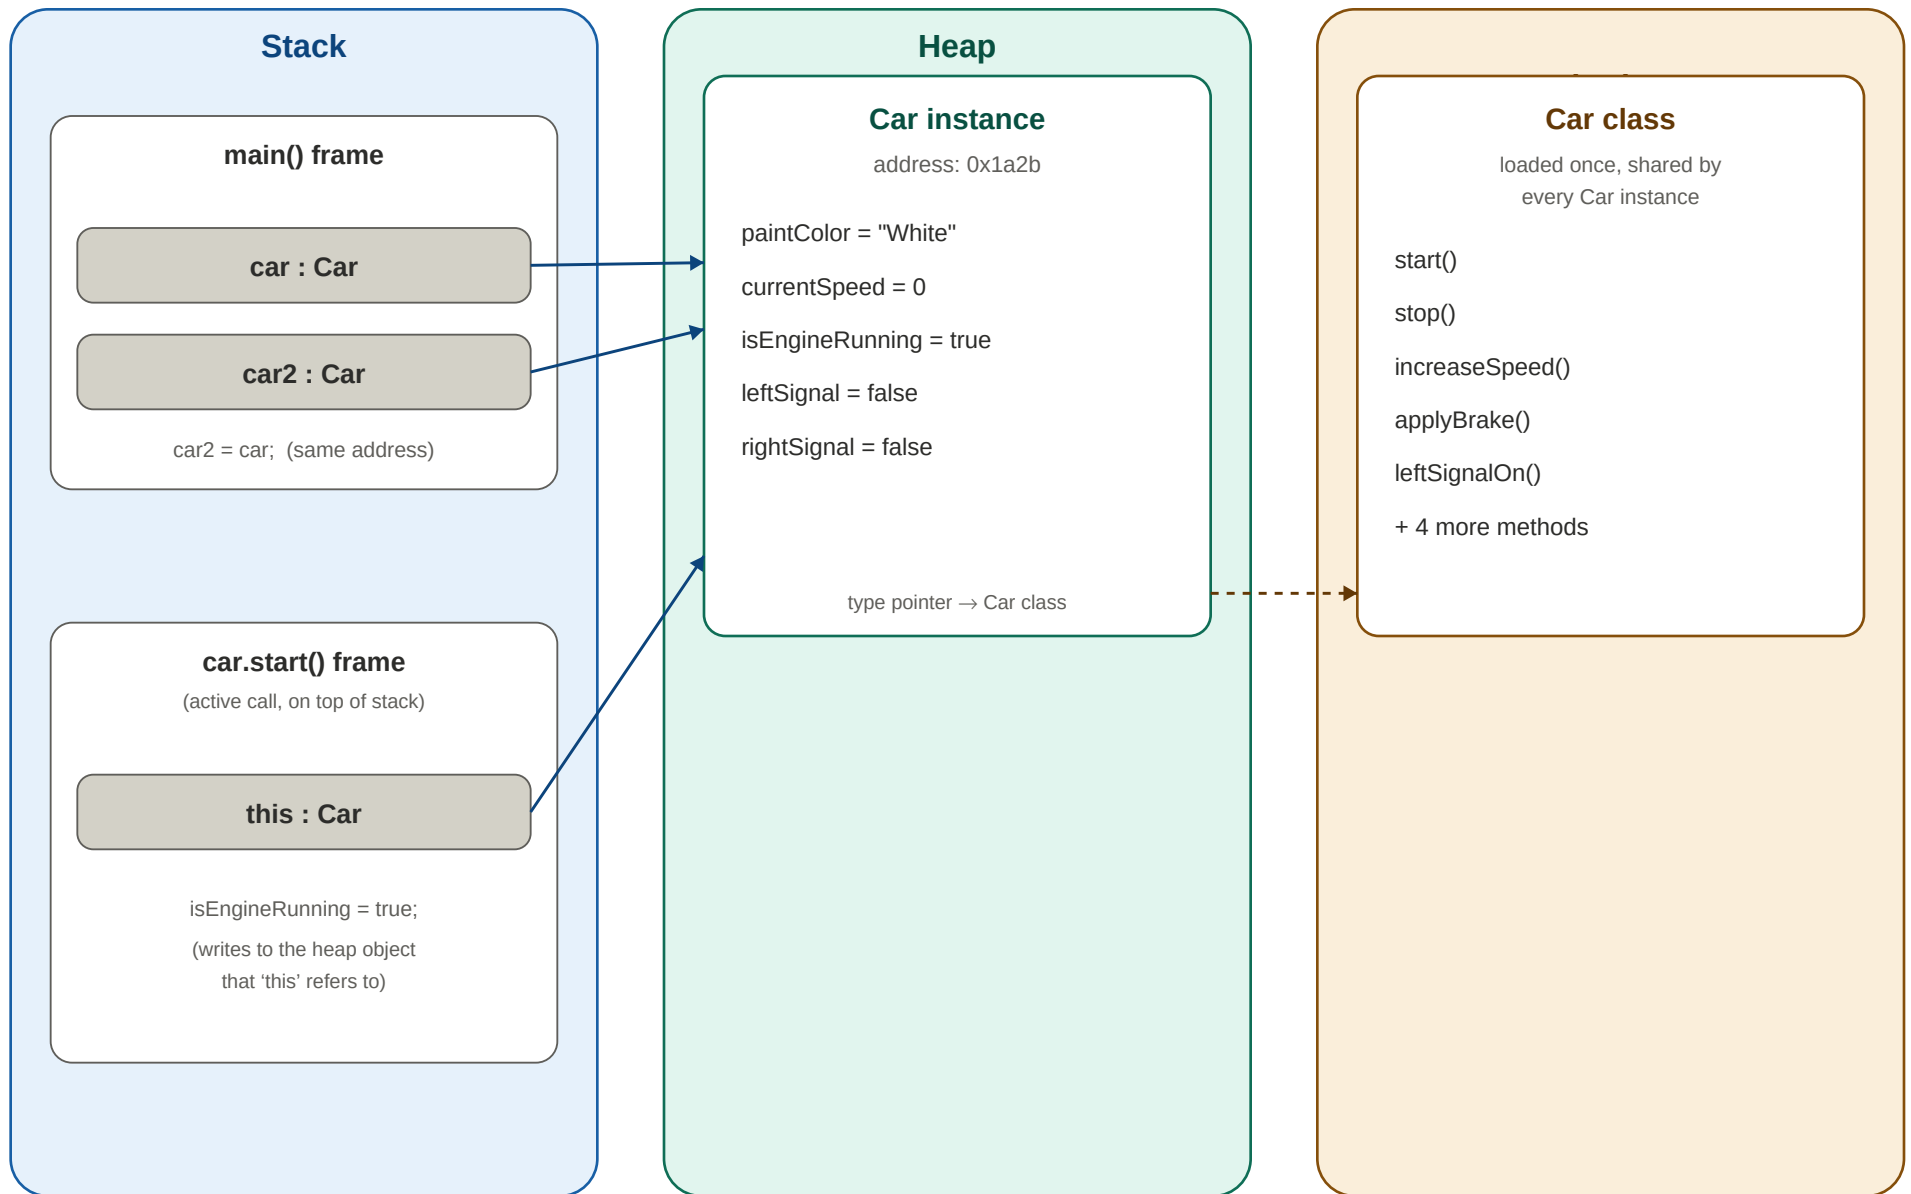

car and car2 are separate stack variables holding the same heap address — both refer to one Car object.

Methods live once in the method area; every instance's calls resolve there and act on that instance's own fields via 'this'.