



# **Cisco BroadWorks**

## **Profile Server Fault and Alarm**

### **Interface Specification**

Release 23.0  
Version 2

## Notification

The BroadSoft BroadWorks has been renamed to Cisco BroadWorks. Beginning in September 2018, you will begin to see the Cisco name and company logo, along with the new product name on the software, documentation, and packaging. During this transition process, you may see both BroadSoft and Cisco brands and former product names. These products meet the same high standards and quality that both BroadSoft and Cisco are known for in the industry.

## Copyright Notice

Copyright© 2019 Cisco Systems, Inc. All rights reserved.

## Trademarks

Any product names mentioned in this document may be trademarks or registered trademarks of Cisco or their respective companies and are hereby acknowledged.

## Document Revision History

---

Release	Version	Reason for Change	Date	Author
22.0	1	Created document.	November 28, 2016	Gabriel Petrella
22.0	1	Updated DRH and published document.	December 19, 2016	Margot Hovey-Ritter
23.0	1	Updated content for Release 23.0.	November 15, 2018	Gabriel Petrella
23.0	1	Verified changes and published document.	November 15, 2018	Margot Hovey-Ritter
23.0	2	Completed rebranding for Cisco and republished document.	March 19, 2019	Margot Hovey-Ritter

## Table of Contents

<b>Document Revision History.....</b>	<b>3</b>
<b>1 History of Changes to the Cisco BroadWorks Fault MIBs.....</b>	<b>12</b>
1.1 Changes from Release 22.0 to Release 23.0.....	12
1.1.1 Added Faults.....	12
1.1.2 Moved Faults.....	14
1.1.3 Deprecated or Obsoleted Faults.....	14
1.1.4 Removed Faults.....	14
1.2 Changes from Release 21.0 to Release 22.0.....	14
1.2.1 Added Faults.....	14
1.2.2 Moved Faults.....	16
1.2.3 Deprecated or Obsoleted Faults.....	16
1.2.4 Removed Faults.....	16
1.3 Changes from Release 20.0 to Release 21.0.....	17
1.3.1 Added Faults.....	17
1.3.2 Moved Faults.....	17
1.3.3 Deprecated or Obsoleted Faults.....	18
1.3.4 Removed Faults.....	18
<b>2 Introduction.....</b>	<b>19</b>
<b>3 SNMP Agent Configuration.....</b>	<b>20</b>
3.1 SNMP Agent Configuration.....	20
3.2 Configuration SNMP V2c Access List.....	20
3.3 SNMP v2c Trap Managers.....	21
3.4 SNMP v3 Access Control.....	21
3.5 SNMP v3 Users.....	23
3.6 Reporting.....	23
<b>4 Cisco BroadWorks Faults.....</b>	<b>24</b>
4.1 Fault Template.....	24
4.2 Notifications and Alarms.....	24
4.3 Alarm Correlation.....	25
4.3.1 Example.....	26
4.3.2 High Availability SNMP Alarms.....	27
4.3.3 Notifications Parameterization.....	31
<b>5 External Subagents Integration.....</b>	<b>33</b>
5.1 High-level Description.....	33
5.2 Integrated Third-Party Subagents.....	33
<b>6 Fault Thresholding and Suppression.....</b>	<b>34</b>
6.1 Trap Lists.....	34
6.2 Trap Filters.....	35
6.3 Filtering Considerations.....	37
6.4 Filtered Faults Notification.....	38
6.5 Provisioning Fault Filters.....	38
6.5.1 SNMP Provisioning.....	38
6.5.2 CLI Provisioning.....	38
<b>7 Organization of Cisco BroadWorks MIB Files.....</b>	<b>40</b>
7.1 MIB files for the Profile Server.....	40
<b>8 Cisco BroadWorks MIB Files.....</b>	<b>41</b>
8.1 BroadworksConfigurationFault MIB.....	41
8.1.1 SNMP Traps For Component: processmonitor.....	41
8.1.2 SNMP Traps For Component: configd.....	42
8.2 BroadworksFault MIB.....	43

8.2.1 SNMP Traps For Component: unspecified.....	44
8.2.2 SNMP Traps For Component: processmonitor.....	46
8.2.3 SNMP Traps For Component: database.....	51
8.2.4 SNMP Traps For Component: sip.....	54
8.2.5 SNMP Traps For Component: mgcp.....	59
8.2.6 SNMP Traps For Component: smtp.....	59
8.2.7 SNMP Traps For Component: filesystem.....	59
8.2.8 SNMP Traps For Component: callp.....	60
8.2.9 SNMP Traps For Component: nssynch.....	63
8.2.10 SNMP Traps For Component: smap.....	65
8.2.11 SNMP Traps For Component: accounting.....	65
8.2.12 SNMP Traps For Component: licensing.....	66
8.2.13 SNMP Traps For Component: pmReporting.....	67
8.2.14 SNMP Traps For Component: smdi.....	68
8.2.15 SNMP Traps For Component: cpeDeviceManagement.....	70
8.2.16 SNMP Traps For Component: networkDeviceManagement.....	70
8.2.17 SNMP Traps For Component: cap.....	71
8.2.18 SNMP Traps For Component: ociReporting.....	71
8.2.19 SNMP Traps For Component: bcct.....	72
8.2.20 SNMP Traps For Component: taskMonitor.....	73
8.2.21 SNMP Traps For Component: logging.....	74
8.2.22 SNMP Traps For Component: dns.....	75
8.2.23 SNMP Traps For Component: snmpAgent.....	75
8.2.24 SNMP Traps For Component: ps.....	76
8.2.25 SNMP Traps For Component: softwareManager.....	76
8.2.26 SNMP Traps For Component: security.....	77
8.2.27 SNMP Traps For Component: webcontainer.....	79
8.2.28 SNMP Traps For Component: sccp.....	80
8.2.29 SNMP Traps For Component: jvmProcess.....	80
8.2.30 SNMP Traps For Component: time.....	81
8.2.31 SNMP Traps For Component: webrtc.....	82
8.2.32 SNMP Traps For Component: sipLocation.....	82
8.2.33 SNMP Traps For Component: threshold.....	82
8.2.34 SNMP Traps For Component: nps.....	83
8.3 BW-CCReportingDBManagementFault MIB.....	84
8.3.1 SNMP Traps For Component: processmonitor.....	84
8.4 BW-DBSObserverFault MIB.....	86
8.4.1 SNMP Traps For Component: processmonitor.....	86
8.5 BW-ECLDBMgmtAmplifyFault MIB.....	87
8.5.1 SNMP Traps For Component: processmonitor.....	87
8.6 BW-ECLReposFault MIB.....	89
8.6.1 SNMP Traps For Component: fileRepos.....	90
8.7 BW-EnhancedCallLogsDBManagementFault MIB.....	90
8.7.1 SNMP Traps For Component: processmonitor.....	90
8.8 BW-EnhancedCallLogsDBManagementFault-XS-TAS MIB.....	92
8.8.1 SNMP Traps For Component: processmonitor.....	93
8.9 BW-FileReposExtdCaptureFault MIB.....	95
8.9.1 SNMP Traps For Component: fileRepos.....	95
8.10 BW-FileReposFault MIB.....	95
8.10.1 SNMP Traps For Component: security.....	96
8.10.2 SNMP Traps For Component: fileRepos.....	96
8.11 BW-LicenseManagerFault MIB.....	97
8.11.1 SNMP Traps For Component: processmonitor.....	97
8.11.2 SNMP Traps For Component: licensing.....	98
8.12 BW-MessageArchiveFault MIB.....	100
8.12.1 SNMP Traps For Component: fileRepos.....	101

8.12.2 SNMP Traps For Component: messageArchiver.....	101
8.13 BW-OpenClientServerFault MIB.....	102
8.13.1 SNMP Traps For Component: processmonitor.....	102
8.13.2 SNMP Traps For Component: openClientServer.....	104
8.14 BW-ProfileBuilderAmplifyFault MIB.....	108
8.14.1 SNMP Traps For Component: processmonitor.....	108
8.15 BW-ProvisioningFault-XS-TAS MIB.....	110
8.15.1 SNMP Traps For Component: processmonitor.....	110
8.15.2 SNMP Traps For Component: conferencing.....	112
8.15.3 SNMP Traps For Component: filesystem.....	113
8.15.4 SNMP Traps For Component: nssynch.....	113
8.15.5 SNMP Traps For Component: transevent.....	113
8.15.6 SNMP Traps For Component: accounting.....	115
8.15.7 SNMP Traps For Component: licensing.....	116
8.15.8 SNMP Traps For Component: ldap.....	117
8.15.9 SNMP Traps For Component: externalAuthentication.....	117
8.15.10 SNMP Traps For Component: servicePackMigration.....	118
8.15.11 SNMP Traps For Component: callLogs.....	121
8.15.12 SNMP Traps For Component: ociReporting.....	121
8.15.13 SNMP Traps For Component: bcct.....	122
8.15.14 SNMP Traps For Component: mm.....	122
8.15.15 SNMP Traps For Component: sh.....	123
8.15.16 SNMP Traps For Component: ps.....	125
8.15.17 SNMP Traps For Component: diameter.....	125
8.15.18 SNMP Traps For Component: subscriberProfileSync.....	125
8.15.19 SNMP Traps For Component: ccReporting.....	126
8.15.20 SNMP Traps For Component: broadCloud.....	127
8.16 BW-ProvisioningServerAmplifyFault MIB.....	128
8.16.1 SNMP Traps For Component: processmonitor.....	128
8.16.2 SNMP Traps For Component: conferencing.....	130
8.16.3 SNMP Traps For Component: filesystem.....	131
8.16.4 SNMP Traps For Component: transevent.....	131
8.16.5 SNMP Traps For Component: accounting.....	133
8.16.6 SNMP Traps For Component: licensing.....	134
8.16.7 SNMP Traps For Component: ldap.....	134
8.16.8 SNMP Traps For Component: externalAuthentication.....	135
8.16.9 SNMP Traps For Component: servicePackMigration.....	135
8.16.10 SNMP Traps For Component: callLogs.....	138
8.16.11 SNMP Traps For Component: ociReporting.....	139
8.16.12 SNMP Traps For Component: bcct.....	140
8.16.13 SNMP Traps For Component: mm.....	140
8.16.14 SNMP Traps For Component: sh.....	141
8.16.15 SNMP Traps For Component: diameter.....	143
8.16.16 SNMP Traps For Component: subscriberProfileSync.....	143
8.16.17 SNMP Traps For Component: ccReporting.....	144
8.16.18 SNMP Traps For Component: broadCloud.....	145
8.17 BW-WebContainerFault MIB.....	146
8.17.1 SNMP Traps For Component: webcontainer.....	146
<b>Appendix A: 9 Additional Information.....</b>	<b>150</b>
9.1 Fault Parameters.....	150
<b>Appendix B: 10 bwSystemHealthReport Alarm Problem Text.....</b>	<b>184</b>
<b>Acronyms and Abbreviations.....</b>	<b>189</b>
<b>Index.....</b>	<b>191</b>

<b>References.....</b>	<b>195</b>
References to Feature Description Documents.....	195

## List of Figures

---

Figure 1: Views.....	22
Figure 2: Visual Representation of Notification during Lifetime of Monitored Device.....	25
Figure 3: Visual Representation of Alarm during Lifetime of Monitored Device.....	25
Figure 4: Visual Representation of Multiple Instances of Same Alarm being Raised.....	25
Figure 5: Visual Representation of Alarm Instance being Set to Off.....	26
Figure 6: Component Failure.....	28
Figure 7: Agent Failure.....	29
Figure 8: Agent Failure with Component Queuing Mechanism.....	29
Figure 9: Clearing Alarm from Manager.....	30



## List of Tables

---

Table 1: Added Faults for Release 23.0.....	12
Table 2: Deprecated or Obsoleted Faults for Release 23.0.....	14
Table 3: Removed Faults for Release 23.0.....	14
Table 4: Added Faults for Release 22.0.....	15
Table 5: Deprecated or Obsoleted Faults for Release 22.0.....	16
Table 6: Added Faults for Release 21.0.....	17
Table 7: Deprecated or Obsoleted Faults for Release 21.0.....	18
Table 8: Fault Report Fields.....	24
Table 9: Traplist Files.....	34
Table 10: Trap Filter Files.....	35
Table 11: MIB Files and OID Value Ranges for the Profile Server.....	40
Table 12: SNMP Traps For BroadworksConfigurationFault:processmonitor.....	41
Table 13: SNMP Traps For BroadworksConfigurationFault:configd.....	42
Table 14: SNMP Traps For BroadworksFault:unspecified.....	44
Table 15: SNMP Traps For BroadworksFault:processmonitor.....	46
Table 16: SNMP Traps For BroadworksFault:database.....	51
Table 17: SNMP Traps For BroadworksFault:sip.....	54
Table 18: SNMP Traps For BroadworksFault:smtp.....	59
Table 19: SNMP Traps For BroadworksFault:filesystem.....	60
Table 20: SNMP Traps For BroadworksFault:callp.....	60
Table 21: SNMP Traps For BroadworksFault:nssynch.....	63
Table 22: SNMP Traps For BroadworksFault:smap.....	65
Table 23: SNMP Traps For BroadworksFault:accounting.....	65
Table 24: SNMP Traps For BroadworksFault:licensing.....	66
Table 25: SNMP Traps For BroadworksFault:pmReporting.....	68
Table 26: SNMP Traps For BroadworksFault:smdi.....	68
Table 27: SNMP Traps For BroadworksFault:cpeDeviceManagement.....	70
Table 28: SNMP Traps For BroadworksFault:networkDeviceManagement.....	71
Table 29: SNMP Traps For BroadworksFault:ociReporting.....	71
Table 30: SNMP Traps For BroadworksFault:bcct.....	72
Table 31: SNMP Traps For BroadworksFault:taskMonitor.....	73
Table 32: SNMP Traps For BroadworksFault:logging.....	74
Table 33: SNMP Traps For BroadworksFault:dns.....	75
Table 34: SNMP Traps For BroadworksFault:snmpAgent.....	75
Table 35: SNMP Traps For BroadworksFault:ps.....	76
Table 36: SNMP Traps For BroadworksFault:softwareManager.....	76
Table 37: SNMP Traps For BroadworksFault:security.....	77
Table 38: SNMP Traps For BroadworksFault:webcontainer.....	79

Table 39: SNMP Traps For BroadworksFault:jvmProcess.....	80
Table 40: SNMP Traps For BroadworksFault:time.....	81
Table 41: SNMP Traps For BroadworksFault:threshold.....	82
Table 42: SNMP Traps For BroadworksFault:nps.....	83
Table 43: SNMP Traps For BW-CCReportingDBManagementFault:processmonitor.....	84
Table 44: SNMP Traps For BW-DBSObserverFault:processmonitor.....	86
Table 45: SNMP Traps For BW-ECLDBMgmtAmplifyFault:processmonitor.....	88
Table 46: SNMP Traps For BW-ECLReposFault:fileRepos.....	90
Table 47: SNMP Traps For BW-EnhancedCallLogsDBManagementFault:processmonitor.....	91
Table 48: SNMP Traps For BW-EnhancedCallLogsDBManagementFault-XS-TAS:processmonitor.....	93
Table 49: SNMP Traps For BW-FileReposExtdCaptureFault:fileRepos.....	95
Table 50: SNMP Traps For BW-FileReposFault:security.....	96
Table 51: SNMP Traps For BW-FileReposFault:fileRepos.....	96
Table 52: SNMP Traps For BW-LicenseManagerFault:processmonitor.....	97
Table 53: SNMP Traps For BW-LicenseManagerFault:licensing.....	98
Table 54: SNMP Traps For BW-MessageArchiveFault:fileRepos.....	101
Table 55: SNMP Traps For BW-MessageArchiveFault:messageArchiver.....	101
Table 56: SNMP Traps For BW-OpenClientServerFault:processmonitor.....	102
Table 57: SNMP Traps For BW-OpenClientServerFault:openClientServer.....	104
Table 58: SNMP Traps For BW-ProfileBuilderAmplifyFault:processmonitor.....	108
Table 59: SNMP Traps For BW-ProvisioningFault-XS-TAS:processmonitor.....	110
Table 60: SNMP Traps For BW-ProvisioningFault-XS-TAS:conferencing.....	112
Table 61: SNMP Traps For BW-ProvisioningFault-XS-TAS:filesystem.....	113
Table 62: SNMP Traps For BW-ProvisioningFault-XS-TAS:transevent.....	113
Table 63: SNMP Traps For BW-ProvisioningFault-XS-TAS:accounting.....	115
Table 64: SNMP Traps For BW-ProvisioningFault-XS-TAS:licensing.....	116
Table 65: SNMP Traps For BW-ProvisioningFault-XS-TAS:ldap.....	117
Table 66: SNMP Traps For BW-ProvisioningFault-XS-TAS:externalAuthentication.....	117
Table 67: SNMP Traps For BW-ProvisioningFault-XS-TAS:servicePackMigration.....	118
Table 68: SNMP Traps For BW-ProvisioningFault-XS-TAS:callLogs.....	121
Table 69: SNMP Traps For BW-ProvisioningFault-XS-TAS:ociReporting.....	122
Table 70: SNMP Traps For BW-ProvisioningFault-XS-TAS:bcct.....	122
Table 71: SNMP Traps For BW-ProvisioningFault-XS-TAS:mm.....	122
Table 72: SNMP Traps For BW-ProvisioningFault-XS-TAS:sh.....	123
Table 73: SNMP Traps For BW-ProvisioningFault-XS-TAS:diameter.....	125
Table 74: SNMP Traps For BW-ProvisioningFault-XS-TAS:subscriberProfileSync.....	126
Table 75: SNMP Traps For BW-ProvisioningFault-XS-TAS:ccReporting.....	126
Table 76: SNMP Traps For BW-ProvisioningFault-XS-TAS:broadCloud.....	127
Table 77: SNMP Traps For BW-ProvisioningServerAmplifyFault:processmonitor.....	128
Table 78: SNMP Traps For BW-ProvisioningServerAmplifyFault:conferencing.....	130

Table 79: SNMP Traps For BW-ProvisioningServerAmplifyFault:filesystem.....	131
Table 80: SNMP Traps For BW-ProvisioningServerAmplifyFault:transevent.....	131
Table 81: SNMP Traps For BW-ProvisioningServerAmplifyFault:accounting.....	133
Table 82: SNMP Traps For BW-ProvisioningServerAmplifyFault:licensing.....	134
Table 83: SNMP Traps For BW-ProvisioningServerAmplifyFault:ldap.....	134
Table 84: SNMP Traps For BW-ProvisioningServerAmplifyFault:externalAuthentication.....	135
Table 85: SNMP Traps For BW-ProvisioningServerAmplifyFault:servicePackMigration.....	135
Table 86: SNMP Traps For BW-ProvisioningServerAmplifyFault:callLogs.....	138
Table 87: SNMP Traps For BW-ProvisioningServerAmplifyFault:ociReporting.....	139
Table 88: SNMP Traps For BW-ProvisioningServerAmplifyFault:bcct.....	140
Table 89: SNMP Traps For BW-ProvisioningServerAmplifyFault:mm.....	140
Table 90: SNMP Traps For BW-ProvisioningServerAmplifyFault:sh.....	141
Table 91: SNMP Traps For BW-ProvisioningServerAmplifyFault:diameter.....	143
Table 92: SNMP Traps For BW-ProvisioningServerAmplifyFault:subscriberProfileSync.....	143
Table 93: SNMP Traps For BW-ProvisioningServerAmplifyFault:ccReporting.....	144
Table 94: SNMP Traps For BW-ProvisioningServerAmplifyFault:broadCloud.....	145
Table 95: SNMP Traps For BW-WebContainerFault:webcontainer.....	146
Table 96: Fault Parameters.....	150

# 1 History of Changes to the Cisco BroadWorks Fault MIBs

This section provides the list of changes to the Cisco BroadWorks MIBs between releases.

## 1.1 Changes from Release 22.0 to Release 23.0

This section provides the changes to Cisco BroadWorks MIBs between Release 23.0 and Release 22.0, the previous major release of Cisco BroadWorks. Note that it also includes information related to service packs from the previous major release.

### 1.1.1 Added Faults

List of faults added for Release 23.0.

**Table 1: Added Faults for Release 23.0**

Fault Name	Mib	Feature	Also Available
bwAmplifyAddGroupEvent	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyAddUserEvent	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyBroadCloudOutOfSync	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyBroadCloudTransactionFailure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyCallCenterConnectionFailure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyCallLogSchemaInstanceProvisioning Overload	BW-ProvisioningServerAmplify Fault.mib	<a href="#">117143</a>	None
bwAmplifyCallLogSOAPServerUnreachable	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyCCScheduledReportConfiguration Failure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyCCScheduledReportFailed	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyCCScheduledReportGenerationFailure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyCPEDeviceConfigurationNumFiles Exceeded	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyDeleteGroupEvent	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyDeleteUserEvent	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyDeviceManagementFtpBlockedWrite ThresholdReached	BW-ProvisioningServerAmplify Fault.mib	143489	None
bwAmplifyExternalAuthenticationUnknownUser	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyGroupAddressChangeEvent	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyICBridgeCommunicationError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None

Fault Name	Mib	Feature	Also Available
bwAmplifyICBridgeResetError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyLDAPConfigurationError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyLDAPConnectionError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyLicenseUserServiceAccntViolation	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyMobilityManagerError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyMobilityManagerUnreachable	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyProvisioningValidationConnectionFailure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyProvisioningValidationXSACConnection Failure	BW-ProvisioningServerAmplify Fault.mib	<a href="#">BW-6957</a>	R22.0
bwAmplifyPsInterfaceInitializationError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyPsPeerConnectionFailure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyServiceLicenseCollectionFailure	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShGeneralErrorReceived	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShInterfaceInitializationError	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShNoAvailableHosts	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShSystemRefreshInitiated	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShSystemRefreshTerminated	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShUserUnknownInAS	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifyShUserUnknownInHSS	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifySrvPackMigrationCompletedWithErrors	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifySrvPackMigrationFoundUnfinishedTask	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifySrvPackMigrationLicenseViolation	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifySrvPackMigrationSpSrvQuantity Violation	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifySrvPackMigrationStoppedBySys Shutdown	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None
bwAmplifySrvPackMigrationStoppedDueToErrors	BW-ProvisioningServerAmplify Fault.mib	PR-55491	None

Fault Name	Mib	Feature	Also Available
bwAmplifySrvPackMigrationStoppedDueToTimeLimit	BW-ProvisioningServerAmplifyFault.mib	PR-55491	None
bwAmplifySrvPackMigrationSystemError	BW-ProvisioningServerAmplifyFault.mib	PR-55491	None
bwAmplifySrvPackMigrationTerminated	BW-ProvisioningServerAmplifyFault.mib	PR-55491	None
bwAmplifySubscriberProfileSyncDataError	BW-ProvisioningServerAmplifyFault.mib	PR-55491	None
bwAmplifySubscriberProfileSyncIOError	BW-ProvisioningServerAmplifyFault.mib	PR-55491	None
bwAmplifyUserAddressChangeEvent	BW-ProvisioningServerAmplifyFault.mib	PR-55491	None

### 1.1.2 Moved Faults

List of faults moved between MIBs for Release 23.0.

No faults were moved in this release.

### 1.1.3 Deprecated or Obsoleted Faults

List of faults deprecated or obsoleted for Release 23.0. Faults are either deprecated or obsoleted. The Status column indicates the status of the fault.

**Table 2: Deprecated or Obsoleted Faults for Release 23.0**

Fault Name	Mib	Status
bwPMconfigdOutOfMemory	BroadworksConfigurationFault.mib	Before: current After: obsolete
bwPMlmdOutOfMemory	BW-LicenseManagerFault.mib	Before: current After: obsolete
bwClientConnectionOciQueueFullNotification	BW-OpenClientServerFault.mib	Before: current After: obsolete

### 1.1.4 Removed Faults

List of faults removed for Release 23.0.

**Table 3: Removed Faults for Release 23.0**

Fault Name	Mib
bwPMProvisioningServerAmplifyOutOfMemory	BW-ProvisioningServerAmplifyFault.mib

## 1.2 Changes from Release 21.0 to Release 22.0

This section provides the changes to Cisco BroadWorks MIBs between Release 22.0 and Release 21.0, the previous major release of Cisco BroadWorks. Note that it also includes information related to service packs from the previous major release.

### 1.2.1 Added Faults

List of faults added for Release 22.0.

**Table 4: Added Faults for Release 22.0**

Fault Name	Mib	Feature	Also Available
bwCentralizedDatabaseListenerFailure	BroadworksFault.mib	PR-52073	None
bwCentralizedDatabaseMaxConnectionsReached	BroadworksFault.mib	PR-52342	None
bwCentralizedDatabaseNewConnectionFailure	BroadworksFault.mib	PR-52871	None
bwCouchbaseNodeConnectivityFailure	BroadworksFault.mib	<a href="#">BW-10066</a>	R22.0
bwExtremeOverload	BroadworksFault.mib	PR-45925	None
bwJVMPProcessOutOfMemory	BroadworksFault.mib	<a href="#">BW-6517</a>	R22.0
bwJVMPProcessUnexpectedSoftwareCondition Detected	BroadworksFault.mib	<a href="#">BW-6517</a>	R22.0
bwNetworkDatabaseClusterConnectivityFailure	BroadworksFault.mib	<a href="#">BW-2299</a>	R21.sp2, R22.0
bwNetworkDatabaseNodeConnectivityFailure	BroadworksFault.mib	<a href="#">BW-2299</a>	R21.sp2, R22.0
bwNetworkDatabaseSchemaFailure	BroadworksFault.mib	<a href="#">BW-2299</a>	R21.sp2, R22.0
bwNSSyncSuccessDbCommitFailed	BroadworksFault.mib	BW-6957	None
bwPushNotificationServerUnreachable	BroadworksFault.mib	TIII-58132	None
bwTimeSkewExceeded	BroadworksFault.mib	<a href="#">BW-2300</a>	R20.sp1, R21.sp1, R22.0
bwPMenhancedCallLogsDBManagementAmplify Death	BW-ECLDBMgmtAmplifyFault .mib	<a href="#">BW-10066</a>	R22.0
bwPMenhancedCallLogsDBManagementAmplify Launched	BW-ECLDBMgmtAmplifyFault .mib	<a href="#">BW-10066</a>	R22.0
bwPMenhancedCallLogsDBManagementAmplify OutOfMemory	BW-ECLDBMgmtAmplifyFault .mib	<a href="#">BW-10066</a>	R22.0
bwPMenhancedCallLogsDBManagementAmplify Restarted	BW-ECLDBMgmtAmplifyFault .mib	<a href="#">BW-10066</a>	R22.0
bwPMenhancedCallLogsDBManagementAmplify ShutDown	BW-ECLDBMgmtAmplifyFault .mib	<a href="#">BW-10066</a>	R22.0
bwPMPProfileBuilderAmplifyDeath	BW-ProfileBuilderAmplifyFault .mib	<a href="#">BW-6957</a>	R22.0
bwPMPProfileBuilderAmplifyLaunched	BW-ProfileBuilderAmplifyFault .mib	<a href="#">BW-6957</a>	R22.0
bwPMPProfileBuilderAmplifyOutOfMemory	BW-ProfileBuilderAmplifyFault .mib	<a href="#">BW-6957</a>	R22.0
bwPMPProfileBuilderAmplifyRestarted	BW-ProfileBuilderAmplifyFault .mib	<a href="#">BW-6957</a>	R22.0
bwPMPProfileBuilderAmplifyShutDown	BW-ProfileBuilderAmplifyFault .mib	<a href="#">BW-6957</a>	R22.0
bwPMPProvisioningServerAmplifyDeath	BW-ProvisioningServerAmplify Fault.mib	<a href="#">BW-6957</a>	R22.0
bwPMPProvisioningServerAmplifyLaunched	BW-ProvisioningServerAmplify Fault.mib	<a href="#">BW-6957</a>	R22.0
bwPMPProvisioningServerAmplifyOutOfMemory	BW-ProvisioningServerAmplify Fault.mib	<a href="#">BW-6957</a>	R22.0
bwPMPProvisioningServerAmplifyRestarted	BW-ProvisioningServerAmplify Fault.mib	<a href="#">BW-6957</a>	R22.0

Fault Name	Mib	Feature	Also Available
bwPMPProvisioningServerAmplifyShutDown	BW-ProvisioningServerAmplifyFault.mib	<a href="#">BW-6957</a>	R22.0

### 1.2.2 Moved Faults

List of faults moved between MIBs for Release 22.0.

No faults were moved in this release.

### 1.2.3 Deprecated or Obsoleted Faults

List of faults deprecated or obsoleted for Release 22.0. Faults are either deprecated or obsoleted. The Status column indicates the status of the fault.

**Table 5: Deprecated or Obsoleted Faults for Release 22.0**

Fault Name	Mib	Status
bwNonheapMemoryUsageExceeded	BroadworksFault.mib	Before: current After: deprecated
bwProvNSLocationConnectivityFailure	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwProvNSLocationFailure	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwProvNSSynchronizationConnectivityFailure	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwProvOciReportingAclViolation	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwProvOciReportingBackLogFileDeleted	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwProvOciReportingConnectionError	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwProvSCFAPURLUnreachable	BW-ProvisioningFault-XS-TAS.mib	Before: current After: obsolete
bwDiskCacheLimitExceeded	BW-SubscriberFault.mib	Before: current After: obsolete
bwSubscriberWriteThreadOverload	BW-SubscriberFault.mib	Before: current After: obsolete

### 1.2.4 Removed Faults

List of faults removed for Release 22.0.

No faults were removed in this release.



## 1.3 Changes from Release 20.0 to Release 21.0

This section provides the changes to Cisco BroadWorks MIBs between Release 21.0 and Release 20.0, the previous major release of Cisco BroadWorks. Note that it also includes information related to service packs from the previous major release.

### 1.3.1 Added Faults

List of faults added for Release 21.0.

**Table 6: Added Faults for Release 21.0**

Fault Name	Mib	Feature	Also Available
bwLocationServiceUnreachable	BroadworksFault.mib		
bwSystemBackwardTimeDrift	BroadworksFault.mib		
bwCCReportingDBManagementScheduledJobExceededMaxDuration	BW-CCReportingDBManagementFault.mib	200349	None
bwCCReportingDBManagementSchemaException	BW-CCReportingDBManagementFault.mib	200349	None
bwReportingRecomputingStats	BW-CCReportingDBManagementFault.mib	<a href="#">208204</a>	R21.0
bwECLReposReplicationFailure	BW-ECLReposFault.mib	<a href="#">206184</a>	R20.sp1, R21.0
bwECLReposReplicationOffline	BW-ECLReposFault.mib	<a href="#">206184</a>	R20.sp1, R21.0
bwLicensingLMCommunicationLoss	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwLicensingLMCommunicationLossGrace	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwLicensingNFMCommunicationLoss	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwLicensingNFMCommunicationLossGrace	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwLicensingOverAllocation	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwLicensingViolation	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwLicensingViolationGrace	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwOverAllocationViolationGrace	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwPMImdDeath	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwPMImdLaunched	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwPMImdOutOfMemory	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwPMImdRestarted	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwPMImdShutDown	BW-LicenseManagerFault.mib	<a href="#">217550</a>	R20.sp1, R21.0
bwMessageArchiveReplicationFailure	BW-MessageArchiveFault.mib	218189	None
bwMessageArchiveReplicationOffline	BW-MessageArchiveFault.mib	218189	None
bwMessageArchiverRepositoryCommunicationFailure	BW-MessageArchiveFault.mib	218189	None
bwSubscriberCannotLaunchDatabaseQuery	BW-SubscriberFault.mib		
bwSslClientAuthWithoutTrust	BW-WebContainerFault.mib	<a href="#">173615</a>	R20.0

### 1.3.2 Moved Faults

List of faults moved between MIBs for Release 21.0.

No faults were moved in this release.

### 1.3.3 Deprecated or Obsoleted Faults

List of faults deprecated or obsoleted for Release 21.0. Faults are either deprecated or obsoleted. The Status column indicates the status of the fault.

**Table 7: Deprecated or Obsoleted Faults for Release 21.0**

Fault Name	Mib	Status
bwOpenClientServerNSConnFailed	BW-OpenClientServerFault.mib	Before: current After: deprecated

### 1.3.4 Removed Faults

List of faults removed for Release 21.0.

No faults were removed in this release.

## 2 Introduction

---

This document describes Cisco BroadWorks Fault Management for all the Cisco BroadWorks servers.

This document describes the:

- Cisco BroadWorks Fault Management components, including the Command Line Interface (CLI) and Simple Network Management Protocol (SNMP) functionality
- Notifications and alarms generated by Cisco BroadWorks

Cisco BroadWorks supports SNMP v2c and v3. Operators are provided with a set of comprehensive CLI commands to manage the SNMP trap redirection. Note that Cisco BroadWorks also acts as an SNMP proxy agent for the Solaris platform agent.

## 3 SNMP Agent Configuration

The information provided in this section applies to the SNMP agent for all the Cisco BroadWorks servers.

### 3.1 SNMP Agent Configuration

The Cisco BroadWorks SNMP interface is configured using the CLI client (bwcli). An operator has access to the SNMP configuration level at the CLI *Interfaces/SNMP* level.

```
CLI/Interface/SNMP> ?
  0)  AccessList : go to level AccessList
  1)    Agent : go to level Agent
  2)   Logging : go to level Logging
  3)    SMAP : go to level SMAP
  4)   TrapTable : go to level TrapTable
  5) V3AccessControl : go to level V3AccessControl
  6)    V3Users : go to level V3Users

h (help), e (exit), q (quit), r (read), w (write), t (tree),
c (config), cd (cd), a (alias), hi (history), p (pause), re (repeat),
k (keyboardHelp)

CLI/Interface/SNMP> Agent

CLI/Interface/SNMP/Agent> get
port = 8001
encoding = ISO-8859-1
readCommunity = public
writeCommunity = public
trapCommunity = public
trapSourceAddress = 192.168.13.189
disableV2 = false
```

By default, Cisco BroadWorks listens on port 8001 to service SNMP get requests. Compared to other typical SNMP agents, the Cisco BroadWorks agent cannot listen on port 161. Note that the community strings apply only for v2c requests.

For a system with multiple network interfaces, the operator can also choose the interface to use to send SNMP traps. In the example above, 192.168.13.189 appears as the trap source address received at the Element or Network Management System.

**NOTE:** At this context, the Logging context is used to configure logging and SMAP is used to configure internal messaging parameters. For information on the V3AccessControl and V3Users contexts, see the [BroadWorks Profile Server Performance Measurement Interface Specification Guide](#).

### 3.2 Configuration SNMP V2c Access List

An access list specifies the management systems permitted to retrieve performance measurements. The management system that sends the query must include, as part of the message, a community name that acts as a password on the agent systems. Upon each SNMP get request, Cisco BroadWorks verifies the community and the IP address of the request against the community and IP address configured in the access list. Upon successful validation, the SNMP get request is processed. The access list is configured through the CLI.

```

CLI/Interface/SNMP> AccessList

CLI/Interface/SNMP/AccessList> get

    192.168.8.181
    192.168.8.179
        127.0.0.1
    192.168.8.43
    192.168.13.187
    192.168.13.185
    192.168.8.251

7 entries found.

```

### 3.3 SNMP v2c Trap Managers

A trap-forwarding table specifies the management systems and the corresponding ports faults. The trap table is configured through the CLI.

```

AS_CLI/Interface/SNMP/TrapTable
AS_CLI/Interface/SNMP/TrapTable get
    IP Address  Port  Model  Use Alarms
=====
192.168.8.179   8001  shared    true
192.168.8.181   8001  shared    true
192.168.8.43    8001  shared    true
192.168.13.187  8001  unique    true
192.168.13.185  8001  unique    true
192.168.8.251   8001  shared    true

6 entries found.

```

Cisco BroadWorks uses the concept of a model to control traps. The model value can either be set to "unique" or "shared". Details of these include:

- In the "unique" model, each Cisco BroadWorks trap has a unique OID. In this model, the management system does not have to do additional processing to uniquely identify a trap.

**Important:** Usage of the "unique" model is recommended.

- In the "shared" model, Cisco BroadWorks traps all use the same notification OID. Following this model, the management system must parse incoming traps and extract the fault name to uniquely identify each notification. The "shared" model was originally the only model supported by Cisco BroadWorks and it has been kept for backward-compatibility. It should only be used if a monitoring system still has scripts that use this functionality and that cannot be converted to use unique OIDs. As of Release 16.0, the "shared" model is deprecated. It is still fully supported; however, steps should be taken to convert monitoring managers relying on this model to the "unique" model.

**Important:** Currently, Cisco BroadWorks servers do not support SNMP v3 traps.

### 3.4 SNMP v3 Access Control

SNMP agent configuration provides the ability to enforce the SNMP v3 View-based Access Control Model (VACM). This access control facility makes it possible to configure different levels of access to the agent Management Information Base (MIB) for SNMP v3 users. Access control is performed by a group, where the group is a set of one or more users. Access is granted for each group to one of the three predefined views: *all*, *management*, or *performance*.

- The *all* view provides access to all MIBs.
- The *management* view provides access to the managed object's subtree from the Cisco BroadWorks maintenance MIB (*BroadworksMaintenance.mib*).
- The *performance* view provides access to all other MIBs. Read and write permissions are given on a per-user basis.

The following figure illustrates the three predefined views.

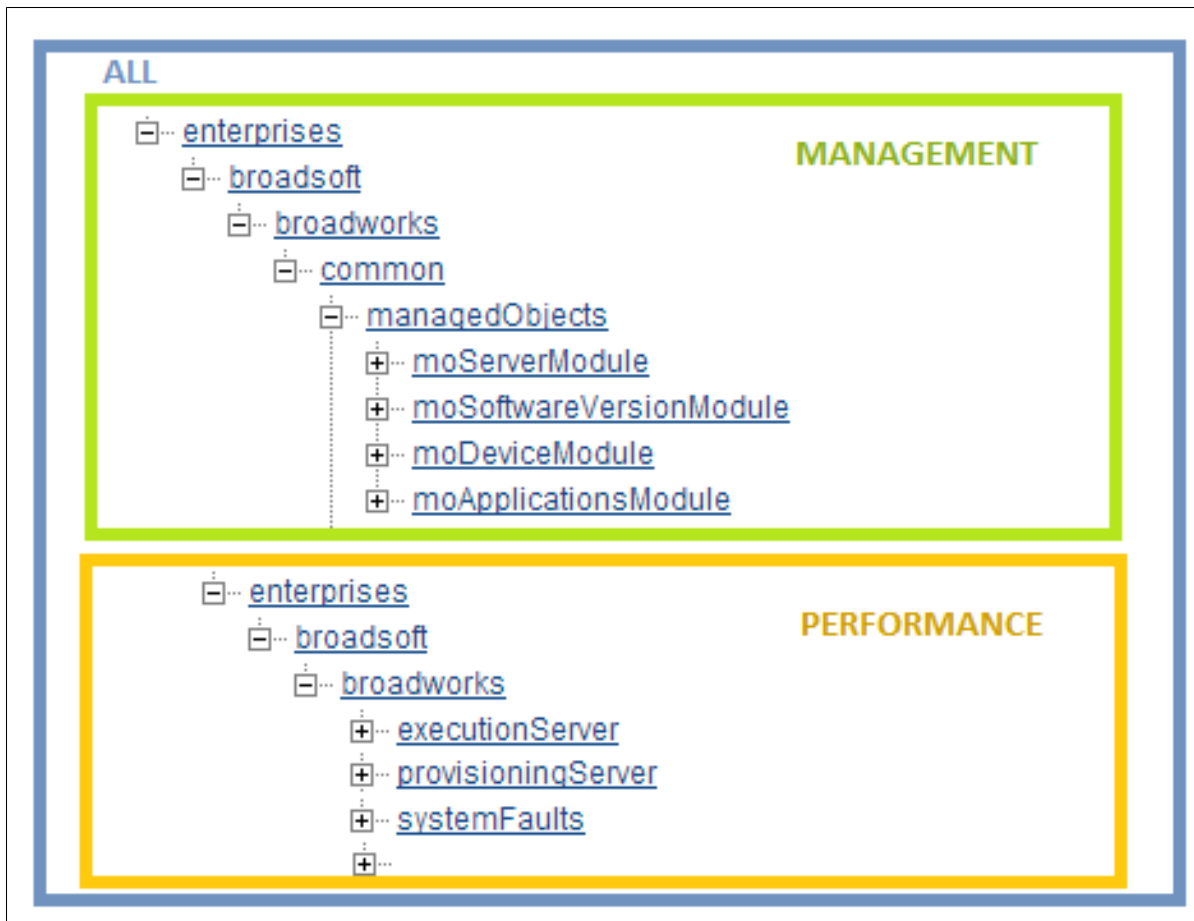


Figure 1: Views

Both the VACM and the User-based Security Model (USM) MIBs are solely allowed "read-only" access. Configuration of the settings for v3 access control is performed through the Cisco BroadWorks CLI.

First, define an access control group and then set the level of access for the group. More than one level of access can be assigned to a group. The following illustrates these steps from the CLI.

```
CLI/Interface/SNMP/V3AccessControl/Groups> add groupOne
...Done

CLI/Interface/SNMP/V3AccessControl/Groups> get
      Name
=====
      groupOne

1 entry found.

CLI/Interface/SNMP/V3AccessControl/Groups> AccessLevels
CLI/Interface/SNMP/V3AccessControl/Groups/AccessLevels> add groupOne performance
...Done
```

```
CLI/Interface/SNMP/V3AccessControl/Groups/AccessLevels> get groupOne
      Level
=====
performance
1 entry found.
```

### 3.5 SNMP v3 Users

SNMP v3 uses a User-based Security Model (USM). Management operations using this security model make use of a defined set of user identities. For any user with management operations authorized at a particular SNMP engine, that SNMP engine must have knowledge of that user. An SNMP engine that wishes to communicate with another SNMP engine must also have knowledge of a user known to that engine, including knowledge of the applicable attributes of that user.

The Cisco BroadWorks v3 implementation supports three levels of v3 users:

- No Authorization, No Privacy
- Authorization (MD5 only), No Privacy
- Authorization (MD5 only), Privacy

A v3 user can be associated with an access control group. Configuration of the SNMP v3 users is done through the Cisco BroadWorks CLI.

**NOTE:** If no access control group is assigned to a v3 user, that user has access to all MIBs.

### 3.6 Reporting

The SNMP reporting level allows an operator to automate the generation of an operational measurements report, which is sent to remote servers. The report (in XML format) contains a header and a value for each SNMP counter and gauge. The report is sent to remote servers via FTP put commands.

For more information on reporting functionality, see the [BroadWorks Profile Server Performance Measurement Interface Specification Guide](#).

## 4 Cisco BroadWorks Faults

This section provides the definitions required to work with the Cisco BroadWorks faults.

### 4.1 Fault Template

The following table describes the fields in a fault report:

**Table 8: Fault Report Fields**

Field	Description
Identifier	A sequentially generated number, which can be used to uniquely identify the fault.
Timestamp	The date and time the fault was generated.
System Name	The host name of the system running Cisco BroadWorks software.
Severity	<p>An indicator of the severity of the fault.</p> <p><b>INFORMATIONAL:</b> This does not affect service.</p> <p><b>LOW:</b> Losing redundant connectivity, but does not affect service or capacity. For example, the primary SMTP server is down, but Call Notify services are still provided via secondary SMTP server (for example, losing one Media Server). (The Media Server is typically deployed in N + 1 fashion).</p> <p><b>MEDIUM:</b> Ability to provide connectivity, but affects service-level. For example, losing two out of four Media Servers impacts the Media Server capacity.</p> <p><b>HIGH:</b> Inability to provide connectivity over a particular interface. For example losing connectivity to all Media Servers or losing connectivity to both SMTP servers.</p> <p><b>CRITICAL:</b> No basic calls can be processed without operator intervention.</p>
Component	The Cisco BroadWorks server or application reporting the fault.
Subcomponent	Software component within the Cisco BroadWorks component reporting the fault.
Problem Type	Notification, Alarm, or Software Error
Alarm State	Alarm "On" or "Off" (applicable to stateful alarms only).
Problem Text	Text indicating the details of the variable. One central file for problem text to support internationalization.
Problem Resources	A list of variables, which bind to the problem text.
Recommended Actions Text	Text indicating details of the recommended actions to take.
Recommended Resources Text	A list of variables, which bind with the recommended actions text.
Notification Parameters variable bindings...	Each fault defines a number of variable bindings that give additional context to the fault being sent.

The remaining sections specify faults generated by Cisco BroadWorks. The document is organized by component followed by subcomponent. Variable bindings for Problem Text parameters are denoted by %<tagName>%, where <tagName> is the name of the notification parameter that is itself featured as a variable binding in the SNMP trap. Variable bindings for *Recommendation Text* parameters are denoted by %n, where n is an integer representing the argument number. Carriage returns in the *Problem Text* and *Recommendation Text* fields are denoted by <cr>.

### 4.2 Notifications and Alarms

Cisco BroadWorks defines two types of faults: notifications and alarms. Notifications describe punctual events that can occur throughout the lifetime of the application. Events such as unauthorized access,



security violations, status reports, added/deleted resources, unreachable servers, and software errors can be the objects of notifications. The system health report is a good example of a notification. A monitored device sends it periodically to provide a snapshot of its health at a certain moment. The severity of this notification depends on the health of the monitored device.




Figure 2: Visual Representation of Notification during Lifetime of Monitored Device

Alarms warn that the system is currently in an abnormal state, but that the situation could change (for better or worse) over time. Alarms are raised at the start of the abnormal state and are cleared upon return to normal state. They are used to represent events such as connectivity loss, unresponsive software components, reached threshold limits, and resource exhaustion. Alarms have a state that determines whether they are *On* or *Off*. Alarms are sometimes referred to as Stateful Alarms. An additional state, *Cleared*, is used when the alarm is set to *Off* through manual intervention. *Off* and *Cleared* mean the same thing except that the latter gives an indication that the alarm was set to *Off* manually.



Figure 3: Visual Representation of Alarm during Lifetime of Monitored Device

### 4.3 Alarm Correlation

This feature introduces the correlation parameter. Monitoring systems can correlate with the alarm name to identify different instances of the same alarm when raised numerous times for different reasons.

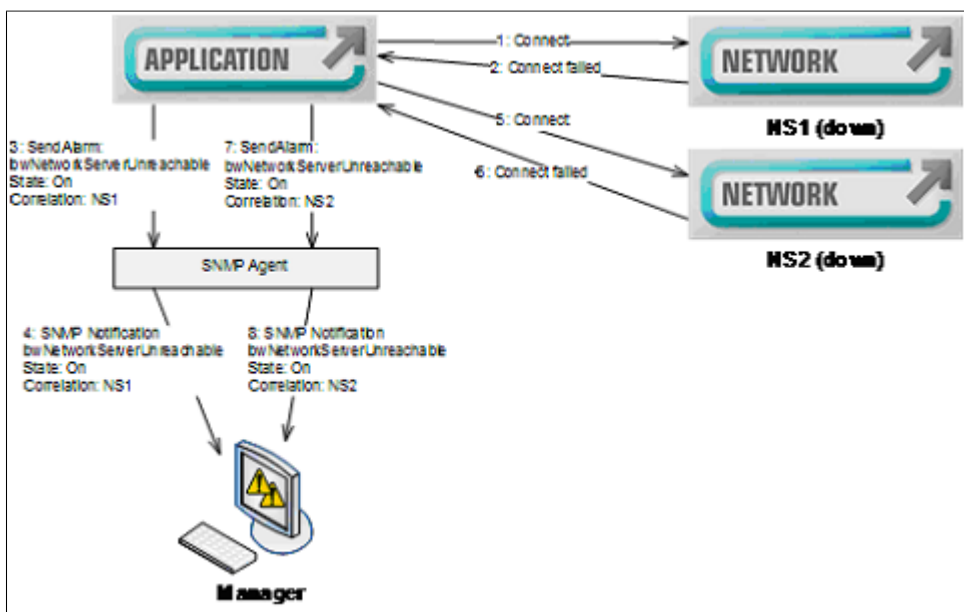


Figure 4: Visual Representation of Multiple Instances of Same Alarm being Raised

In **Figure 3** the Application Server tries to connect to two Network Servers; however, it fails. When an Application Server is unable to connect to a Network Server, the *bwNetworkServerUnreachable* alarm is raised. To differentiate between the alarms concerning NS1 and NS2, the monitoring system can now read the correlation variable which, in addition to the alarm name, correlates and uniquely identifies the alarm instance.

When the Application Server is finally able to connect to NS1, it sends a new alarm - *state = "off"* with the same differentiator variable. This way, the monitoring system knows which *bwNetworkServerUnreachable* alarm instance to clear.

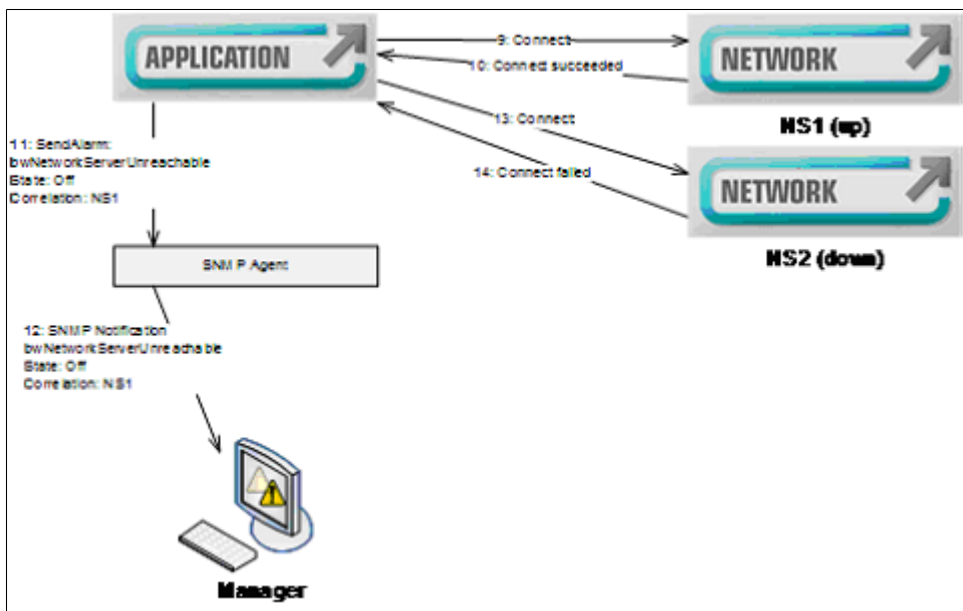


Figure 5: Visual Representation of Alarm Instance being Set to Off

The *correlation* parameter type is a string. This allows it to be generic enough for all alarm types that use it. For example, in the case of a connectivity problem, the correlation value could be the configured address; for software failures, the correlation value could be the component name, and so on.

The correlation parameter is defined at the following object identifier (OID):

```
.iso.org.dod.internet.private.enterprises.broadsoft.broadworks.  
common.systemFaults.faultFields.correlationParameter  
OID: .1.3.6.1.4.1.6431.1.1.1.11
```

**NOTE:** Monitoring managers shall always correlate alarms using the alarm OID and the correlation parameter.

### 4.3.1 Example

The *bwCNAMSoapServerUnreachable* notification is sent when an Application Server detects a connectivity problem with a CNAM (CNAM) SOAP server. In this example, the originating component is the Application Server and the subcomponent is the SOAP interface. The *BroadworksFault.mib* file defines the Application Server as component 0 and the SOAP interface as the subcomponent 47. In this example the unreachable CNAM SOAP server is at address *192.168.8.13* and the exception message is *unknown*.

The correlation parameter for this alarm would be a composition of the component, the subcomponent, and all the problem variables:

```
0;47;192.168.8.13;unknown
```

The same correlation parameter is calculated when the alarm state is set to *Off*, allowing managers to clear the alarm.

### 4.3.2 High Availability SNMP Alarms

One of the SNMP agent challenges is to provide high availability for SNMP alarms even though they are transferred over the unreliable User Datagram Protocol (UDP). High availability is achieved by providing access to active and historical alarms as well as re-sending alarms following an agent failure.

#### 4.3.2.1 List of Alarms

The agent sends SNMP alarms (traps/notifications) to the monitoring systems over the UDP protocol, a connectionless and unreliable protocol. It is possible that monitoring systems do not receive alarms at all. For this reason and because the monitoring systems can be restarted, the agent provides a list of currently active alarms. The agent maintains this table with the information coming from the subcomponents on the server.

```
The alarm list is located in the common maintenance MIB:
.iso.org.dod.internet.private.enterprises.broadsoft.broadworks.
common.alarms.bwAlarmsTableOID:
.1.3.6.1.4.1.6431.1.1.2.1
```

Managers can request alarms to be resent to them. Additionally, it is possible to clear currently active alarms.

The table contains up to a maximum of 500 (configurable through a Java property) alarms that are currently raised. The table displays the following alarms fields. All fields are read-only.

- *Sequential Identifier* (Counter32) - INDEX
- *Timestamp* (DateAndTime)
- *Alarm OID* (OID)
- *Alarm Name* (DisplayString)
- *Severity* (Integer: Informational (0), low (1), medium (2), high (3), critical (4))
- *Correlation Parameter* (DisplayString)

Two additional read-write fields are provided to perform actions on selected alarms:

- *Clear Alarm* (Integer: Clear (1))
- *Resend* (String)

The Sequential Identifier integer always counts up for each new notification and alarm. It is, therefore, not a sequential table row count.

In the event that the table limit is reached, no new alarms are generated by the agent. A critical notification, *bwAlarmsTableLimitReached*, is sent to notify monitoring managers that the agent is no longer processing alarms normally.

When the alarm state is set to *Off*, the originating component is notified that it must clear its alarm. This results in a new notification being sent to clear the alarm by the originating component.

The *Resend* field must be set with a valid host and port (format: host:port) for an alarm to be resent. Any valid combination of host and port can be used, as long as it is a configured manager and it is configured to support alarms. When set, the corresponding alarm is resent to the monitoring manager defined by the host and port. All original parameters are kept, including the timestamp. Note that it is possible that the resending of the alarms reaches the host after a possible clearing of the alarm. The monitoring manager must handle this scenario by comparing the timestamps and correlation parameters.

At the CLI, the list can also be consulted using the list command at the AlarmsTable level:

```
$ CLI/Monitoring/Alarms/AlarmsTable> list
Identifier   TimeStamp           Alarm Name           Severity
Correlation Parameter
=====
```

```
2562      2010-3-23 20:48:50 GMT  bwNSSynchUnknownHostnameError  Medium
2;16;MTLSOL-27;
1 entry found.
```

#### 4.3.2.2 Component Failure

A component failure is defined as a component losing its communication with the SNMP agent while the SNMP agent itself is still alive. Loss of communication is detected by the Cisco BroadWorks Common Communication Transport (BCCT) framework which actively monitors the connection between the agent and SNMP agent for disconnections and socket failures. When the communication is re-established with the SNMP agent through a communication reset or through a restart of the component's process, the failure is resolved.

When a component failure is detected by the agent, it removes the outstanding alarms sent by this component from the alarms tables, and sends clearing notifications to the monitoring managers.

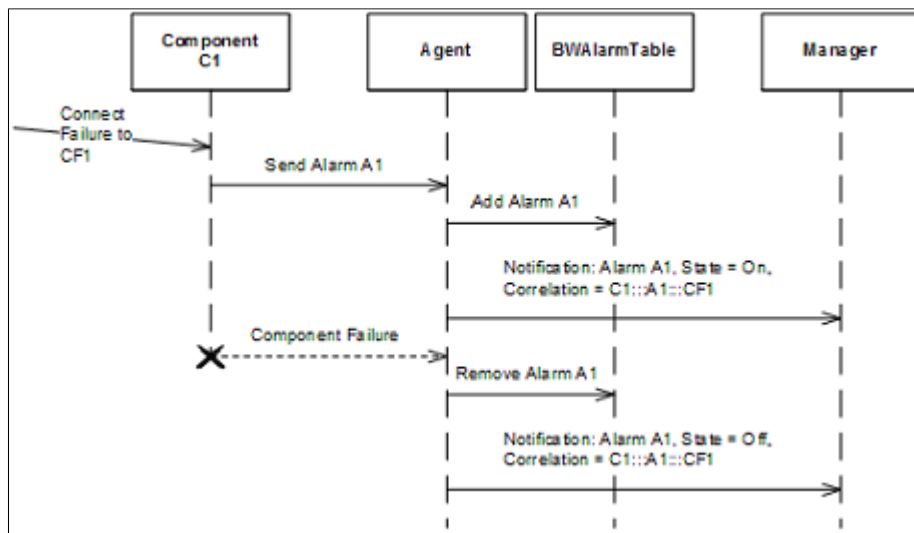


Figure 6: Component Failure

Upon resolution of the component failure, the component communicates active alarms to the agent who in turn sends them out to the managers.

Managers can check this table periodically to ensure they are synchronized and that they have not missed any alarms.

#### 4.3.2.3 Agent Failure

In the event that the agent fails, it is automatically restarted by the process monitor. Although this situation is not supposed to occur, a strategy is in place to reduce the failure time while ensuring high availability of the alarm.

At startup or following a failure, the agent starts with an empty Alarms table. Upon reconnection of the different server's components with the SNMP agent, the table is repopulated with currently active alarms. Alarm raises or clears that occurred on the component during the agent failure are also sent to the agent who in turn sends out alarms to the managers.

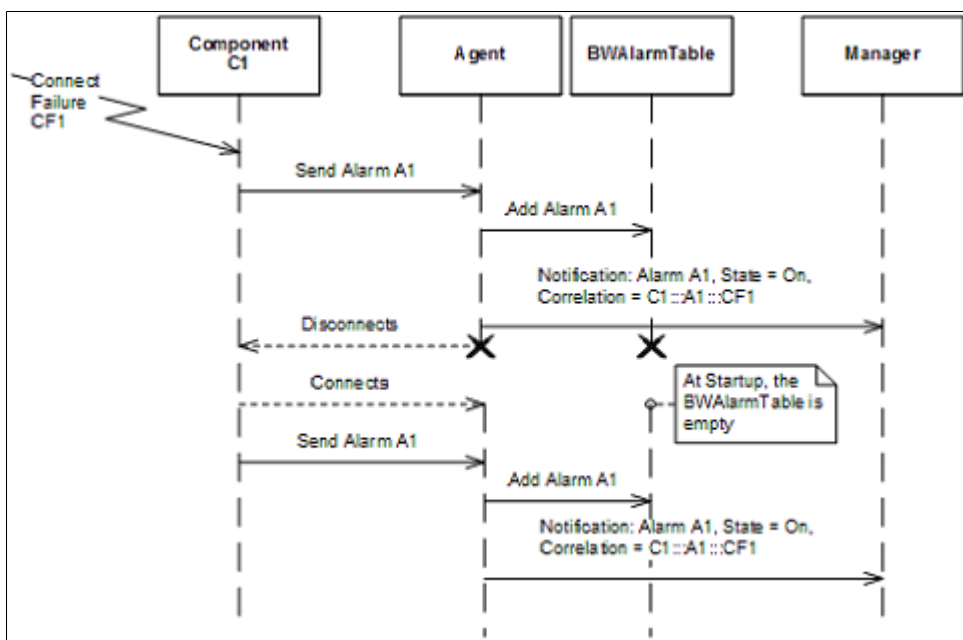


Figure 7: Agent Failure

In this scenario, if the manager did not detect the agent failure through a ping, it receives the same notification twice. In this case, the manager should update the initial alarm, which is identifiable with the correlation parameter. Note that if the component sends a notification indicating that it was just restarted, the manager could trigger on this notification to clear all the other alarms for this component.

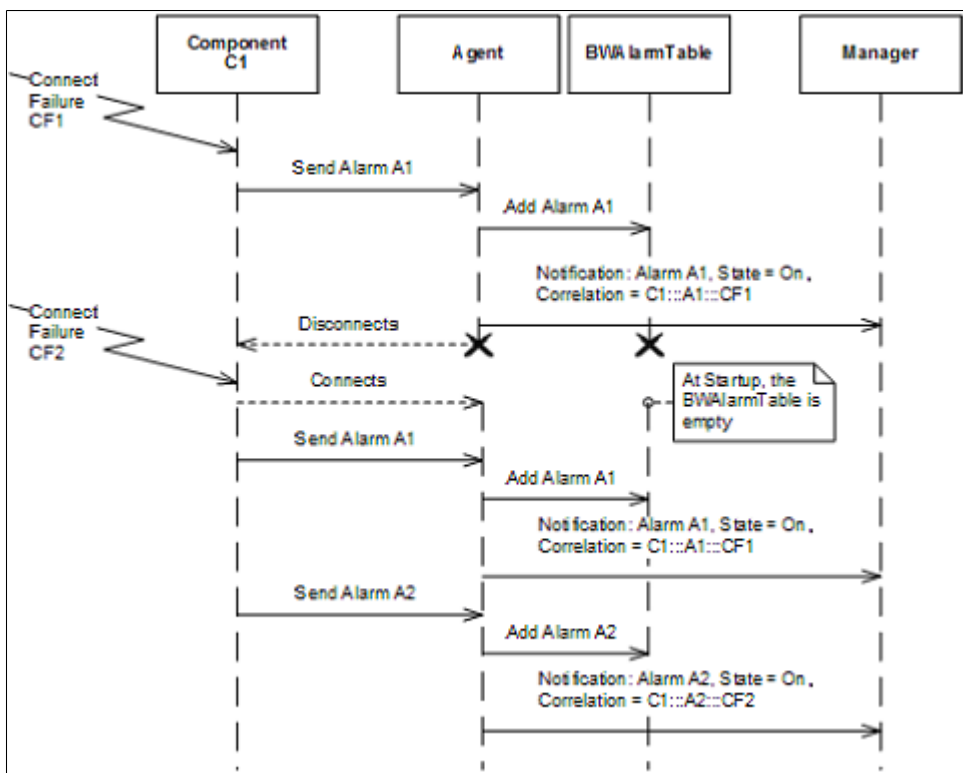


Figure 8: Agent Failure with Component Queuing Mechanism

In the case that a component detects an event noteworthy of an alarm while not connected to the SNMP agent, it queues the alarm until the connection is re-established.

#### 4.3.2.4 Cisco BroadWorks Restart

When it starts, a notification is not sent by the agent. Even if there was one, their unreliable nature would not guarantee that all monitoring managers would receive it. Following a Cisco BroadWorks server restart, when problems are encountered, the agent generates new notifications. If they share the same correlation parameter, they might look like updates of past notifications to the monitoring managers.

Monitoring managers should perform periodic lookups (for example, 15 minutes) to ensure they remain synchronized.

#### 4.3.2.5 Clear Alarm

Managers can clear any alarm in the Alarms table. To clear a specific alarm, the value of the corresponding alarm *clearAlarm* column must be set to 1. When the agent receives such a request, it notifies the originating component. The originating component is responsible to send back, asynchronously, a message to the agent indicating that the alarm was cleared. The agent then sends an alarm clear to all monitoring managers. When an alarm is manually cleared, its state should be *Cleared*.

It is also possible to clear an alarm using the CLI:

```
$ CLI/Monitoring/Alarms/AlarmsTable> clear 134
...Done
```

**NOTE:** Because the agent must request the clear to another component, there is absolutely no guarantee that a request to clear an alarm results in a *Cleared* notification to be issued.

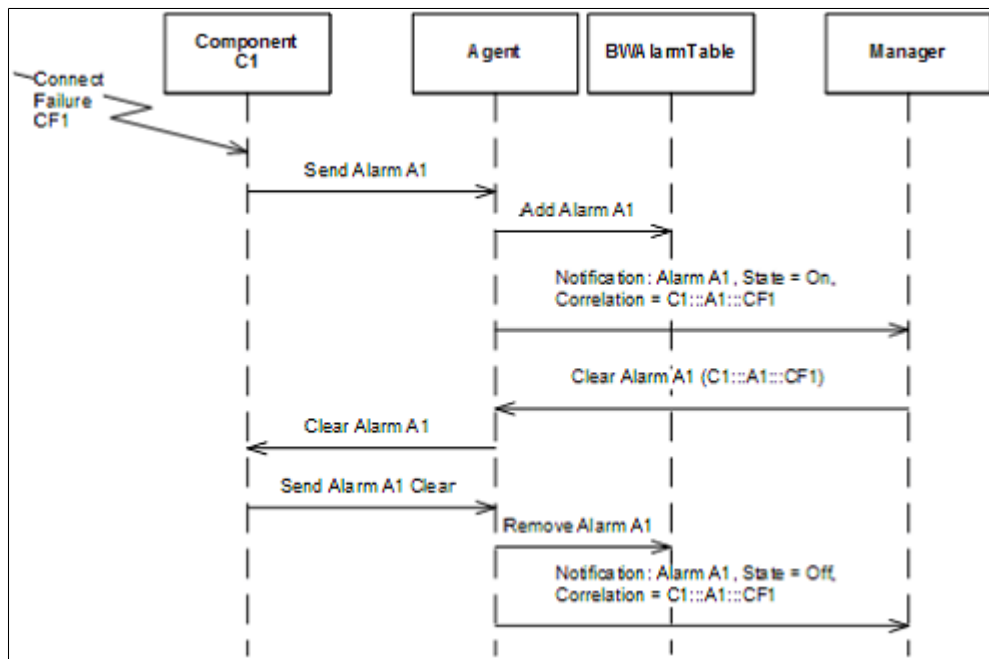


Figure 9: Clearing Alarm from Manager

#### 4.3.2.6 Clearing the Alarms

It is possible to clear the alarm list from the agent through a unique SNMP operation. This has the same effect as clearing every single alarm individually.

The entire alarm list can be reset by setting the integer value 1 on the following OID:

```
.iso.org.dod.internet.private.enterprises.broadsoft.broadworks.  
common.alarms.resetAlarmsTable  
OID: .1.3.6.1.4.1.6431.1.1.4.2
```

The clearing of the Alarms table can also be provisioned at the CLI:

```
$ CLI/Monitoring/Alarms/AlarmsTable> clearAll
WARNING: This will clear all currently active alarms. Every configured manager will
receive many notifications.
Please confirm (Yes, Y, No, N): y
...Done
```

**NOTE:** Resetting the entire alarm list might trigger as many notifications as there are active alarms. To prevent the flooding of the monitoring managers, this operation is by default permitted only once every 30 seconds (configurable through the *resendAllRequestPeriod* property) for all monitoring managers.

#### 4.3.2.7 Resending All Alarms in Alarms Table

In the event that a monitoring manager requires SNMP notifications to be sent to re-synchronize due to an impossibility of synchronization based on the information contained in the Alarms table, it is possible to have all the current alarms resent.

```
The entire alarm list can be resent through SNMP notifications by setting the address
and the port of a configured monitoring manager that uses alarms (format: host:port)
on the following OID:
.iso.org.dod.internet.private.enterprises.broadsoft.broadworks.
common.alarms.resendAlarmsTableOID:
.1.3.6.1.4.1.6431.1.1.4.3
```

Resending all alarms in the Alarms table can also be done at the CLI:

```
$ CLI/Monitoring/Alarms> resendAll 192.168.1.14 20001
...Done
```

**NOTE:** Resending all alarms of the Alarms table triggers as many notifications as there are active alarms. To prevent the flooding of the target monitoring manager, this operation is by default permitted only once every 30 seconds (configurable through the *clearAllRequestPeriod* property) per monitoring manager.

#### 4.3.2.8 Last Modification Timestamp

Every time the Alarms table is modified, the agent updates a timestamp indicating the time at which the last modification to the table was made. This timestamp is exposed and can be used by monitoring managers in their effort to synchronize the table. Every time a monitoring manager wants to synchronize, it should compare its copy of the last modification timestamp with the one on the server before traversing the Alarms table. The timestamp is always set when the Cisco BroadWorks SNMP agent restarts, whether or not there are alarms in the table.

```
Node Name:
.iso.org.dod.internet.private.enterprises.broadsoft.broadworks.
common.alarms.lastAlarmsTableModificationTimestampOID:
.1.3.6.1.4.1.6431.1.1.4.4
```

#### 4.3.2.9 Polling

The agent does not notify monitoring systems when it suddenly dies. Monitoring systems should poll the agent on a regular basis to ensure that it is still alive and that alarms reported earlier are still valid.

#### 4.3.3 Notifications Parameterization

A weakness of the former SNMP agent implementation is the lack of contextualized parameters in notifications. All notifications are sent with the same parameters and one has to read the *Problem Text* field to understand what the root cause of the problem is.

This verbose behavior is acceptable for human beings who read complex sentences. However, it makes information systems parse the *Problem Text* field to gather the information it requires to deal with the alarm.

Notification parameters solve this problem. In addition to existing generic parameters, new contextualized parameters are added to notifications. For example, for connectivity problems, a new parameter *npRemoteAddress* is added. Notifications can have as many parameters as required to provide adequate context to network managers. Each fault definition in the MIBs defines the parameters they carry.

The following example shows how the *bwExternalAuthenticationUnknownUser* carries the *npUserName* and *npDomain* parameters when it is sent.

```
bwExternalAuthenticationUnknownUser NOTIFICATION-TYPE
  OBJECTS { identifier, timestamp, alarmName, systemName, severity, component,
subcomponent, problemText, recommendedActionsText, npUserName, npDomain}
  STATUS current
  DESCRIPTION
    "...
  ::= { systemFaults 3583 }
```



---

## 5 External Subagents Integration

---

This section provides a list of SNMP subagents for which Cisco BroadWorks acts as proxy.

### 5.1 High-level Description

The integration of the SNMP subagents is performed through a master/proxy agent with subagent architecture.

The Cisco BroadWorks agent acts as a master/proxy agent to the other subagent(s) and provides a single point of access for managers. The master/proxy agent functionalities are as follows:

- Receives requests from managers
- Forwards requests to appropriate subagent
- Receives responses from subagent
- Forwards responses to managers
- Forwards traps to managers

The Cisco BroadWorks master SNMP agent listens for traps on port 162, thereby allowing any agent that is sending traps to port 162 to be captured by the master agent and forwarded to the appropriate managers. This is the case with the TimesTen application, which forwards traps to port 162 even though it is not defined as a subagent for the Network Server (NS) and the Application Server (AS). Note that TimesTen is not part of the Media Server (MS).

The authorization list for manager(s) accessing the system is managed through the existing Cisco BroadWorks SNMP agent access control list.

This feature is designed for network and system operators to monitor hardware and software devices on which Cisco BroadWorks applications are running and is available for Cisco BroadWorks servers.

### 5.2 Integrated Third-Party Subagents

Cisco BroadWorks integrates the following subagents:

- Solaris MIB II subagent
- TimesTen subagent (alarms only)

## 6 Fault Thresholding and Suppression

Fault suppression and threshold can be viewed as fault filters. This feature provides fault filtering at the Cisco BroadWorks SNMP agent level. The Cisco BroadWorks servers continue to generate faults. They send the faults to their SNMP agent (using a proprietary protocol) and the agent processes them. When the SNMP agent receives a fault, it performs the following tasks:

- 1) Logs the fault to a local file.
- 2) Sends the fault to a trap server, which then sends it to all registered trap clients (such as Cisco BroadWorks CLI sessions).
- 3) Sends an SNMP trap to the provisioned managers.

This feature only performs fault filtering for tasks one (1) and three (3) above. Therefore, fault filtering has no impact on trap clients waiting for faults.

The feature only provides a mechanism to filter faults generated by Cisco BroadWorks applications (such as the Application Server Execution Server, Application Server Provisioning Server, Network Server Execution Server, Network Server Provisioning Server, and so on) and Cisco BroadWorks process monitors. In other words, this feature provides filtering for faults defined under the Cisco Object Identifier (OID).

Fault filtering occurs at the SNMP agent-level (not by cluster).

### 6.1 Trap Lists

Currently, each Cisco BroadWorks server comes with XML-encoded trap list files which define all the traps that this server can generate. These files are:

**Table 9: Traplist Files**

Cisco BroadWorks Server	Traplist File Name
Common to all servers	<i>/usr/local/broadworks/bw_base/conf/commontraplist.xml /usr/local/broadworks/bw_base/conf/configdtraplist.xml</i>
Access Mediation Server	
Application Server	<i>/usr/local/broadworks/bw_base/conf/executiontraplist.xml /usr/local/broadworks/bw_base/conf/ocstraplist.xml /usr/local/broadworks/bw_base/conf/provisioningtraplist.xml /usr/local/broadworks/bw_base/web/conf/containertraplist.xml</i>
Call Detail Server	<i>/usr/local/broadworks/bw_base/conf/cdstraplist.xml /usr/local/broadworks/bw_base/conf/webcontainertraplist.xml</i>
Element Management System	<i>/usr/local/broadworks/bw_base/conf/emstraplist.xml /usr/local/broadworks/bw_base/conf/ocstraplist.xml /usr/local/broadworks/bw_base/web/conf/containertraplist.xml Profile Server /usr/local/broadworks/bw_base/conf/pstraplist.xml /usr/local/broadworks/bw_base/conf/webcontainertraplist.xml</i>
Media Server	<i>/usr/local/broadworks/bw_base/conf/mstraplist.xml</i>
Network Server	<i>/usr/local/broadworks/bw_base/conf/nsexecutiontraplist.xml /usr/local/broadworks/bw_base/conf/nsportaltraplist.xml /usr/local/broadworks/bw_base/conf/nsprovisioningtraplist.xml /usr/local/broadworks/bw_base/conf/webcontainertraplist.xml</i>
Profile Server	<i>/usr/local/broadworks/bw_base/conf/pstraplist.xml /usr/local/broadworks/bw_base/conf/webcontainertraplist.xml</i>
Xtended Services Platform	<i>/usr/local/broadworks/bw_base/conf/xspttraplist.xml /usr/local/broadworks/bw_base/conf/ocstraplist.xml /usr/local/broadworks/bw_base/conf/webcontainertraplist.xml /usr/local/broadworks/bw_base/conf/ucconnecttraplist.xml</i> ( <b>NOTE:</b> This file appears once the application is activated.)

Although trap definitions are in every component's fault MIBs, some information is also defined in the trap list file. The trap list file hosts the problem text and recommended action text for all traps originating from a

Cisco BroadWorks component. This text is defined in a separate file to allow internationalization of these fields if required.

Traplist entry example:

```
<trap>
  <name>bwTrunkGroupCapacityExceeded</name>
  <problemType>0</problemType>
  <problemText>The capacity of a trunk group was exceeded.
Service Provider / Enterprise Name: %npServiceProviderId%
Group Name: %npGroupName%
Trunk Group Name: %npTrunkGroupName%</problemText>
  <recommendedAction>Increase the Maximum Active Calls Allowed parameter of the
associated trunk group.
Maximum Active Calls Allowed: *
Maximum Outgoing Active Calls Allowed: *
Maximum Incoming Active Calls Allowed: *
Bursting Maximum Active Calls Allowed *
Bursting Maximum Outgoing Active Calls Allowed: *
Bursting Maximum Incoming Active Calls Allowed: *
    <recommendedActionParam doc="Maximum Active Calls Allowed parameter" />
    <recommendedActionParam doc="Maximum Outgoing Active Calls Allowed parameter" /
>
    <recommendedActionParam doc="Maximum Incoming Active Calls Allowed parameter" /
>
    <recommendedActionParam doc="Bursting Maximum Active Calls Allowed parameter" /
>
    <recommendedActionParam doc="Bursting Maximum Outgoing Active Calls Allowed
parameter" />
    <recommendedActionParam doc="Bursting Maximum Incoming Active Calls Allowed
parameter" />
  </recommendedAction>
</trap>
```

Variables in the problem text must be valid notification parameters described in the *BroadworksFault.mib* file. Conversely, the wildcard character for the recommended action text is always the asterisk (\*). If this file must be internationalized, only the *problemText* and *recommendedAction* must be translated. The *recommendedActionParam* is for internal use and does not appear in the trap sent to the monitoring managers. When internationalizing, the problem text variables ( between percent (%) signs) should not be modified.

## 6.2 Trap Filters

Trap filter files are XML-based files. The purpose of this file is different from the trap lists. Rather than defining trap information, they define fault filters that can be used to throttle or suppress faults sent by the SNMP agent.

Trap filters are defined in the following files:

**Table 10: Trap Filter Files**

Cisco BroadWorks Server	Trap Filter File Name
Access Mediation Server	
Application Server	<i>/usr/local/broadworks/bw_base/conf/astrapfilter.xml /usr/local/broadworks/bw_base/conf/ocstrapfilter.xml</i>
Call Detail Server	<i>/usr/local/broadworks/bw_base/conf/cdstrapfilter.xml</i>
Element Management System	<i>/usr/local/broadworks/bw_base/conf/emstrapfilter.xml /usr/local/broadworks/bw_base/conf/ocstrapfilter.xml</i>
Media Server	<i>/usr/local/broadworks/bw_base/conf/mstrapfilter.xml</i>

Cisco BroadWorks Server	Trap Filter File Name
Network Server	<i>/usr/local/broadworks/bw_base/conf/nstrapfilter.xml</i>
Profile Server	<i>/usr/local/broadworks/bw_base/conf/pstrapfilter.xml /usr/local/broadworks/bw_base/conf/ocstrapfilter.xml</i>
Xtended Services Platform	<i>/usr/local/broadworks/bw_base/conf/xsptapfilter.xml /usr/local/broadworks/bw_base/conf/ocstrapfilter.xml</i>

The trap filter files are preserved during a Cisco BroadWorks upgrade so that filters defined by customers can remain unchanged after an upgrade.

Details on the Document Type Definition (DTD) for trap filter files follow.

```
<?xml version='1.0' encoding="UTF-8"?>

<!ELEMENT trapFilter      (defaultFilter?, filter*)>

<!ELEMENT defaultFilter   (active, maxNumTrapsPerTimePeriod, timePeriodInSeconds?,
minSeverity?)>

<!ELEMENT filter          (name, active, maxNumTrapsPerTimePeriod, timePeriodInSeconds?,
problemTextVarNum1?, problemTextVarNum2?, problemTextVarNum3?, problemTextVarNum4?,
problemTextVarNum5?)>

<!ELEMENT name            (#PCDATA)>
<!ELEMENT active          (false|true)>
<!ELEMENT maxNumTrapsPerTimePeriod (#PCDATA)>
<!ELEMENT timePeriodInSeconds (#PCDATA)>
<!ELEMENT minSeverity     (0|1|2|3|4)>
<!ELEMENT problemTextVarNum1 (#PCDATA)>
<!ELEMENT problemTextVarNum2 (#PCDATA)>
<!ELEMENT problemTextVarNum3 (#PCDATA)>
<!ELEMENT problemTextVarNum4 (#PCDATA)>
<!ELEMENT problemTextVarNum5 (#PCDATA)>

>
```

Assuming that astrapfilter.xml contains the following trapFilter block:

```
<trapFilter>
  <defaultFilter>
    <active>false</active>
    <maxNumTrapsPerTimePeriod>10</maxNumTrapsPerTimePeriod>
    <timePeriodInSeconds>5</timePeriodInSeconds>
    <minSeverity>1</minSeverity>
  </defaultFilter>
  <filter>
    <name>bwSipRegistrationFailure</name>
    <active>true</active>
    <maxNumTrapsPerTimePeriod>0</maxNumTrapsPerTimePeriod>
  </filter>
  <filter>
    <name>bwSipUnexpectedMessage</name>
    <active>true</active>
    <maxNumTrapsPerTimePeriod>2</maxNumTrapsPerTimePeriod>
    <timePeriodInSeconds>5</timePeriodInSeconds>
  </filter>
  <filter>
    <name>bwNSSynchronizationFailure</name>
    <active>true</active>
    <maxNumTrapsPerTimePeriod>1</maxNumTrapsPerTimePeriod>
    <timePeriodInSeconds>10</timePeriodInSeconds>
  </filter>
</trapFilter>
```

```

    <problemTextVarNum1>3</problemTextVarNum1>
  </filter>
  <filter>
    <name>bwSMDIOperationFailure</name>
    <active>true</active>
    <maxNumTrapsPerTimePeriod>10</maxNumTrapsPerTimePeriod>
    <timePeriodInSeconds>60</timePeriodInSeconds>
    <problemTextVarNum1>2</problemTextVarNum1>
    <problemTextVarNum2>3</problemTextVarNum2>
  </filter>
</trapFilter>

```

The Application Server SNMP agent filters faults as follows:

- In general, no more than 10 faults of a type per sliding period of five seconds are sent out over the SNMP interface, unless fault-specific filters exist for some faults. However, this system default threshold is inactive, so the SNMP agent simply ignores this threshold definition. Also, if the default fault filter is activated, only faults with a severity of *low* (1) or greater are sent out. Informational faults are discarded.
- All *bwSipRegistrationFailure* faults are filtered out and none are sent over the SNMP interface.
- The SNMP agent only sends a maximum of two *bwSipUnexpectedMessage* faults per sliding period of five seconds.
- For a given Network Server address (<problemTextVarNum1>3</problemTextVarNum1>), the SNMP agent sends a maximum of one *bwNSSynchronizationFailure* fault per sliding period of ten seconds.
- For a given phone number (<problemTextVarNum1>2</problemTextVarNum1>) and a given failure reason (<problemTextVarNum2>3</problemTextVarNum2>), the SNMP agent sends a maximum of ten *bwSMDIOperationFailure* faults per sliding period of one minute.

The above feature behavior is the same on all types of Cisco BroadWorks servers.

### 6.3 Filtering Considerations

- Cisco does not provide any predefined fault suppression or threshold rules in the various trapfilter files besides the system default fault threshold (set to "inactive").
- Fault filtering works on a per-node basis and not on a per-cluster basis. This means that if a filter specifies that fault X should be discarded if the generation rate exceeds five faults per second, no fault is discarded if each server in a cluster has an actual rate of three faults per second, even though the aggregated rate for this two-node cluster is actually of six faults per second.
- The data that the SNMP agent uses to filter out faults is not persisted. This means that after the SNMP agent restarts, filtering is reinitialized using the filters defined in the trapfilter file, and faults are sent out until the various thresholds are reached once more.
- For a given fault name, it is possible to define more than one filter. In this case, all filters are evaluated and if at least one does not allow the fault to be sent, then the fault is not sent.
- If *maxNumTrapsPerTimePeriod* is set to 0 (zero) or a negative integer value, then the fault (matching the other filter criteria, if some are specified) is suppressed. In such a case, the *timePeriodInSeconds* value is ignored.
- If *maxNumTrapsPerTimePeriod* is a positive integer greater than zero, then the fault (matching the other filter criteria, if some are specified) has a threshold. In such a case, the *timePeriodInSeconds* must contain a positive integer value greater than zero.
- Fault threshold uses the concept of sliding time period. When the agent receives a fault, it checks how many alarms matching the threshold rule(s) were received in the previous *timePeriodInSeconds* seconds. If that number exceeds *maxNumTrapsPerTimePeriod*, then the alarm is not sent over the SNMP interface. The agent remembers that this fault was received, for proper filtering when the next one comes.
- A maximum of five problem text variable filters can be defined per threshold. When the agent compares the content of problem text variables for filtering purposes, the comparison is not case sensitive.

- If a fault filter is provisioned with an invalid fault name (that is, the fault name does not exist in the system), the filter is accepted but it remains in state invalid.
- If the filtered fault is an alarm, the alarm is still added to the Alarms table.

## 6.4 Filtered Faults Notification

The fault named *bwAlarmsDiscarded* is common to all servers. The SNMP agent generates this fault every 15 minutes (15 minutes after SNMP agent restart and every 15 minutes thereafter) if at least one fault was discarded in the past 15 minutes. If this is the case, the fault gives a list of all the alarms that were discarded in the past 15 minutes along with the number of times each fault was discarded.

If the data to be included in the alarm gets too big, more than one fault is generated. The threshold is set to no more than 1024 characters in the list (and count) of faults discarded.

## 6.5 Provisioning Fault Filters

The SNMP agent stores all fault filters in a trapfilter file, as described in the previous sections. To provision fault filters, an administrator can:

- Use the SNMP interface to ask the SNMP agent to add, delete, get, and set fault filters.
- Use the Cisco BroadWorks CLI interface to add, delete, get, and set fault filters.

These methods are explained in detail in the following subsections.

### 6.5.1 SNMP Provisioning

The definition of fault filters and their configuration are part of the BroadworksMaintenance.mib. Therefore, any network element that has an authorized SNMP connectivity to the server's SNMP agent can configure fault filters. Fault filters can only be provisioned if the SNMP agent is running.

### 6.5.2 CLI Provisioning

It is also possible to add, delete, get, and set fault filters using the Cisco BroadWorks CLI. To provision and configure fault filters using the CLI, the SNMP agent on the server must be running. The following is an example (on an Application Server) showing how fault filters can be managed using the CLI.

```
AS_CLI/Monitoring/Alarm/Threshold> get
  Index  AlarmName  MaxNumTrapsPerTimePeriod  TimePeriodInSeconds
  Var1   Var2    Var3   Var4   Var5   Status
=====
=====
0 entry found.

AS_CLI/Monitoring/Alarm/Threshold> %% No more than 4 bwNSSynchronizationFailure alarms
per sliding period of 10 seconds.

AS_CLI/Monitoring/Alarm/Threshold> add bwNSSynchronizationFailure 4 10 active
...Done

AS_CLI/Monitoring/Alarm/Threshold> %% Suppress all bwSipRegistrationFailure alarms.

AS_CLI/Monitoring/Alarm/Threshold> add bwSipRegistrationFailure 0 1 active
...Done

AS_CLI/Monitoring/Alarm/Threshold/Default> %% Limit each alarm in system to 100 alarms
of each type per hour.

AS_CLI/Monitoring/Alarm/Threshold/Default> set maxNumTrapsPerTimePeriod 100
timePeriodInSeconds 3600 status active minSeverity low
```

```

...Done

AS_CLI/Monitoring/Alarm/Threshold> %% For the same Endpoint ID (problem text variable
position 1) and Device Address (problem text variable position 2), limit the number of
bwMGCPReTransmissionTimeout alarms to 2 per sliding period of 30 seconds.

AS_CLI/Monitoring/Alarm/Threshold> add bwMGCPReTransmissionTimeout 2 30 active
problemTextVariable1 1 problemTextVariable2 2
...Done

AS_CLI/Monitoring/Alarm/Threshold> get
  Index          AlarmName  MaxNumTrapsPerTimePeriod  TimePeriodInSeconds
Var1  Var2  Var3  Var4  Var5  Status
=====
=====
      1    bwNSSynchronizationFailure              4              10
              active
      2    bwSipRegistrationFailure              0              1
              active
      4    bwMGCPReTransmissionTimeout              2              30
      1      2              active

3 entries found.

AS_CLI/Monitoring/Alarm/Threshold/Default> get
  maxNumTrapsPerTimePeriod = 100
  timePeriodInSeconds = 3600
  status = active
  minSeverity = low

```

## 7 Organization of Cisco BroadWorks MIB Files

This section describes the organization of Cisco BroadWorks MIB files by server type. In addition, the range of notification OIDs currently in use by each MIB file is identified.

**NOTE:** fault IDs are uniquely defined within Cisco BroadWorks. All faults have the following root OID: .1.3.6.1.4.1.16431.1.1.1

You can click on the link of each MIB for a description of the MIB.

### 7.1 MIB files for the Profile Server

MIB files for the Profile Server.

**Table 11: MIB Files and OID Value Ranges for the Profile Server.**

MIB File	Application	Notification ID Range
<a href="#">BroadworksConfigurationFault MIB</a>	BroadWorks Platform	6101 through 6109
<a href="#">BroadworksFault MIB</a>		2 through 11759
<a href="#">BW-LicenseManagerFault MIB</a>		15801 through 15813
<a href="#">BW-CCReportingDBManagementFault MIB</a>	CC Reporting DB Management Application	11001 through 11008
<a href="#">BW-DBSObserverFault MIB</a>	DBS Observer Application	11101 through 11104
<a href="#">BW-ECLReposFault MIB</a>	ECL Reporting Repository Application	13501 through 13502
<a href="#">BW-ECLDBMgmtAmplifyFault MIB</a>	Enhanced Call Logs DB Management Amplify Application	20501 through 20505
<a href="#">BW-EnhancedCallLogsDBManagement Fault MIB</a>	Enhanced Call Logs DB Management Application	11201 through 11205
<a href="#">BW-EnhancedCallLogsDBManagement Fault-XS-TAS MIB</a>	Enhanced Call Logs DB Management-XS-TAS Application	11601 through 11605
<a href="#">BW-FileReposFault MIB</a>	File Repos Application	12501 through 12503
<a href="#">BW-FileReposExtdCaptureFault MIB</a>	File Repos Extd Capture Application	12601 through 12602
<a href="#">BW-MessageArchiveFault MIB</a>	Message Archive Application	15151 through 15153
<a href="#">BW-OpenClientServerFault MIB</a>	OCS Application	501 through 523
<a href="#">BW-ProfileBuilderAmplifyFault MIB</a>	Profile Builder Amplify Application	18301 through 18305
<a href="#">BW-ProvisioningFault-XS-TAS MIB</a>	Provisioning Application	11701 through 11758
<a href="#">BW-ProvisioningServerAmplifyFault MIB</a>	Provisioning Server Amplify Application	21101 through 21151
<a href="#">BW-WebContainerFault MIB</a>	Web Container Application	6001 through 6013



## 8 Cisco BroadWorks MIB Files

This section describes all Cisco BroadWorks MIBs in alphabetical order.

### 8.1 BroadworksConfigurationFault MIB

This section presents SNMP traps (notifications and alarms) for the BroadworksConfigurationFault MIB grouped by component.

The MIB defines the faults for the Configuration subsystem.

#### Applicable server(s):

[Profile Server](#).

#### 8.1.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BroadworksConfigurationFault MIB.

**Table 12: SNMP Traps For BroadworksConfigurationFault:processmonitor**

Alarm Name	Attributes	Values
bwPMconfigdLaunched	Problem Type	Notification
	OID	6101
	Status	current
	Severity Range	informational
	Description	This notification indicates that the configuration agent has been started.
	Problem Text	configd started.
	Recommended Action(s)	
	Correlation Rules	bwPMconfigdLaunched, bwPMconfigdShutDown, bwPMconfigdRestarted, and bwPMconfigdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the configd process.
bwPMconfigdShutDown	Problem Type	Notification
	OID	6102
	Status	current
	Severity Range	informational
	Description	This notification indicates that the configuration agent has been shutdown.
	Problem Text	configd shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMconfigdLaunched, bwPMconfigdShutDown, bwPMconfigdRestarted, and bwPMconfigdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the configd process.

Alarm Name	Attributes	Values
bwPMconfigdRestarted	Problem Type	Notification
	OID	6103
	Status	current
	Severity Range	informational
	Description	This notification indicates that the configuration agent has been restarted.
	Problem Text	configd restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMconfigdLaunched, bwPMconfigdShutDown, bwPMconfigdRestarted, and bwPMconfigdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the configd process.
bwPMconfigdDeath	Problem Type	Notification
	OID	6104
	Status	current
	Severity Range	critical
	Description	This notification indicates that the configuration agent as abnormally terminated.
	Problem Text	configd terminated.
	Recommended Action(s)	Make sure configd gets restarted
	Correlation Rules	bwPMconfigdLaunched, bwPMconfigdShutDown, bwPMconfigdRestarted, and bwPMconfigdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the configd process.

### 8.1.2 SNMP Traps For Component: configd

The table that follows describes the SNMP traps for the configd subcomponent of the BroadworksConfigurationFault MIB.

**Table 13: SNMP Traps For BroadworksConfigurationFault:configd**

Alarm Name	Attributes	Values
bwConfigurationChanged	Problem Type	Notification
	OID	6105
	Status	current
	Severity Range	informational
	Description	This notification indicates that the configuration agent as loaded a new configuration version.
	Problem Text	Configuration version %npConfigVersion% loaded.
	Recommended Action(s)	

Alarm Name	Attributes	Values
bwConfigurationFailed	Correlation Rules	
	Problem Type	Notification
	OID	6106
	Status	current
	Severity Range	high
	Description	This notification indicates that the configuration agent as failed to loaded a new configuration version.
	Problem Text	Configuration version %npConfigVersion% failed.
	Recommended Action(s)	
bwConfigReplicationOffline	Correlation Rules	
	Problem Type	Alarm
	OID	6108
	Status	current
	Severity Range	high
	Description	This alarm indicates that the configuration replication is currently offline.
	Problem Text	Configuration replication is offline.
	Recommended Action(s)	
bwConfigReplicationFailed	Correlation Rules	
	Problem Type	Notification
	OID	6109
	Status	current
	Severity Range	high
	Description	This notification indicates that the master's configuration could not be properly replicated.
	Problem Text	The master's configuration could not be properly replicated.
	Recommended Action(s)	
	Correlation Rules	

## 8.2 BroadworksFault MIB

This section presents SNMP traps (notifications and alarms) for the BroadworksFault MIB grouped by component.

This MIB defines management information that is common to all elements in a Broadworks system.

### Applicable server(s):

[Profile Server.](#)

## 8.2.1 SNMP Traps For Component: unspecified

The table that follows describes the SNMP traps for the unspecified subcomponent of the BroadworksFault MIB.

**Table 14: SNMP Traps For BroadworksFault:unspecified**

Alarm Name	Attributes	Values
bwGeneralSoftwareError	Problem Type	Notification
	OID	5
	Status	current
	Severity Range	medium
	Description	This software error indicates that an unspecified software error has occurred.
	Problem Text	Unexpected software error occurred during processing. Stack Trace: %npStackTrace%
	Recommended Action(s)	Contact BroadSoft Support Engineer.
	Correlation Rules	
bwServerStateTransition	Problem Type	Notification
	OID	12
	Status	current
	Severity Range	informational
	Description	Reports a BroadWorks server state transition.
	Problem Text	Server administrative state change. Old Administrative State: %npOldAdministrativeState%, New Administrative State: %npNewAdministrativeState%
	Recommended Action(s)	
	Correlation Rules	It is recommended to clear all alarms associated with a network element whenever there is an NE transition to the enable state, since the network element, itself, will in this case automatically clear all internal error conditions.
bwAlarmsDiscarded	Problem Type	Notification
	OID	41
	Status	current
	Severity Range	low
	Description	Provides a complete list of all the alarms that the SNMP agent discarded in the past 15 minutes either because they are suppressed or because they exceeded their predefined threshold criteria.
	Problem Text	The following alarms were discarded during the 15 minutes period ending at: %npTimestamp%  %npAlarmList%

Alarm Name	Attributes	Values
	Recommended Action(s)	
	Correlation Rules	
bwApplicationStateTransition	Problem Type	Notification
	OID	52
	Status	current
	Severity Range	informational
	Description	Reports an application's administrative or effective state transition.
	Problem Text	Application State Changed Application Name: %npApplicationName%, Old Administrative State: %npOldAdministrativeState%, New Administrative State: %npNewAdministrativeState%, Old Effective State: %npOldEffectiveState%, New Effective State: %npNewEffectiveState%
	Recommended Action(s)	
	Correlation Rules	
bwExtremeOverload	Problem Type	Notification
	OID	80
	Status	current
	Severity Range	high
	Description	Queue dropped event because of extreme overload.
	Problem Text	Queue dropped event because of extreme overload. Queue name: %npQueueName% Reason: %npExtremeOverloadReason%
	Recommended Action(s)	
	Correlation Rules	
bwCPEDeviceConfigurationDeviceReset	Problem Type	Notification
	OID	3572
	Status	current
	Severity Range	medium
	Description	An IP phone could not be reset.
	Problem Text	An IP phone could not be reset. Device Name: %npDeviceName% Remote Host: %npRemoteAddress%

Alarm Name	Attributes	Values
	Recommended Action(s)	Use one of the following steps to troubleshoot the problem: 1- Check that the phone is on, or 2- Check that the communication to the phone is up.
	Correlation Rules	

## 8.2.2 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BroadworksFault MIB.

**Table 15: SNMP Traps For BroadworksFault:processmonitor**

Alarm Name	Attributes	Values
bwPMtomcatLaunched	Problem Type	Notification
	OID	6
	Status	current
	Severity Range	informational
	Description	This notification indicates that the Tomcat server has been started.
	Problem Text	tomcat started.
	Recommended Action(s)	
	Correlation Rules	bwPMtomcatLaunched, bwPMtomcatShutDown, bwPMtomcatStarted, and bwPMtomcatDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the Tomcat process running on some of the BroadWorks servers.
bwPMtomcatShutDown	Problem Type	Notification
	OID	7
	Status	current
	Severity Range	informational
	Description	This notification indicates that the Tomcat server has been manually shut down.
	Problem Text	tomcat shut down.
	Recommended Action(s)	
	Correlation Rules	bwPMtomcatLaunched, bwPMtomcatShutDown, bwPMtomcatStarted, and bwPMtomcatDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the Tomcat process running on some of the BroadWorks servers.
bwPMtomcatRestarted	Problem Type	Notification
	OID	8
	Status	current
	Severity Range	informational

Alarm Name	Attributes	Values
	Description	This notification provides the date and time of the Tomcat server restart.
	Problem Text	tomcat restarted.
	Recommended Action(s)	Log in BroadWorks.
	Correlation Rules	bwPMtomcatLaunched, bwPMtomcatShutDown, bwPMtomcatStarted, and bwPMtomcatDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the Tomcat process running on some of the BroadWorks servers.
bwPMtomcatDeath	Problem Type	Notification
	OID	9
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the Tomcat server death.
	Problem Text	tomcat terminated.
	Recommended Action(s)	Make sure tomcat gets restarted
	Correlation Rules	bwPMtomcatLaunched, bwPMtomcatShutDown, bwPMtomcatStarted, and bwPMtomcatDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the Tomcat process running on some of the BroadWorks servers.
bwSystemHealthReport	Problem Type	Notification
	OID	10
	Status	current
	Severity Range	informational-critical
	Description	System health report. See Appendix B of the BroadWorks Faults and Alarms Interface Specification for a description of the bwSystemHealthReport Alarm Problem Text.
	Problem Text	%npReport%
	Recommended Action(s)	*
	Correlation Rules	The system health should always be at the latest state/severity reported by a bwSystemHealthReport trap. For example a critical alarm raised through bwSystemHealthReport could be cleared automatically in case the next severity received is informational.
bwDatabaseSyncReport	Problem Type	Notification
	OID	11
	Status	current
	Severity Range	informational

Alarm Name	Attributes	Values
	Description	This notification is generated by the synchcheck_basic.pl command. It provides a detail reports on database differences.
	Problem Text	%npReport%
	Recommended Action(s)	*
	Correlation Rules	
bwCPUIIdleTimeLimitReached	Problem Type	Notification
	OID	17
	Status	current
	Severity Range	informational-critical
	Description	CPU idle time monitoring.
	Problem Text	Average CPU idle time is %npCpuldleTimePercentage %% where the %npThresholdName% threshold is %npCurrentThresholdValue%%
	Recommended Action(s)	<p>This may be an intermittent issue. Verify by performing the following:</p> <ul style="list-style-type: none"> <li>- Monitor real-time server CPU usage using "vmstat 1 10".</li> <li>- Identify high running process using "top".</li> <li>- If "sar" is enabled, check historic CPU usage statistics.</li> </ul> <p>If high CPU usage persists, issue the following command and send the output to BroadSoft support:</p> <p>\$ tech-support</p>
	Correlation Rules	It is recommended to always keep the highest severity value for this notification until it is cleared.
bwMemoryLimitReached	Problem Type	Notification
	OID	18
	Status	current
	Severity Range	critical
	Description	This notification is generated by the bwCPUMon script. It monitors the heap, CPU, and I/O usage for the entire system and for the Execution Server process (Application Server only).
	Problem Text	%npReport%
	Recommended Action(s)	<p>Issue the following command and send the output to BroadSoft support:</p> <p>\$ tech-support</p>
	Correlation Rules	It is recommended to always keep the highest severity value for this notification until it is cleared.
bwPMremotexlaLaunched	Problem Type	Notification
	OID	21
	Status	current
	Severity Range	informational



Alarm Name	Attributes	Values
	Description	This notification indicates that the remote XLA server has been started.
	Problem Text	remotexla started.
	Recommended Action(s)	
	Correlation Rules	bwPMremotexlaLaunched, bwPMremotexlaShutDown, bwPMremotexlaRestarted, and bwPMremotexlaDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the remoteXLA process running on some of the BroadWorks servers.
bwPMremotexlaShutDown	Problem Type	Notification
	OID	22
	Status	current
	Severity Range	informational
	Description	This notification indicates that the remote XLA server has been manually shut down.
	Problem Text	remotexla shut down.
	Recommended Action(s)	
	Correlation Rules	bwPMremotexlaLaunched, bwPMremotexlaShutDown, bwPMremotexlaRestarted, and bwPMremotexlaDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the remoteXLA process running on some of the BroadWorks servers.
bwPMremotexlaRestarted	Problem Type	Notification
	OID	23
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the remote XLA server restart.
	Problem Text	remotexla restarted.
	Recommended Action(s)	Log in BroadWorks.
	Correlation Rules	bwPMremotexlaLaunched, bwPMremotexlaShutDown, bwPMremotexlaRestarted, and bwPMremotexlaDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the remoteXLA process running on some of the BroadWorks servers.
bwPMremotexlaDeath	Problem Type	Notification
	OID	24
	Status	current
	Severity Range	critical

Alarm Name	Attributes	Values
	Description	This notification provides the date and time of the remote XLA server death.
	Problem Text	remotexla terminated.
	Recommended Action(s)	Make sure remotexla gets restarted
	Correlation Rules	bwPMremotexlaLaunched, bwPMremotexlaShutDown, bwPMremotexlaRestarted, and bwPMremotexlaDeath can be correlated into a single notification. These events have to be considered as a transition of the state machine for the management of the remoteXLA process running on some of the BroadWorks servers.
bwPMhttpdLaunched	Problem Type	Notification
	OID	48
	Status	current
	Severity Range	informational
	Description	Apache started.
	Problem Text	apache started.
	Recommended Action(s)	
	Correlation Rules	
bwPMhttpdShutDown	Problem Type	Notification
	OID	49
	Status	current
	Severity Range	informational
	Description	Apache manually shut down.
	Problem Text	apache shut down.
	Recommended Action(s)	
	Correlation Rules	
bwPMhttpdRestarted	Problem Type	Notification
	OID	50
	Status	current
	Severity Range	informational
	Description	Apache restarted.
	Problem Text	apache restarted.
	Recommended Action(s)	Log in BroadWorks.
	Correlation Rules	
bwPMhttpdDeath	Problem Type	Notification
	OID	51

Alarm Name	Attributes	Values
	Status	current
	Severity Range	critical
	Description	Apache process unexpectedly died.
	Problem Text	apache terminated.
	Recommended Action(s)	Make sure apache gets restarted
	Correlation Rules	
bwMaintenanceTaskFailure	Problem Type	Notification
	OID	65
	Status	current
	Severity Range	medium
	Description	A maintenance task failed to execute.
	Problem Text	The maintenance task %npTaskName% failed to execute
	Recommended Action(s)	*
	Correlation Rules	
bwSystemBackwardTimeDrift	Problem Type	Notification
	OID	73
	Status	current
	Severity Range	high
	Description	The system time has gone backward, which can result in software malfunction.
	Problem Text	The system time has gone backward, which can result in software malfunction.
	Recommended Action(s)	Verify that BroadWorks applications are working as expected, if this is not the case, restart BroadWorks.
	Correlation Rules	

### 8.2.3 SNMP Traps For Component: database

The table that follows describes the SNMP traps for the database subcomponent of the BroadworksFault MIB.

**Table 16: SNMP Traps For BroadworksFault:database**

Alarm Name	Attributes	Values
bwCentralizedDatabaseConnectivity Failure	Problem Type	Alarm
	OID	60
	Status	current
	Severity Range	high

Alarm Name	Attributes	Values
	Description	A connectivity failure is detected on the connection to a centralized database site for a given site.
	Problem Text	A connectivity failure occurred for Database %npDatabaseName% on site %npSite%.
	Recommended Action(s)	Verify that the Database Server(s) on the problematic sites are running and verify the IP connectivity between the local node to the Database Server site on the configured port.
	Correlation Rules	
bwCentralizedDatabaseSchemaFailure	Problem Type	Alarm
	OID	67
	Status	current
	Severity Range	high
	Description	A schema access failure is detected to a centralized database site for a given schema.
	Problem Text	A schema access failure occurred for schema %npSchemaInstanceName% (state = %npSchemaInstanceState%).
	Recommended Action(s)	Make sure the application is connected to a Read/Write Centralized Database site.
	Correlation Rules	
bwNetworkDatabaseNodeConnectivity Failure	Problem Type	Alarm
	OID	77
	Status	current
	Severity Range	high
	Description	This notification indicates that the application has no connectivity to a database node.
	Problem Text	A connectivity failure is detected on the connection to a Network Database node: Database: %npDatabaseName% Node: %npDatabaseNode%.
	Recommended Action(s)	Verify that the Network Database node is running and verify the IP connectivity between the server reporting the fault and the database node. Verify the database node hostname and port configuration.
	Correlation Rules	
bwNetworkDatabaseClusterConnectivity Failure	Problem Type	Alarm
	OID	78
	Status	current
	Severity Range	critical
	Description	This notification indicates that the application has no connectivity to all the database nodes.

Alarm Name	Attributes	Values
	Problem Text	Connectivity lost with all the Network Database nodes for database %npDatabaseName% Nodes: %npDatabaseNode%.
	Recommended Action(s)	Verify that the Network Database nodes are running and verify the IP connectivity between the server reporting the fault and all the database nodes. Verify the database nodes hostname and port configuration.
	Correlation Rules	
bwNetworkDatabaseSchemaFailure	Problem Type	Alarm
	OID	79
	Status	current
	Severity Range	high
	Description	This notification indicates that a schema instance is not able to communicate to any node of the Network Database.
	Problem Text	A schema access failure is detected to Network Database %npDatabaseName% for schema instance %npSchemaInstanceName%.
	Recommended Action(s)	Verify that the Network Database nodes are running and verify the IP connectivity between the server reporting the fault and all the database nodes. Verify the database nodes hostname and port configuration. Verify the schema instance configuration to make sure it uses the correct database. Verify if the schema instance is in state OFFLINE in the Network Database.
	Correlation Rules	
bwCouchbaseNodeConnectivityFailure	Problem Type	Alarm
	OID	81
	Status	current
	Severity Range	low, high, critical
	Description	This notification indicates that the application has no connectivity to one or more Couchbase nodes.
	Problem Text	A connectivity failure is detected on the connection to one or more Couchbase nodes: Node(s): %npCouchbaseNodes%
	Recommended Action(s)	
	Correlation Rules	
bwCentralizedDatabaseListenerFailure	Problem Type	Alarm
	OID	82
	Status	current
	Severity Range	high
	Description	Cannot connect to Oracle Database Listener.
	Problem Text	A failure occurred connecting to listener at %npAddress%.

Alarm Name	Attributes	Values
	Recommended Action(s)	Make sure the listener is working properly on Database site
	Correlation Rules	
bwCentralizedDatabaseMaxConnections Reached	Problem Type	Alarm
	OID	83
	Status	current
	Severity Range	high
	Description	Maximum number of borrowable connections has been reached.
	Problem Text	Maximum number of borrowable connections has been reached (%npConnectionCount% connections)
	Recommended Action(s)	
	Correlation Rules	
bwCentralizedDatabaseNewConnection Failure	Problem Type	Alarm
	OID	84
	Status	current
	Severity Range	high
	Description	Unable to create a new database connection.
	Problem Text	The persistency monitoring framework failed to create a new database connection on %npSite%
	Recommended Action(s)	Make sure all listeners are working and responsive on Database site
	Correlation Rules	

## 8.2.4 SNMP Traps For Component: sip

The table that follows describes the SNMP traps for the sip subcomponent of the BroadworksFault MIB.

**Table 17: SNMP Traps For BroadworksFault:sip**

Alarm Name	Attributes	Values
bwSipTcpExceededMax	Problem Type	Notification
	OID	31
	Status	current
	Severity Range	low
	Description	SIP TCP connections reclaimed to avoid exceeding the maximum number of SIP TCP connections.
	Problem Text	SIP TCP connections reclaimed to avoid exceeding the maximum number of SIP TCP connections.
	Recommended Action(s)	No action is typically required. Adjust the following configuration values as needed: maxNumberTcpSocketsPerSystem, autoDiscardStaleConnections, and staleConnectionTimerInMinutes.

Alarm Name	Attributes	Values
bwSipTcpExceededMaxPerPeer	Correlation Rules	
	Problem Type	Notification
	OID	32
	Status	current
	Severity Range	low
	Description	SIP TCP connections associated with the IP address were reclaimed to avoid exceeding the maximum number of SIP TCP connections per peer.
	Problem Text	SIP TCP connections associated with %npRemoteAddress% were reclaimed to avoid exceeding the maximum number of SIP TCP connections per peer.
	Recommended Action(s)	No action is typically required. Adjust the following configuration values as needed: maxNumberOfTcpSocketsPerPeer, autoDiscardStaleConnections, and staleConnectionTimerInMinutes.
bwSipTcpSocketError	Correlation Rules	
	Problem Type	Notification
	OID	33
	Status	current
	Severity Range	low
	Description	SIP TCP connection associated with IP address and port was released or unable to be established
	Problem Text	SIP TCP connection associated with %npRemoteAddress% was released or unable to be established.
	Recommended Action(s)	
bwSipSocketAlreadyBound	Correlation Rules	
	Problem Type	Notification
	OID	71
	Status	current
	Severity Range	low
	Description	The server attempted to bind a socket against a local port that was already used.
	Problem Text	Could not bind to %npLocalPort%
	Recommended Action(s)	
bwSipMessageParsingError	Correlation Rules	
	Problem Type	Notification
	OID	3509
	Status	current
	Severity Range	low

Alarm Name	Attributes	Values
	Description	This notification indicates that BroadWorks is unable to parse an incoming SIP message.
	Problem Text	Unable to parse SIP message. Error is %npMissingHeader%. Message: %npMessage%
	Recommended Action(s)	Check SIP message for syntax error
	Correlation Rules	
bwSipRegistrationFailure	Problem Type	Notification
	OID	3510
	Status	current
	Severity Range	low
	Description	This notification indicates that BroadWorks rejected a registration attempt from an endpoint due to the Emergency Zone feature.
	Problem Text	Emergency Zone rejected SIP Registration. Message: %npMessage%
	Recommended Action(s)	
	Correlation Rules	
bwSipUnexpectedMessage	Problem Type	Notification
	OID	3511
	Status	current
	Severity Range	low
	Description	This notification indicates that an unexpected SIP message is received.
	Problem Text	Unexpected SIP Message received. Reason: %npReason% Response Message: %npSipResponseMessage% Request Message: %npSipRequestMessage%
	Recommended Action(s)	
	Correlation Rules	
bwSipMaxRetriesExceeded	Problem Type	Notification
	OID	3512
	Status	current
	Severity Range	low



Alarm Name	Attributes	Values
	Description	This notification indicates a SIP request was aborted after maximum number of retries.
	Problem Text	SIP request %npMethod% aborted after maximum number of retries. Call-ID: %npCallId% Destination address: %npDeviceAddress%:%npRemotePort%
	Recommended Action(s)	
	Correlation Rules	
bwSipRequestTimeOutReceived	Problem Type	Notification
	OID	3513
	Status	current
	Severity Range	low
	Description	This notification indicates that a SIP request timeout message was received.
	Problem Text	SIP respond 408 Request Timeout received. Response Message: %npSipResponseMessage% Request Message: %npSipRequestMessage% Device Address: %npDeviceAddress%
	Recommended Action(s)	
bwSipServiceUnavailableReceived	Correlation Rules	
	Problem Type	Notification
	OID	3514
	Status	current
	Severity Range	low
	Description	This notification indicates that a SIP service unavailable message was received.
	Problem Text	SIP respond 503 Service Unavailable received. Response Message: %npSipResponseMessage% Request Message: %npSipRequestMessage% Device Address: %npDeviceAddress%
bwSipServerTimeOutReceived	Recommended Action(s)	
	Correlation Rules	
	Problem Type	Notification
	OID	3515

Alarm Name	Attributes	Values
	Status	current
	Severity Range	low
	Description	This notification indicates that a SIP server timeout message was received.
	Problem Text	SIP respond 504 Server Timeout received. Response Message: %npSipResponseMessage% Request Message: %npSipRequestMessage% Device Address: %npDeviceAddress%
	Recommended Action(s)	
	Correlation Rules	
bwAclViolation	Problem Type	Notification
	OID	3517
	Status	current
	Severity Range	low
	Description	SIP request received from an unknown device.
	Problem Text	SIP request %npMethod% received violates access control list. Call-ID: %npCallId% %npReason%
	Recommended Action(s)	
bwSipUnrecognisedDomainName	Correlation Rules	
	Problem Type	Notification
	OID	3518
	Status	current
	Severity Range	medium
	Description	The domain name entered in the access device location is unrecognized or the domain name server is unreachable.
	Problem Text	The access device:%npHost% is not currently in service
bwSipTcpConnectionFailure	Recommended Action(s)	Check the connectivity/availability of the DNS or verify the domain name used as location.
	Correlation Rules	
	Problem Type	Notification
	OID	3595
	Status	current
	Severity Range	low
	Description	Failure to establish TCP connection.

Alarm Name	Attributes	Values
	Problem Text	Could not connect to %npRemoteAddress%
	Recommended Action(s)	Check the connectivity, availability, and configuration of the device.
	Correlation Rules	

### 8.2.5 SNMP Traps For Component: mgcp

The table that follows describes the SNMP traps for the mgcp subcomponent of the BroadworksFault MIB. There is no visible fault for this component.

### 8.2.6 SNMP Traps For Component: smtp

The table that follows describes the SNMP traps for the smtp subcomponent of the BroadworksFault MIB.

**Table 18: SNMP Traps For BroadworksFault:smtp**

Alarm Name	Attributes	Values
bwSMTPPrimaryServerEmailMessageDeliveryError	Problem Type	Alarm
	OID	3519
	Status	current
	Severity Range	low
	Description	This notification indicates that the system failed to deliver an e-mail message via the primary SMTP server.
	Problem Text	System failed to deliver emails via the primary SMTP server.
	Recommended Action(s)	Check the connectivity/availability of the primary SMTP server.
	Correlation Rules	
bwSMTPConnectivityFailure	Problem Type	Notification
	OID	3520
	Status	current
	Severity Range	high
	Description	This notification indicates that the system has lost the connection to both SMTP servers.
	Problem Text	System failed to deliver emails via the primary and the secondary SMTP servers.
	Recommended Action(s)	Check the connectivity/availability of the primary and secondary SMTP servers.
	Correlation Rules	

### 8.2.7 SNMP Traps For Component: filesystem

The table that follows describes the SNMP traps for the filesystem subcomponent of the BroadworksFault MIB.

**Table 19: SNMP Traps For BroadworksFault:filesystem**

Alarm Name	Attributes	Values
bwFileServerClusterUnreachable	Problem Type	Alarm
	OID	37
	Status	current
	Severity Range	critical
	Description	The file server cluster is unreachable, causing a file operation to fail.
	Problem Text	Could not connect to any server in file server cluster %npClusterName%.
	Recommended Action(s)	Verify that: <ul style="list-style-type: none"> <li>- The file server is properly configured in CLI context System/MediaFileSystem and/or in CLI context System/Device/FileRepos.</li> <li>- The DNS is properly configured.</li> <li>- The failing file server nodes are reachable from the Application Server, the Media Server and the Xtended Services Platform for device management.</li> <li>- The file server is properly configured.</li> </ul>
	Correlation Rules	
bwFileServerNodeUnreachable	Problem Type	Notification
	OID	38
	Status	current
	Severity Range	high
	Description	One node in the file server cluster is not reachable.
	Problem Text	The file server node %npRemoteAddress% in the file server cluster %npClusterName% is unreachable.
	Recommended Action(s)	Verify that: <ul style="list-style-type: none"> <li>- The DNS is properly configured for the failing file server nodes.</li> <li>- The failing file server nodes are reachable from the Application Server, the Media Server and/or the Xtended Services Platform for device management.</li> <li>- The file server is properly configured on the failing file server nodes.</li> </ul>
	Correlation Rules	

### 8.2.8 SNMP Traps For Component: callp

The table that follows describes the SNMP traps for the callp subcomponent of the BroadworksFault MIB.

**Table 20: SNMP Traps For BroadworksFault:callp**

Alarm Name	Attributes	Values
bwCongestionManagementNeighbors Inhibited	Problem Type	Notification
	OID	46

Alarm Name	Attributes	Values
	Status	current
	Severity Range	medium
	Description	The Application Server has identified the main overload source when it enters into the yellow zone.
	Problem Text	%npNbInhibitedNeighbors% network element addresses caused the server to become overloaded: %npInhibitedNeighbors%
	Recommended Action(s)	
	Correlation Rules	
bwAuditAbnormalCallTermination	Problem Type	Notification
	OID	3536
	Status	current
	Severity Range	low
	Description	This notification is sent when an end device does not respond during an active call or when a call is detected in the system in an incorrect state. Session audit has terminated the call when this alarm is sent.
	Problem Text	Failed audit User: %npUserUid% Session Key: %npSessionKey% Endpoint: %npEndpointId%
	Recommended Action(s)	None
bwCallIPThreadAutoRestart	Correlation Rules	
	Problem Type	Notification
	OID	3555
	Status	current
	Severity Range	high
	Description	This notification is sent when the Application Server call processing watchdog thread has detected a problem with a call processing thread and has restarted it.
	Problem Text	Thread automatically restarted by watchdog: %npThreadName%
	Recommended Action(s)	Contact Broadsoft support.
bwForcedExitDueToHungThread	Correlation Rules	
	Problem Type	Notification
	OID	3556
	Status	current
	Severity Range	critical

Alarm Name	Attributes	Values
	Description	This notification is sent when the Application Server call processing watchdog thread has detected a problem with a call processing thread. An attempt was made to restart the thread, however this has failed. The Application Server processes exits and is restarted by the process monitor.
	Problem Text	Application server restarting because of unrecoverable problem in thread: %npThreadName%
	Recommended Action(s)	Check log file for full Java stack trace and contact Broadsoft support.
	Correlation Rules	
bwThreadDelayDetected	Problem Type	Notification
	OID	3594
	Status	current
	Severity Range	high
	Description	A thread was delayed.
	Problem Text	The %npThreadName% thread was delayed for %npTimeElapsed% milliseconds. A thread dump is available in the XSOutput log file. Last message processed: %npMessage%
	Recommended Action(s)	Contact Broadsoft support and supply the XSOutput file.
bwPhysicalLocationOriginationBlocked	Correlation Rules	
	Problem Type	Notification
	OID	3609
	Status	current
	Severity Range	informational
	Description	User origination blocked by the Physical Location service.
	Problem Text	User origination blocked by the Physical Location service. User ID: %npUserId% Call ID: %npCallId% Dialed Number: %npDialedNumber% Device Line/Port: %npDeviceLinePort% Received Physical Location: %npReceivedPhysicalLocation% Configured Physical Location: %npConfiguredPhysicalLocation%
bwCallOverloadZoneTransition	Recommended Action(s)	
	Correlation Rules	
	Problem Type	Alarm
	OID	3618
	Status	current

Alarm Name	Attributes	Values
	Severity Range	high
	Description	This trap is generated when the BroadWorks component enters a new non-call overload control zone.
	Problem Text	The server has entered a new call processing overload control zone. Old Zone: %npOldZone% New Zone: %npNewZone%
	Recommended Action(s)	
	Correlation Rules	
bwNonCallOverloadZoneTransition	Problem Type	Alarm
	OID	3619
	Status	current
	Severity Range	high
	Description	This trap is generated when the BroadWorks component enters a new call overload control zone.
	Problem Text	The server has entered a new non-call processing overload control zone. Old Zone: %npOldZone% New Zone: %npNewZone%
	Recommended Action(s)	
	Correlation Rules	
bwCongestionManagementNeighbor Overloaded	Problem Type	Alarm
	OID	3635
	Status	current
	Severity Range	medium
	Description	The Server has received a 503 Response with Retry-After from the neighbor and set the neighbor to Overloaded state.
	Problem Text	Neighbor: %npRemoteAddress% Retry-After period: %npPeriod%
	Recommended Action(s)	
	Correlation Rules	

### 8.2.9 SNMP Traps For Component: nssynch

The table that follows describes the SNMP traps for the nssynch subcomponent of the BroadworksFault MIB.

**Table 21: SNMP Traps For BroadworksFault:nssynch**

Alarm Name	Attributes	Values
bwNSSynchronizationConnectivityFailure	Problem Type	Notification

Alarm Name	Attributes	Values
	OID	3537
	Status	current
	Severity Range	high
	Description	Failure to create data synchronization connection between Application Server and Network Server.
	Problem Text	Failure with connectivity between Application Server and Network Server for synchronization. %npReason%
	Recommended Action(s)	*
	Correlation Rules	
bwNSLocationConnectivityFailure	Problem Type	Alarm
	OID	3539
	Status	current
	Severity Range	high
	Description	Failure with connectivity between the Application Server and the Network Server.
	Problem Text	Failure with connectivity between Application Server and Network Server for user location. %npReason% Failed Transaction: %npMessage%
	Recommended Action(s)	*
	Correlation Rules	
bwNSLocationFailure	Problem Type	Notification
	OID	3540
	Status	current
	Severity Range	medium
	Description	Data may be out of synch between the Application Server and the Network Server.
	Problem Text	Failure with user location transaction between Application Server and Network Server. %npReason% Failed Transaction: %npMessage% Network Server IP address: %npRemoteAddress%
	Recommended Action(s)	Check synchronization of data with Network Server used for user location.



Alarm Name	Attributes	Values
bwNSSyncSuccessDbCommitFailed	Correlation Rules	
	Problem Type	Notification
	OID	11759
	Status	current
	Severity Range	medium
	Description	A provisioning transaction successfully performed a NSSynch but failed to commit to the database.
	Problem Text	Out of synch with NS : %npRequestName%
	Recommended Action(s)	
	Correlation Rules	

### 8.2.10 SNMP Traps For Component: smap

The table that follows describes the SNMP traps for the smap subcomponent of the BroadworksFault MIB.

**Table 22: SNMP Traps For BroadworksFault:smap**

Alarm Name	Attributes	Values
bwSMAPConnectionFailure	Problem Type	Notification
	OID	26
	Status	current
	Severity Range	medium
	Description	The SMAP port failed to be opened.
	Problem Text	Unable to open SMAP port, which will prevent processing of SNMP requests.
	Recommended Action(s)	Stop server. Make sure SMAP port * is available for connection. Restart server. If problem persists, contact BroadSoft Support Engineer.
	Correlation Rules	

### 8.2.11 SNMP Traps For Component: accounting

The table that follows describes the SNMP traps for the accounting subcomponent of the BroadworksFault MIB.

**Table 23: SNMP Traps For BroadworksFault:accounting**

Alarm Name	Attributes	Values
bwLicenseMonitoringFault	Problem Type	Notification
	OID	3665
	Status	current
	Severity Range	high
	Description	Licensing threshold exceeded.

Alarm Name	Attributes	Values
	Problem Text	bwLicenseMon has detected that some services have exceeded the following licensing threshold: %npCurrentThresholdValue% %npReport%
	Recommended Action(s)	
	Correlation Rules	

## 8.2.12 SNMP Traps For Component: licensing

The table that follows describes the SNMP traps for the licensing subcomponent of the BroadworksFault MIB.

**Table 24: SNMP Traps For BroadworksFault:licensing**

Alarm Name	Attributes	Values
bwLicenseFileNotFound	Problem Type	Notification
	OID	25
	Status	current
	Severity Range	critical
	Description	This notification indicates that the system is unable to locate the license files.
	Problem Text	License file not found. %npFilename%
	Recommended Action(s)	Install the license file or contact Broadsoft support.
	Correlation Rules	
bwLicenseFileExpiring	Problem Type	Notification
	OID	44
	Status	current
	Severity Range	critical
	Description	This alarm is generated once a day when the license file expiration date is less than seven days from the current day.
	Problem Text	The license file will expire on %npDate%. After that date, the system will no longer start.
	Recommended Action(s)	Please contact BroadSoft to get an updated license file.
	Correlation Rules	
bwLicenseFileExpired	Problem Type	Notification
	OID	45
	Status	current
	Severity Range	critical
	Description	This alarm is sent once a day, after the license file has expired.
	Problem Text	The license file expired on %npDate%. The system can no longer start.

Alarm Name	Attributes	Values
	Recommended Action(s)	Please contact BroadSoft to get an updated license file.
	Correlation Rules	
bwLicenseAuthenticationFailure	Problem Type	Notification
	OID	3541
	Status	current
	Severity Range	critical
	Description	This notification indicates that the authentication of the license file failed.
	Problem Text	License file authentication failure.
	Recommended Action(s)	Use the correct license file or contact Broadsoft support.
	Correlation Rules	
bwLicenseHWViolation	Problem Type	Notification
	OID	3543
	Status	current
	Severity Range	critical
	Description	This notification indicates that there is an attempt to run the application on an unlicensed server.
	Problem Text	Attempt to run the application on an unlicensed server.
	Recommended Action(s)	Please run the application on the designated server or contact BroadSoft to obtain additional licenses.
	Correlation Rules	
bwLicenseAccntViolation	Problem Type	Notification
	OID	3544
	Status	current
	Severity Range	high
	Description	This notification indicates that the license allocation has exceeded the limit.
	Problem Text	License allocation has exceeded the limit for %npLicenseKey%. Limit is %npLicenseLimit% and current allocation is %npLicenseAllocation%.
	Recommended Action(s)	Please contact BroadSoft to obtain additional licenses.
	Correlation Rules	

### 8.2.13 SNMP Traps For Component: pmReporting

The table that follows describes the SNMP traps for the pmReporting subcomponent of the BroadworksFault MIB.

**Table 25: SNMP Traps For BroadworksFault:pmReporting**

Alarm Name	Attributes	Values
bwPMReportingFTPConnectionError	Problem Type	Alarm
	OID	16
	Status	current
	Severity Range	informational
	Description	Periodic measurement report could not be sent to FTP server.
	Problem Text	Periodic SNMP measurement report could not be sent to FTP server. Could not connect to %npRemoteAddress%. User ID: %npUserId%
	Recommended Action(s)	Verify the availability of the FTP server. Verify that the FTP domain, user ID and password are correct. The report file was copied to the /var/broadworks/pm_reports/not_sent directory. It can be uploaded manually to the FTP server.
	Correlation Rules	

#### 8.2.14 SNMP Traps For Component: smdi

The table that follows describes the SNMP traps for the smdi subcomponent of the BroadworksFault MIB.

**Table 26: SNMP Traps For BroadworksFault:smdi**

Alarm Name	Attributes	Values
bwSMDIsessionRejected	Problem Type	Notification
	OID	3566
	Status	current
	Severity Range	low
	Description	An SMDI session, initiated by an external terminal server, was rejected.
	Problem Text	An SMDI session was rejected. Rejection reason: %npReason%. Client address: %npClientAddress%.
	Recommended Action(s)	1- Make sure that the server sending the request is configured in the AS access list, 2- Try to increase to maximum number of sessions.
	Correlation Rules	
bwSMDIInterfaceError	Problem Type	Notification
	OID	3574
	Status	current
	Severity Range	low
	Description	The SMDI interface could not be started on a specific port.
	Problem Text	The SMDI interface cannot be enabled using listening port %npLocalPort%. The Application Server will not be able to receive or send SMDI messages.

Alarm Name	Attributes	Values
	Recommended Action(s)	Validate whether: 1- The listening port specified is not already used by another application in the system. 2- The SMDI component is allowed to use the listening port specified. 3- Enabling the interface using another port works.
	Correlation Rules	
bwSMDIConfigurationError	Problem Type	Notification
	OID	3575
	Status	current
	Severity Range	low
	Description	An outgoing SMDI message could not be sent to a SMDI device for the specified user.
	Problem Text	The following user could not be mapped to an outgoing SMDI device: User ID: %npUserId% SMDI number: %npSmdiNumber%
	Recommended Action(s)	For Outgoing Message Waiting Indicator (MWI), verify that: 1- In Voice Messaging Service, Outgoing MWI is assigned and turned on for the user, 2- The SMDI route list is properly configured. For Message Desk (MD), verify that: 1- At least one outgoing SMDI device (terminal server) is configured for the SMDI Message Desk service.
	Correlation Rules	
bwSMDIOperationFailure	Problem Type	Notification
	OID	3576
	Status	current
	Severity Range	low
	Description	For the actual description, refer the BroadWorks FaultManagementGuide as it may contain variable data.
	Problem Text	The SMDI MWI indicator was not accepted by the destination PBX or C5 network: User ID: %npUserId% SMDI number: %npSmdiNumber% Reason: %npReason%
	Recommended Action(s)	Validate whether: 1- The user should be assigned MWI on SMDI in the voice messaging service, or 2- The configuration on the PBX and/or class 5 is accurate.
	Correlation Rules	
bwSMDIRouteExhaustion	Problem Type	Notification

Alarm Name	Attributes	Values
	OID	3577
	Status	current
	Severity Range	low
	Description	An SMDI message could not be sent because of route exhaustion.
	Problem Text	The SMDI MWI indicator cannot be sent to any SMDI device: User ID: %npUserId% SMDI number: %npSmdiNumber% Devices: %npDeviceName%
	Recommended Action(s)	Validate whether: 1- The SMDI device address and port are valid and reachable, or 2- The SMDI device configuration is accurate, or 3- The SMDI device is running and correctly communicating with the PBX and/or class 5.
	Correlation Rules	

### 8.2.15 SNMP Traps For Component: cpeDeviceManagement

The table that follows describes the SNMP traps for the cpeDeviceManagement subcomponent of the BroadworksFault MIB.

**Table 27: SNMP Traps For BroadworksFault:cpeDeviceManagement**

Alarm Name	Attributes	Values
bwCPEDeviceProfileLockout	Problem Type	Notification
	OID	66
	Status	current
	Severity Range	low
	Description	Device Profile is locked out because of an authentication failure per device profile lockout rules.
	Problem Text	Device is locked out because of authentication failure. Service Provider / Enterprise ID: %npServiceProviderId% Group ID: %npGroupId% Device Profile Name: %npDeviceProfileName% Lockout Counter: %npLockoutCounter% Lockout Period (minutes): %npLockoutPeriod% %npDeviceFileRequestMessage%
	Recommended Action(s)	Determine if caused by a rogue device or configuration issue.
	Correlation Rules	

### 8.2.16 SNMP Traps For Component: networkDeviceManagement

The table that follows describes the SNMP traps for the networkDeviceManagement subcomponent of the BroadworksFault MIB.

**Table 28: SNMP Traps For BroadworksFault:networkDeviceManagement**

Alarm Name	Attributes	Values
bwNetworkDevicesFailed	Problem Type	Alarm
	OID	19
	Status	current
	Severity Range	high
	Description	This alarm is generated whenever a network device that was previously responding does not respond to an application-level ping.
	Problem Text	The following network device is currently unavailable: %npServerType% %npRemoteAddress%
	Recommended Action(s)	Please verify that the device is operational and that there is connectivity to the device.
	Correlation Rules	It is recommended to always keep the highest severity value for this notification until it is cleared.

### 8.2.17 SNMP Traps For Component: cap

The table that follows describes the SNMP traps for the cap subcomponent of the BroadworksFault MIB.

There is no visible fault for this component.

### 8.2.18 SNMP Traps For Component: ociReporting

The table that follows describes the SNMP traps for the ociReporting subcomponent of the BroadworksFault MIB.

**Table 29: SNMP Traps For BroadworksFault:ociReporting**

Alarm Name	Attributes	Values
bwOciReportingAclViolation	Problem Type	Notification
	OID	3607
	Status	current
	Severity Range	low
	Description	Connection request received from an unknown external system.
	Problem Text	External system IP address %npRemoteAddress% not in access control list.
	Recommended Action(s)	
	Correlation Rules	
bwOciReportingConnectionError	Problem Type	Alarm
	OID	3608
	Status	current
	Severity Range	low
	Description	Error detected on connection to an external system.

Alarm Name	Attributes	Values
	Problem Text	Error detected on connection to external system IP address %npRemoteAddress%. Connection released.
	Recommended Action(s)	
	Correlation Rules	
bwOciReportingBackLogFileDeleted	Problem Type	Notification
	OID	3615
	Status	current
	Severity Range	low
	Description	The total size of the OCI reporting backlog files exceeded the system limit (500 MB). The oldest file is deleted.
	Problem Text	OCI Report backlog file %npFilename% for host %npHost% is deleted due to the system size limit.
	Recommended Action(s)	Reestablish the connection so the backlog files can be processed.
	Correlation Rules	

### 8.2.19 SNMP Traps For Component: bcct

The table that follows describes the SNMP traps for the bcct subcomponent of the BroadworksFault MIB.

**Table 30: SNMP Traps For BroadworksFault:bcct**

Alarm Name	Attributes	Values
bwCommProtocolInitError	Problem Type	Notification
	OID	28
	Status	current
	Severity Range	high
	Description	Could not bind on TCP port.
	Problem Text	Application is unable to connect to local port: - Local Interface: %npLocalInterface% - Port: %npLocalPort%
	Recommended Action(s)	Make sure the listening port is not used by another application
	Correlation Rules	
bwCommProtocolHostNotAllowed	Problem Type	Notification
	OID	29
	Status	current
	Severity Range	low
	Description	A host that is not allowed for this protocol has attempted to connect.



Alarm Name	Attributes	Values
	Problem Text	An unauthorized host for a specific protocol has attempted to connect to this server: - Remote Host Address: %npRemoteAddress% - Local Interface: %npLocalInterface% - Protocol: %npProtocol%
	Recommended Action(s)	In case of a valid host, make sure it is defined in the BCCT Access List for the specified protocol.
	Correlation Rules	
bwCommProtocolInterfaceNotAllowed	Problem Type	Notification
	OID	30
	Status	current
	Severity Range	low
	Description	Connections for this protocol are not allowed on this interface.
	Problem Text	A remote server has attempted to connect on an interface that is not registered for a protocol: - Remote Host Address: %npRemoteAddress% - Local Interface: %npLocalInterface% - Protocol: %npProtocol%
	Recommended Action(s)	In case of a valid host, make sure it is defined in the BCCT Access List for the specified protocol.
	Correlation Rules	

## 8.2.20 SNMP Traps For Component: taskMonitor

The table that follows describes the SNMP traps for the taskMonitor subcomponent of the BroadworksFault MIB.

**Table 31: SNMP Traps For BroadworksFault:taskMonitor**

Alarm Name	Attributes	Values
bwTaskMonitorWarning	Problem Type	Notification
	OID	34
	Status	current
	Severity Range	low
	Description	A task is taking longer than normal.
	Problem Text	A task is taking too long to complete. The task timeout is %npTimeLength% ms and it was started %npTimeElapsed% ms ago. Thread: %npThreadName%. Stack trace: %npStackTrace%
	Recommended Action(s)	Please report to BroadSoft support.
	Correlation Rules	
bwTaskMonitorHungTask	Problem Type	Notification
	OID	35

Alarm Name	Attributes	Values
	Status	current
	Severity Range	high-critical
	Description	A task is hung.
	Problem Text	A task is hung. The task timeout is %npTimeLength% ms and it was started %npTimeElapsed% ms ago. Thread: %npThreadName% Stack trace: %npStackTrace%
	Recommended Action(s)	BroadWorks should be restarted as soon as possible. Please report to BroadSoft support.
	Correlation Rules	
bwTcpSubsystemFatalError	Problem Type	Notification
	OID	36
	Status	current
	Severity Range	high
	Description	TCP subsystem fatal error.
	Problem Text	TCP subsystem fatal error: shutdown initiated. %npStackTrace%
	Recommended Action(s)	Please report to BroadSoft support.
	Correlation Rules	

### 8.2.21 SNMP Traps For Component: logging

The table that follows describes the SNMP traps for the logging subcomponent of the BroadworksFault MIB.

**Table 32: SNMP Traps For BroadworksFault:logging**

Alarm Name	Attributes	Values
bwLogQueueSizeLimitReached	Problem Type	Alarm
	OID	42
	Status	current
	Severity Range	high
	Description	The server has started to drop log entries because the logging queue size limit has been reached.
	Problem Text	Log queue size reached %npSizeLimit% for the OutputChannels configured in %npFilename%
	Recommended Action(s)	Please verify the availability of the OutputChannels.
	Correlation Rules	

## 8.2.22 SNMP Traps For Component: dns

The table that follows describes the SNMP traps for the dns subcomponent of the BroadworksFault MIB.

**Table 33: SNMP Traps For BroadworksFault:dns**

Alarm Name	Attributes	Values
bwDnsTimeout	Problem Type	Notification
	OID	63
	Status	current
	Severity Range	high
	Description	A query to the Domain Name System (DNS) server times out.
	Problem Text	A DNS query timed out.
	Recommended Action(s)	
	Correlation Rules	
bwDnsServerUnreachable	Problem Type	Notification
	OID	3645
	Status	current
	Severity Range	low
	Description	A DNS server was unreachable for a DNS query.
	Problem Text	DNS server: %npRemoteAddress% is unreachable.
	Recommended Action(s)	
	Correlation Rules	
bwDnsAllServersUnreachable	Problem Type	Alarm
	OID	3646
	Status	current
	Severity Range	high
	Description	All DNS servers are unreachable.
	Problem Text	All DNS servers are unreachable.
	Recommended Action(s)	
	Correlation Rules	

## 8.2.23 SNMP Traps For Component: snmpAgent

The table that follows describes the SNMP traps for the snmpAgent subcomponent of the BroadworksFault MIB.

**Table 34: SNMP Traps For BroadworksFault:snmpAgent**

Alarm Name	Attributes	Values
bwAlarmsTableLimitReached	Problem Type	Notification
	OID	47

Alarm Name	Attributes	Values
	Status	current
	Severity Range	critical
	Description	This alarm is raised when the alarms table has reached the configured maximum number of entries. It warns the manager that no more alarms will be sent until the problem is fixed.
	Problem Text	The alarms table has reached its capacity limit of %npMaximumNbItems%. No more alarms will be sent until alarms are cleared.
	Recommended Action(s)	
	Correlation Rules	

#### 8.2.24 SNMP Traps For Component: ps

The table that follows describes the SNMP traps for the ps subcomponent of the BroadworksFault MIB.

**Table 35: SNMP Traps For BroadworksFault:ps**

Alarm Name	Attributes	Values
bwSCFAPURLUnreachable	Problem Type	Alarm
	OID	2607
	Status	current
	Severity Range	high
	Description	Connection to SCF API failed due to URL not being reachable.
	Problem Text	Could not connect to SCF API URL %npRemoteAddress%.
	Recommended Action(s)	
	Correlation Rules	

#### 8.2.25 SNMP Traps For Component: softwareManager

The table that follows describes the SNMP traps for the softwareManager subcomponent of the BroadworksFault MIB.

**Table 36: SNMP Traps For BroadworksFault:softwareManager**

Alarm Name	Attributes	Values
bwMemoryAllocationExceeded	Problem Type	Notification
	OID	53
	Status	current
	Severity Range	informational
	Description	Reports a lack of memory when deploying an application..
	Problem Text	Total application memory usage (%npApplicationMemory% MB) exceeded system memory capacity (%npSystemMemory% MB).
	Recommended Action(s)	Please consider un-deploying some applications.

Alarm Name	Attributes	Values
bwMemoryOverAllocation	Correlation Rules	
	Problem Type	Alarm
	OID	54
	Status	current
	Severity Range	informational
	Description	The memory allocation for application is overallocated.
	Problem Text	Memory settings for the containers on the node cannot be satisfied as configured. This condition is checked by the software manager on restart and when a new configuration is deployed on the node.
	Recommended Action(s)	The amount of memory configured for the containers exceeds the amount of physical memory.
	Correlation Rules	

### 8.2.26 SNMP Traps For Component: security

The table that follows describes the SNMP traps for the security subcomponent of the BroadworksFault MIB.

**Table 37: SNMP Traps For BroadworksFault:security**

Alarm Name	Attributes	Values
bwMaximumFailedLoginAttempts	Problem Type	Notification
	OID	27
	Status	current
	Severity Range	low
	Description	A user has failed to log in the allowed maximum number of times (consecutive login failures).
	Problem Text	The number of failed login attempts: %npFailedLoginAttempts% has exceeded the maximum of %npMaxFailedLoginAttempts%.
	Recommended Action(s)	
	Correlation Rules	
bwMaximumFailedUserLoginAttempts	Problem Type	Notification
	OID	59
	Status	current
	Severity Range	low
	Description	A specific user/administrator has failed to log in the allowed maximum number of times (consecutive login failures).
	Problem Text	The user %npUserId% has reached the maximum number allowed (%npMaxFailedLoginAttempts%) of consecutive failed attempts, this account login has been disabled.
	Recommended Action(s)	

Alarm Name	Attributes	Values
bwSecureTktToolResult	Correlation Rules	
	Problem Type	Notification
	OID	64
	Status	current
	Severity Range	critical, high, medium, low, or informational
	Description	This notification returns the result from executing one of the Security Toolkit tool as a task where the tool is configured to report a notification.
	Problem Text	Result for tool %npSecureTktToolName% Tool result: %npSecureTktToolResult%
	Recommended Action(s)	
bwSecurityRiskDetected	Correlation Rules	
	Problem Type	Notification
	OID	68
	Status	current
	Severity Range	high
	Description	A security risk is detected.
	Problem Text	The Security Monitor maintenance task detects a security risk.
	Recommended Action(s)	Please review %npLogFile%.
bwKeyManagerCriticalDataMismatch	Correlation Rules	
	Problem Type	Notification
	OID	69
	Status	current
	Severity Range	high-critical
	Description	The key manager identified a mismatch between the password and the keystore entity.
	Problem Text	Mismatch: the %npMissingComponent% is %npState% for the %npExistingComponent% that already exists.
	Recommended Action(s)	
bwChangeDatabaseUserPasswordError	Correlation Rules	
	Problem Type	Notification
	OID	70
	Status	current
	Severity Range	low
	Description	An error occurred while changing the password.

Alarm Name	Attributes	Values
	Problem Text	An error occurred while changing the database password of %npUserName%. The previous password is still effective.
	Recommended Action(s)	Please ensure the database engine is running and retry with a different password.
	Correlation Rules	

## 8.2.27 SNMP Traps For Component: webcontainer

The table that follows describes the SNMP traps for the webcontainer subcomponent of the BroadworksFault MIB.

**Table 38: SNMP Traps For BroadworksFault:webcontainer**

Alarm Name	Attributes	Values
bwExecutorQueueUsageExceeded	Problem Type	Alarm
	OID	6005
	Status	current
	Severity Range	high
	Description	The usage ratio of the executor queue (in %) exceeded the threshold level.
	Problem Text	The usage ratio of the %npExecutorType% executor exceeded the threshold level.
	Recommended Action(s)	Review server usage for identifying potential bottlenecks.
	Correlation Rules	
bwExecutorQueueLatencyExceeded	Problem Type	Alarm
	OID	6006
	Status	current
	Severity Range	high
	Description	The executor queue latency exceeded the threshold level.
	Problem Text	The %npExecutorType% executor queue latency exceeded the threshold level.
	Recommended Action(s)	Review server usage for identifying potential bottlenecks.
	Correlation Rules	
bwExecutorThreadPoolProcessingTime Exceeded	Problem Type	Alarm
	OID	6007
	Status	current
	Severity Range	high
	Description	The executor thread pool processing time exceeded the threshold level.
	Problem Text	The %npExecutorType% executor thread pool processing time exceeded the threshold level.

Alarm Name	Attributes	Values
bwExecutorThreadPoolBusyExceeded	Recommended Action(s)	Review server usage for identifying potential bottlenecks.
	Correlation Rules	
	Problem Type	Alarm
	OID	6008
	Status	current
	Severity Range	high
	Description	The executor thread pool busy ratio exceeded the threshold level.
	Problem Text	The %npExecutorType% executor thread pool busy ratio exceeded the threshold level.
	Recommended Action(s)	Review server usage for identifying potential bottlenecks.
	Correlation Rules	

### 8.2.28 SNMP Traps For Component: sccp

The table that follows describes the SNMP traps for the sccp subcomponent of the BroadworksFault MIB.

There is no visible fault for this component.

### 8.2.29 SNMP Traps For Component: jvmProcess

The table that follows describes the SNMP traps for the jvmProcess subcomponent of the BroadworksFault MIB.

**Table 39: SNMP Traps For BroadworksFault:jvmProcess**

Alarm Name	Attributes	Values
bwHeapMemoryUsageExceeded	Problem Type	Alarm
	OID	61
	Status	current
	Severity Range	high
	Description	The memory usage ratio after a full garbage collection (in %) exceeded the threshold level.
	Problem Text	The memory usage after a full garbage collection reached %npProcessMemoryUsage% M for %npContainerName%.
	Recommended Action(s)	Review server usage for identifying potential memory bottlenecks.
	Correlation Rules	
bwJVMPProcessOutOfMemory	Problem Type	Alarm
	OID	74
	Status	current
	Severity Range	critical
	Description	An out of memory condition was detected by a thread.



Alarm Name	Attributes	Values
	Problem Text	An out of memory condition has been detected by thread %npThreadName% for container %npContainerName%.
	Recommended Action(s)	Please contact BroadSoft support.
	Correlation Rules	
bwJVMPProcessUnexpectedSoftwareConditionDetected	Problem Type	Alarm
	OID	75
	Status	current
	Severity Range	high
	Description	An unexpected software condition has been detected by a thread.
	Problem Text	An unexpected software condition has been detected by thread %npThreadName% for container %npContainerName%. Message: %npErrorMessage%
	Recommended Action(s)	Further details can be found in the container's output logs. Please contact BroadSoft support.
	Correlation Rules	
bwNonheapMemoryUsageExceeded	Problem Type	Alarm
	OID	62
	Status	deprecated
	Severity Range	high
	Description	The non heap memory usage ratio after a full garbage collection (in %) exceeded the threshold level.
	Problem Text	The non heap memory usage after a full garbage collection reached %npProcessMemoryUsage% M for %npContainerName%.
	Recommended Action(s)	Review server usage for identifying potential memory bottlenecks.
	Correlation Rules	

### 8.2.30 SNMP Traps For Component: time

The table that follows describes the SNMP traps for the time subcomponent of the BroadworksFault MIB.

**Table 40: SNMP Traps For BroadworksFault:time**

Alarm Name	Attributes	Values
bwTimeSkewExceeded	Problem Type	Alarm
	OID	76
	Status	current
	Severity Range	medium
	Description	The time difference between servers exceeds threshold.
	Problem Text	The time difference with %npRemoteAddress% exceeds the %npTimeLength% seconds allowed threshold.

Alarm Name	Attributes	Values
	Recommended Action(s)	Check the time on the servers. Check that NTP is correctly configured on the servers.
	Correlation Rules	

### 8.2.31 SNMP Traps For Component: webrtc

The table that follows describes the SNMP traps for the webrtc subcomponent of the BroadworksFault MIB.

There is no visible fault for this component.

### 8.2.32 SNMP Traps For Component: sipLocation

The table that follows describes the SNMP traps for the sipLocation subcomponent of the BroadworksFault MIB.

There is no visible fault for this component.

### 8.2.33 SNMP Traps For Component: threshold

The table that follows describes the SNMP traps for the threshold subcomponent of the BroadworksFault MIB.

**Table 41: SNMP Traps For BroadworksFault:threshold**

Alarm Name	Attributes	Values
bwCounterThreshold	Problem Type	Notification
	OID	13
	Status	current
	Severity Range	variable
	Description	Sent when a counter threshold reaches its limit.
	Problem Text	Counter %npCounterName% has reached or exceeded a user-defined threshold. The counter's value is %npCurrentCounterValue% and the threshold was set at %npCurrentThresholdValue%. The value to reach before the next notification is now %npNewThresholdValue%. User-defined description follows.  %npThresholdDescription%
	Recommended Action(s)	
	Correlation Rules	
bwGaugeLowLimitThreshold	Problem Type	Alarm
	OID	14
	Status	current
	Severity Range	variable
	Description	Sent when gauge threshold lowNotify value is reached while decreasing.

Alarm Name	Attributes	Values
	Problem Text	Gauge %npGaugeName% has reached a user-defined low notification threshold. The threshold low value is %npCurrentThresholdValue% and the value to reach to clear the alarm is %npClearThresholdValue%. User-defined description follows. %npThresholdDescription%
	Recommended Action(s)	
	Correlation Rules	
bwGaugeHighLimitThreshold	Problem Type	Alarm
	OID	15
	Status	current
	Severity Range	variable
	Description	Sent when gauge threshold highNotify value is reached while increasing.
	Problem Text	Gauge %npGaugeName% has reached a user-defined high notification threshold. The threshold high value is %npCurrentThresholdValue% and the value to reach to clear the alarm is %npClearThresholdValue%. User-defined description follows. %npThresholdDescription%
	Recommended Action(s)	
	Correlation Rules	

### 8.2.34 SNMP Traps For Component: nps

The table that follows describes the SNMP traps for the nps subcomponent of the BroadworksFault MIB.

**Table 42: SNMP Traps For BroadworksFault:nps**

Alarm Name	Attributes	Values
bwPushNotificationServerUnreachable	Problem Type	Alarm
	OID	85
	Status	current
	Severity Range	critical
	Description	Push Notification Server has become unreachable.
	Problem Text	Push Notification Server %npAddress% has become unreachable.
	Recommended Action(s)	Please verify Push Notification Server connectivity.
	Correlation Rules	

### 8.3 BW-CCReportingDBManagementFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-CCReportingDBManagementFault MIB grouped by component.

This MIB defines the faults for the BroadWorks CCReportingDBManagement Application.

#### Applicable server(s):

*Profile Server.*

#### 8.3.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-CCReportingDBManagementFault MIB.

**Table 43: SNMP Traps For BW-CCReportingDBManagementFault:processmonitor**

Alarm Name	Attributes	Values
bwPMccReportingDBManagementLaunched	Problem Type	Notification
	OID	11001
	Status	current
	Severity Range	informational
	Description	This notification indicates that the CCReporting DB Management has been started.
	Problem Text	ccReportingDBManagement started.
	Recommended Action(s)	
	Correlation Rules	bwPMccReportingDBManagementLaunched, bwPMccReportingDBManagementShutDown, bwPMccReportingDBManagementRestarted, bwPMccReportingDBManagementDeath and bwPMccReportingDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ccReportingDBManagement process
bwPMccReportingDBManagementShutDown	Problem Type	Notification
	OID	11002
	Status	current
	Severity Range	informational
	Description	This notification indicates that the CCReporting DB Management has been manually shut down.
	Problem Text	ccReportingDBManagement shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMccReportingDBManagementLaunched, bwPMccReportingDBManagementShutDown, bwPMccReportingDBManagementRestarted, bwPMccReportingDBManagementDeath and bwPMccReportingDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ccReportingDBManagement process

Alarm Name	Attributes	Values
bwPMccReportingDBManagement Restarted	Problem Type	Notification
	OID	11003
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the CCReporting DB Management restart.
	Problem Text	ccReportingDBManagement restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMccReportingDBManagementLaunched, bwPMccReportingDBManagementShutDown, bwPMccReportingDBManagementRestarted, bwPMccReportingDBManagementDeath and bwPMccReportingDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ccReportingDBManagement process
bwPMccReportingDBManagementDeath	Problem Type	Notification
	OID	11004
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the CCReporting DB Management death.
	Problem Text	ccReportingDBManagement terminated.
	Recommended Action(s)	Make sure ccReportingDBManagement gets restarted
	Correlation Rules	bwPMccReportingDBManagementLaunched, bwPMccReportingDBManagementShutDown, bwPMccReportingDBManagementRestarted, bwPMccReportingDBManagementDeath and bwPMccReportingDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ccReportingDBManagement process
bwPMccReportingDBManagementOutOfMemory	Problem Type	Notification
	OID	11005
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the CCReporting DB Management ran out of memory.
	Problem Text	ccReportingDBManagement ran out of memory.
	Recommended Action(s)	Make sure ccReportingDBManagement gets restarted

Alarm Name	Attributes	Values
	Correlation Rules	bwPMccReportingDBManagementLaunched, bwPMccReportingDBManagementShutDown, bwPMccReportingDBManagementRestarted, bwPMccReportingDBManagementDeath, and bwPMccReportingDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ccReportingDBManagement process

## 8.4 BW-DBSObserverFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-DBSObserverFault MIB grouped by component.

This MIB defines the faults for the BroadWorks DBSObserver Application.

### Applicable server(s):

[Profile Server](#).

### 8.4.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-DBSObserverFault MIB.

**Table 44: SNMP Traps For BW-DBSObserverFault:processmonitor**

Alarm Name	Attributes	Values
bwPMdbSObserverLaunched	Problem Type	Notification
	OID	11101
	Status	current
	Severity Range	informational
	Description	This notification indicates that the DBSObserver has been started.
	Problem Text	dbSObserver started.
	Recommended Action(s)	
	Correlation Rules	bwPMdbSObserverLaunched, bwPMdbSObserverShutDown, bwPMdbSObserverRestarted, and bwPMdbSObserverDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the dbSObserver process
bwPMdbSObserverShutDown	Problem Type	Notification
	OID	11102
	Status	current
	Severity Range	informational
	Description	This notification indicates that the DBSObserver has been manually shut down.
	Problem Text	dbSObserver shutdown.
	Recommended Action(s)	

Alarm Name	Attributes	Values
	Correlation Rules	bwPMdbObserverLaunched, bwPMdbObserverShutDown, bwPMdbObserverRestarted, and bwPMdbObserverDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the dbObserver process
bwPMdbObserverRestarted	Problem Type	Notification
	OID	11103
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the DBSObserver restart.
	Problem Text	dbObserver restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMdbObserverLaunched, bwPMdbObserverShutDown, bwPMdbObserverRestarted, and bwPMdbObserverDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the dbObserver process
bwPMdbObserverDeath	Problem Type	Notification
	OID	11104
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the DBSObserver death.
	Problem Text	dbObserver terminated.
	Recommended Action(s)	Make sure dbObserver gets restarted
	Correlation Rules	bwPMdbObserverLaunched, bwPMdbObserverShutDown, bwPMdbObserverRestarted, and bwPMdbObserverDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the dbObserver process

## 8.5 BW-ECLDBMgmtAmplifyFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-ECLDBMgmtAmplifyFault MIB grouped by component.

This MIB defines the faults for the BroadWorks Enhanced Call Logs DB Management Amplify Application.

### Applicable server(s):

[Profile Server](#).

### 8.5.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-ECLDBMgmtAmplifyFault MIB.

**Table 45: SNMP Traps For BW-ECLDBMgmtAmplifyFault:processmonitor**

Alarm Name	Attributes	Values
bwPMenhancedCallLogsDBManagementAmplifyLaunched	Problem Type	Notification
	OID	20501
	Status	current
	Severity Range	informational
	Description	This notification indicates that the ECL DB Management Amplify application has been started.
	Problem Text	enhancedCallLogsDBManagementAmplify started.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementAmplifyLaunched, bwPMenhancedCallLogsDBManagementAmplifyShutDown, bwPMenhancedCallLogsDBManagementAmplifyRestarted, bwPMenhancedCallLogsDBManagementAmplifyDeath and bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagementAmplify process
bwPMenhancedCallLogsDBManagementAmplifyShutDown	Problem Type	Notification
	OID	20502
	Status	current
	Severity Range	informational
	Description	This notification indicates that the ECL DB Management Amplify application has been manually shut down.
	Problem Text	enhancedCallLogsDBManagementAmplify shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementAmplifyLaunched, bwPMenhancedCallLogsDBManagementAmplifyShutDown, bwPMenhancedCallLogsDBManagementAmplifyRestarted, bwPMenhancedCallLogsDBManagementAmplifyDeath and bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagementAmplify process
bwPMenhancedCallLogsDBManagementAmplifyRestarted	Problem Type	Notification
	OID	20503
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the ECL DB Management Amplify application restart.
	Problem Text	enhancedCallLogsDBManagementAmplify restarted.
	Recommended Action(s)	



Alarm Name	Attributes	Values
bwPMenhancedCallLogsDBManagementAmplifyDeath	Correlation Rules	bwPMenhancedCallLogsDBManagementAmplifyLaunched, bwPMenhancedCallLogsDBManagementAmplifyShutDown, bwPMenhancedCallLogsDBManagementAmplifyRestarted, bwPMenhancedCallLogsDBManagementAmplifyDeath and bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagementAmplify process
	Problem Type	Notification
	OID	20504
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the ECL DB Management Amplify application death.
	Problem Text	enhancedCallLogsDBManagementAmplify terminated.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagementAmplify gets restarted
bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory	Correlation Rules	bwPMenhancedCallLogsDBManagementAmplifyLaunched, bwPMenhancedCallLogsDBManagementAmplifyShutDown, bwPMenhancedCallLogsDBManagementAmplifyRestarted, bwPMenhancedCallLogsDBManagementAmplifyDeath and bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagementAmplify process
	Problem Type	Notification
	OID	20505
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the ECL DB Management Amplify application ran out of memory.
	Problem Text	enhancedCallLogsDBManagementAmplify ran out of memory.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagementAmplify gets restarted
	Correlation Rules	bwPMenhancedCallLogsDBManagementAmplifyLaunched, bwPMenhancedCallLogsDBManagementAmplifyShutDown, bwPMenhancedCallLogsDBManagementAmplifyRestarted, bwPMenhancedCallLogsDBManagementAmplifyDeath, and bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagementAmplify process
	Problem Type	Notification
	OID	20505
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the ECL DB Management Amplify application ran out of memory.
	Problem Text	enhancedCallLogsDBManagementAmplify ran out of memory.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagementAmplify gets restarted

## 8.6 BW-ECLReposFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-ECLReposFault MIB grouped by component.

This MIB defines the faults for the BroadWorks ECL Reporting Repository Application.

#### Applicable server(s):

[Profile Server](#).

### 8.6.1 SNMP Traps For Component: fileRepos

The table that follows describes the SNMP traps for the fileRepos subcomponent of the BW-ECLReposFault MIB.

**Table 46: SNMP Traps For BW-ECLReposFault:fileRepos**

Alarm Name	Attributes	Values
bwECLReposReplicationFailure	Problem Type	Alarm
	OID	13501
	Status	current
	Severity Range	high
	Description	A replication failure occurred.
	Problem Text	A replication failure occurred on peer: %npProfileServer% for %npWebAppContextPath%.
	Recommended Action(s)	Review server connectivity.
	Correlation Rules	
bwECLReposReplicationOffline	Problem Type	Alarm
	OID	13502
	Status	current
	Severity Range	critical
	Description	The replication stopped for one of the Profile Server peers. This was caused by exceeding the replication queue capacity.
	Problem Text	The replication for %npWebAppContextPath% on the Profile Server %npProfileServer% has stopped.
	Recommended Action(s)	The profile server is out of sync and needs to be restored.
	Correlation Rules	

### 8.7 BW-EnhancedCallLogsDBManagementFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-EnhancedCallLogsDBManagementFault MIB grouped by component.

This MIB defines the faults for the BroadWorks EnhancedCallLogsDBManagement Application.

#### Applicable server(s):

[Profile Server](#).

### 8.7.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-EnhancedCallLogsDBManagementFault MIB.

**Table 47: SNMP Traps For BW-EnhancedCallLogsDBManagementFault:processmonitor**

Alarm Name	Attributes	Values
bwPMenhancedCallLogsDBManagement Launched	Problem Type	Notification
	OID	11201
	Status	current
	Severity Range	informational
	Description	This notification indicates that the ECL DB Management application has been started.
	Problem Text	enhancedCallLogsDBManagement started.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementLaunched, bwPMenhancedCallLogsDBManagementShutDown, bwPMenhancedCallLogsDBManagementRestarted, bwPMenhancedCallLogsDBManagementDeath and bwPMenhancedCallLogsDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDBManagement ShutDown	Problem Type	Notification
	OID	11202
	Status	current
	Severity Range	informational
	Description	This notification indicates that the ECL DB Management application has been manually shut down.
	Problem Text	enhancedCallLogsDBManagement shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementLaunched, bwPMenhancedCallLogsDBManagementShutDown, bwPMenhancedCallLogsDBManagementRestarted, bwPMenhancedCallLogsDBManagementDeath and bwPMenhancedCallLogsDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDBManagement Restarted	Problem Type	Notification
	OID	11203
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the ECL DB Management application restart.
	Problem Text	enhancedCallLogsDBManagement restarted.
	Recommended Action(s)	
	Correlation Rules	

Alarm Name	Attributes	Values
bwPMenhancedCallLogsDBManagementDeath	Correlation Rules	bwPMenhancedCallLogsDBManagementLaunched, bwPMenhancedCallLogsDBManagementShutDown, bwPMenhancedCallLogsDBManagementRestarted, bwPMenhancedCallLogsDBManagementDeath and bwPMenhancedCallLogsDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
	Problem Type	Notification
	OID	11204
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the ECL DB Management application death.
	Problem Text	enhancedCallLogsDBManagement terminated.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagement gets restarted
	Correlation Rules	bwPMenhancedCallLogsDBManagementLaunched, bwPMenhancedCallLogsDBManagementShutDown, bwPMenhancedCallLogsDBManagementRestarted, bwPMenhancedCallLogsDBManagementDeath and bwPMenhancedCallLogsDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDBManagementOutOfMemory	Problem Type	Notification
	OID	11205
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the ECL DB Management application ran out of memory.
	Problem Text	enhancedCallLogsDBManagement ran out of memory.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagement gets restarted
	Correlation Rules	bwPMenhancedCallLogsDBManagementLaunched, bwPMenhancedCallLogsDBManagementShutDown, bwPMenhancedCallLogsDBManagementRestarted, bwPMenhancedCallLogsDBManagementDeath, and bwPMenhancedCallLogsDBManagementOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process

## 8.8 BW-EnhancedCallLogsDBManagementFault-XS-TAS MIB

This section presents SNMP traps (notifications and alarms) for the BW-EnhancedCallLogsDBManagementFault-XS-TAS MIB grouped by component.

This MIB defines the faults for the BroadWorks EnhancedCallLogsDBManagement XS-TAS Application.

**Applicable server(s):**

### 8.8.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-EnhancedCallLogsDBManagementFault-XS-TAS MIB.

**Table 48: SNMP Traps For BW-EnhancedCallLogsDBManagementFault-XS-TAS:processmonitor**

Alarm Name	Attributes	Values
bwPMenhancedCallLogsDBManagementXSTASLaunched	Problem Type	Notification
	OID	11601
	Status	current
	Severity Range	informational
	Description	This notification indicates that the ECL DB Management application has been started.
	Problem Text	enhancedCallLogsDBManagement XS-TAS started.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementXSTASLaunched, bwPMenhancedCallLogsDBManagementXSTASShutDown, bwPMenhancedCallLogsDBManagementXSTASRestarted, bwPMenhancedCallLogsDBManagementXSTASDeath and bwPMenhancedCallLogsDBManagementXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDBManagementXSTASShutDown	Problem Type	Notification
	OID	11602
	Status	current
	Severity Range	informational
	Description	This notification indicates that the ECL DB Management application has been manually shut down.
	Problem Text	enhancedCallLogsDBManagement XS-TAS shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementXSTASLaunched, bwPMenhancedCallLogsDBManagementXSTASShutDown, bwPMenhancedCallLogsDBManagementXSTASRestarted, bwPMenhancedCallLogsDBManagementXSTASDeath and bwPMenhancedCallLogsDBManagementXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDBManagementXSTASRestarted	Problem Type	Notification
	OID	11603
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the ECL DB Management application restart.

Alarm Name	Attributes	Values
	Problem Text	enhancedCallLogsDBManagement XS-TAS restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMenhancedCallLogsDBManagementXSTASLaunched, bwPMenhancedCallLogsDBManagementXSTASShutDown, bwPMenhancedCallLogsDBManagementXSTASRestarted, bwPMenhancedCallLogsDBManagementXSTASDeath and bwPMenhancedCallLogsDBManagementXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDB ManagementXSTASDeath	Problem Type	Notification
	OID	11604
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the ECL DB Management application death.
	Problem Text	enhancedCallLogsDBManagement XS-TAS terminated.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagement XS-TAS gets restarted
	Correlation Rules	bwPMenhancedCallLogsDBManagementXSTASLaunched, bwPMenhancedCallLogsDBManagementXSTASShutDown, bwPMenhancedCallLogsDBManagementXSTASRestarted, bwPMenhancedCallLogsDBManagementXSTASDeath and bwPMenhancedCallLogsDBManagementXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process
bwPMenhancedCallLogsDB ManagementXSTASOutOfMemory	Problem Type	Notification
	OID	11605
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the ECL DB Management application ran out of memory.
	Problem Text	enhancedCallLogsDBManagement XS-TAS ran out of memory.
	Recommended Action(s)	Make sure enhancedCallLogsDBManagement XS-TAS gets restarted
	Correlation Rules	bwPMenhancedCallLogsDBManagementXSTASLaunched, bwPMenhancedCallLogsDBManagementXSTASShutDown, bwPMenhancedCallLogsDBManagementXSTASRestarted, bwPMenhancedCallLogsDBManagementXSTASDeath, and bwPMenhancedCallLogsDBManagementXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the enhancedCallLogsDBManagement process

## 8.9 BW-FileReposExtdCaptureFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-FileReposExtdCaptureFault MIB grouped by component.

This MIB defines the faults for the BroadWorks FileReposExtdCapture Application.

### Applicable server(s):

[Profile Server](#).

### 8.9.1 SNMP Traps For Component: fileRepos

The table that follows describes the SNMP traps for the fileRepos subcomponent of the BW-FileReposExtdCaptureFault MIB.

**Table 49: SNMP Traps For BW-FileReposExtdCaptureFault:fileRepos**

Alarm Name	Attributes	Values
bwFileReposExtdCaptureReplication Failure	Problem Type	Alarm
	OID	12601
	Status	current
	Severity Range	high
	Description	A replication failure occurred.
	Problem Text	A replication failure occurred on peer : %npProfileServer% for %npWebAppContextPath%.
	Recommended Action(s)	Review the server connectivity.
	Correlation Rules	
bwFileReposExtdCaptureReplication Offline	Problem Type	Alarm
	OID	12602
	Status	current
	Severity Range	high
	Description	The replication stopped for one of the Profile Server peer. This was caused by exceeding the replication queue capacity.
	Problem Text	The replication for %npWebAppContextPath% on the Profile Server %npProfileServer% has stopped.
	Recommended Action(s)	The Profile Server is out of sync and needs to be restored.
	Correlation Rules	

## 8.10 BW-FileReposFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-FileReposFault MIB grouped by component.

This MIB defines the faults for the BroadWorks FileRepos Application.

### Applicable server(s):

[Profile Server](#).

### 8.10.1 SNMP Traps For Component: security

The table that follows describes the SNMP traps for the security subcomponent of the BW-FileReposFault MIB.

**Table 50: SNMP Traps For BW-FileReposFault:security**

Alarm Name	Attributes	Values
bwBroadworksFileReposDiskCipherError	Problem Type	Notification
	OID	12503
	Status	current
	Severity Range	critical
	Description	An error occurred in the disk cipher functionality that prevents encryption and decryption functionality.
	Problem Text	The Web application %npWebAppName% is unable to encrypt or decrypt files. %npErrorMessage%
	Recommended Action(s)	Perform a resynchronization from a Profile Server peer.
	Correlation Rules	

### 8.10.2 SNMP Traps For Component: fileRepos

The table that follows describes the SNMP traps for the fileRepos subcomponent of the BW-FileReposFault MIB.

**Table 51: SNMP Traps For BW-FileReposFault:fileRepos**

Alarm Name	Attributes	Values
bwFileReposReplicationFailure	Problem Type	Alarm
	OID	12501
	Status	current
	Severity Range	high
	Description	A replication failure occurred.
	Problem Text	A replication failure occurred on peer : %npProfileServer% for %npWebAppContextPath%.
	Recommended Action(s)	Review the server connectivity.
	Correlation Rules	
bwFileReposReplicationOffline	Problem Type	Alarm
	OID	12502
	Status	current
	Severity Range	high
	Description	The replication stopped for one of the Profile Server peer. This was caused by exceeding the replication queue capacity.
	Problem Text	The replication for %npWebAppContextPath% on the Profile Server %npProfileServer% has stopped.



Alarm Name	Attributes	Values
	Recommended Action(s)	The Profile Server is out of sync and needs to be restored.
	Correlation Rules	

## 8.11 BW-LicenseManagerFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-LicenseManagerFault MIB grouped by component.

This MIB defines the faults for the BroadWorks license manager daemon.

### Applicable server(s):

[Profile Server](#).

### 8.11.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-LicenseManagerFault MIB.

**Table 52: SNMP Traps For BW-LicenseManagerFault:processmonitor**

Alarm Name	Attributes	Values
bwPMImdLaunched	Problem Type	Notification
	OID	15801
	Status	current
	Severity Range	informational
	Description	This notification indicates that the license manager daemon has started.
	Problem Text	The license manager has started.
	Recommended Action(s)	
	Correlation Rules	bwPMImdLaunched, bwPMImdShutDown, bwPMImdRestarted, and bwPMImdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the LicenseController process
bwPMImdShutDown	Problem Type	Notification
	OID	15802
	Status	current
	Severity Range	informational
	Description	This notification indicates that the license manager daemon has been manually shut down.
	Problem Text	The license manager has shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMImdLaunched, bwPMImdShutDown, bwPMImdRestarted, and bwPMImdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the LicenseController process

Alarm Name	Attributes	Values
bwPMImdRestarted	Problem Type	Notification
	OID	15803
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the license manager daemon restart.
	Problem Text	The license manager has restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMImdLaunched, bwPMImdShutDown, bwPMImdRestarted, and bwPMImdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the LicenseController process
bwPMImdDeath	Problem Type	Notification
	OID	15804
	Status	current
	Severity Range	critical
	Description	This notification indicates that the license manager daemon has abnormally terminated.
	Problem Text	The License has terminated.
	Recommended Action(s)	Ensure license manager is restarted.
	Correlation Rules	bwPMImdLaunched, bwPMImdShutDown, bwPMImdRestarted, and bwPMImdDeath can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the LicenseController process

### 8.11.2 SNMP Traps For Component: licensing

The table that follows describes the SNMP traps for the licensing subcomponent of the BW-LicenseManagerFault MIB.

**Table 53: SNMP Traps For BW-LicenseManagerFault:licensing**

Alarm Name	Attributes	Values
bwLicensingNFMCommunicationLoss	Problem Type	Alarm
	OID	15806
	Status	current
	Severity Range	high
	Description	There is a communication loss with the Network Function Manager.
	Problem Text	The license manager could not connect to Networks Function Manager at %npNFMFqdn%.
	Recommended Action(s)	Fix the connection between this node and the Network Function Manager.

Alarm Name	Attributes	Values
bwLicensingLMCommunicationLoss	Correlation Rules	
	Problem Type	Alarm
	OID	15807
	Status	current
	Severity Range	high
	Description	There is a communication loss with the license manager.
	Problem Text	Unable to connect to the license manager.
	Recommended Action(s)	Ensure the license manager daemon is alive on this node.
bwLicensingViolation	Correlation Rules	
	Problem Type	Alarm
	OID	15808
	Status	current
	Severity Range	high
	Description	There is a license usage violation.
	Problem Text	This node is not allowed to use the current license, %npLicenseId%, %npBroadWorksRelease%, %npDate%.
	Recommended Action(s)	Please update the node with a valid license.
bwLicensingOverAllocation	Correlation Rules	
	Problem Type	Alarm
	OID	15809
	Status	current
	Severity Range	high
	Description	An application reports a license over-allocation.
	Problem Text	An application reports a license over-allocation.
	Recommended Action(s)	Please update the license or de-provision the over-allocated application to clear the condition.
bwLicensingNFMCommunicationLoss Grace	Correlation Rules	
	Problem Type	Notification
	OID	15810
	Status	current
	Severity Range	low to critical
	Description	There is a communication loss grace period.
	Problem Text	This node is in licensing communication loss grace period. %npGraceAction% will be executed in %npHours% hours.
	Recommended Action(s)	Fix the connection between this node and the Network Function Manager.

Alarm Name	Attributes	Values
bwLicensingLMCommunicationLossGrace	Correlation Rules	
	Problem Type	Notification
	OID	15811
	Status	current
	Severity Range	low to critical
	Description	There is a communication loss grace period.
	Problem Text	This node is in licensing communication loss grace period. %npGraceAction% will be executed in %npHours% hours.
	Recommended Action(s)	Ensure the license manager daemon is alive on the machine.
bwLicensingViolationGrace	Correlation Rules	
	Problem Type	Notification
	OID	15812
	Status	current
	Severity Range	low to high
	Description	There is a licensing violation grace period.
	Problem Text	This node is in licensing violation grace period. %npGraceAction% will be executed in %npHours% hours.
	Recommended Action(s)	Update the node with a valid license.
bwOverAllocationViolationGrace	Correlation Rules	
	Problem Type	Notification
	OID	15813
	Status	current
	Severity Range	low to high
	Description	There is a licensing over-allocation grace period.
	Problem Text	This node is in licensing over allocation grace period. %npGraceAction% will be executed in %npHours% hours.
	Recommended Action(s)	Update the license or de-provision the node to clear the over-allocation condition.
	Correlation Rules	
	Problem Type	Notification
	OID	15813
	Status	current
	Severity Range	low to high
	Description	There is a licensing over-allocation grace period.
	Problem Text	This node is in licensing over allocation grace period. %npGraceAction% will be executed in %npHours% hours.
	Recommended Action(s)	Update the license or de-provision the node to clear the over-allocation condition.

## 8.12 BW-MessageArchiveFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-MessageArchiveFault MIB grouped by component.

This MIB defines the faults for the BroadWorks Message Archive Application.

### Applicable server(s):

[Profile Server](#).

## 8.12.1 SNMP Traps For Component: fileRepos

The table that follows describes the SNMP traps for the fileRepos subcomponent of the BW-MessageArchiveFault MIB.

**Table 54: SNMP Traps For BW-MessageArchiveFault:fileRepos**

Alarm Name	Attributes	Values
bwMessageArchiveReplicationFailure	Problem Type	Alarm
	OID	15151
	Status	current
	Severity Range	high
	Description	A replication failure occurred.
	Problem Text	A replication failure occurred on peer : %npProfileServer% for %npWebAppContextPath%.
	Recommended Action(s)	Review the server connectivity.
	Correlation Rules	
bwMessageArchiveReplicationOffline	Problem Type	Alarm
	OID	15152
	Status	current
	Severity Range	high
	Description	The replication stopped for one of the Profile Server peer. This was caused by exceeding the replication queue capacity.
	Problem Text	The replication for %npWebAppContextPath% on the Profile Server %npProfileServer% has stopped.
	Recommended Action(s)	The Profile Server is out of sync and needs to be restored.
	Correlation Rules	

## 8.12.2 SNMP Traps For Component: messageArchiver

The table that follows describes the SNMP traps for the messageArchiver subcomponent of the BW-MessageArchiveFault MIB.

**Table 55: SNMP Traps For BW-MessageArchiveFault:messageArchiver**

Alarm Name	Attributes	Values
bwMessageArchiverRepository CommunicationFailure	Problem Type	Alarm
	OID	15153
	Status	current
	Severity Range	high
	Description	The MessageArchiver is unable to send files to the configured file repository.
	Problem Text	A failure to send files to the repository: %npRepositoryUri%.
	Recommended Action(s)	Review repository server connectivity.

Alarm Name	Attributes	Values
	Correlation Rules	

## 8.13 BW-OpenClientServerFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-OpenClientServerFault MIB grouped by component.

This MIB defines the faults for the BroadWorks Open Client Server.

**Applicable server(s):**

[Profile Server](#).

### 8.13.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-OpenClientServerFault MIB.

**Table 56: SNMP Traps For BW-OpenClientServerFault:processmonitor**

Alarm Name	Attributes	Values
bwPMOpenClientServerLaunched	Problem Type	Notification
	OID	501
	Status	current
	Severity Range	informational
	Description	This notification indicates that the Open Client Server has been started.
	Problem Text	Open Client Server started.
	Recommended Action(s)	
	Correlation Rules	bwPMOpenClientServerLaunched, bwPMOpenClientServerShutDown, bwPMOpenClientServerRestarted, bwPMOpenClientServerDeath, bwPMOpenClientServerStartupFailed and bwPMOpenClientServerOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the Open Client Server process available on some of the BroadWorks servers, for example, Application Server, Web Server, and EMS.
bwPMOpenClientServerShutDown	Problem Type	Notification
	OID	502
	Status	current
	Severity Range	informational
	Description	This notification indicates that the Open Client Server has been shut down.
	Problem Text	Open Client Server shut down.
	Recommended Action(s)	

Alarm Name	Attributes	Values
bwPMOpenClientServerRestarted	Correlation Rules	bwPMOpenClientServerLaunched, bwPMOpenClientServerShutDown, bwPMOpenClientServerRestarted, bwPMOpenClientServerDeath, bwPMOpenClientServerStartupFailed and bwPMOpenClientServerOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the Open Client Server process available on some of the BroadWorks servers, for example, Application Server, Web Server, and EMS.
	Problem Type	Notification
	OID	503
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the Open Client Server restart.
	Problem Text	Open Client Server restarted.
	Recommended Action(s)	
bwPMOpenClientServerDeath	Correlation Rules	bwPMOpenClientServerLaunched, bwPMOpenClientServerShutDown, bwPMOpenClientServerRestarted, bwPMOpenClientServerDeath, bwPMOpenClientServerStartupFailed and bwPMOpenClientServerOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the Open Client Server process available on some of the BroadWorks servers, for example, Application Server, Web Server, and EMS.
	Problem Type	Notification
	OID	504
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the Open Client Server terminated.
	Problem Text	Open Client Server terminated.
	Recommended Action(s)	Make sure the Open Client Server gets restarted.
bwPMOpenClientServerStartupFailed	Correlation Rules	bwPMOpenClientServerLaunched, bwPMOpenClientServerShutDown, bwPMOpenClientServerRestarted, bwPMOpenClientServerDeath, bwPMOpenClientServerStartupFailed and bwPMOpenClientServerOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the Open Client Server process available on some of the BroadWorks servers, for example, Application Server, Web Server, and EMS.
	Problem Type	Notification
	OID	505

Alarm Name	Attributes	Values
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the failed Open Client Server startup.
	Problem Text	Open Client Server startup failed.
	Recommended Action(s)	Make sure the primary application server is specified in the configuration file and either CAP proxy or OCI proxy is turned on.
	Correlation Rules	bwPMOpenClientServerLaunched, bwPMOpenClientServerShutDown, bwPMOpenClientServerRestarted, bwPMOpenClientServerDeath, bwPMOpenClientServerStartupFailed and bwPMOpenClientServerOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the Open Client Server process available on some of the BroadWorks servers, for example, Application Server, Web Server, and EMS.
bwPMOpenClientServerOutOfMemory	Problem Type	Notification
	OID	518
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the Open Client Server ran out of memory.
	Problem Text	OpenClientServer ran out of memory.
	Recommended Action(s)	Make sure OpenClientServer gets restarted
	Correlation Rules	bwPMOpenClientServerLaunched, bwPMOpenClientServerShutDown, bwPMOpenClientServerRestarted, bwPMOpenClientServerDeath, bwPMOpenClientServerStartupFailed, and bwPMOpenClientServerOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the Open Client Server process available on some of the BroadWorks servers, for example, Application Server, Web Server, and EMS.

### 8.13.2 SNMP Traps For Component: openClientServer

The table that follows describes the SNMP traps for the openClientServer subcomponent of the BW-OpenClientServerFault MIB.

**Table 57: SNMP Traps For BW-OpenClientServerFault:openClientServer**

Alarm Name	Attributes	Values
bwOpenClientServerASConnFailed	Problem Type	Alarm
	OID	507
	Status	current
	Severity Range	critical



Alarm Name	Attributes	Values
	Description	This notification indicates the Open Client Server failed to connect to an Application Server.
	Problem Text	Open Client Server failed to make %npProtocol% connection to Application Server %npRemoteAddress%.
	Recommended Action(s)	Make sure the Application Server can be reached using the specified IP address and port.
	Correlation Rules	
bwOpenClientServerClientConn Terminated	Problem Type	Notification
	OID	508
	Status	current
	Severity Range	informational
	Description	This notification indicates the Open Client Server terminated a connection between the Open Client Server and client application.
	Problem Text	Open Client Server terminated client connection for user %npUserId%.
	Recommended Action(s)	Have client re-log into the Open Client Server.
	Correlation Rules	
bwOpenClientServerASConnTerminated	Problem Type	Notification
	OID	509
	Status	current
	Severity Range	critical
	Description	This notification indicates a CAP/OSS connection between the Open Client Server and the Application Server has been terminated.
	Problem Text	A %npProtocol% connection has been terminated between the Open Client Server and Application Server %npRemoteAddress%.
	Recommended Action(s)	Make sure the Application Server can be reached using the specified IP address and port.
	Correlation Rules	
bwOpenClientServerNSConnTerminated	Problem Type	Notification
	OID	510
	Status	current
	Severity Range	critical
	Description	This notification indicates a connection between the Open Client Server and the Network Server has been terminated.
	Problem Text	A %npProtocol% connection has been terminated between the Open Client Server and Network Server %npRemoteAddress%.
	Recommended Action(s)	Make sure the Network Server can be reached using the specified IP address and port.

Alarm Name	Attributes	Values
bwOpenClientServerUserIdForceLogged Out	Correlation Rules	
	Problem Type	Notification
	OID	515
	Status	current
	Severity Range	low
	Description	A valid user ID was used to establish an OCI session on the Application Server but the user ID login level is not allowed by the Open Client Server proxying the OCI session. Therefore, the Open Client Server immediately force logged out the user ID session.
	Problem Text	UserId %npUserId% OCI session force logged out by the Open Client Server because the userId login level %npLoginLevel% is not allowed by the Open Client Server. Client connection address: %npRemoteAddress%
	Recommended Action(s)	Verify that the login level rejected by the Open Client Server should indeed be disallowed. If not, add it using the CLI. If so, verify why a successful login attempt was made using that userId.
bwOpenClientServerExtAuthConnFailed	Correlation Rules	
	Problem Type	Alarm
	OID	516
	Status	current
	Severity Range	critical
	Description	Cannot connect to the external authentication server.
	Problem Text	Could not connect to %npRemoteAddress%.
	Recommended Action(s)	Verify that the External Authentication server is up and running.
bwOpenClientServerExtAuthProcessing Failed	Correlation Rules	
	Problem Type	Alarm
	OID	517
	Status	current
	Severity Range	critical
	Description	The WAS returned a processing error while authenticating a user.
	Problem Text	Could not process authentication request on %npRemoteAddress%.
	Recommended Action(s)	
bwOpenClientServerOffline	Correlation Rules	
	Problem Type	Alarm
	OID	519
	Status	current

Alarm Name	Attributes	Values
	Severity Range	critical
	Description	This alarm is raised to indicate that the OCS is running but it is offline and not processing requests. The OCS goes offline because its configuration is such that it cannot perform its initialization.
	Problem Text	The OCS is not properly configured.
	Recommended Action(s)	Review the logs and the server configuration for further details. If the OCS is not being used, it can be undeployed.
	Correlation Rules	
bwOpenClientServerNbConnectionsLimit Exceeded	Problem Type	Alarm
	OID	520
	Status	current
	Severity Range	high
	Description	The number of connections exceeded the threshold level.
	Problem Text	The number of connection exceeded the threshold level.
	Recommended Action(s)	
	Correlation Rules	
bwOpenClientServerAuthenticationServer Unreachable	Problem Type	Alarm
	OID	521
	Status	current
	Severity Range	critical
	Description	The Open Client Server was unable to connect to the Authentication Server.
	Problem Text	The Open Client Server was unable to connect to the Authentication Server %npAuthenticationServer%.
	Recommended Action(s)	Identify why the Open Client Server cannot communicate with the authentication server.
	Correlation Rules	
bwOpenClientServerNSConnFailed	Problem Type	Alarm
	OID	506
	Status	deprecated
	Severity Range	critical
	Description	This notification indicates the Open Client Server failed to connect to a Network Server.
	Problem Text	Open Client Server failed to make %npProtocol% connection to Network Server %npRemoteAddress%.
	Recommended Action(s)	Make sure the Network Server can be reached using the specified IP address and port.
	Correlation Rules	

## 8.14 BW-ProfileBuilderAmplifyFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-ProfileBuilderAmplifyFault MIB grouped by component.

This MIB defines the faults for the BroadWorks profile builder Amplify Application.

### Applicable server(s):

*Profile Server.*

### 8.14.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-ProfileBuilderAmplifyFault MIB.

**Table 58: SNMP Traps For BW-ProfileBuilderAmplifyFault:processmonitor**

Alarm Name	Attributes	Values
bwPMPProfileBuilderAmplifyLaunched	Problem Type	Notification
	OID	18301
	Status	current
	Severity Range	informational
	Description	This notification indicates that the profile builder Amplify has been started.
	Problem Text	The profile builder Amplify has started.
	Recommended Action(s)	
	Correlation Rules	bwPMPProfileBuilderAmplifyLaunched, bwPMPProfileBuilderAmplifyShutDown, bwPMPProfileBuilderAmplifyRestarted, bwPMPProfileBuilderAmplifyDeath, and bwPMPProfileBuilderAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the profile builder Amplify process
bwPMPProfileBuilderAmplifyShutDown	Problem Type	Notification
	OID	18302
	Status	current
	Severity Range	informational
	Description	This notification indicates that the profile builder Amplify has been manually shut down.
	Problem Text	The profile builder Amplify has shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMPProfileBuilderAmplifyLaunched, bwPMPProfileBuilderAmplifyShutDown, bwPMPProfileBuilderAmplifyRestarted, bwPMPProfileBuilderAmplifyDeath, and bwPMPProfileBuilderAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the profile builder Amplify process

Alarm Name	Attributes	Values
bwPMPProfileBuilderAmplifyRestarted	Problem Type	Notification
	OID	18303
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the profile builder Amplify restart.
	Problem Text	The profile builder Amplify has restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMPProfileBuilderAmplifyLaunched, bwPMPProfileBuilderAmplifyShutDown, bwPMPProfileBuilderAmplifyRestarted, bwPMPProfileBuilderAmplifyDeath, and bwPMPProfileBuilderAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the profile builder Amplify process
bwPMPProfileBuilderAmplifyDeath	Problem Type	Notification
	OID	18304
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the profile builder Amplify death.
	Problem Text	The profile builder Amplify has terminated.
	Recommended Action(s)	Ensure profile builder Amplify is restarted.
	Correlation Rules	bwPMPProfileBuilderAmplifyLaunched, bwPMPProfileBuilderAmplifyShutDown, bwPMPProfileBuilderAmplifyRestarted, bwPMPProfileBuilderAmplifyDeath, and bwPMPProfileBuilderAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the profile builder Amplify process
bwPMPProfileBuilderAmplifyOutOfMemory	Problem Type	Notification
	OID	18305
	Status	current
	Severity Range	high
	Description	This notification provides the date and time when the profile builder Amplify application ran out of memory.
	Problem Text	The profile builder Amplify ran out of memory.
	Recommended Action(s)	Ensure profile builder Amplify is restarted.

Alarm Name	Attributes	Values
	Correlation Rules	bwPMPProfileBuilderAmplifyLaunched, bwPMPProfileBuilderAmplifyShutDown, bwPMPProfileBuilderAmplifyRestarted, bwPMPProfileBuilderAmplifyDeath, and bwPMPProfileBuilderAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the profile builder Amplify process.

## 8.15 BW-ProvisioningFault-XS-TAS MIB

This section presents SNMP traps (notifications and alarms) for the BW-ProvisioningFault-XS-TAS MIB grouped by component.

This MIB defines the faults for the Provisioning XS-TAS Server.

### Applicable server(s):

[Profile Server.](#)

### 8.15.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 59: SNMP Traps For BW-ProvisioningFault-XS-TAS:processmonitor**

Alarm Name	Attributes	Values
bwPMPProvisioningServerXSTAS Launched	Problem Type	Notification
	OID	11701
	Status	current
	Severity Range	informational
	Description	This notification indicates that the Provisioning XS-TAS Server has been started.
	Problem Text	Provisioning XS-TAS server started.
	Recommended Action(s)	
	Correlation Rules	bwPMPProvisioningServerXSTASLaunched, bwPMPProvisioningServerXSTASShutDown, bwPMPProvisioningServerXSTASRestarted, bwPMPProvisioningServerXSTASDeath and bwPMPProvisioningServerXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ProvisioningServerXSTAS process.
bwPMPProvisioningServerXSTASShut Down	Problem Type	Notification
	OID	11702
	Status	current
	Severity Range	informational
	Description	This notification indicates that the Provisioning XS-TAS Server has been manually shut down.
	Problem Text	Provisioning XS-TAS server shut down.

Alarm Name	Attributes	Values
	Recommended Action(s)	
	Correlation Rules	bwPMPProvisioningServerXSTASLaunched, bwPMPProvisioningServerXSTASShutDown, bwPMPProvisioningServerXSTASRestarted, bwPMPProvisioningServerXSTASDeath and bwPMPProvisioningServerXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ProvisioningServerXSTAS process.
bwPMPProvisioningServerXSTAS Restarted	Problem Type	Notification
	OID	11703
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the Provisioning XS-TAS Server restart.
	Problem Text	Provisioning XS-TAS server restarted.
	Recommended Action(s)	Log in BroadWorks.
	Correlation Rules	bwPMPProvisioningServerXSTASLaunched, bwPMPProvisioningServerXSTASShutDown, bwPMPProvisioningServerXSTASRestarted, bwPMPProvisioningServerXSTASDeath and bwPMPProvisioningServerXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ProvisioningServerXSTAS process.
bwPMPProvisioningServerXSTASDeath	Problem Type	Notification
	OID	11704
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the Provisioning XS-TAS Server death.
	Problem Text	Provisioning XS-TAS server terminated.
	Recommended Action(s)	Make sure the Provisioning XS-TAS server gets restarted
	Correlation Rules	bwPMPProvisioningServerXSTASLaunched, bwPMPProvisioningServerXSTASShutDown, bwPMPProvisioningServerXSTASRestarted, bwPMPProvisioningServerXSTASDeath and bwPMPProvisioningServerXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ProvisioningServerXSTAS process.
bwPMPProvisioningServerXSTASOutOfMemory	Problem Type	Notification
	OID	11757
	Status	current
	Severity Range	high

Alarm Name	Attributes	Values
	Description	This notification provides the date and time when the Provisioning XS-TAS Server ran out of memory.
	Problem Text	Provisioning XS-TAS server ran out of memory.
	Recommended Action(s)	Make sure the Provisioning XS-TAS server gets restarted
	Correlation Rules	bwPMProvisioningServerXSTASLaunched, bwPMProvisioningServerXSTASShutDown, bwPMProvisioningServerXSTASRestarted, bwPMProvisioningServerXSTASDeath, and bwPMProvisioningServerXSTASOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the ProvisioningServerXSTAS process.
bwProvDeviceManagementFtpBlockedWriteThresholdReached	Problem Type	Notification
	OID	11758
	Status	current
	Severity Range	high
	Description	The threshold has been reached for the number of occurrences of a Device Management (DM) FTP blocked write due to a network issue. As a result, future occurrences will leave the DM thread stuck and no more DM events will be processed. A restartbw is required to clear this condition.
	Problem Text	The threshold has been reached for the number of occurrences of a Device Management (DM) FTP blocked write due to a network issue. As a result, future occurrences will leave the DM thread stuck and no more DM events will be processed.
	Recommended Action(s)	Restart the server to clear the condition.
	Correlation Rules	

### 8.15.2 SNMP Traps For Component: conferencing

The table that follows describes the SNMP traps for the conferencing subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 60: SNMP Traps For BW-ProvisioningFault-XS-TAS:conferencing**

Alarm Name	Attributes	Values
bwProvICBridgeCommunicationError	Problem Type	Notification
	OID	11717
	Status	current
	Severity Range	medium
	Description	The alarm is generated at provisioning time when a communication problem to the BroadWorks Conferencing Server is detected.



Alarm Name	Attributes	Values
	Problem Text	Error detected while updating the information of an account on the integrated conference server: Bridge Name: %npBridgeName% Group Name: %npGroupName% Conference Server Address: %npRemoteAddress% Operation: %npOperation% Cause: %npReason%
	Recommended Action(s)	Validate that the conference server is properly configured: - Verify that the address is valid, - For FQDN, verify that the returned addresses are valid for the conference server,
	Correlation Rules	

### 8.15.3 SNMP Traps For Component: filesystem

The table that follows describes the SNMP traps for the filesystem subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 61: SNMP Traps For BW-ProvisioningFault-XS-TAS:filesystem**

Alarm Name	Attributes	Values
bwProvCPEDeviceConfigurationNumFiles Exceeded	Problem Type	Alarm
	OID	11743
	Status	current
	Severity Range	high
	Description	This alarm is generated when the Device Management system has exceeded the maximum number of files to be generated.
	Problem Text	The backlog of device files to be generated is too big and it has exceeded the maximum value %npMaximumNbItems%.
	Recommended Action(s)	When the Device Management system becomes less busy, manually regenerate files that were not generated.
	Correlation Rules	

### 8.15.4 SNMP Traps For Component: nssynch

The table that follows describes the SNMP traps for the nssynch subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

There is no visible fault for this component.

### 8.15.5 SNMP Traps For Component: transevent

The table that follows describes the SNMP traps for the transevent subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 62: SNMP Traps For BW-ProvisioningFault-XS-TAS:transevent**

Alarm Name	Attributes	Values
bwProvAddUserEvent	Problem Type	Notification
	OID	11709

Alarm Name	Attributes	Values
	Status	current
	Severity Range	informational
	Description	This notification indicates that a user is added.
	Problem Text	User Added: %npUserId%
	Recommended Action(s)	
	Correlation Rules	
bwProvDeleteUserEvent	Problem Type	Notification
	OID	11710
	Status	current
	Severity Range	informational
	Description	This notification indicates that a user is deleted.
	Problem Text	User Deleted: %npUserId%
	Recommended Action(s)	
	Correlation Rules	
bwProvAddGroupEvent	Problem Type	Notification
	OID	11711
	Status	current
	Severity Range	informational
	Description	This notification indicates that a group is added.
	Problem Text	Group Added: %npGroupId%
	Recommended Action(s)	
	Correlation Rules	
bwProvDeleteGroupEvent	Problem Type	Notification
	OID	11712
	Status	current
	Severity Range	informational
	Description	This notification indicates that a group is deleted.
	Problem Text	Group Deleted: %npGroupId%
	Recommended Action(s)	
	Correlation Rules	
bwProvUserAddressChangeEvent	Problem Type	Notification
	OID	11713
	Status	current

Alarm Name	Attributes	Values
	Severity Range	informational
	Description	This notification indicates that a user's address has changed.
	Problem Text	User Address Change: User: %npFirstName% %npLastName% Group: %npGroupName% Original Address: %npOriginalAddress% New Address: %npNewAddress%
	Recommended Action(s)	
	Correlation Rules	
bwProvGroupAddressChangeEvent	Problem Type	Notification
	OID	11714
	Status	current
	Severity Range	informational
	Description	This notification indicates that a group's address has changed.
	Problem Text	Group Address Change: Group: %npGroupName% Original Address: %npOriginalAddress% New Address: %npNewAddress%
	Recommended Action(s)	
	Correlation Rules	

### 8.15.6 SNMP Traps For Component: accounting

The table that follows describes the SNMP traps for the accounting subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 63: SNMP Traps For BW-ProvisioningFault-XS-TAS:accounting**

Alarm Name	Attributes	Values
bwProvPeerConnectionFailure	Problem Type	Notification
	OID	11746
	Status	current
	Severity Range	high
	Description	A failure occurred on a connection between the PS and a Diameter Peer (or the XS if operating in Relay mode).

Alarm Name	Attributes	Values
	Problem Text	Diameter Peer connection failure. Peer Diameter Identity: %npServerName% Peer IP address: %npRemoteAddress% Peer Diameter port: %npRemotePort%
	Recommended Action(s)	Verify that the specified Diameter Peer is up and running. Verify that there is network connection between the BroadWorks server and the Diameter Peer. Verify that the Diameter interface is properly configured on the BroadWorks server.
	Correlation Rules	

### 8.15.7 SNMP Traps For Component: licensing

The table that follows describes the SNMP traps for the licensing subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 64: SNMP Traps For BW-ProvisioningFault-XS-TAS:licensing**

Alarm Name	Attributes	Values
bwProvLicenseUserServiceAcntViolation	Problem Type	Notification
	OID	11708
	Status	current
	Severity Range	high
	Description	This notification indicates that the license allocation has exceeded the limit.
	Problem Text	License allocation has exceeded the limit for %npLicenseKey%.
	Recommended Action(s)	Please contact BroadSoft to obtain additional licenses.
	Correlation Rules	
bwProvServiceLicenseCollectionFailure	Problem Type	Notification
	OID	11747
	Status	current
	Severity Range	low
	Description	The Service License Collection Script could not successfully complete.
	Problem Text	The Service License Collection Script could not successfully complete. Error: %npError%
	Recommended Action(s)	If the problem persists, verify that there is no collision between the Service License Collection Script, and other maintenance tasks.
	Correlation Rules	

### 8.15.8 SNMP Traps For Component: ldap

The table that follows describes the SNMP traps for the ldap subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 65: SNMP Traps For BW-ProvisioningFault-XS-TAS:ldap**

Alarm Name	Attributes	Values
bwProvLDAPConnectionError	Problem Type	Notification
	OID	11715
	Status	current
	Severity Range	medium
	Description	Unable to establish a connection to the specified LDAP server.
	Problem Text	Could not connect to LDAP server: ldap://%npRemoteAddress%:%npRemotePort%
	Recommended Action(s)	*
	Correlation Rules	
bwProvLDAPConfigurationError	Problem Type	Notification
	OID	11716
	Status	current
	Severity Range	medium
	Description	Problem communicating with an LDAP server. The problem is related to a system configuration error.
	Problem Text	Could not connect to LDAP server: ldap://%npRemoteAddress%:%npRemotePort%
	Recommended Action(s)	*
	Correlation Rules	

### 8.15.9 SNMP Traps For Component: externalAuthentication

The table that follows describes the SNMP traps for the externalAuthentication subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 66: SNMP Traps For BW-ProvisioningFault-XS-TAS:externalAuthentication**

Alarm Name	Attributes	Values
bwProvExternalAuthenticationUnknown User	Problem Type	Notification
	OID	11719
	Status	current
	Severity Range	low
	Description	Applies to the scenario when the: User ID is not provided or unknown, and/or, Domain is required but not provided or unknown/incorrect.

Alarm Name	Attributes	Values
	Problem Text	The following user could not be authenticated through external authentication: UserId: %npUserId% Domain: %npDomain%
	Recommended Action(s)	Validate whether: 1. The user should exist in the BroadWorks system, or 2. The domain is required but not provided
	Correlation Rules	

#### 8.15.10 SNMP Traps For Component: servicePackMigration

The table that follows describes the SNMP traps for the servicePackMigration subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 67: SNMP Traps For BW-ProvisioningFault-XS-TAS:servicePackMigration**

Alarm Name	Attributes	Values
bwProvSrvPackMigrationTerminated	Problem Type	Notification
	OID	11720
	Status	current
	Severity Range	informational
	Description	An administrator deliberately terminated a migration task before it was finished.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was terminated by administrator %npUserId%.
	Recommended Action(s)	
	Correlation Rules	
bwProvSrvPackMigrationCompletedWith Errors	Problem Type	Notification
	OID	11721
	Status	current
	Severity Range	medium
	Description	A migration task ran to completion, but there were one or more errors.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% completed with %npNbOfErrors% errors.
	Recommended Action(s)	Examine the migration task report to see the error details.
	Correlation Rules	
bwProvSrvPackMigrationStoppedDueTo Errors	Problem Type	Notification
	OID	11722
	Status	current

Alarm Name	Attributes	Values
	Severity Range	medium
	Description	A migration task was automatically stopped by the system because the number of errors reached the error threshold.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was automatically stopped because there were %npNbOfErrors% errors.
	Recommended Action(s)	Examine the migration task report to see the error details.
	Correlation Rules	
bwProvSrvPackMigrationStoppedDueToTimeLimit	Problem Type	Notification
	OID	11723
	Status	current
	Severity Range	medium
	Description	A migration task was automatically stopped by the system because the duration of the task reached the maximum allowed time.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was automatically stopped because the duration of the task reached the maximum allowed time of %npTimeLength% hours.
	Recommended Action(s)	Examine the migration task report to determine why the task did not finish in the allowed time. Consider rescheduling the task to resume processing.
	Correlation Rules	
bwProvSrvPackMigrationStoppedBySysShutdown	Problem Type	Notification
	OID	11724
	Status	current
	Severity Range	medium
	Description	A migration task was automatically stopped by the system because the system was shut down.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was automatically stopped because the system was shutdown.
	Recommended Action(s)	Copy and reschedule the task to resume processing.
	Correlation Rules	
bwProvSrvPackMigrationFoundUnfinishedTask	Problem Type	Notification
	OID	11725
	Status	current
	Severity Range	medium
	Description	An unfinished migration task was found during system restart. This could happen if the system is not shut down gracefully.

Alarm Name	Attributes	Values
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was found in an unfinished state during system restart.
	Recommended Action(s)	Consider rescheduling the task to resume processing.
	Correlation Rules	
bwProvSrvPackMigrationLicense Violation	Problem Type	Notification
	OID	11726
	Status	current
	Severity Range	medium
	Description	A migration task was stopped because of pre-existing system license violation.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% cannot be executed because system-level feature licenses are already violated.
	Recommended Action(s)	Purchase additional feature licenses before attempting any service pack migrations.
	Correlation Rules	
bwProvSrvPackMigrationSpSrvQuantity Violation	Problem Type	Notification
	OID	11727
	Status	current
	Severity Range	medium
	Description	A migration task was stopped because of pre-existing system license violation.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was stopped because the service provider has no more service quantities for feature %npFeatureName%.
	Recommended Action(s)	Examine the service quantities for the service provider and possibly all groups to ensure adequate quantities are available. Then copy and reschedule the task to resume processing.
	Correlation Rules	
bwProvSrvPackMigrationSystemError	Problem Type	Notification
	OID	11728
	Status	current
	Severity Range	medium
	Description	A migration task was stopped due to a non-recoverable system error.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% cannot continue because a system error has occurred.
	Recommended Action(s)	Examine the migration task report and the provisioning server log file to determine the cause of the system error.



Alarm Name	Attributes	Values
	Correlation Rules	

### 8.15.11 SNMP Traps For Component: callLogs

The table that follows describes the SNMP traps for the callLogs subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 68: SNMP Traps For BW-ProvisioningFault-XS-TAS:callLogs**

Alarm Name	Attributes	Values
bwProvCallLogSOAPServerUnreachable	Problem Type	Alarm
	OID	11729
	Status	current
	Severity Range	high
	Description	A Call Detail Server is not responding to read Requests.
	Problem Text	Call Log SOAP Server %npServerName% is not responding. Configured Address: %npConfiguredAddress% Resolved Address: %npResolvedAddress%
	Recommended Action(s)	Verify that this SOAP server is up and running. Verify that there is network connection between Provisioning XS-TAS Server and SOAP server.
	Correlation Rules	
bwProvCallLogSchemaInstance ProvisioningOverload	Problem Type	Alarm
	OID	11756
	Status	current
	Severity Range	low, high
	Description	This alarm indicates that the number of users currently provisioned to use the given Enhanced Call Logs DB schema instance is overloaded as defined per Broadworks standards.  Low: Current number of users assigned to the instance is above 200K.  High: Current number of users assigned to the instance is above 300K.
	Problem Text	The number of users currently using Enhanced Call Logs repository schema instance %npDBSchemaName% is overloaded.
	Recommended Action(s)	Ensure any new groups or enterprises with Enhanced Call logs service are not using the overloaded repository instance.
	Correlation Rules	

### 8.15.12 SNMP Traps For Component: ociReporting

The table that follows describes the SNMP traps for the ociReporting subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 69: SNMP Traps For BW-ProvisioningFault-XS-TAS:ociReporting**

Alarm Name	Attributes	Values
bwProvValidationConnectionFailure	Problem Type	Notification
	OID	11733
	Status	current
	Severity Range	low
	Description	Connection between the Provisioning XS-TAS Server and the Execution Server for provisioning validation cannot be established.
	Problem Text	The Provisioning XS-TAS Server could not connect to the Execution Server for Provisioning Validation.
	Recommended Action(s)	Try restarting the Provisioning XS-TAS Server or disabling Provisioning Validation using the CLI.
	Correlation Rules	

### 8.15.13 SNMP Traps For Component: bcct

The table that follows describes the SNMP traps for the bcct subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 70: SNMP Traps For BW-ProvisioningFault-XS-TAS:bcct**

Alarm Name	Attributes	Values
bwProvCallCenterConnectionFailure	Problem Type	Alarm
	OID	11744
	Status	current
	Severity Range	high
	Description	Connection between the Provisioning XS-TAS Server and the Execution Server for Call Center cannot be established.
	Problem Text	The Provisioning XS-TAS Server could not connect to the Execution Server for Call Center. Remote IP address: %npRemoteAddress%
	Recommended Action(s)	Try restarting the Application.
	Correlation Rules	This alarm is cleared by the Provisioning XS-TAS Server once connection is re-established or reconfigured.

### 8.15.14 SNMP Traps For Component: mm

The table that follows describes the SNMP traps for the mm subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 71: SNMP Traps For BW-ProvisioningFault-XS-TAS:mm**

Alarm Name	Attributes	Values
bwProvMobilityManagerUnreachable	Problem Type	Notification
	OID	11740
	Status	current

Alarm Name	Attributes	Values
	Severity Range	high
	Description	A connection could not be established between BroadWorks and Mobility Manager.
	Problem Text	Mobility Manager URL: %npUrl% Error: %npMessage%
	Recommended Action(s)	Verify that the MM address is reachable. Verify that the MM is up and running.
	Correlation Rules	
bwProvMobilityManagerError	Problem Type	Notification
	OID	11741
	Status	current
	Severity Range	high
	Description	Mobility Manager returned an error.
	Problem Text	Mobility Manager returned an error: %npMessage%
	Recommended Action(s)	
	Correlation Rules	

#### 8.15.15 SNMP Traps For Component: sh

The table that follows describes the SNMP traps for the sh subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 72: SNMP Traps For BW-ProvisioningFault-XS-TAS:sh**

Alarm Name	Attributes	Values
bwProvShNoAvailableHosts	Problem Type	Notification
	OID	11734
	Status	current
	Severity Range	high
	Description	This fault is generated when host selection has exhausted all hosts.
	Problem Text	Command %npCommand% for %npPublicIdentity% data reference %npDataReference% failed due to no available hosts.
	Recommended Action(s)	Please check connectivity and availability of HSS hosts. Once connectivity is established, refresh the public identities that failed refresh.
	Correlation Rules	
bwProvShUserUnknownInHSS	Problem Type	Notification
	OID	11735
	Status	current
	Severity Range	high

Alarm Name	Attributes	Values
	Description	This fault is generated whenever the Provisioning XS-TAS Server receives an answer indicating that the user is unknown in the HSS.
	Problem Text	Command %npCommand% for %npPublicIdentity% failed. Public user identity is unknown in the HSS.
	Recommended Action(s)	The public identities in the HSS and Provisioning XS-TAS Server are out of synch. Ensure that the public identities in the Provisioning XS-TAS Server and HSS are in synch. Refresh affected public identities.
	Correlation Rules	
bwProvShUserUnknownInAS	Problem Type	Notification
	OID	11736
	Status	current
	Severity Range	high
	Description	This fault is generated whenever the Provisioning XS-TAS Server receives a request for a public identity that is unknown.
	Problem Text	Received command %npCommand% for unknown public identity %npPublicIdentity%.
	Recommended Action(s)	The public identities in the HSS and Provisioning XS-TAS Server are out of synch. Ensure that the public identities in the Provisioning XS-TAS Server and HSS are in synch. Refresh affected public identities.
bwProvShGeneralErrorReceived	Correlation Rules	
	Problem Type	Notification
	OID	11737
	Status	current
	Severity Range	high
	Description	This fault is generated whenever the Provisioning XS-TAS Server encounters an error that results in the failure of the public identity refresh procedure for reasons other than unknown user or host selection exhaustion.
	Problem Text	Command %npCommand% for %npPublicIdentity% encountered %npResultCodeType% error %npResultCode%.
	Recommended Action(s)	
bwProvShSystemRefreshInitiated	Correlation Rules	
	Problem Type	Notification
	OID	11738
	Status	current
	Severity Range	informational
	Description	This notification is generated whenever the Provisioning XS-TAS Server initiates the system refresh procedure over the Sh Interface.

Alarm Name	Attributes	Values
	Problem Text	System refresh initiated.
	Recommended Action(s)	
	Correlation Rules	
bwProvShSystemRefreshTerminated	Problem Type	Notification
	OID	11739
	Status	current
	Severity Range	informational
	Description	This notification is generated whenever the Provisioning XS-TAS Server has stopped the system refresh procedure over the Sh Interface.
	Problem Text	System refresh terminated due to %npReason%.
	Recommended Action(s)	
	Correlation Rules	

#### 8.15.16 SNMP Traps For Component: ps

The table that follows describes the SNMP traps for the ps subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

There is no visible fault for this component.

#### 8.15.17 SNMP Traps For Component: diameter

The table that follows describes the SNMP traps for the diameter subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 73: SNMP Traps For BW-ProvisioningFault-XS-TAS:diameter**

Alarm Name	Attributes	Values
bwProvInterfaceInitializationError	Problem Type	Notification
	OID	11745
	Status	current
	Severity Range	high
	Description	The Diameter Interface cannot be initialized.
	Problem Text	The Diameter Interface cannot be initialized. Error message: %npExceptionMessage%
	Recommended Action(s)	Verify that the Diameter interface is properly configured on the Provisioning XS-TAS Server.
	Correlation Rules	

#### 8.15.18 SNMP Traps For Component: subscriberProfileSync

The table that follows describes the SNMP traps for the subscriberProfileSync subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 74: SNMP Traps For BW-ProvisioningFault-XS-TAS:subscriberProfileSync**

Alarm Name	Attributes	Values
bwProvSubscriberProfileSyncIOError	Problem Type	Alarm
	OID	11748
	Status	current
	Severity Range	medium
	Description	Several attempt to sync a profile to the SubscriberAgent failed due to a communication issue.
	Problem Text	Could not sync a profile to the subscriberAgent due to a communication error. Affected profile : %profileDescription%
	Recommended Action(s)	Please check the SubscriberAgent status connections.
	Correlation Rules	
bwProvSubscriberProfileSyncDataError	Problem Type	Notification
	OID	11749
	Status	current
	Severity Range	high
	Description	Several attempt to sync a profile to the SubscriberAgent failed.
	Problem Text	Could not sync a profile to the SubscriberAgent due to a data error. Affected profile : %profileDescription%
	Recommended Action(s)	
	Correlation Rules	

#### 8.15.19 SNMP Traps For Component: ccReporting

The table that follows describes the SNMP traps for the ccReporting subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 75: SNMP Traps For BW-ProvisioningFault-XS-TAS:ccReporting**

Alarm Name	Attributes	Values
bwProvCCScheduledReportFailed	Problem Type	Alarm
	OID	11750
	Status	current
	Severity Range	medium
	Description	Failed to generate a call center scheduled report.
	Problem Text	Cannot generate a call center scheduled report due to connection or overload issues with CCReporting Webapps %npNetAddress%. The report %npReportName% was scheduled by %npUserId% to be run at %npDateTime%.

Alarm Name	Attributes	Values
	Recommended Action(s)	Check the connectivity between Provisioning XS-TAS Server and CCRReporting Webapps and make sure the Webapps are not overloaded.
	Correlation Rules	
bwProvCCSscheduledReportGeneration Failure	Problem Type	Notification
	OID	11752
	Status	current
	Severity Range	medium
	Description	Failed to generate a call center scheduled report.
	Problem Text	Cannot generate a call center scheduled report due to connection or overload issues with the Call Center Reporting (CCR) web application's %npNetAddress%. The report %npReportName% was scheduled by %npUserId% to be run at %npDateTime%.
	Recommended Action(s)	Check the connectivity between the Provisioning XS-TAS Server and the CCR web applications and make sure that the web applications are not overloaded.
bwProvCCSscheduledReportConfiguration Failure	Correlation Rules	
	Problem Type	Notification
	OID	11753
	Status	current
	Severity Range	medium
	Description	Failed to start the call center scheduling task.
	Problem Text	Cannot start the task of scheduling reports due to missing configuration: template repository application URL, report application URL and SMTP primary server must all be configured.
	Recommended Action(s)	Make sure the template repository application URL, the report application URL and the SMTP primary server are configured at the CLI.
	Correlation Rules	

### 8.15.20 SNMP Traps For Component: broadCloud

The table that follows describes the SNMP traps for the broadCloud subcomponent of the BW-ProvisioningFault-XS-TAS MIB.

**Table 76: SNMP Traps For BW-ProvisioningFault-XS-TAS:broadCloud**

Alarm Name	Attributes	Values
bwProvBroadCloudTransactionFailure	Problem Type	Notification
	OID	11754
	Status	current
	Severity Range	medium
	Description	Failed to execute provisioning request to the BroadCloud server.

Alarm Name	Attributes	Values
	Problem Text	Failed to execute %npBroadCloudRequest% request to the BroadCloud server for user %npUserId% with BroadCloud Uid %npBroadCloudUid% regarding service %npBroadCloudService% for the following reason: %npBroadCloudFailureReason%.
	Recommended Action(s)	Contact BroadWorks TAC support
	Correlation Rules	
bwProvBroadCloudOutOfSync	Problem Type	Notification
	OID	11755
	Status	current
	Severity Range	medium
	Description	Failed execute the rollback request to BroadCloud
	Problem Text	Failed to execute %npBroadCloudRequest% request to the BroadCloud server for user %npUserId% with BroadCloud Uid %npBroadCloudUid% regarding service %npBroadCloudService% during a rollback procedure.
	Recommended Action(s)	Contact BroadWorks TAC support
	Correlation Rules	

## 8.16 BW-ProvisioningServerAmplifyFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-ProvisioningServerAmplifyFault MIB grouped by component.

This MIB defines the faults for the BroadWorks provisioning server Amplify Application.

### Applicable server(s):

[Profile Server.](#)

### 8.16.1 SNMP Traps For Component: processmonitor

The table that follows describes the SNMP traps for the processmonitor subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 77: SNMP Traps For BW-ProvisioningServerAmplifyFault:processmonitor**

Alarm Name	Attributes	Values
bwPMProvisioningServerAmplify Launched	Problem Type	Notification
	OID	21101
	Status	current
	Severity Range	informational
	Description	This notification indicates that the provisioning server Amplify has been started.
	Problem Text	The provisioning server Amplify has started.
	Recommended Action(s)	



Alarm Name	Attributes	Values
	Correlation Rules	bwPMPProvisioningServerAmplifyLaunched, bwPMPProvisioningServerAmplifyShutDown, bwPMPProvisioningServerAmplifyRestarted, bwPMPProvisioningServerAmplifyDeath, and bwPMPProvisioningServerAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the provisioning server Amplify process
bwPMPProvisioningServerAmplifyShut Down	Problem Type	Notification
	OID	21102
	Status	current
	Severity Range	informational
	Description	This notification indicates that the provisioning server Amplify has been manually shut down.
	Problem Text	The provisioning server Amplify has shutdown.
	Recommended Action(s)	
	Correlation Rules	bwPMPProvisioningServerAmplifyLaunched, bwPMPProvisioningServerAmplifyShutDown, bwPMPProvisioningServerAmplifyRestarted, bwPMPProvisioningServerAmplifyDeath, and bwPMPProvisioningServerAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the provisioning server Amplify process
bwPMPProvisioningServerAmplify Restarted	Problem Type	Notification
	OID	21103
	Status	current
	Severity Range	informational
	Description	This notification provides the date and time of the provisioning server Amplify restart.
	Problem Text	The provisioning server Amplify has restarted.
	Recommended Action(s)	
	Correlation Rules	bwPMPProvisioningServerAmplifyLaunched, bwPMPProvisioningServerAmplifyShutDown, bwPMPProvisioningServerAmplifyRestarted, bwPMPProvisioningServerAmplifyDeath, and bwPMPProvisioningServerAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the provisioning server Amplify process
bwPMPProvisioningServerAmplifyDeath	Problem Type	Notification
	OID	21104
	Status	current
	Severity Range	critical
	Description	This notification provides the date and time of the provisioning server Amplify death.

Alarm Name	Attributes	Values
	Problem Text	The provisioning server Amplify has terminated.
	Recommended Action(s)	Ensure provisioning server Amplify is restarted.
	Correlation Rules	bwPMProvisioningServerAmplifyLaunched, bwPMProvisioningServerAmplifyShutDown, bwPMProvisioningServerAmplifyRestarted, bwPMProvisioningServerAmplifyDeath, and bwPMProvisioningServerAmplifyOutOfMemory can be correlated into a single alarm. These events have to be considered as a transition of the state machine for the management of the provisioning server Amplify process
bwAmplifyDeviceManagementFtpBlockedWriteThresholdReached	Problem Type	Notification
	OID	21116
	Status	current
	Severity Range	high
	Description	The threshold has been reached for the number of occurrences of a Device Management (DM) FTP blocked write due to a network issue. As a result, future occurrences will leave the DM thread stuck and no more DM events will be processed. A restartbw is required to clear this condition.
	Problem Text	The threshold has been reached for the number of occurrences of a Device Management (DM) FTP blocked write due to a network issue. As a result, future occurrences will leave the DM thread stuck and no more DM events will be processed.
	Recommended Action(s)	Restart the server to clear the condition.
	Correlation Rules	

### 8.16.2 SNMP Traps For Component: conferencing

The table that follows describes the SNMP traps for the conferencing subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 78: SNMP Traps For BW-ProvisioningServerAmplifyFault:conferencing**

Alarm Name	Attributes	Values
bwAmplifyICBridgeCommunicationError	Problem Type	Notification
	OID	21126
	Status	current
	Severity Range	medium
	Description	The alarm is generated at provisioning time when a communication problem to the BroadWorks Conferencing Server is detected.

Alarm Name	Attributes	Values
	Problem Text	Error detected while updating the information of an account on the integrated conference server: Bridge Name: %npBridgeName% Group Name: %npGroupName% Conference Server Address: %npRemoteAddress% Operation: %npOperation% Cause: %npReason%
	Recommended Action(s)	Validate that the conference server is properly configured: - Verify that the address is valid, - For FQDN, verify that the returned addresses are valid for the conference server,
	Correlation Rules	

### 8.16.3 SNMP Traps For Component: filesystem

The table that follows describes the SNMP traps for the filesystem subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 79: SNMP Traps For BW-ProvisioningServerAmplifyFault:filesystem**

Alarm Name	Attributes	Values
bwAmplifyCPEDeviceConfigurationNumFilesExceeded	Problem Type	Alarm
	OID	21149
	Status	current
	Severity Range	high
	Description	This alarm is generated when the Device Management system has exceeded the maximum number of files to be generated.
	Problem Text	The backlog of device files to be generated is too big and it has exceeded the maximum value %npMaximumNbItems%.
	Recommended Action(s)	When the Device Management system becomes less busy, manually regenerate files that were not generated.
	Correlation Rules	

### 8.16.4 SNMP Traps For Component: transevent

The table that follows describes the SNMP traps for the transevent subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 80: SNMP Traps For BW-ProvisioningServerAmplifyFault:transevent**

Alarm Name	Attributes	Values
bwAmplifyAddUserEvent	Problem Type	Notification
	OID	21118
	Status	current
	Severity Range	informational
	Description	This notification indicates that a user is added.

Alarm Name	Attributes	Values
	Problem Text	User Added: %npUserId%
	Recommended Action(s)	
	Correlation Rules	
bwAmplifyDeleteUserEvent	Problem Type	Notification
	OID	21119
	Status	current
	Severity Range	informational
	Description	This notification indicates that a user is deleted.
	Problem Text	User Deleted: %npUserId%
	Recommended Action(s)	
	Correlation Rules	
bwAmplifyAddGroupEvent	Problem Type	Notification
	OID	21120
	Status	current
	Severity Range	informational
	Description	This notification indicates that a group is added.
	Problem Text	Group Added: %npGroupId%
	Recommended Action(s)	
	Correlation Rules	
bwAmplifyDeleteGroupEvent	Problem Type	Notification
	OID	21121
	Status	current
	Severity Range	informational
	Description	This notification indicates that a group is deleted.
	Problem Text	Group Deleted: %npGroupId%
	Recommended Action(s)	
	Correlation Rules	
bwAmplifyUserAddressChangeEvent	Problem Type	Notification
	OID	21122
	Status	current
	Severity Range	informational
	Description	This notification indicates that a user's address has changed.

Alarm Name	Attributes	Values
	Problem Text	User Address Change: User: %npFirstName% %npLastName% Group: %npGroupName% Original Address: %npOriginalAddress% New Address: %npNewAddress%
	Recommended Action(s)	
	Correlation Rules	
bwAmplifyGroupAddressChangeEvent	Problem Type	Notification
	OID	21123
	Status	current
	Severity Range	informational
	Description	This notification indicates that a group's address has changed.
	Problem Text	Group Address Change: Group: %npGroupName% Original Address: %npOriginalAddress% New Address: %npNewAddress%
	Recommended Action(s)	
	Correlation Rules	

### 8.16.5 SNMP Traps For Component: accounting

The table that follows describes the SNMP traps for the accounting subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 81: SNMP Traps For BW-ProvisioningServerAmplifyFault:accounting**

Alarm Name	Attributes	Values
bwAmplifyPsPeerConnectionFailure	Problem Type	Notification
	OID	21106
	Status	current
	Severity Range	high
	Description	A failure occurred on a connection between the PS and a Diameter Peer (or the XS if operating in Relay mode).
	Problem Text	Diameter Peer connection failure. Peer Diameter Identity: %npServerName% Peer IP address: %npRemoteAddress% Peer Diameter port: %npRemotePort%

Alarm Name	Attributes	Values
	Recommended Action(s)	<p>Verify that the specified Diameter Peer is up and running.</p> <p>Verify that there is network connection between the BroadWorks server and the Diameter Peer.</p> <p>Verify that the Diameter interface is properly configured on the BroadWorks server.</p>
	Correlation Rules	

### 8.16.6 SNMP Traps For Component: licensing

The table that follows describes the SNMP traps for the licensing subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 82: SNMP Traps For BW-ProvisioningServerAmplifyFault:licensing**

Alarm Name	Attributes	Values
bwAmplifyServiceLicenseCollection Failure	Problem Type	Notification
	OID	21107
	Status	current
	Severity Range	low
	Description	The Service License Collection Script could not successfully complete.
	Problem Text	The Service License Collection Script could not successfully complete. Error: %npError%
	Recommended Action(s)	If the problem persists, verify that there is no collision between the Service License Collection Script, and other maintenance tasks.
	Correlation Rules	
bwAmplifyLicenseUserServiceAccnt Violation	Problem Type	Notification
	OID	21117
	Status	current
	Severity Range	high
	Description	This notification indicates that the license allocation has exceeded the limit.
	Problem Text	License allocation has exceeded the limit for %npLicenseKey%.
	Recommended Action(s)	Please contact BroadSoft to obtain additional licenses.
	Correlation Rules	

### 8.16.7 SNMP Traps For Component: ldap

The table that follows describes the SNMP traps for the ldap subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 83: SNMP Traps For BW-ProvisioningServerAmplifyFault:ldap**

Alarm Name	Attributes	Values
bwAmplifyLDAPConnectionError	Problem Type	Notification

Alarm Name	Attributes	Values
	OID	21124
	Status	current
	Severity Range	medium
	Description	Unable to establish a connection to the specified LDAP server.
	Problem Text	Could not connect to LDAP server: ldap://%npRemoteAddress %:%npRemotePort%
	Recommended Action(s)	*
	Correlation Rules	

### 8.16.8 SNMP Traps For Component: externalAuthentication

The table that follows describes the SNMP traps for the externalAuthentication subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 84: SNMP Traps For BW-ProvisioningServerAmplifyFault:externalAuthentication**

Alarm Name	Attributes	Values
bwAmplifyExternalAuthenticationUnknown User	Problem Type	Notification
	OID	21128
	Status	current
	Severity Range	low
	Description	Applies to the scenario when the: User ID is not provided or unknown, and/or, Domain is required but not provided or unknown/incorrect.
	Problem Text	The following user could not be authenticated through external authentication: UserId: %npUserId% Domain: %npDomain%
	Recommended Action(s)	Validate whether: 1. The user should exist in the BroadWorks system, or 2. The domain is required but not provided
	Correlation Rules	

### 8.16.9 SNMP Traps For Component: servicePackMigration

The table that follows describes the SNMP traps for the servicePackMigration subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 85: SNMP Traps For BW-ProvisioningServerAmplifyFault:servicePackMigration**

Alarm Name	Attributes	Values
bwAmplifySvcPackMigrationTerminated	Problem Type	Notification
	OID	21129
	Status	current

Alarm Name	Attributes	Values
	Severity Range	informational
	Description	An administrator deliberately terminated a migration task before it was finished.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was terminated by administrator %npUserId%.
	Recommended Action(s)	
	Correlation Rules	
bwAmplifySrvcPackMigrationCompletedWithErrors	Problem Type	Notification
	OID	21130
	Status	current
	Severity Range	medium
	Description	A migration task ran to completion, but there were one or more errors.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% completed with %npNbOfErrors% errors.
	Recommended Action(s)	Examine the migration task report to see the error details.
bwAmplifySrvcPackMigrationStoppedDueToErrors	Problem Type	Notification
	OID	21131
	Status	current
	Severity Range	medium
	Description	A migration task was automatically stopped by the system because the number of errors reached the error threshold.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was automatically stopped because there were %npNbOfErrors% errors.
	Recommended Action(s)	Examine the migration task report to see the error details.
bwAmplifySrvcPackMigrationStoppedDueToTimeLimit	Problem Type	Notification
	OID	21132
	Status	current
	Severity Range	medium
	Description	A migration task was automatically stopped by the system because the duration of the task reached the maximum allowed time.



Alarm Name	Attributes	Values
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was automatically stopped because the duration of the task reached the maximum allowed time of %npTimeLength% hours.
	Recommended Action(s)	Examine the migration task report to determine why the task did not finish in the allowed time. Consider rescheduling the task to resume processing.
	Correlation Rules	
bwAmplifySrvPackMigrationStoppedBySysShutdown	Problem Type	Notification
	OID	21133
	Status	current
	Severity Range	medium
	Description	A migration task was automatically stopped by the system because the system was shut down.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was automatically stopped because the system was shutdown.
	Recommended Action(s)	Copy and reschedule the task to resume processing.
	Correlation Rules	
bwAmplifySrvPackMigrationFoundUnfinishedTask	Problem Type	Notification
	OID	21134
	Status	current
	Severity Range	medium
	Description	An unfinished migration task was found during system restart. This could happen if the system is not shut down gracefully.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was found in an unfinished state during system restart.
	Recommended Action(s)	Consider rescheduling the task to resume processing.
	Correlation Rules	
bwAmplifySrvPackMigrationLicenseViolation	Problem Type	Notification
	OID	21135
	Status	current
	Severity Range	medium
	Description	A migration task was stopped because of pre-existing system license violation.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% cannot be executed because system-level feature licenses are already violated.
	Recommended Action(s)	Purchase additional feature licenses before attempting any service pack migrations.

Alarm Name	Attributes	Values
bwAmplifySrvPackMigrationSpSrvQuantityViolation	Correlation Rules	
	Problem Type	Notification
	OID	21136
	Status	current
	Severity Range	medium
	Description	A migration task was stopped because of pre-existing system license violation.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% was stopped because the service provider has no more service quantities for feature %npFeatureName%.
	Recommended Action(s)	Examine the service quantities for the service provider and possibly all groups to ensure adequate quantities are available. Then copy and reschedule the task to resume processing.
bwAmplifySrvPackMigrationSystemError	Correlation Rules	
	Problem Type	Notification
	OID	21137
	Status	current
	Severity Range	medium
	Description	A migration task was stopped due to a non-recoverable system error.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% cannot continue because a system error has occurred.
	Recommended Action(s)	Examine the migration task report and the provisioning server log file to determine the cause of the system error.
	Correlation Rules	
	Problem Type	Notification
	OID	21137
	Status	current
	Severity Range	medium
	Description	A migration task was stopped due to a non-recoverable system error.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% cannot continue because a system error has occurred.
	Recommended Action(s)	Examine the migration task report and the provisioning server log file to determine the cause of the system error.
	Correlation Rules	
	Problem Type	Notification
	OID	21137
	Status	current
	Severity Range	medium
	Description	A migration task was stopped due to a non-recoverable system error.
	Problem Text	The service pack migration task entitled %npTaskName% for service provider %npServiceProviderId% cannot continue because a system error has occurred.
	Recommended Action(s)	Examine the migration task report and the provisioning server log file to determine the cause of the system error.

#### 8.16.10 SNMP Traps For Component: callLogs

The table that follows describes the SNMP traps for the callLogs subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 86: SNMP Traps For BW-ProvisioningServerAmplifyFault:callLogs**

Alarm Name	Attributes	Values
bwAmplifyCallLogSchemaInstanceProvisioningOverload	Problem Type	Alarm
	OID	21115
	Status	current
	Severity Range	low, high

Alarm Name	Attributes	Values
	Description	This alarm indicates that the number of users currently provisioned to use the given Enhanced Call Logs DB schema instance is overloaded as defined per Broadworks standards.  Low: Current number of users assigned to the instance is above 200K.  High: Current number of users assigned to the instance is above 300K.
	Problem Text	The number of users currently using Enhanced Call Logs repository schema instance %npDBSchemaName% is overloaded.
	Recommended Action(s)	Ensure any new groups or enterprises with Enhanced Call logs service are not using the overloaded repository instance.
	Correlation Rules	
bwAmplifyCallLogSOAPServer Unreachable	Problem Type	Alarm
	OID	21138
	Status	current
	Severity Range	high
	Description	A Call Detail Server is not responding to read Requests.
	Problem Text	Call Log SOAP Server %npServerName% is not responding. Configured Address: %npConfiguredAddress% Resolved Address: %npResolvedAddress%
	Recommended Action(s)	Verify that this SOAP server is up and running. Verify that there is network connection between application server and SOAP server.
	Correlation Rules	

### 8.16.11 SNMP Traps For Component: ociReporting

The table that follows describes the SNMP traps for the ociReporting subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 87: SNMP Traps For BW-ProvisioningServerAmplifyFault:ociReporting**

Alarm Name	Attributes	Values
bwAmplifyProvisioningValidation ConnectionFailure	Problem Type	Notification
	OID	21139
	Status	current
	Severity Range	high
	Description	Connection between the Provisioning Server and the Execution Server for provisioning validation cannot be established.
	Problem Text	The Provisioning Server could not connect to the Execution Server for Provisioning Validation.
	Recommended Action(s)	Try restarting the Application Server or disabling Provisioning Validation using the CLI.

Alarm Name	Attributes	Values
	Correlation Rules	

### 8.16.12 SNMP Traps For Component: bcct

The table that follows describes the SNMP traps for the bcct subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 88: SNMP Traps For BW-ProvisioningServerAmplifyFault:bcct**

Alarm Name	Attributes	Values
bwAmplifyCallCenterConnectionFailure	Problem Type	Alarm
	OID	21150
	Status	current
	Severity Range	high
	Description	Connection between the Provisioning Server and the Execution Server for Call Center cannot be established.
	Problem Text	The Provisioning Server could not connect to the Execution Server for Call Center. Remote IP address: %npRemoteAddress%
	Recommended Action(s)	Try restarting the Application.
	Correlation Rules	This alarm is cleared by the Application Server once connection is re-established or reconfigured.
bwAmplifyProvisioningValidationXSA ConnectionFailure	Problem Type	Notification
	OID	21151
	Status	current
	Severity Range	high
	Description	This notification indicates that the connection between the Provisioning Server and the Execution Server (XSA) has failed.
	Problem Text	The Provisioning Server could not connect to the Execution Server located at %npRemoteAddress% for Provisioning Validation.
	Recommended Action(s)	
	Correlation Rules	

### 8.16.13 SNMP Traps For Component: mm

The table that follows describes the SNMP traps for the mm subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 89: SNMP Traps For BW-ProvisioningServerAmplifyFault:mm**

Alarm Name	Attributes	Values
bwAmplifyMobilityManagerUnreachable	Problem Type	Notification
	OID	21140
	Status	current

Alarm Name	Attributes	Values
	Severity Range	high
	Description	A connection could not be established between BroadWorks and Mobility Manager.
	Problem Text	Mobility Manager URL: %npUrl% Error: %npMessage%
	Recommended Action(s)	Verify that the MM address is reachable. Verify that the MM is up and running.
	Correlation Rules	
bwAmplifyMobilityManagerError	Problem Type	Notification
	OID	21141
	Status	current
	Severity Range	high
	Description	Mobility Manager returned an error.
	Problem Text	Mobility Manager returned an error: %npMessage%
	Recommended Action(s)	
	Correlation Rules	

#### 8.16.14 SNMP Traps For Component: sh

The table that follows describes the SNMP traps for the sh subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 90: SNMP Traps For BW-ProvisioningServerAmplifyFault:sh**

Alarm Name	Attributes	Values
bwAmplifyShNoAvailableHosts	Problem Type	Notification
	OID	21142
	Status	current
	Severity Range	high
	Description	This fault is generated when host selection has exhausted all hosts.
	Problem Text	Command %npCommand% for %npPublicIdentity% data reference %npDataReference% failed due to no available hosts.
	Recommended Action(s)	Please check connectivity and availability of HSS hosts. Once connectivity is established, refresh the public identities that failed refresh.
	Correlation Rules	
bwAmplifyShUserUnknownInHSS	Problem Type	Notification
	OID	21143
	Status	current
	Severity Range	high

Alarm Name	Attributes	Values
	Description	This fault is generated whenever the Application Server receives an answer indicating that the user is unknown in the HSS.
	Problem Text	Command %npCommand% for %npPublicIdentity% failed. Public user identity is unknown in the HSS.
	Recommended Action(s)	The public identities in the HSS and Application Server are out of synch. Ensure that the public identities in the Application Server and HSS are in synch. Refresh affected public identities.
	Correlation Rules	
bwAmplifyShUserUnknownInAS	Problem Type	Notification
	OID	21144
	Status	current
	Severity Range	high
	Description	This fault is generated whenever the Application Server receives a request for a public identity that is unknown.
	Problem Text	Received command %npCommand% for unknown public identity %npPublicIdentity%.
	Recommended Action(s)	The public identities in the HSS and Application Server are out of synch. Ensure that the public identities in the Application Server and HSS are in synch. Refresh affected public identities.
	Correlation Rules	
bwAmplifyShGeneralErrorReceived	Problem Type	Notification
	OID	21145
	Status	current
	Severity Range	high
	Description	This fault is generated whenever the Application Server encounters an error that results in the failure of the public identity refresh procedure for reasons other than unknown user or host selection exhaustion.
	Problem Text	Command %npCommand% for %npPublicIdentity% encountered %npResultCodeType% error %npResultCode%.
	Recommended Action(s)	
	Correlation Rules	
bwAmplifyShSystemRefreshInitiated	Problem Type	Notification
	OID	21146
	Status	current
	Severity Range	informational
	Description	This notification is generated whenever the Application Server initiates the system refresh procedure over the Sh Interface.
	Problem Text	System refresh initiated.
	Recommended Action(s)	

Alarm Name	Attributes	Values
bwAmplifyShSystemRefreshTerminated	Correlation Rules	
	Problem Type	Notification
	OID	21147
	Status	current
	Severity Range	informational
	Description	This notification is generated whenever the Application Server has stopped the system refresh procedure over the Sh Interface.
	Problem Text	System refresh terminated due to %npReason%.
	Recommended Action(s)	
	Correlation Rules	

#### 8.16.15 SNMP Traps For Component: diameter

The table that follows describes the SNMP traps for the diameter subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 91: SNMP Traps For BW-ProvisioningServerAmplifyFault:diameter**

Alarm Name	Attributes	Values
bwAmplifyPsInterfaceInitializationError	Problem Type	Notification
	OID	21105
	Status	current
	Severity Range	high
	Description	The Diameter Interface cannot be initialized.
	Problem Text	The Diameter Interface cannot be initialized. Error message: %npExceptionMessage%
	Recommended Action(s)	Verify that the Diameter interface is properly configured on the Application Server.
	Correlation Rules	

#### 8.16.16 SNMP Traps For Component: subscriberProfileSync

The table that follows describes the SNMP traps for the subscriberProfileSync subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 92: SNMP Traps For BW-ProvisioningServerAmplifyFault:subscriberProfileSync**

Alarm Name	Attributes	Values
bwAmplifySubscriberProfileSyncIOError	Problem Type	Alarm
	OID	21108
	Status	current
	Severity Range	medium
	Description	Several attempt to sync a profile to the SubscriberAgent failed due to a communication issue.

Alarm Name	Attributes	Values
	Problem Text	Could not sync a profile to the subscriberAgent due to a communication error. Affected profile : %profileDescription%
	Recommended Action(s)	Please check the SubscriberAgent status connections.
	Correlation Rules	
bwAmplifySubscriberProfileSyncDataError	Problem Type	Notification
	OID	21109
	Status	current
	Severity Range	high
	Description	Several attempt to sync a profile to the SubscriberAgent failed.
	Problem Text	Could not sync a profile to the SubscriberAgent due to a data error. Affected profile : %profileDescription%
	Recommended Action(s)	
	Correlation Rules	

#### 8.16.17 SNMP Traps For Component: ccReporting

The table that follows describes the SNMP traps for the ccReporting subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 93: SNMP Traps For BW-ProvisioningServerAmplifyFault:ccReporting**

Alarm Name	Attributes	Values
bwAmplifyCCScheduledReportFailed	Problem Type	Alarm
	OID	21110
	Status	current
	Severity Range	medium
	Description	Failed to generate a call center scheduled report.
	Problem Text	Cannot generate a call center scheduled report due to connection or overload issues with CCReporting Webapps %npNetAddress%. The report %npReportName% was scheduled by %npUserId% to be run at %npDateTime%.
	Recommended Action(s)	Check the connectivity between provisioning server and CCReporting Webapps and make sure the Webapps are not overloaded.
	Correlation Rules	
bwAmplifyCCScheduledReportGeneration Failure	Problem Type	Notification
	OID	21111
	Status	current
	Severity Range	medium



Alarm Name	Attributes	Values
	Description	Failed to generate a call center scheduled report.
	Problem Text	Cannot generate a call center scheduled report due to connection or overload issues with the Call Center Reporting (CCR) web application's %npNetAddress%. The report %npReportName% was scheduled by %npUserId% to be run at %npDateTime%.
	Recommended Action(s)	Check the connectivity between the Provisioning Server and the CCR web applications and make sure that the web applications are not overloaded.
	Correlation Rules	
bwAmplifyCCScheduledReport ConfigurationFailure	Problem Type	Notification
	OID	21112
	Status	current
	Severity Range	medium
	Description	Failed to start the call center scheduling task.
	Problem Text	Cannot start the task of scheduling reports due to missing configuration: template repository application URL, report application URL and SMTP primary server must all be configured.
	Recommended Action(s)	Make sure the template repository application URL, the report application URL and the SMTP primary server are configured at the CLI.
	Correlation Rules	

#### 8.16.18 SNMP Traps For Component: broadCloud

The table that follows describes the SNMP traps for the broadCloud subcomponent of the BW-ProvisioningServerAmplifyFault MIB.

**Table 94: SNMP Traps For BW-ProvisioningServerAmplifyFault:broadCloud**

Alarm Name	Attributes	Values
bwAmplifyBroadCloudTransactionFailure	Problem Type	Notification
	OID	21113
	Status	current
	Severity Range	medium
	Description	Failed to execute provisioning request to the BroadCloud server.
	Problem Text	Failed to execute %npBroadCloudRequest% request to the BroadCloud server for user %npUserId% with BroadCloud Uid %npBroadCloudUid% regarding service %npBroadCloudService% for the following reason: %npBroadCloudFailureReason%.
	Recommended Action(s)	Contact BroadWorks TAC support
	Correlation Rules	
bwAmplifyBroadCloudOutOfSync	Problem Type	Notification
	OID	21114

Alarm Name	Attributes	Values
	Status	current
	Severity Range	medium
	Description	Failed execute the rollback request to BroadCloud
	Problem Text	Failed to execute %npBroadCloudRequest% request to the BroadCloud server for user %npUserId% with BroadCloud Uid %npBroadCloudUid% regarding service %npBroadCloudService% during a rollback procedure.
	Recommended Action(s)	Contact BroadWorks TAC support
	Correlation Rules	

## 8.17 BW-WebContainerFault MIB

This section presents SNMP traps (notifications and alarms) for the BW-WebContainerFault MIB grouped by component.

This MIB defines the faults for the Web Container application.

### Applicable server(s):

[Profile Server](#).

### 8.17.1 SNMP Traps For Component: webcontainer

The table that follows describes the SNMP traps for the webcontainer subcomponent of the BW-WebContainerFault MIB.

**Table 95: SNMP Traps For BW-WebContainerFault:webcontainer**

Alarm Name	Attributes	Values
bwWebContainerTransactionGlobalRateLimitExceeded	Problem Type	Notification
	OID	6001
	Status	current
	Severity Range	high
	Description	Transaction denial due to high transaction rate for a given webapp.
	Problem Text	Transaction denied due to high transaction rate for webapp %npWebAppContext%
	Recommended Action(s)	
	Correlation Rules	
bwWebContainerTransactionUserRateLimitExceeded	Problem Type	Notification
	OID	6002
	Status	current
	Severity Range	high
	Description	Transaction denial due to high transaction rate for a given userid.

Alarm Name	Attributes	Values
	Problem Text	Transaction denied due to high transaction rate for webapp %npWebAppContext% and userid %npUserId%
	Recommended Action(s)	
	Correlation Rules	
bwWebApplicationCacheDiskFull	Problem Type	Alarm
	OID	6003
	Status	current
	Severity Range	low
	Description	A cache update has failed because the disk is full.
	Problem Text	The web application "%npWebAppName%" cache is out of space.
	Recommended Action(s)	Clean disk space or reduce the cache size on disk.
	Correlation Rules	
bwHttpWorkersBusyExceeded	Problem Type	Alarm
	OID	6004
	Status	current
	Severity Range	high
	Description	The ratio of http workerBusy exceeded the threshold level.
	Problem Text	The ratio of http workerBusy exceeded the threshold level.
	Recommended Action(s)	Review server usage for identifying potential bottlenecks.
	Correlation Rules	
bwWebContainerServerTransactionLimitExceeded	Problem Type	Notification
	OID	6009
	Status	current
	Severity Range	high
	Description	The number of incoming requests exceeded the prescribed limit during the last overload protection period.
	Problem Text	The number of incoming requests reached %npReceivedRequestsDuringLastPeriod% for the last %npProtectionPeriod% %npPeriodUnit%.
	Recommended Action(s)	Review incoming traffic to identify potential Denial of Service (DOS) attacks.
	Correlation Rules	
bwWebContainerWebAppTransactionLimitExceeded	Problem Type	Notification
	OID	6010
	Status	current
	Severity Range	high

Alarm Name	Attributes	Values
	Description	The number of incoming requests exceeded the prescribed limit during the last overload protection period.
	Problem Text	The number of incoming requests for %npWebAppContext% reached %npReceivedRequestsDuringLastPeriod% for the last %npProtectionPeriod% %npPeriodUnit%.
	Recommended Action(s)	Review incoming traffic to identify potential Denial of Service (DOS) attacks.
	Correlation Rules	
bwWebContainerUserTransactionLimit Exceeded	Problem Type	Notification
	OID	6011
	Status	current
	Severity Range	high
	Description	The number of incoming requests exceeded the prescribed limit during the last overload protection period.
	Problem Text	The number of incoming requests from %npWebAppUser% for %npWebAppContext% reached %npReceivedRequestsDuringLastPeriod% for the last %npProtectionPeriod% %npPeriodUnit%.
	Recommended Action(s)	Review incoming traffic to identify potential Denial of Service (DOS) attacks.
bwWebContainerAuthenticationServer Unreachable	Correlation Rules	
	Problem Type	Alarm
	OID	6012
	Status	current
	Severity Range	critical
	Description	The Web Container was unable to connect to the Authentication Server.
	Problem Text	The Web Container was unable to connect to the Authentication Server %npAuthenticationServer%.
bwSslClientAuthWithoutTrust	Recommended Action(s)	Identify why the WebContainer cannot communicate with the authentication server.
	Correlation Rules	
	Problem Type	Notification
	OID	6013
	Status	current
	Severity Range	high
	Description	There is no trust configured on the system but a client authentication is required on a secure interface.
	Problem Text	The client authentication is required on the %npProtocol% secure interface %npName% without any trust configured.
	Recommended Action(s)	Configure at least one valid trust anchor.

---

Alarm Name	Attributes	Values
	Correlation Rules	

## Appendix A: Additional Information

This section captures additional information related to Cisco BroadWorks Fault and Alarm Management.

### 9.1 Fault Parameters

This section captures the list of parameters that can be used by the various Cisco BroadWorks faults.

**Table 96: Fault Parameters**

Parameter Name	Attributes	Values
npAlarmList	OID	1
	Description	Describes a list of alarms
	Type	DisplayString
npAllowedAttempts	OID	2
	Description	The number of allowed attempts
	Type	DisplayString
npAnswerTime	OID	3
	Description	Answer Time
	Type	DisplayString
npBridgeName	OID	4
	Description	Bridge Name
	Type	DisplayString
npCallAnswered	OID	5
	Description	Call Answered
	Type	DisplayString
npCallCapacityGroup	OID	6
	Description	Call Capacity Group
	Type	DisplayString
npCallId	OID	7
	Description	Call ID
	Type	DisplayString
npCallPersonality	OID	8
	Description	Call Personality
	Type	DisplayString
npCalledNumber	OID	9
	Description	Called Number
	Type	DisplayString
npCalledNumberContext	OID	10

Parameter Name	Attributes	Values
	Description	Called Number Context
	Type	DisplayString
	OID	11
npCaller	Description	Caller
	Type	DisplayString
	OID	12
npCallingNumber	Description	Calling Number
	Type	DisplayString
	OID	13
npCallingNumberContext	Description	Calling Number Context
	Type	DisplayString
	OID	14
npCallingPartyCategory	Description	Calling Party Category
	Type	DisplayString
	OID	15
npCallingPresentationIndicator	Description	Calling Presentation Indicator
	Type	DisplayString
	OID	16
npCallsLimit	Description	Calls Limit
	Type	DisplayString
	OID	17
npCallTreatment	Description	Call Treatment
	Type	DisplayString
	OID	18
npCallType	Description	Call Type
	Type	DisplayString
	OID	19
npClientAddress	Description	Client Address
	Type	DisplayString
	OID	20
npClusterName	Description	Cluster Name
	Type	DisplayString
	OID	21
npConfiguredAddress	Description	Configured Address
	Type	DisplayString
	OID	21

Parameter Name	Attributes	Values
npConfiguredPhysicalLocation	OID	22
	Description	Configured Physical Location
	Type	DisplayString
npCounterName	OID	23
	Description	Counter Name
	Type	DisplayString
npCountryCode	OID	24
	Description	Country Code
	Type	DisplayString
npCpuIdleTimePercentage	OID	25
	Description	CPU Idle Time Percentage
	Type	DisplayString
npCurrentThresholdValue	OID	26
	Description	Current Threshold Value
	Type	DisplayString
npDate	OID	27
	Description	Date
	Type	DisplayString
npDepartmentName	OID	28
	Description	Department Name
	Type	DisplayString
npDestinationUserId	OID	29
	Description	Destination User ID
	Type	DisplayString
npDeviceAddress	OID	30
	Description	Device Address
	Type	DisplayString
npDeviceLinePort	OID	31
	Description	Device Line Port
	Type	DisplayString
npDeviceList	OID	32
	Description	Device List
	Type	DisplayString
npDeviceName	OID	33
	Description	Device Name



Parameter Name	Attributes	Values
npDeviceType	Type	DisplayString
	OID	34
	Description	Device Type
npDialedNumber	Type	DisplayString
	OID	35
	Description	Dialed Number
npDirection	Type	DisplayString
	OID	36
	Description	Direction
npDomain	Type	DisplayString
	OID	37
	Description	Domain
npEndpointId	Type	DisplayString
	OID	38
	Description	Endpoint ID
npExceptionMessage	Type	DisplayString
	OID	39
	Description	Exception Message
npExpectedVersion	Type	DisplayString
	OID	40
	Description	Expected Version
npFailedAttempts	Type	DisplayString
	OID	41
	Description	Failed Attempts
npFailedLoginAttempts	Type	DisplayString
	OID	42
	Description	Failed Login Attempts
npFeatureName	Type	DisplayString
	OID	43
	Description	Feature Name
npFilename	Type	DisplayString
	OID	44
	Description	File Name
npFilenameAlt	OID	45

Parameter Name	Attributes	Values
	Description	Alternate File Name
	Type	DisplayString
	OID	46
npFirstName	Description	First Name
	Type	DisplayString
	OID	47
npGaugeName	Description	Gauge Name
	Type	DisplayString
	OID	48
npGroupId	Description	Group ID
	Type	DisplayString
	OID	49
npGroupName	Description	Group Name
	Type	DisplayString
	OID	50
npGroupNumber	Description	Group Number
	Type	DisplayString
	OID	51
npHost	Description	Host
	Type	DisplayString
	OID	52
npIndex	Description	Index
	Type	DisplayString
	OID	53
npInhibitedNeighbors	Description	Inhibited Neighbours
	Type	DisplayString
	OID	54
npInstanceName	Description	Instance Name
	Type	DisplayString
	OID	55
npLastIncomingCallTime	Description	Last Incoming Call Time
	Type	DisplayString
	OID	56
npLastName	Description	Last Name
	Type	DisplayString
	OID	

Parameter Name	Attributes	Values
npLicenseAllocation	OID	57
	Description	License Allocation
	Type	DisplayString
npLicenseKey	OID	58
	Description	License Key
	Type	DisplayString
npLicenseLimit	OID	59
	Description	License Limit
	Type	DisplayString
npLocalInterface	OID	60
	Description	Local Interface
	Type	DisplayString
npLocalPort	OID	61
	Description	Local Port
	Type	DisplayString
npMailboxId	OID	62
	Description	Mailbox ID
	Type	DisplayString
npMaxFailedLoginAttempts	OID	63
	Description	Maximum Failed Login Attempts
	Type	DisplayString
npMessage	OID	64
	Description	Message
	Type	DisplayString
npMethod	OID	65
	Description	Method
	Type	DisplayString
npMissingHeader	OID	66
	Description	Missing Header
	Type	DisplayString
npNbDevicesProcessed	OID	67
	Description	Number of Devices Processed
	Type	DisplayString
npNbDevicesWithoutMACAddress	OID	68
	Description	Number of Devices Without MAC Address

Parameter Name	Attributes	Values
npNbInhibitedNeighbors	Type	DisplayString
	OID	69
	Description	Number of Inhibited Neighbors
npNbOfErrors	Type	DisplayString
	OID	70
	Description	Number of Errors
npNbOfSoapThreads	Type	DisplayString
	OID	71
	Description	Number of SOAP Threads
npNbTransactions	Type	DisplayString
	OID	72
	Description	Number of Transactions
npNetworkCallId	Type	DisplayString
	OID	73
	Description	Network Call ID
npNewAddress	Type	DisplayString
	OID	74
	Description	New Address
npNewAdministrativeState	Type	DisplayString
	OID	75
	Description	New Administrative State
npNewDomainName	Type	DisplayString
	OID	76
	Description	New Domain Name
npNewOperationalState	Type	DisplayString
	OID	77
	Description	New Operational State
npNewThresholdValue	Type	DisplayString
	OID	78
	Description	New Threshold Value
npNewZone	Type	DisplayString
	OID	79
	Description	New Zone
npNodeId	OID	80

Parameter Name	Attributes	Values
	Description	Node ID
	Type	DisplayString
npOldAdministrativeState	OID	81
	Description	Old Administrative State
	Type	DisplayString
npOldDomainName	OID	82
	Description	Old Domain Name
	Type	DisplayString
npOldOperationalState	OID	83
	Description	Old Operational State
	Type	DisplayString
npOldZone	OID	84
	Description	Old Zone
	Type	DisplayString
npOperation	OID	85
	Description	Operation
	Type	DisplayString
npOriginalAddress	OID	86
	Description	Original Address
	Type	DisplayString
npOriginalCalledNumber	OID	87
	Description	Original Called Number
	Type	DisplayString
npOriginalCalledNumberContext	OID	88
	Description	Original Called Number Context
	Type	DisplayString
npOriginalCalledNumberPresentation Indicator	OID	89
	Description	Original Called Number Presentation Indicator
	Type	DisplayString
npOriginalCalledReason	OID	90
	Description	Original Called Reason
	Type	DisplayString
npOriginator	OID	91
	Description	Originator
	Type	DisplayString

Parameter Name	Attributes	Values
npPeriod	OID	92
	Description	Period
	Type	DisplayString
npPolicyFeature	OID	93
	Description	Policy Feature
	Type	DisplayString
npProtocol	OID	94
	Description	Protocol
	Type	DisplayString
npReason	OID	95
	Description	Reason
	Type	DisplayString
npRadiusServerList	OID	96
	Description	Radius Server List
	Type	DisplayString
npReceivedPhysicalLocation	OID	97
	Description	Received Physical Location
	Type	DisplayString
npReceivedVersion	OID	98
	Description	Received Version
	Type	DisplayString
npRedirectingNumber	OID	99
	Description	Redirecting Number
	Type	DisplayString
npRedirectingNumberContext	OID	100
	Description	Redirecting Number Context
	Type	DisplayString
npRedirectingNumberPresentation Indicator	OID	101
	Description	Redirecting Number Presentation Indicator
	Type	DisplayString
npRedirectingReason	OID	102
	Description	Redirecting Reason
	Type	DisplayString
npRemoteAddress	OID	103
	Description	Remote Address

Parameter Name	Attributes	Values
npRemoteParty	Type	DisplayString
	OID	104
	Description	Remote Party
npRemotePort	Type	DisplayString
	OID	105
	Description	Remote Port
npReport	Type	DisplayString
	OID	106
	Description	Report
npRequest	Type	DisplayString
	OID	107
	Description	Request
npResolvedAddress	Type	DisplayString
	OID	108
	Description	Resolved Address
npRoute	Type	DisplayString
	OID	109
	Description	Route
npServerName	Type	DisplayString
	OID	110
	Description	Server Name
npServerType	Type	DisplayString
	OID	111
	Description	Server Type
npServiceProviderId	Type	DisplayString
	OID	112
	Description	Service Provider ID
npSessionId	Type	DisplayString
	OID	113
	Description	Session ID
npSessionKey	Type	DisplayString
	OID	114
	Description	Session Key
npSipErrorCode	OID	115

Parameter Name	Attributes	Values
	Description	SIP Error Code
	Type	DisplayString
	OID	116
npSipRequestMessage	Description	SIP Request Message
	Type	DisplayString
	OID	117
npSipResponseMessage	Description	SIP Response Message
	Type	DisplayString
	OID	118
npSizeLimit	Description	Size Limit
	Type	DisplayString
	OID	119
npSmdiNumber	Description	SMDI Number
	Type	DisplayString
	OID	120
npStackTrace	Description	Stack Trace
	Type	DisplayString
	OID	121
npStartTime	Description	Start Time
	Type	DisplayString
	OID	122
npSubscriberType	Description	Subscriber Type
	Type	DisplayString
	OID	123
npTaskName	Description	Task Name
	Type	DisplayString
	OID	124
npThreadName	Description	Thread Name
	Type	DisplayString
	OID	125
npThresholdName	Description	Threshold Name
	Type	DisplayString
	OID	126
npTimeElapsed	Description	Time Elapsed
	Type	DisplayString
	OID	126



Parameter Name	Attributes	Values
npTimeLength	OID	127
	Description	Time Length
	Type	DisplayString
npTimestamp	OID	128
	Description	Timestamp
	Type	DisplayString
npTraceType	OID	129
	Description	Trace Type
	Type	DisplayString
npTrunkGroupName	OID	130
	Description	Trunk Group Name
	Type	DisplayString
npUrl	OID	131
	Description	Uniform Resource Locator
	Type	DisplayString
npUserId	OID	132
	Description	User ID
	Type	DisplayString
npUserName	OID	133
	Description	User Name
	Type	DisplayString
npUserNumber	OID	134
	Description	User Number
	Type	DisplayString
npUserUid	OID	135
	Description	User UID
	Type	DisplayString
npThresholdDescription	OID	136
	Description	Threshold Description
	Type	DisplayString
npSubscriberId	OID	137
	Description	Subscriber ID
	Type	DisplayString
npCommand	OID	138
	Description	Command

Parameter Name	Attributes	Values
npPublicIdentity	Type	DisplayString
	OID	139
	Description	Public Identity
npDataReference	Type	DisplayString
	OID	140
	Description	Data Reference
npResultCode	Type	DisplayString
	OID	141
	Description	Result Code
npResultCodeType	Type	DisplayString
	OID	142
	Description	Result Code Type
npError	Type	DisplayString
	OID	143
	Description	Error
npLoginLevel	Type	DisplayString
	OID	144
	Description	Login Level
npMaximumNbItems	Type	DisplayString
	OID	145
	Description	Maximum Number of Items
npRequestUriUser	Type	DisplayString
	OID	146
	Description	Requested User URI
npWebAppContext	Type	DisplayString
	OID	147
	Description	Web Application context path
npTreatment	Type	DisplayString
	OID	148
	Description	Treatment received for call
npPrimaryAddress	Type	DisplayString
	OID	149
	Description	Primary Address
npSecondaryAddress	OID	150

Parameter Name	Attributes	Values
	Description	Secondary Address
	Type	DisplayString
npServiceProviderName	OID	151
	Description	Service Provider Name
	Type	DisplayString
npConfigVersion	OID	152
	Description	Configuration revision number
	Type	DisplayString
npApplicationName	OID	153
	Description	Name of the application.
	Type	DisplayString
npOldEffectiveState	OID	154
	Description	Old Effective State
	Type	DisplayString
npNewEffectiveState	OID	155
	Description	New Administrative State
	Type	DisplayString
npApplicationMemory	OID	156
	Description	The quantity of memory allocated for the application.
	Type	DisplayString
npSystemMemory	OID	157
	Description	The total amount of memory in the system that is available to allocate for applications.
	Type	DisplayString
npSourceCodec	OID	158
	Description	Name of original codec.
	Type	DisplayString
npDestinationCodec	OID	159
	Description	Name of destination codec.
	Type	DisplayString
npMaximumAttempt	OID	160
	Description	Maximum number of attempt.
	Type	DisplayString
npMacAddress	OID	161
	Description	Mac Address

Parameter Name	Attributes	Values
npMaxNumberOfSessions	Type	DisplayString
	OID	162
	Description	Maximum number of sessions
	Type	DisplayString
npSACGroupld	OID	163
	Description	The Id of the SAC group
	Type	DisplayString
npFileURL	OID	164
	Description	The file URL
	Type	DisplayString
npObjectId	OID	165
	Description	Object Identifier
	Type	DisplayString
npMSCAddr	OID	166
	Description	network MSC Address
	Type	DisplayString
npRoutePointName	OID	167
	Description	The name of the route point
	Type	DisplayString
npProfileDescription	OID	168
	Description	The profile description
	Type	DisplayString
npTransactionLimitPeriod	OID	169
	Description	The transaction limit period in secs
	Type	DisplayString
npGlobalTransactionLimit	OID	170
	Description	The configured global transaction limit
	Type	DisplayString
npNetAddress	OID	171
	Description	The IP/FQDN Address
	Type	DisplayString
npReportName	OID	172
	Description	The name of the scheduled report. This parameter is encoded using the application/x-www-form-urlencoded MIME format.
	Type	DisplayString

Parameter Name	Attributes	Values
npDateTime	OID	173
	Description	The date and time
	Type	DisplayString
npTimeoutValue	OID	174
	Description	The timeout value
	Type	DisplayString
npMediaServerAddress	OID	175
	Description	The address of the Media Server.
	Type	DisplayString
npUserDN	OID	176
	Description	The DN of the paging group.
	Type	DisplayString
npApplicationServerSetName	OID	177
	Description	The Application Server set name
	Type	DisplayString
npApplicationServerSetContent	OID	178
	Description	A comma-separated list of Hosting NE names that are part of the set.
	Type	DisplayString
npIdentity	OID	179
	Description	The main PUI for the profile.
	Type	DisplayString
npAlternate	OID	180
	Description	The alternate PUI which failed to be linked.
	Type	DisplayString
npDatabaseName	OID	181
	Description	The database name.
	Type	DisplayString
npSite	OID	182
	Description	The database site.
	Type	DisplayString
npEnterpriseld	OID	183
	Description	The enterprise Id.
	Type	DisplayString
npAddress	OID	184

Parameter Name	Attributes	Values
	Description	The IP address.
	Type	DisplayString
npResourceRecordType	OID	185
	Description	Resource record type (NAPTR, SRV, A, PTR) in the query.
	Type	DisplayString
npIMRNNumber	OID	186
	Description	IMRN number
	Type	DisplayString
npSIPCallID	OID	187
	Description	SIP Call ID
	Type	DisplayString
npFrom	OID	188
	Description	Caller
	Type	DisplayString
npDatabaseObjectType	OID	189
	Description	Database Object type.
	Type	DisplayString
npWebAppName	OID	190
	Description	Web Application Name
	Type	DisplayString
npBroadCloudRequest	OID	191
	Description	The provisioning action requested to BroadCloud. Can be POST, PUT or DELETE
	Type	DisplayString
npBroadCloudUid	OID	192
	Description	The BroadCloud unique subscriber id.
	Type	DisplayString
npBroadCloudService	OID	193
	Description	The BroadCloud service for which the request was made.
	Type	DisplayString
npBroadCloudFailureReason	OID	194
	Description	The reason for the failure.
	Type	DisplayString
npSCCASPSIDNNumber	OID	195
	Description	SCC AS PSI DN number.

Parameter Name	Attributes	Values
npDBSchemaName	Type	DisplayString
	OID	196
	Description	The name of the database schema instance.
npHttpWorkersBusy	Type	DisplayString
	OID	197
	Description	The ratio of busy workers.
npExecutorType	Type	DisplayString
	OID	198
	Description	The executor type (ajp, httpnio, cti, ocic, ocip).
npExecutorQueueUsage	Type	DisplayString
	OID	199
	Description	The ratio of executor queue usage.
npExecutorQueueLatency	Type	DisplayString
	OID	200
	Description	The ratio of executor queue latency.
npExecutorDurationUnit	Type	DisplayString
	OID	201
	Description	The measurement unit.
npExecutorThreadPoolProcessingTime	Type	DisplayString
	OID	202
	Description	The executor thread pool processing time.
npExecutorThreadPoolProcessingDurationUnit	Type	DisplayString
	OID	203
	Description	The executor thread pool processing time unit.
npExecutorThreadPoolBusy	Type	DisplayString
	OID	204
	Description	The executor thread pool busy ratio.
npProcessMemoryUsage	Type	DisplayString
	OID	205
	Description	The process memory usage.
npReceivedRequestsDuringLastPeriod	Type	DisplayString
	OID	206
	Description	The number of requests received during the last overload protection period.

Parameter Name	Attributes	Values
npProtectionPeriod	OID	207
	Description	The duration of the overload protection period.
	Type	DisplayString
npPeriodUnit	OID	208
	Description	The unit used for the overload protection period. Its default value is seconds.
	Type	DisplayString
npWebAppUser	OID	209
	Description	The user of the web app
	Type	DisplayString
npNEMaintenancePartitionId	OID	210
	Description	The subscriber's NE maintenance partition
	Type	DisplayString
sccpObjId	OID	211
	Description	The sccp object id
	Type	Integer32
sccpState	OID	212
	Description	The sccp state
	Type	Integer32
sccpAffectedSsn	OID	213
	Description	The sccp affected sub system number
	Type	Integer32
sccpAffectedSsnSp	OID	214
	Description	The sp of affected sub system number
	Type	Integer32
sccpAffectedSsnSsn	OID	215
	Description	The affected sub system number
	Type	Integer32
sccpConnectionId	OID	216
	Description	The sccp connection id
	Type	Integer32
sccpResetReason	OID	217
	Description	The sccp reset reason
	Type	DisplayString
sccpOriginator	OID	218



Parameter Name	Attributes	Values
	Description	The sccp originator
	Type	DisplayString
sccpModuleId	OID	219
	Description	The sccp module id
	Type	Integer32
sccpSubModuleId	OID	220
	Description	The sccp sub-module id
	Type	Integer32
sccpMtpSap	OID	221
	Description	The sap id
	Type	Integer32
sccpErrorCode	OID	222
	Description	The sccp error code
	Type	Integer32
sccpBitMask	OID	223
	Description	The sccp bit mask
	Type	Integer32
sccpDroppedApiId	OID	224
	Description	The sccp dropped api id
	Type	Integer32
sccpErrorLevel	OID	225
	Description	The sccp error level
	Type	Integer32
sccpErrorFlag	OID	226
	Description	The sccp error flag
	Type	Integer32
sccpPointCode	OID	227
	Description	The point code
	Type	Integer32
m3uaAsId	OID	228
	Description	The m3ua AS id
	Type	Integer32
m3uaLocalSpId	OID	229
	Description	The m3ua local SP id
	Type	Integer32

Parameter Name	Attributes	Values
m3uaRemSpId	OID	230
	Description	The m3ua remote SP id
	Type	Integer32
m3uaState	OID	231
	Description	The m3ua state
	Type	DisplayString
m3uaNwSpId	OID	232
	Description	The m3ua n/w SP id
	Type	Integer32
m3uaAspId	OID	233
	Description	The m3ua ASP id
	Type	Integer32
m3uaOptIndParams	OID	234
	Description	The m3ua optional indication paramters
	Type	Integer32
m3uaOptIndParamsBitmap	OID	235
	Description	The m3ua optional indication paramter's bitmap
	Type	Integer32
m3uaOptIndParamsDownCause	OID	236
	Description	The m3ua optional indication paramter's down cause
	Type	Integer32
m3uaSgId	OID	237
	Description	The m3ua SG id
	Type	Integer32
m3uaAssocId	OID	238
	Description	The association id
	Type	Integer32
m3uaNumInStreams	OID	239
	Description	The number of input streams
	Type	Integer32
m3uaNumOutStreams	OID	240
	Description	The number of output streams
	Type	Integer32
m3uaErrSrc	OID	241
	Description	The m3ua error source

Parameter Name	Attributes	Values
m3uaEcode	Type	Integer32
	OID	242
	Description	The m3ua error code
m3uaInfoLength	Type	Integer32
	OID	243
	Description	The m3ua information length
m3uaPInfoStr	Type	Integer32
	OID	244
	Description	The m3ua information string
m3uaRegStatus	Type	OCTET STRING
	OID	245
	Description	The m3ua registration status
m3uaDeregStatus	Type	Integer32
	OID	246
	Description	The m3ua de-registration status
m3uaNewAs	Type	Integer32
	OID	247
	Description	The m3ua new AS
m3uaDelAs	Type	Integer32
	OID	248
	Description	The m3ua deleted AS
ss7pInstanceId	Type	Integer32
	OID	249
	Description	The ss7p instance id
ss7pStackType	Type	Integer32
	OID	250
	Description	The ss7p stack type
ss7pEcode	Type	Integer32
	OID	251
	Description	The ss7p error code
ss7pEntityStatus	Type	Integer32
	OID	252
	Description	The ss7p entity status
ss7pFailureEcode	Type	DisplayString
	OID	253

Parameter Name	Attributes	Values
	Description	The ss7p failure error code
	Type	Integer32
	OID	254
ss7pTierId	Description	The ss7p tier id
	Type	Integer32
	OID	255
ss7pPc	Description	The ss7p point code
	Type	Integer32
	OID	256
ss7pPcType	Description	The ss7p point code type
	Type	Integer32
	OID	257
ss7pSpld	Description	The ss7p SP id
	Type	Integer32
	OID	258
ss7pNi	Description	The ss7p network indicator
	Type	Integer32
	OID	259
ss7pVariant	Description	The ss7p variant
	Type	DisplayString
	OID	260
ss7pSapId	Description	The ss7p sap id
	Type	Integer32
	OID	261
ss7pSsn	Description	The ss7p sub-system number
	Type	Integer32
	OID	262
ss7pSsld	Description	The ss7p sub-system id
	Type	Integer32
	OID	263
ss7pNumBitsInstanceId	Description	The ss7p T2 bits intance id
	Type	Integer32
	OID	264
ss7pFlag	Description	The ss7p flag
	Type	DisplayString
	OID	264

Parameter Name	Attributes	Values
ss7pEmStatus	OID	265
	Description	The ss7p EM status
	Type	DisplayString
ss7pEmInfoAddr	OID	266
	Description	The Em IP address
	Type	OCTET STRING (SIZE(30))
ss7pEmInfoServerPort	OID	267
	Description	The Em server port
	Type	Integer32
ss7pEmInfoMinClientPort	OID	268
	Description	The Em minimum client port
	Type	Integer32
ss7pEmInfoMaxClientPort	OID	269
	Description	The Em maximum client port
	Type	Integer32
ss7pInstanceType	OID	270
	Description	The ss7p instance type
	Type	DisplayString
ss7pIp	OID	271
	Description	The ss7p IP address
	Type	OCTET STRING (SIZE(20))
ss7pPort	OID	272
	Description	The Ss7p port
	Type	Integer32
ss7pIpStr	OID	273
	Description	The ss7p IP address in string
	Type	OCTET STRING (SIZE(20))
mapInstId	OID	274
	Description	The map instance id
	Type	Integer32
mapTierLevel	OID	275
	Description	The map platform tier level
	Type	Integer32
mapErrorCode	OID	276
	Description	The map error code

Parameter Name	Attributes	Values
mapInfoLen	Type	Integer32
	OID	277
	Description	The map information length
	Type	Integer32
mapInfoStr	OID	278
	Description	The Em information string
	Type	OCTET STRING
mapStatus	OID	279
	Description	The map status
	Type	DisplayString
mapInstanceType	OID	280
	Description	The map instance type
	Type	DisplayString
mapVariant	OID	281
	Description	The map platform variant
	Type	Integer32
mapIp	OID	282
	Description	The map ip address
	Type	OCTET STRING (SIZE(30))
mapPort	OID	283
	Description	The map port
	Type	Integer32
mapEmStatus	OID	284
	Description	The map EM status
	Type	DisplayString
mapEmInfoAddr	OID	285
	Description	The map EM's IP address
	Type	OCTET STRING (SIZE(30))
mapEmInfoServerPort	OID	286
	Description	The map EM's server port
	Type	Integer32
mapEmInfoMinClientPort	OID	287
	Description	The map EM's minimum client port
	Type	Integer32
mapEmInfoMaxClientPort	OID	288

Parameter Name	Attributes	Values
	Description	The map EM's maximum client port
	Type	Integer32
npSecureTktToolName	OID	289
	Description	The name of the Secure Toolkit.
	Type	DisplayString
npSecureTktToolResult	OID	290
	Description	The result of the Secure Toolkit.
	Type	DisplayString
npIMRN	OID	291
	Description	The IP Multimedia Routing Number.
	Type	DisplayString
npDeviceLinePortOrPublicIdentity	OID	292
	Description	The Device Line/Port or Public Identity.
	Type	DisplayString
npLockoutCounter	OID	293
	Description	The lockout count since last reset.
	Type	DisplayString
npLockoutPeriod	OID	294
	Description	The number of minutes or permanent.
	Type	DisplayString
npDeviceProfileName	OID	295
	Description	The Device Profile Name.
	Type	DisplayString
npDeviceFileRequestMessage	OID	296
	Description	The Device File Request Message.
	Type	DisplayString
npWebAppContextPath	OID	297
	Description	The Web Application context path.
	Type	DisplayString
npSS7SubsystemNumber	OID	298
	Description	The SS7 Subsystem number.
	Type	DisplayString
npAuthenticationServer	OID	299
	Description	The authentication server.
	Type	DisplayString

Parameter Name	Attributes	Values
npLdapVersion	OID	300
	Description	The configured LDAP version.
	Type	DisplayString
npSchemaInstanceName	OID	301
	Description	The schema instance name.
	Type	DisplayString
npSchemaInstanceState	OID	302
	Description	The schema instance state.
	Type	DisplayString
npMessageCount	OID	303
	Description	The number of Messages.
	Type	DisplayString
npProfileServer	OID	304
	Description	The ProfileServer.
	Type	DisplayString
npPercentEventQueueFiles	OID	305
	Description	The percentage of event queue files in use.
	Type	DisplayString
npMaxNumEventQueueFiles	OID	306
	Description	The Maximum number of event queue files allowed.
	Type	DisplayString
npOldestEventAge	OID	307
	Description	The age of oldest event not saved on the Database Server.
	Type	DisplayString
npMaxEventAge	OID	308
	Description	The maximum age of an event that can be saved on the Database Server.
	Type	DisplayString
npLogFile	OID	309
	Description	The log filename.
	Type	DisplayString
npIS41Operation	OID	310
	Description	The IS41 operation.
	Type	DisplayString
npMissingComponent	OID	311



Parameter Name	Attributes	Values
	Description	The missing component.
	Type	DisplayString
npState	OID	312
	Description	The state id the component.
	Type	DisplayString
npExistingComponent	OID	313
	Description	The existing component.
	Type	DisplayString
npBridgeParticipantId	OID	314
	Description	The bridge participant id.
	Type	DisplayString
npRoomId	OID	315
	Description	The room id.
	Type	DisplayString
npErrorCode	OID	316
	Description	The error code.
	Type	DisplayString
npErrorMessage	OID	317
	Description	The error message.
	Type	DisplayString
npPort	OID	318
	Description	The Port.
	Type	DisplayString
npName	OID	319
	Description	The name of the Hypertext Transfer Protocol (HTTP) server or the Internet Protocol (IP) address for other protocols.
	Type	DisplayString
npRepositoryUri	OID	320
	Description	The URI of the repository.
	Type	DisplayString
npRemoteAddresses	OID	321
	Description	The remote addresses.
	Type	DisplayString
npConnectionType	OID	322
	Description	The connection type.

Parameter Name	Attributes	Values
npFileCapacityInBytes	Type	DisplayString
	OID	323
	Description	The capacity of a file in bytes.
npFileSystemPathList	Type	DisplayString
	OID	324
	Description	The list of paths.
npDiskUsageInBytes	Type	DisplayString
	OID	325
	Description	The amount of disk space currently in use.
npValidLicenseId	Type	DisplayString
	OID	326
	Description	The valid license Id.
npNFMName	Type	DisplayString
	OID	327
	Description	The Network Function Manager name.
npNodeName	Type	DisplayString
	OID	328
	Description	The node name.
npLicenseIdInstance	Type	DisplayString
	OID	329
	Description	The details of the licenseId instance.
npNFMFqdn	Type	DisplayString
	OID	330
	Description	The Fully Qualified Domain Name (FQDN) of the Network Function Manager.
npBroadWorksRelease	Type	DisplayString
	OID	331
	Description	The BroadWorks release.
npGraceAction	Type	DisplayString
	OID	332
	Description	The action taken on grace period expiration.
npHours	Type	DisplayString
	OID	333
	Description	The number of hours remaining before taking action.

Parameter Name	Attributes	Values
npEnterpriseTrunkName	OID	334
	Description	The name of the enterprise trunk.
	Type	DisplayString
npInvalidLicenseId	OID	335
	Description	The invalid license Id.
	Type	DisplayString
npCallingParty	OID	336
	Description	The calling party.
	Type	DisplayString
npLicenseId	OID	337
	Description	The licenseId.
	Type	DisplayString
npContainerName	OID	338
	Description	The name of the container.
	Type	DisplayString
npDatabaseNode	OID	339
	Description	The hostname and port of the database node.
	Type	DisplayString
npDatabaseNodes	OID	340
	Description	A space separated list of all the hostname and port of the database nodes.
	Type	DisplayString
npQueueName	OID	341
	Description	The name of the queue.
	Type	DisplayString
npExtremeOverloadReason	OID	342
	Description	The reason for the extreme overload, either expiration or count.
	Type	DisplayString
npApplicationId	OID	343
	Description	The application ID associated with the certificate.
	Type	DisplayString
npChannelId	OID	344
	Description	The Xsi channel Id.
	Type	DisplayString
npChannelSetId	OID	345

Parameter Name	Attributes	Values
	Description	The Xsi channel set id.
	Type	DisplayString
	OID	346
npChannelOwner	Description	The Xsi channel owner.
	Type	DisplayString
	OID	347
npRequestName	Description	The request name
	Type	DisplayString
	OID	348
npPatchTitle	Description	The patch title.
	Type	DisplayString
	OID	349
npListOfNodes	Description	The list of nodes.
	Type	DisplayString
	OID	350
npSWManagerVersion	Description	The Software Manager version.
	Type	DisplayString
	OID	351
npCallerAssertedIdentity	Description	The calling asserted identity, including the asserted name and number.
	Type	DisplayString
	OID	352
npCallingAssertedNumber	Description	The calling asserted number.
	Type	DisplayString
	OID	353
npCallingAssertedNumberContext	Description	The calling asserted number context.
	Type	DisplayString
	OID	354
npCurrentCounterValue	Description	The current value of the counter.
	Type	DisplayString
	OID	355
npClearThresholdValue	Description	The value to reach by the gauge to clear the alarm.
	Type	DisplayString
	OID	356
npCouchbaseNodes	Description	The List of Couchbase nodes.
	OID	

Parameter Name	Attributes	Values
npTableName	Type	DisplayString
	OID	357
	Description	The name of the table that was modified.
npErrorText	Type	DisplayString
	OID	358
	Description	The error text.
npConnectionCount	Type	DisplayString
	OID	359
	Description	The number of connections.
npDefaultProfilePUI	Type	Integer32
	OID	360
	Description	The default user pui.
npDataCenter	Type	DisplayString
	OID	361
	Description	The name of the data center.
npResellerId	Type	DisplayString
	OID	362
	Description	The reseller id.
npTcapObjId	Type	DisplayString
	OID	363
	Description	The tcap object ID.
npTcapModuleId	Type	DisplayString
	OID	364
	Description	The tcap module ID.
npSs7pSapId	Type	DisplayString
	OID	365
	Description	The sap ID.
npTcapErrorCode	Type	DisplayString
	OID	366
	Description	The tcap error code.
npTcapErrorStr	Type	DisplayString
	OID	367
	Description	The tcap error string.
npTcapBitMask	OID	368

Parameter Name	Attributes	Values
	Description	The tcap bit mask.
	Type	DisplayString
	OID	369
npTcapUserId	Description	The tcap user ID.
	Type	DisplayString
	OID	370
npDialogId	Description	The dialog ID.
	Type	DisplayString
	OID	371
npDialogState	Description	The dialog state.
	Type	DisplayString
	OID	372
npTcapTransId	Description	The transaction ID.
	Type	DisplayString
	OID	373
npTcapTransState	Description	The transaction state.
	Type	DisplayString
	OID	374
npInvokeld	Description	The invoke ID.
	Type	DisplayString
	OID	375
npInvokeState	Description	The invoke state.
	Type	DisplayString
	OID	376
npResellerName	Description	The reseller name.
	Type	DisplayString
	OID	377
npPercent	Description	The percent.
	Type	DisplayString
	OID	382
npQueryDuration	Description	The query duration time.
	Type	DisplayString
	OID	383
npConfiguredMax	Description	The threshold time configured.
	Type	DisplayString
	OID	

Parameter Name	Attributes	Values
npDiscrepancyRatio	OID	384
	Description	The discrepancy ratio between the average execution time of a given command for the current run and the Life-Time average for this same command.
	Type	DisplayString
npCurrentAverage	OID	385
	Description	The current command average query time for this run.
	Type	DisplayString
npLifeTimeAverage	OID	386
	Description	The current command average query time over the life time of CallP Timing Verifications.
	Type	DisplayString

## Appendix B: bwSystemHealthReport Alarm Problem Text

The following table describes the problem text contained in the bwSystemHealthReport.

Problem text	Severity	Recommended action
The following FileSystems have exceeded the size limit: [STOPBW(<STOPBW_THRESHOLD>%) :: <PARTITION>] [CRITICAL(<CRITICAL_THRESHOLD>%) :: <PARTITION>] [HIGH(<HIGH_THRESHOLD>%) :: <PARTITION>] [WARNING(<WARNING_THRESHOLD>%) :: <PARTITION>]	Critical Critical Major Warning	Try to free up some space on FileSystems that have exceeded a limit. Consider deleting old logs, old database backups and/or old software versions in directories /var/broadworks/logs, /usr/local/broadworks and /bw/install. BroadSoft doesn't recommend keeping more that three software versions installed on a given server.
The following sub agents are not started: [MIBIIA sub agent] [ESD sub agent]	Minor	To start the SNMP sub agent(s): [As root user, do: /etc/init.d/init.subagentctl start] [As root user, do: /etc/init.d/init.es_agent start]
BroadWorks <server_type> processes in trouble:		
[Invalid date in BroadWorks License file.]	Minor	[Invalid date in BroadWorks License file, please contact BroadSoft Support.]
[BroadWorks License expired. License expire date:<expired_date>]	Minor	[BroadWorks License expired, please contact BroadSoft Support.]
[BroadWorks License expired. License expire date:<expired_date>]	Minor	[BroadWorks License is expiring, please contact BroadSoft Support.]
[SNMP Agent not running]	Critical	[Broadworks needs to be restarted]
[Configuration agent not running]	Critical	[The Configuration Agent needs to be restarted (configdctl start)]
[The Software Manager is not running]	Critical	[The Software Manager needs to be restarted (startswman.pl)]
[<CONTAINER_NAME> not running]	Critical	[The <FAULTY_APPLICATION> application needs to be restarted]
[<CONTAINER_NAME> process monitor not running]	Critical	[The <FAULTY_APPLICATION> application needs to be restarted]
[Current DSN permanent size (<PERM_SIZE>M) exceeds the maximum of 128M for a system with or with less than 1G in physical memory]	Major	[Contact BroadSoft Support to get the DSN resizing procedure]
[Current DSN permanent size (<PERM_SIZE>M) exceeds <MINIMUM_RATIO>% of the memory available in the system <MEM_SIZE>M]	Major	[Contact BroadSoft Support to get the DSN resizing procedure]
[Open Client Server Monitoring not running]	Critical	[The Web Server needs to be restarted]
[Open Client Server not running]	Critical	[The Web Server needs to be restarted]
[APACHE Monitoring not running]	Critical	[The Web Server needs to be restarted]
[APACHE not running]	Critical	[The Web Server needs to be restarted]
[Flash policy server process monitor not running]	Critical	[The Web Server needs to be restarted]
[Flash policy server not running]	Critical	[The Web Server needs to be restarted]
[<PROCESS_NAME> process monitor not running]	Critical	[The <SERVER_TYPE> needs to be restarted]



Problem text	Severity	Recommended action
[<PROCESS_NAME> not running]	Critical	[The <SERVER_TYPE> needs to be restarted]
[License Server process monitor not running]	Critical	[The Virtualized License Server needs to be restarted]
[License Server not running]	Critical	[The Virtualized License Server needs to be restarted]
[DbManagement not running]	Critical	[The Database Server needs to be restarted. Please restart BroadWorks server using restartbw.]
[SSHD not running]	Critical	[Restart the sshd process (/etc/init.d/sshd start)]
[TIMESTEND not running]	Critical	[The TimesTen daemon (TIMESTEND) needs to be restarted. Please refer to the BroadWorks Maintenance Guide for detailed procedures on how to restart the process(es) currently not running on this server, or contact your BroadWorks support team.]
[*** Internal error in healthmon script *** <INTERNAL_ERROR_OUTPUT>]	Major	[Contact BroadSoft support.]
[Could not properly monitor TimesTen permanent and temporary memory area usage. This error is not fatal and can be caused by an impossibility to obtain a connection to the TimesTen engine.]	Minor	Try running "<command>" and see if you get any results. If this problem persists, please contact BroadSoft support.
[TimesTen permanent memory area is at <PERM_MEM_PERCENT> of total permanent size. (Currently in use size is at <PERM_IN_USE>. Allocated size is <ALLOCATED_SIZE>, high water mark is <HIGH_WATER_MARK> and in use size is <PERM_IN_USE>]	Critical, Major or Minor	[Increase your datastore permanent size area (using the resizeDSN tool)]
[TimesTen temporary memory area is at <TEMP_MEM_PERCENT> of total temporary size. (Currently in use size is at <TEMP_IN_USE>. Allocated size is <ALLOCATED_SIZE>, high water mark is <HIGH_WATER_MARK> and in use size is <TEMP_IN_USE>]	Critical, Major or Minor	[Increase your datastore temporary size area (using the resizeDSN tool)]
[TimesTen data store permanent size is different (<PERM_ALLOCATED> compared to <CURRENT>) on peers in the cluster.]	Critical	[Check the data store permanent size and adjust it so that all peers have the same permanent size (using the resizeDSN tool).]
[TimesTen data store temporary size is different (<PERM_ALLOCATED> compared to <CURRENT>) on peers in the cluster.]	Critical	[Check the data store temporary size and adjust it so that all peers have the same temporary size (using the resizeDSN tool).]
[SLAPD not running]	Critical	[Restart the slapd process (/etc/init.d/lapctl start)]
[An error occurred with the LDAP server replication.]	Critical	[Restart the LDAP server replication by importing the database on the secondary from the primary.]
[Cannot connect to the LDAP master server to retrieve replication status.]	Critical	[Configure LDAP master and slave server with same replication port.]
[Cannot connect to the LDAP slave server to retrieve replication status.]	Critical	[Configure LDAP master and slave server with same replication port.]
[MYSQLD is not running]	Critical	[The MySQL daemon (MYSQLD) needs to be restarted. Please refer to the BroadWorks Maintenance Guide for detailed procedures on how to restart the process(es) currently not running on this server, or contact BroadSoft support team.]

Problem text	Severity	Recommended action
[Database integrity failed]	Critical	[The MySQL database needs to be repaired: <OUTPUT_MSG>. Please restart BroadWorks server using restartbw command to repair the database. If the problem persist, contact BroadSoft support team.]
[DSN not initialized properly.]	Critical	[The server must be re-installed. If the problem persist, contact BroadSoft support team.]
[Application schema not properly installed.]	Critical	[The server must be re-installed. If the problem persist, contact BroadSoft support team.]
[Oracle DBS Utilities Error Detected]	Critical	[The server must be re-installed. If the problem persist, contact BroadSoft support team.]
[Oracle Grid not running.]	Critical	[Oracle Grid Infrastructure (High Availability framework) needs to be restarted]
[Fragmentation detected on <ENTITY>.]	Warning	[Contact BroadSoft Support]
[Low preallocation level detected on <ENTITY>]	Warning	[Contact BroadSoft Support]
[<NUM_OF_ERROR> Oracle redo log checkpointing error(s) detected.]	Major	[Contact BroadSoft Support]
[Oracle Observer not running]	Major	[Oracle Observer needs to run on a separate server (PS) and must be configured to monitor this DBS.]
[Oracle Database failover detected]	Major	[Restore the original primary site and perform a manual switch-over using the DBS observer CLI]
[Oracle redundancy error detected, failure on the primary site will result in data loss.]	Major	[Make sure redo apply is enabled by running 'dbsctl redo apply=on' on the standby site. If the error persists, contact BroadSoft Support.]
[Oracle Database secondary host <HOST_NAME> is not ready.]	Warning	[Verify <HOST> reachability or reinstall a new standby and reconfigure redundancy.]
[Could not found an active primary database instance.]	Major	[Log back as bwadmin on the primary DBS to complete redundancy configuration.]
[Could not get reliable peer information.]	Major	[Please restart BroadWorks server using restartbw.]
[Oracle Database not running.]	Critical	[Oracle Database must be restarted.]
[Internal: problem with healthmon script (validate_peers_state method)]	Critical	[Contact BroadSoft Support.]
[Error in transmitting commands to a remote peer. Reported error is: <ERROR>]	Critical	[Make sure ssh and replication are correctly configured. (If a server has been unreachable for a long time, its database may be out-of-synch. It can be re-synchronized with importdb.pl. Please refer to the BroadWorks Maintenance Guide.)]
[Replication: a remote server is in MAINTENANCE state. Replication test bypassed.]	Warning	[Validate that the peer server is in the right state.]
[Replication: a remote server <PEER> is not responding or not in RUNNING state. Replication test bypassed.]	Major	[Validate that the peer server <PEER> is reachable.]
[File replication is not running.]	Critical	[Perform a file replication restart (repctl restart)]
[Cannot connect to the MySQL database to retrieve replication status.]	Critical	[Contact BroadSoft Support.]
[An error occurred with the database replication.]	Critical	[Restart the database replication by importing the database on the secondary from the primary.]

Problem text	Severity	Recommended action
[The following peers' clocks have a delay of +/- <DIFFERENCE> seconds with the local (<LOCAL_HOSTNAME>) clock: <PEER_LIST>]	Minor	[Make sure that the clocks are synchronized. If using NTP, ensure that all peers are using the same server. If using NTP with the same server, augment the frequency at which the time is synchronized with the server for each peer.]
[Not all members of the cluster use the same SWManager version.]	Minor	[Make sure that all of this server's peers are running the same SWManager version.]
[All members of this cluster are not at the same patch level.]	Major	[The output of the checkPeer.pl script returned the following output: <OUTPUT>. All servers in a cluster must be at the same patch level.]
[Hostname <HOSTNAME> cannot be found in redundancy peers (peerctl ls)]	Major	[Change the server hostname or change the redundancy peer hostname (peerctl)]
[Database is locked: no provisioning can occur on the server]	Major	[Unlock the server using peerctl]
[Server is NOT unlocked]	Major	[Unlock the server via the CLI or SNMP.]
[Failure in reading server administrative state from the Configuration Agent]	Major	[Make sure the Configuration Agent is started (configdctl status)]
[Unknown server state received from server: <STATE>]	Major	[Make sure the SNMP Agent is started (snmpdctl status)]
[The directory for offline CDR file queueing (/var/broadworks/billing/rf/) takes more than 5% of the available space on the partition where it is mounted. File queueing will be disabled.]	Minor	[File Queueing could not be automatically disabled. Manually disable it at the CLI: AS_CLI/Interface/Accounting/BroadWorksCDRInterface/Diameter/Offline> set enableFileQueueing false. Manually re-enable file queueing when the disk full condition is cleared. Verify that the file queueing retention time is appropriate for the call rate and the disk space. Verify that the listed offline charging servers are up and running. Verify that there is network connection between the Application Server and the offline charging servers. Verify that the Diameter interface is properly configured on the Application Server.]
[The partition on which the directory for offline CDR file queueing (/var/broadworks/billing/rf/) is hosted is <PARTITION_USAGE>% full.]	Minor	[File Queueing could not be automatically disabled. Manually disable it at the CLI: AS_CLI/Interface/Accounting/BroadWorksCDRInterface/Diameter/Offline> set enableFileQueueing false. Manually re-enable file queueing when the disk full condition is cleared. Verify that the file queueing retention time is appropriate for the call rate and the disk space. Verify that the listed offline charging servers are up and running. Verify that there is network connection between the Application Server and the offline charging servers. Verify that the Diameter interface is properly configured on the Application Server.]
[Replication is not running for DSN <DSN>. Databases may be out-of-synch.]	Critical	[Replication must be started (repctl start). If databases are out-of-synch they must be re-synchronized first (with the importdb.pl tool). Please refer to the BroadWorks Maintenance Guide for detailed procedures.]
[Internal: problem with healthmon script (monitor_redundancy method)]	Critical	[Contact BroadSoft Support.]
[Insufficient space to perform backup]	Major	[Try to free up some space by deleting old logs, old database backups and/or old software versions.]

Problem text	Severity	Recommended action
[Dangling processes detected: <PROCESS_HEADER> <DANGLING_PROCESSES>]	Informational	[Over time dangling processes may cause performance impact on your BroadWorks system. Those processes were identified and killed automatically.]
[The swap configured on the system is very insufficient.]	Critical (50% of required swap detected) or Major (65% of required swap detected)	[You should add more swap space to the system.]
[ The swap configured on the system is insufficient. ]	Warning (80% of required swap detected) or Informational (90% of required swap detected)	[Consider adding more swap space to the system.]

---

## Acronyms and Abbreviations

---

<b>API</b>	Application Programming Interface
<b>AS</b>	Application Server
<b>BCCT</b>	BroadWorks Common Communication Transport
<b>BW</b>	BroadWorks
<b>CAP</b>	Client Application Protocol
<b>CC</b>	Country Code
<b>CDR</b>	Call Detail Record
<b>CLI</b>	Command Line Interface
<b>CNAM</b>	Caller ID with NAME
<b>CPU</b>	Central Processing Unit
<b>DB</b>	Database
<b>DBS</b>	Database Server
<b>DN</b>	Directory Number
<b>DNS</b>	Domain Name System
<b>DSN</b>	Database Store Name
<b>DTD</b>	Document Type Definition
<b>ECL</b>	Enhanced Call Log
<b>FQDN</b>	Fully Qualified Domain Name
<b>FTP</b>	File Transfer Protocol
<b>HSS</b>	Home Subscriber Server
<b>HTTP</b>	Hypertext Transfer Protocol
<b>IMRN</b>	IP Multimedia Routing Number
<b>IN</b>	International
<b>IP</b>	Internet Protocol
<b>LDAP</b>	Lightweight Directory Access Protocol
<b>MAC</b>	Media Access Control
<b>MB</b>	Megabyte
<b>MIB</b>	Management Information Base
<b>MIME</b>	Multipurpose Internet Mail Extensions
<b>MS</b>	Media Server
<b>MSC</b>	Mobile Switching Centre
<b>MWI</b>	Message Waiting Indicator or Indication
<b>NAPTR</b>	Naming Authority Pointer
<b>NS</b>	Network Server
<b>NTP</b>	Network Time Protocol
<b>OCI</b>	Open Client Interface
<b>OID</b>	Object Identifier

<b>OSS</b>	Operations Support System
<b>PBX</b>	Private Branch Exchange
<b>PUI</b>	Public User Identity
<b>SCC</b>	Service Centralization and Continuity
<b>SCR</b>	Selective Call Rejection
<b>Sh</b>	The interface between an IP Multimedia Subsystem (IMS) Application Server (AS) and an IMS Home Subscriber Server (HSS)
<b>SIP</b>	Session Initiation Protocol
<b>SMDI</b>	Simplified Message Desk Interface
<b>SMTP</b>	Simple Mail Transfer Protocol
<b>SNMP</b>	Simple Network Management Protocol
<b>SOAP</b>	Simple Object Access Protocol
<b>TCP</b>	Transmission Control Protocol
<b>UDP</b>	User Datagram Protocol
<b>UID</b>	Unique Identifier
<b>URI</b>	Uniform Resource Identifier
<b>URL</b>	Uniform Resource Locator
<b>WAS</b>	Web-based Authentication Server
<b>XML</b>	eXtensible Markup Language
<b>XS</b>	Execution Server
<b>Xsi</b>	Xtended Services Interface

## Index

---

### A

Access list 20  
 Agent configuration 20  
 Alarm Correlation 25  
 Alarms 24

### B

BroadworksConfigurationFault.mib 41  
 BroadworksFault.mib 43  
 BW-CCReportingDBManagementFault.mib 84  
 BW-DBSObserverFault.mib 86  
 BW-ECLDBMgmtAmplifyFault.mib 87  
 BW-ECLReposFault.mib 89  
 BW-EnhancedCallLogsDBManagementFault-XS-TAS.mib 92  
 BW-EnhancedCallLogsDBManagementFault.mib 90  
 BW-FileReposExtdCaptureFault.mib 95  
 BW-FileReposFault.mib 95  
 BW-LicenseManagerFault.mib 97  
 BW-MessageArchiveFault.mib 100  
 BW-OpenClientServerFault.mib 102  
 BW-ProfileBuilderAmplifyFault.mib 108  
 BW-ProvisioningFault-XS-TAS.mib 110  
 BW-ProvisioningServerAmplifyFault.mib 128  
 BW-WebContainerFault.mib 146  
 bwAclViolation 58  
 bwAlarmsDiscarded 44  
 bwAlarmsTableLimitReached 75  
 bwAmplifyAddGroupEvent 12, 132  
 bwAmplifyAddUserEvent 12, 131  
 bwAmplifyBroadCloudOutOfSync 12, 145  
 bwAmplifyBroadCloudTransactionFailure 12, 145  
 bwAmplifyCallCenterConnectionFailure 12, 140  
 bwAmplifyCallLogSchemaInstanceProvisioningOverload 12, 138  
 bwAmplifyCallLogSOAPServerUnreachable 12, 139  
 bwAmplifyCCScheduledReportConfigurationFailure 12, 145  
 bwAmplifyCCScheduledReportFailed 12, 144  
 bwAmplifyCCScheduledReportGenerationFailure 12, 144  
 bwAmplifyCPEDeviceConfigurationNumFilesExceeded 12, 131  
 bwAmplifyDeleteGroupEvent 12, 132  
 bwAmplifyDeleteUserEvent 12, 132  
 bwAmplifyDeviceManagementFtpBlockedWriteThresholdReached 12, 130  
 bwAmplifyExternalAuthenticationUnknownUser 12, 135  
 bwAmplifyGroupAddressChangeEvent 12, 133  
 bwAmplifyICBridgeCommunicationError 12, 130  
 bwAmplifyICBridgeResetError 13  
 bwAmplifyLDAPConfigurationError 13  
 bwAmplifyLDAPConnectionError 13, 134  
 bwAmplifyLicenseUserServiceAccntViolation 13, 134  
 bwAmplifyMobilityManagerError 13, 141  
 bwAmplifyMobilityManagerUnreachable 13, 140  
 bwAmplifyProvisioningValidationConnectionFailure 13, 139  
 bwAmplifyProvisioningValidationXSACConnectionFailure 13, 140  
 bwAmplifyPsInterfaceInitializationError 13, 143  
 bwAmplifyPsPeerConnectionFailure 13, 133  
 bwAmplifyServiceLicenseCollectionFailure 13, 134  
 bwAmplifyShGeneralErrorReceived 13, 142  
 bwAmplifyShInterfaceInitializationError 13  
 bwAmplifyShNoAvailableHosts 13, 141  
 bwAmplifyShSystemRefreshInitiated 13, 142  
 bwAmplifyShSystemRefreshTerminated 13, 143  
 bwAmplifyShUserUnknownInAS 13, 142  
 bwAmplifyShUserUnknownInHSS 13, 141  
 bwAmplifySrvPackMigrationCompletedWithErrors 13, 136  
 bwAmplifySrvPackMigrationFoundUnfinishedTask 13, 137  
 bwAmplifySrvPackMigrationLicenseViolation 13, 137  
 bwAmplifySrvPackMigrationSpSrvQuantityViolation 13, 138  
 bwAmplifySrvPackMigrationStoppedBySysShutdown 13, 137  
 bwAmplifySrvPackMigrationStoppedDueToErrors 13, 136  
 bwAmplifySrvPackMigrationStoppedDueToTimeLimit 14, 136  
 bwAmplifySrvPackMigrationSystemError 14, 138  
 bwAmplifySrvPackMigrationTerminated 14, 135  
 bwAmplifySubscriberProfileSyncDataError 14, 144  
 bwAmplifySubscriberProfileSyncIOError 14, 143  
 bwAmplifyUserAddressChangeEvent 14, 132  
 bwApplicationStateTransition 45  
 bwAuditAbnormalCallTermination 61  
 bwBroadworksFileReposDiskCipherError 96  
 bwCallOverloadZoneTransition 62  
 bwCallPThreadAutoRestart 61  
 bwCCReportingDBManagementScheduledJobExceededMaxDuration 17  
 bwCCReportingDBManagementSchemaException 17  
 bwCentralizedDatabaseConnectivityFailure 51  
 bwCentralizedDatabaseListenerFailure 15, 53  
 bwCentralizedDatabaseMaxConnectionsReached 15, 54  
 bwCentralizedDatabaseNewConnectionFailure 15, 54  
 bwCentralizedDatabaseSchemaFailure 52  
 bwChangeDatabaseUserPasswordError 78  
 bwClientConnectionOciQueueFullNotification 14  
 bwCommProtocolHostNotAllowed 72  
 bwCommProtocolInitError 72  
 bwCommProtocolInterfaceNotAllowed 73  
 bwConfigReplicationFailed 43  
 bwConfigReplicationOffline 43  
 bwConfigurationChanged 42  
 bwConfigurationFailed 43  
 bwCongestionManagementNeighborOverloaded 63  
 bwCongestionManagementNeighborsInhibited 60  
 bwCouchbaseNodeConnectivityFailure 15, 53  
 bwCounterThreshold 82  
 bwCPEDeviceConfigurationDeviceReset 45  
 bwCPEDeviceProfileLockout 70  
 bwCPUIdleTimeLimitReached 48  
 bwDatabaseSyncReport 47  
 bwDiskCacheLimitExceeded 16  
 bwDnsAllServersUnreachable 75  
 bwDnsServerUnreachable 75  
 bwDnsTimeout 75



bwECLReposReplicationFailure 17, 90	bwOpenClientServerASConnFailed 104
bwECLReposReplicationOffline 17, 90	bwOpenClientServerASConnTerminated 105
bwExecutorQueueLatencyExceeded 79	bwOpenClientServerAuthenticationServerUnreachable 107
bwExecutorQueueUsageExceeded 79	bwOpenClientServerClientConnTerminated 105
bwExecutorThreadPoolBusyExceeded 80	bwOpenClientServerExtAuthConnFailed 106
bwExecutorThreadPoolProcessingTimeExceeded 79	bwOpenClientServerExtAuthProcessingFailed 106
bwExtremeOverload 15, 45	bwOpenClientServerNbConnectionsLimitExceeded 107
bwFileReposExtDCaptureReplicationFailure 95	bwOpenClientServerNSConnFailed 18, 107
bwFileReposExtDCaptureReplicationOffline 95	bwOpenClientServerNSConnTerminated 105
bwFileReposReplicationFailure 96	bwOpenClientServerOffline 106
bwFileReposReplicationOffline 96	bwOpenClientServerUserIdForceLoggedOut 106
bwFileServerClusterUnreachable 60	bwOverAllocationViolationGrace 17, 100
bwFileServerNodeUnreachable 60	bwPhysicalLocationOriginationBlocked 62
bwForcedExitDueToHungThread 61	bwPMccReportingDBManagementDeath 85
bwGaugeHighLimitThreshold 83	bwPMccReportingDBManagementLaunched 84
bwGaugeLowLimitThreshold 82	bwPMccReportingDBManagementOutOfMemory 85
bwGeneralSoftwareError 44	bwPMccReportingDBManagementRestarted 85
bwHeapMemoryUsageExceeded 80	bwPMccReportingDBManagementShutDown 84
bwHttpWorkersBusyExceeded 147	bwPMconfigdDeath 42
bwJVMPProcessOutOfMemory 15, 80	bwPMconfigdLaunched 41
bwJVMPProcessUnexpectedSoftwareConditionDetected 15, 81	bwPMconfigdOutOfMemory 14
bwKeyManagerCriticalDataMismatch 78	bwPMconfigdRestarted 42
bwLicenseAcctViolation 67	bwPMconfigdShutDown 41
bwLicenseAuthenticationFailure 67	bwPMdbsObserverDeath 87
bwLicenseFileExpired 66	bwPMdbsObserverLaunched 86
bwLicenseFileExpiring 66	bwPMdbsObserverRestarted 87
bwLicenseFileNotFound 66	bwPMdbsObserverShutDown 86
bwLicenseHWViolation 67	bwPMenhancedCallLogsDBManagementAmplifyDeath 15, 89
bwLicenseMonitoringFault 65	bwPMenhancedCallLogsDBManagementAmplifyLaunched 15, 88
bwLicensingLMCommunicationLoss 17, 99	bwPMenhancedCallLogsDBManagementAmplifyOutOfMemory 15, 89
bwLicensingLMCommunicationLossGrace 17, 100	bwPMenhancedCallLogsDBManagementAmplifyRestarted 15, 88
bwLicensingNFMCommunicationLoss 17, 98	bwPMenhancedCallLogsDBManagementAmplifyShutDown 15, 88
bwLicensingNFMCommunicationLossGrace 17, 99	bwPMenhancedCallLogsDBManagementDeath 92
bwLicensingOverAllocation 17, 99	bwPMenhancedCallLogsDBManagementLaunched 91
bwLicensingViolation 17, 99	bwPMenhancedCallLogsDBManagementOutOfMemory 92
bwLicensingViolationGrace 17, 100	bwPMenhancedCallLogsDBManagementRestarted 91
bwLocationServiceUnreachable 17	bwPMenhancedCallLogsDBManagementShutDown 91
bwLogQueueSizeLimitReached 74	bwPMenhancedCallLogsDBManagementXSTASDeath 94
bwMaintenanceTaskFailure 51	bwPMenhancedCallLogsDBManagementXSTASLaunched 93
bwMaximumFailedLoginAttempts 77	bwPMenhancedCallLogsDBManagementXSTASOutOfMemory 94
bwMaximumFailedUserLoginAttempts 77	bwPMenhancedCallLogsDBManagementXSTASRestarted 93
bwMemoryAllocationExceeded 76	bwPMenhancedCallLogsDBManagementXSTASShutDown 93
bwMemoryLimitReached 48	bwPMhttpdDeath 50
bwMemoryOverAllocation 77	bwPMhttpdLaunched 50
bwMessageArchiveReplicationFailure 17, 101	bwPMhttpdRestarted 50
bwMessageArchiveReplicationOffline 17, 101	bwPMhttpdShutDown 50
bwMessageArchiverRepositoryCommunicationFailure 17, 101	bwPMLmdDeath 17, 98
bwNetworkDatabaseClusterConnectivityFailure 15, 52	bwPMLmdLaunched 17, 97
bwNetworkDatabaseNodeConnectivityFailure 15, 52	bwPMLmdOutOfMemory 14, 17
bwNetworkDatabaseSchemaFailure 15, 53	bwPMLmdRestarted 17, 98
bwNetworkDevicesFailed 71	bwPMLmdShutDown 17, 97
bwNonCallOverloadZoneTransition 63	bwPMOpenClientServerDeath 103
bwNonheapMemoryUsageExceeded 16, 81	bwPMOpenClientServerLaunched 102
bwNSLocationConnectivityFailure 64	
bwNSLocationFailure 64	
bwNSSynchronizationConnectivityFailure 63	
bwNSSyncSuccessDbCommitFailed 15, 65	
bwOciReportingAclViolation 71	
bwOciReportingBackLogFileDeleted 72	
bwOciReportingConnectionError 71	



bwPMOpenClientServerOutOfMemory 104	bwProvShNoAvailableHosts 123
bwPMOpenClientServerRestarted 103	bwProvShSystemRefreshInitiated 124
bwPMOpenClientServerShutdown 102	bwProvShSystemRefreshTerminated 125
bwPMOpenClientServerStartupFailed 103	bwProvShUserUnknownInAS 124
bwPMProfileBuilderAmplifyDeath 15, 109	bwProvShUserUnknownInHSS 123
bwPMProfileBuilderAmplifyLaunched 15, 108	bwProvSrvPackMigrationCompletedWithErrors 118
bwPMProfileBuilderAmplifyOutOfMemory 15, 109	bwProvSrvPackMigrationFoundUnfinishedTask 119
bwPMProfileBuilderAmplifyRestarted 15, 109	bwProvSrvPackMigrationLicenseViolation 120
bwPMProfileBuilderAmplifyShutdown 15, 108	bwProvSrvPackMigrationSpSrvQuantityViolation 120
bwPMProvisioningServerAmplifyDeath 15, 129	bwProvSrvPackMigrationStoppedBySysShutdown 119
bwPMProvisioningServerAmplifyLaunched 15, 128	bwProvSrvPackMigrationStoppedDueToErrors 118
bwPMProvisioningServerAmplifyOutOfMemory 14, 15	bwProvSrvPackMigrationStoppedDueToTimeLimit 119
bwPMProvisioningServerAmplifyRestarted 15, 129	bwProvSrvPackMigrationSystemError 120
bwPMProvisioningServerAmplifyShutdown 16, 129	bwProvSrvPackMigrationTerminated 118
bwPMProvisioningServerXSTASDeath 111	bwProvSubscriberProfileSyncDataError 126
bwPMProvisioningServerXSTASLaunched 110	bwProvSubscriberProfileSyncIOError 126
bwPMProvisioningServerXSTASOutOfMemory 111	bwProvUserAddressChangeEvent 114
bwPMProvisioningServerXSTASRestarted 111	bwProvValidationConnectionFailure 122
bwPMProvisioningServerXSTASShutdown 110	bwPushNotificationServerUnreachable 15, 83
bwPMremotexlaDeath 49	bwReportingRecomputingStats 17
bwPMremotexlaLaunched 48	bwSCFAPURLUnreachable 76
bwPMremotexlaRestarted 49	bwSecureTktToolResult 78
bwPMremotexlaShutdown 49	bwSecurityRiskDetected 78
bwPMReportingFTPConnectionError 68	bwServerStateTransition 44
bwPMtomcatDeath 47	bwSipMaxRetriesExceeded 56
bwPMtomcatLaunched 46	bwSipMessageParsingError 55
bwPMtomcatRestarted 46	bwSipRegistrationFailure 56
bwPMtomcatShutdown 46	bwSipRequestTimeOutReceived 57
bwProvAddGroupEvent 114	bwSipServerTimeOutReceived 57
bwProvAddUserEvent 113	bwSipServiceUnavailableReceived 57
bwProvBroadCloudOutOfSync 128	bwSipSocketAlreadyBound 55
bwProvBroadCloudTransactionFailure 127	bwSipTcpConnectionFailure 58
bwProvCallCenterConnectionFailure 122	bwSipTcpExceededMax 54
bwProvCallLogSchemaInstanceProvisioningOverload 121	bwSipTcpExceededMaxPerPeer 55
bwProvCallLogSOAPServerUnreachable 121	bwSipTcpSocketError 55
bwProvCCSscheduledReportConfigurationFailure 127	bwSipUnexpectedMessage 56
bwProvCCSscheduledReportFailed 126	bwSipUnrecognisedDomainName 58
bwProvCCSscheduledReportGenerationFailure 127	bwSMAPConnectionFailure 65
bwProvCPEDeviceConfigurationNumFilesExceeded 113	bwSMDIConfigurationError 69
bwProvDeleteGroupEvent 114	bwSMDIInterfaceError 68
bwProvDeleteUserEvent 114	bwSMDIOperationFailure 69
bwProvDeviceManagementFtpBlockedWriteThresholdReached 112	bwSMDIRouteExhaustion 69
bwProvExternalAuthenticationUnknownUser 117	bwSMDISessionRejected 68
bwProvGroupAddressChangeEvent 115	bwSMTPConnectivityFailure 59
bwProvICBridgeCommunicationError 112	bwSMTPPrimaryServerEmailMessageDeliveryError 59
bwProvInterfaceInitializationError 125	bwSslClientAuthWithoutTrust 17, 148
bwProvLDAPConfigurationError 117	bwSubscriberCannotLaunchDatabaseQuery 17
bwProvLDAPConnectionError 117	bwSubscriberWriteThreadOverload 16
bwProvLicenseUserServiceAcntViolation 116	bwSystemBackwardTimeDrift 17, 51
bwProvMobilityManagerError 123	bwSystemHealthReport 47
bwProvMobilityManagerUnreachable 122	bwTaskMonitorHungTask 73
bwProvNSLocationConnectivityFailure 16	bwTaskMonitorWarning 73
bwProvNSLocationFailure 16	bwTcpSubsystemFatalError 74
bwProvNSSynchronizationConnectivityFailure 16	bwThreadDelayDetected 62
bwProvOciReportingAclViolation 16	bwTimeSkewExceeded 15, 81
bwProvOciReportingBackLogFileDeleted 16	bwWebApplicationCacheDiskFull 147
bwProvOciReportingConnectionError 16	bwWebContainerAuthenticationServerUnreachable 148
bwProvPeerConnectionFailure 115	bwWebContainerServerTransactionLimitExceeded 147
bwProvSCFAPURLUnreachable 16	bwWebContainerTransactionGlobalRateLimitExceeded 146
bwProvServiceLicenseCollectionFailure 116	bwWebContainerTransactionUserRateLimitExceeded 146
bwProvShGeneralErrorReceived 124	bwWebContainerUserTransactionLimitExceeded 148
	bwWebContainerWebAppTransactionLimitExceeded 147

## C

Configuration 20

## E

External subagents  
Integration 33, 33

## F

Fault  
Alarms 24, 25  
Definitions 24  
Fault IDs 40  
Filters 38  
MIB files 40  
Notification 38  
Notifications 24  
Suppression 34  
Template 24  
Thresholding  
Filtering considerations 37  
Trap filters 35  
Trap lists 34

## I

Integration 33  
Introduction 19

## M

MIB  
BroadworksConfigurationFault.mib 41  
BroadworksFault.mib 43  
BW-CCReportingDBManagementFault.mib 84  
BW-DBSObserverFault.mib 86  
BW-ECLDBMgmtAmplifyFault.mib 87  
BW-ECLReposFault.mib 89  
BW-EnhancedCallLogsDBManagementFault-XS-TAS.mib 92  
BW-EnhancedCallLogsDBManagementFault.mib 90  
BW-FileReposExtdCaptureFault.mib 95  
BW-FileReposFault.mib 95  
BW-LicenseManagerFault.mib 97  
BW-MessageArchiveFault.mib 100  
BW-OpenClientServerFault.mib 102  
BW-ProfileBuilderAmplifyFault.mib 108  
BW-ProvisioningFault-XS-TAS.mib 110  
BW-ProvisioningServerAmplifyFault.mib 128  
BW-WebContainerFault.mib 146  
Files 40  
MIBs 41

## N

Notifications 24

## O

OID  
Shared 21  
Unique 21

## P

Provisioning filters 38

## R

Reporting 23

## S

SNMP  
Access list 20  
Agent 20, 20  
Agent configuration 21  
Security model 23  
Trap manager 21  
v2c 20, 21  
v3 users 23

## T

Template 24  
Threshold filtering 35, 37, 38  
Trap  
Lists 34  
Manager 21

## References

---

- [1] Cisco Systems, Inc. 2019. *BroadWorks Profile Server Performance Measurement Interface Specification, Release 23.0*.  
Available from Cisco at <https://xchange.broadsoft.com>.

## References to Feature Description Documents

- [FR 208204] Cisco Systems, Inc. 2019. *Enhanced Call Center Reporting and Enhanced Call Logs Archived Event Recovery Feature Description, Release 21.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/475513>.
- [FR 206184] Cisco Systems, Inc. 2019. *Enhanced Call Log Reporting Interface Feature Description, Release 21.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/466074>.
- [FR 217550] Cisco Systems, Inc. 2019. *Node License Management Feature Description, Release 21.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/475423>.
- [FR 173615] Cisco Systems, Inc. 2019. *External Authentication for MS Active Directory Feature Description, Release 20.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/455965>.
- [FR 2299] Cisco Systems, Inc. 2017. *Network Database Server Feature Description, Release 22.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/481987>.
- [FR 2300] Cisco Systems, Inc. 2017. *Generic Database Change Notification Feature Description, Release 22.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/490553>.
- [FR 6517] Cisco Systems, Inc. 2017. *Java Heap Monitoring Feature Description, Release 22.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/490523>.
- [FR 10066] Cisco Systems, Inc. 2017. *Enhanced Call Log DB Switch from Database Server Feature Description, Release 22.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/491649>.
- [FR 117143] Cisco Systems, Inc. 2019. *Enhanced Call Log Server Feature Description, Release 19.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/450637>.
- [FR 6957] Cisco Systems, Inc. 2018. *BroadWorks Evolved Architecture Provisioning, Release 22.0*.  
Available from Cisco at <https://xchange.broadsoft.com/node/492296>.